



**隔膜式蓄能器**  
Diaphragm Accumulator



**宁波圣瑞液压机械有限公司**  
Ningbo Shengrui Hydraulic Machinery Co.,LTD.



## 焊接隔膜式蓄能器

# Welded Diaphragm Accumulator

### 一. 概述General Description :

AD系列焊接隔膜式蓄能器用于吸收脉动、吸收冲击、补偿泄漏。

AD Series welded diaphragm accumulator is for absorbing pulsation、impact and compensation leaks.



### 二. 型号说明Ordering Code:

AD — A — × / × — × — ×

AD:焊接隔膜式蓄能器Welded diaphragm accumulators

结构形式Construction:A可充气Rechargeable B完全密封Completely

公称容积(升)Nominal Volume(L)


最大允许工作压力 (bar) Max allowable working pressure

壳体材料Shell Material 1.碳钢Carbon steel 2.不锈钢Stainless steel

隔膜材料代号Diaphragm Material code

1.丁腈橡胶NBR 2.丁基橡胶IIR 3.氟素橡胶FKM 4.三元乙丙橡胶EPDM 5.氯化丁基橡胶HNBR 6.氯丁橡胶CR 7.硅橡胶SL 8.聚氨酯胶PUR

### 三. 内部结构与外形尺寸 Structure and Dimension

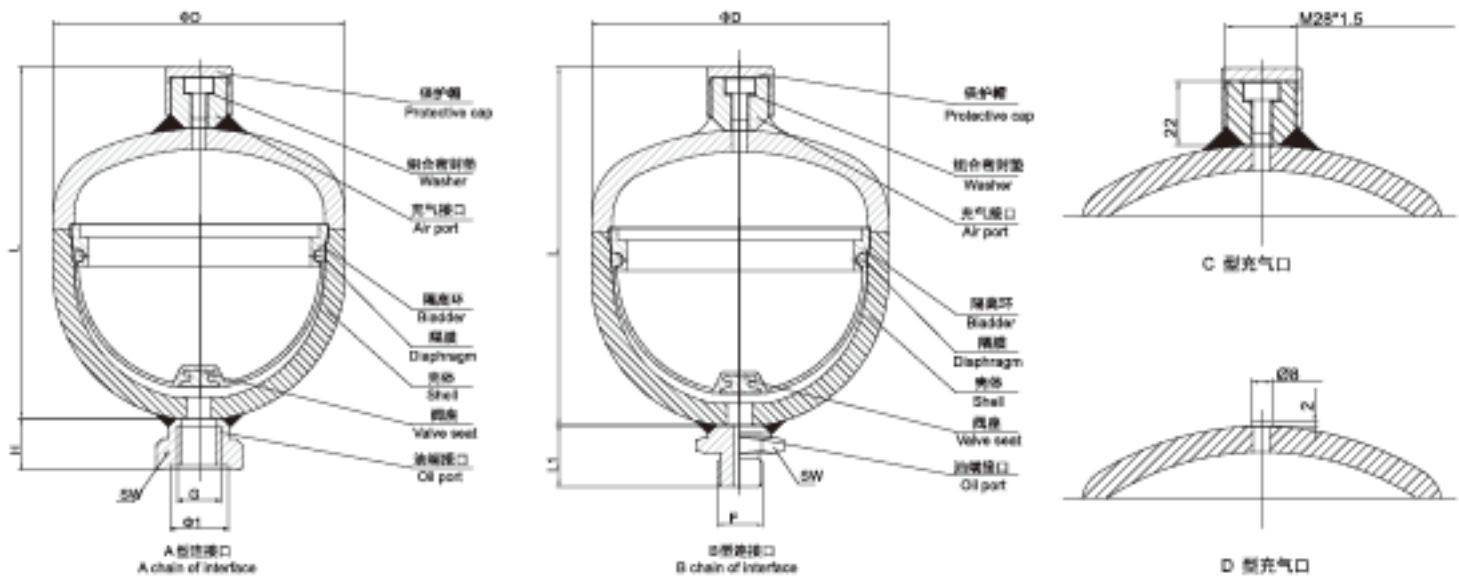

公称 容积 L	压缩 比 P2:P0	设计 压力 bar	L mm	Φ D	重量 Kg	气端 连接	油端连接					
							G	Φ 1	H	SW	F	L1
0.075	8:1	210	88	65	0.7	C		28	21	22	G3/8	25
0.16	8:1	210	107	73	0.85	C		28	21	32	G3/8	25
0.25	8:1	210	107	84	1.2	C/D	G1/2	28	25	32		25
0.32	8:1	210	115	93	1.4	C/D	G1/2	28	25	32		25
0.5	8:1	210	135	107	2.2	C	G1/2	28	25	32		25
0.75	8:1	210	148	125	3.0	C	G1/2	28	25	32		25
1.0	4:1	210	164	140	5.0	C	G1/2	28	25	32		25
1.4	4:1	210	182	153	5.9	C	G1/2	28	25	32		25
2.0	4:1	210	200	173	9.2	C	G3/4	35	30	41		30
2.8	4:1	210	256	173	11	C	G3/4	35	30	41		30
3.5	4:1	210	300	173	13.8	C	G3/4	35	30	41		30
4.0	4:1	210	320	173	15.2	C	G3/4	35	30	41		30

### 四. 订货说明 Ordering Note :

如有特殊要求, 请与本公司商洽。

If you have special requirements, please contact our company for advice.



## 宁波圣瑞液压机械有限公司

Ningbo Shengrui Hydraulic Machinery Co.,LTD.

国际贸易部

INTERNATIONAL TRADE DEPARTMENT:

TEL:0086-574-88900766

FAX:0086-574-88900766

国内业务部

DOMESTIC TRADE DEPARTMENT:

TEL:0086-574-88900767 88900768

FAX:0086-574-88900766

地址:浙江省宁波奉化经济开发区东江路88号

ADD: No.88Road,Fanghua,Ningbo,China.

网址:www.nbshengrui.cn P.C:315500

邮箱: zhaofeng315@126.com

SHE