

WORKSHOP

车间



WHY CHOOSE US

Reputation · Quality · Service



OEM/ODM
The worldwide order
OEM customized order are
accepted and welcomed.



QUALITY
Well finished product,
Quality guaranteed strict
quality control.



SERVICE
Superior quality, efficient
and fast service.



DELIVERY
Received/first Delivery



福建联骏机械有限公司

FUJIAN LIANJUN MACHINERY CO., LTD.

地址：福建省泉州南安工业装备制造业基地滨南7路7号
ADD: Lane 7 No.7 Binan Road · Bin Jiang Machinery Equipment Manufacture
Industrial Park · Nanan · Quanzhou city, Fujian Province, China

电话(TEL): +86-595-26552999 +86-595-26982555
传真(FAX): +86-595-26561789 手机(MOBILE): +86-13645977333
E-mail: info@cljmachinery.com

<http://www.cjmachinery.com> <http://cljmachinery.en.alibaba.com>

专业生产底盘件四轮一带
斗轴/斗轴套

SPECIALIZING IN THE PRODUCTION OF
FOUR-WHEEL AND ONE-BELT PIN
BUSHING AND OTHER WEARING PARTS.

联骏机械
LIANJUN MACHINERY

智造不息 转动不止

ABOUT US

关于我们




Fujian Lianjun Machinery Co., Ltd. is located in Binjiang Industrial Park, Xiamen Town, Nanan, Quanzhou City, covering an area of over 20,000 square meters. Our company specializes in producing excavator, bulldozer undercarriage parts, bucket pin and bushing, track pin and track bushing, teeth pin and other wearing parts. More than 90% of our products are exported to overseas countries and regions around the world.

福建联骏机械有限公司位于泉州市南安镇滨南工业园区，占地面积2万多平方米，我司专业生产挖掘机、推土机底盘四轮一带及斗轴、斗轴套、销轴等零件，我们的产品90%以上出口国外，产品远销世界几十个国家和地区。





油槽形状 Oil-Groove Shape

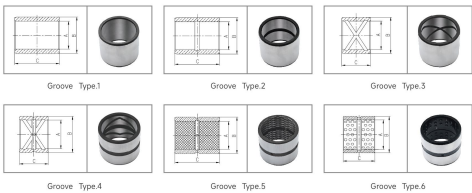

产品特性 Characteristics

| 产品分类 ITEM | 材质 MATERIAL | 热处理 Heat treatment | 表面处理 Surface treatment | 润滑型式 Lubricating type |
|-------------------------------------|--|--|--|---|
| 渗碳淬火钢套 Carburizing and quenching | 20CrMnTi, 20CrMo 等低碳合金钢 20CrMnTi, 20CrMo etc. Low carbon steel or low carbon alloy | 表面渗碳淬火, 表面硬度 58-62HRC, 渗碳层深度 0.8-1.5mm, Surface hardness 58- 62HRC, and carburizing layer 0.8-1.5mm | 磨白 磷化 电泳 Grinding Phosphating Electrophoresis | 八字油槽 螺旋油槽 网纹油槽 蜂窝油槽 8 Shape oil grooves Spiral grooves Nets oil grooves Dotted oil grooves |
| 整体淬火钢套 Whole quenching | 40Cr等中合金钢 40Cr etc. Middle carbon alloy steel | 整体淬火, 硬度50-55HRC, Whole quenching, hardness 50-55HRC | | |



产品特性 Characteristics

| 材质 Material | 45、40Cr | 42CrMo |
|----------------------------|---|---|
| 基体硬度 Tempering hardness | 228-261 HB | 238-276HB |
| 表面淬火 Surface quenching | 高频淬火 表面硬度: 62-56HRC 淬硬层深度: 1.8-2.8mm High-frequency quenching, surface hardness 62-56HRC hardening depth 1.8-2.8mm | 高频淬火 表面硬度: 54-60HRC 淬硬层深度: 1.8-2.8mm High-frequency quenching, surface hardness 54-60HRC hardening depth 1.8-2.8mm |
| 表面处理 Surface treatment | 表面可做镀铬处理, 镀铬层厚度0.02-0.05mm, 硬度≥900HV Surface hard chrome plating treatment is available and chrome layer thickness can be 0.02/0.05mm, hardness is greater than or equal to 900HV | |



支重轮 Track Roller 托链轮 Carrier Roller



驱动轮 Sprocket 引导轮 Front Idler

