



EVERLEAD

**LEADING EXCAVATOR
ATTACHMENTS
MANUFACTURE**

CONTENTS >>>



Company Profile	01
Certificate	02
Workshop Machine Tools	03
Workshop Production	04
Production Process	05
Hydraulic Hammer Breaker	06
Tilt / rotating Quick Hitch	08
Tilt Quick Hitch Coupler.....	09
Double Locking Quick Hitch Coupler.....	09
RT-Pulverizer	10
Pulverizer	10
Scrap Shear	11
Hydraulic Mulcher	12
Hydraulic Plate Compactor	13
RT-Sorting Grapple	14
Sorting Grapple	14
RT-Grapple	15
RT-Timber Grapple	16
Timber Grapple	16
Finger Grab	17
High Finger Grab	17
Grab Bucket	17

COMPANY PROFILE

Advanced equipment leader, focus on R & D and production of construction machinery, forest machinery, Agriculture machinery.

Major products: Hammer breaker, Quick hitch coupler, Scrap shear, Pulverizer, Crusher, grab with saw, sorting grapple, scrap grapple, timber grapple, Mulcher, grab bucket; Compactor, and skid steer loader attachments.

Have excellent R & D team and strict quality control system.

We sincerely welcome you to join us to create a prosperous future!





Certificate




Workshop Machine Tools



Cnc Machine Efficient And Precise

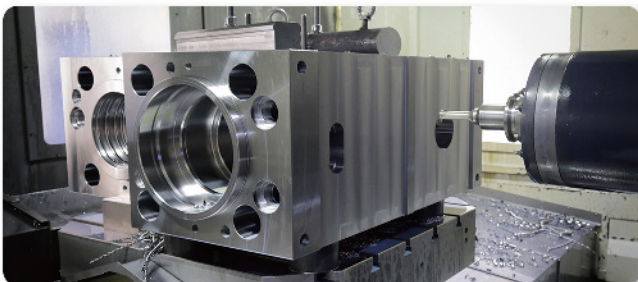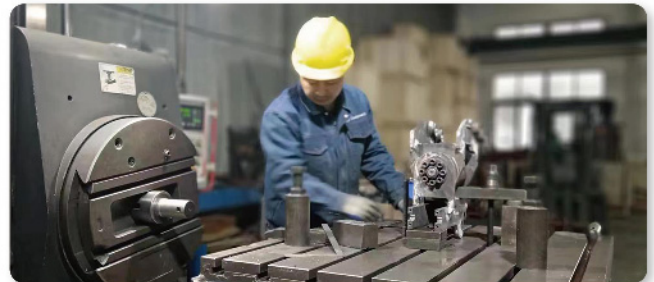

Workshop Production

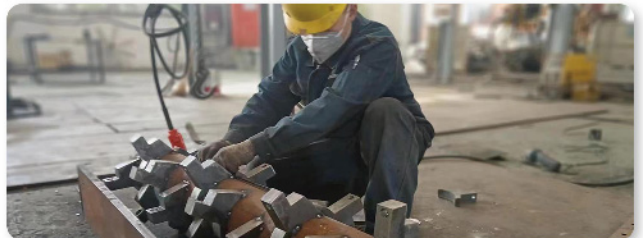

Production Process

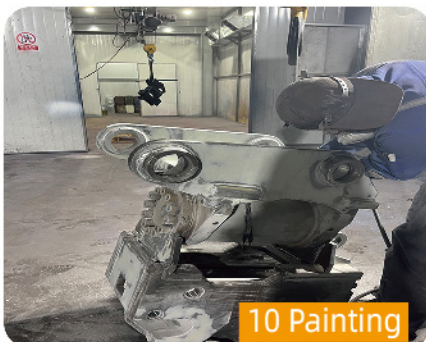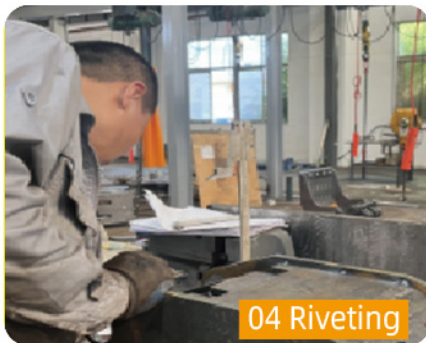

Hydraulic Hammer Breaker



Side Type



Top Type



Box Type



Model	ELB450	ELB530	ELB680	ELB750	ELB850	ELB1000	ELB1350	ELB1400	ELB1550	ELB1650	ELB1750
	SB20	SB30	SB40	SB43	SB45	SB50	SB81N SB70	SB81	SB121	SB131	SB151
Suit excavator (ton)	1.2-3	2.5-3	3-7	6-9	7-14	10-15	18-25	20-30	27-36	30-45	40-50
Working Flow Rate (Liter/min)	20-40	25-45	36-60	50-90	45-85	80-120	130-170	150-190	150-230	200-260	210-280
Working Pressure (bar)	90-120	90-120	110-140	120-170	127-147	150-170	160-185	165-195	170-200	180-200	180-200
Impact Rate (bpm)	700-1200	500-1100	500-900	400-800	400-800	400-650	400-650	400-800	400-800	250-400	250-350
Chisel Diameter (mm)	45	53	68	75	85	100	135	140	155	160	175
Hose Diameter (inch)	1/2	1/2	1/2	1/2	1/2	3/4	1	1	1-1/4	1-1/4	1-1/4
Weight (Side/Top/Box)	91/91/125	154/154/151	259/339/357	331/405/446	554/633/729	757/862/1003	1649/1843/1889	1763/2055/2007	2573/2750/2964	2747/3152/2912	3901/4053/3898

- Forged material with more hardness
- Real 20CrMo raw material for cylinder and front head and back head
- Higher manufacture required tolerance with professional CNC machine
- Experienced worker with much sensitive for quality and assembly control



Tilt /rotating Quick Hitch

- Compact structure, suitable for small space operation, compared with the traditional connector can achieve 120° swing, can also achieve 360° rotation. More flexible and convenient to use.
- The hitch cylinder is integrated, one set oil line control double cylinder, large thrust, high strength, more stable; The cylinder is also integrated with a hydraulic control check valve to prevent attachments from falling off when the oil line fails.
- The rotating mechanism is driven by turbine worm structure. The turbine is made of wear-resistant copper material and the worm is made of 40Cr. And with a locking function. The turbine does not rotate due to the self-weight of the attachments.
- The motor is installed inside the shell to avoid collision damage.
- Rotary joint can be selected according to customer needs multi-channel, up to 8.
- According to customer needs to choose a single motor or double motor drive rotation.
- PLC control system.

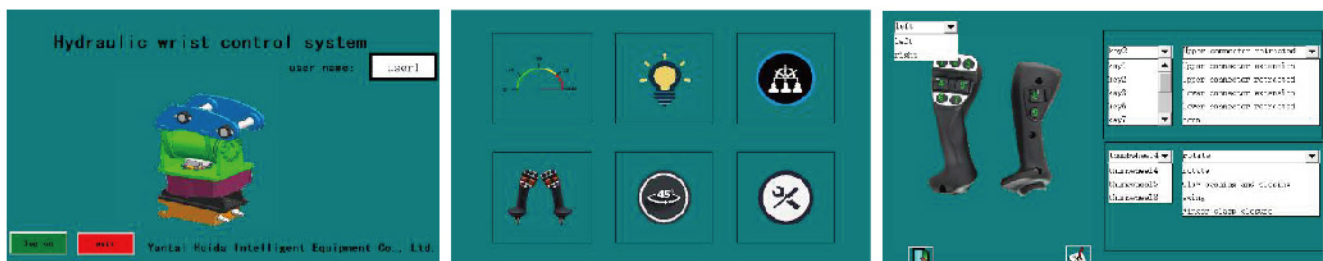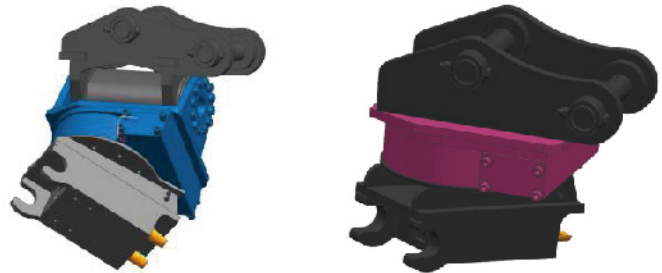


Tilt Quick Hitch Coupler

- Powerful Tilt Cylinder;
- Double Locking;
- Large Pins Range;
- Compact Structure.



Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0300
Tilt Degree	°	±90	±90	±90	±90	±70	±70	-
Tilt working pressure	Bar	210	210	210	210	210	210	-
Tilt working flow	Lpm	2-4	5-16	5-16	5-16	19-58	22-67	-
working pressur	Bar	25-300	25-300	25-300	25-300	25-300	25-300	-
Necessary flow	Lpm	15-25	15-25	15-25	15-25	15-25	15-25	-
Excavator weight	Ton	1-2	3-4	4-6	6-9	10-15	17-22	-
Weight	Kg	53	110	160	210	420	635	-


Double Locking Quick Hitch Coupler

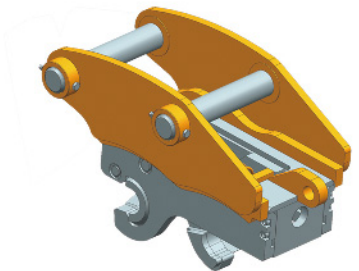

Category	Unit	ELB0015	ELB0025	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0260	ELB0300	ELB0400
Quick Coupler Working Pressure	bar	25-200	25-200	25-200	25-200	25-200	25-200	25-200	25-200	25-200	25-200
Necessary Flow	Lpm	15-25	15-25	15-25	15-25	15-25	15-25	20-30	20-30	20-30	20-30
Excavator	Ton	1-1.9	2-2.9	3-3.9	4-5.9	6-9.9	10-14.9	18-23.9	24-29.9	30-36.9	37-51.9
Pin refer	mm	20-30	30-35	35-40	40-45	50-55	60-65	80	90	90-100	100-120
Weight	Kg	35	41	48	70	108	200	320	580	620	870

RT-Pulverizer

- HALLITE seals;
- Replaceable teeth ;
- Wear-resistant alloy steel blade; NM450 steel, 42CrMo pins;
- Good toughness and wear resistance.

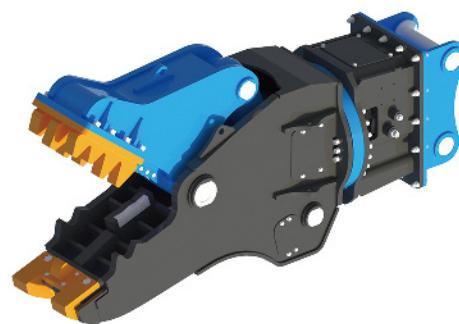

Category	Unit	ELB0135	ELB0200	ELB0260	ELB0300
Open width	mm	700	790	880	950
Crushing force	Ton	65	75	100	120
Shear force	Ton	180	220	305	340
Blade length	mm	180	220	240	240
Motor Pressure(for rotating)	kg/cm ²	120-150	120-150	120-150	120-150
Motor Flow(for rotating)	lpm	40-70	40-70	40-70	40-70
Working pressure	Mpa	31	32	32	32
Hydraulic Flow	Lpm	120-180	180-250	180-250	200-300
Excavator weight	ton	10-15T	16-23T	23-30T	30-37T
Weight	kg	1630	2050	2600	3200

Pulverizer



Category	Unit	ELB0050	ELB0080	ELB0135	ELB0200	ELB0260	ELB0300
Open width	mm	1032	1344	1723	2100	2100	2500
Hight	mm	420	600	750	850	900	1020
Width	mm	75	95	112	180	180	360
Crushing force	KN	260	510	650	1170	1170	1500
Crushing force	KN	170	260	470	994	994	1350
Working pressure	Mpa	24	24	31	32	32	32
Hydraulic Flow	Lpm	80-120	100-140	120-180	180-250	180-250	200-300
Excavator weight	ton	3-5T	6-9T	10-15T	15-25T	20-30T	30-36T
Weight	kg	270	480	880	1600	1980	2500

Scrap shear


- HALLITE seals;
- Wear-resistant alloy steel blade; NM450 steel, 42CrMo pins;
- Good toughness and wear resistance.



Model	Unit	ELB80	ELB150	ELB250	ELB350	ELB400	ELB450
Excavator weight - Arm installation	ton	6-9	12-18	20-28	30-38	36-45	40-50
Excavator weight - Boom installation	ton	-	-	-	20-38	26-45	30-50
Oil Cylinder Pressure	bar	200	250-300	250-300	300-320	320-350	320-350
Operating flow	lpm	100	90-110	180-220	200-250	200-250	250-300
Weight	kg	580	1350	2400	3100	3950	5200
Motor Flow(for rotating)	lpm	30	30-40	30-40	30-40	30-40	30-40
Motor Pressure (for rotating)	bar	100	90-110	100-115	100-115	100-115	100-115
Open width	mm	300	380	590	650	650	810
Full Length	mm	1790	2100	2700	3450	3650	4300
Cutting Depth	mm	400	525	630	680	720	800

Hydraulic Mulcher


- Powerful forestry mulcher

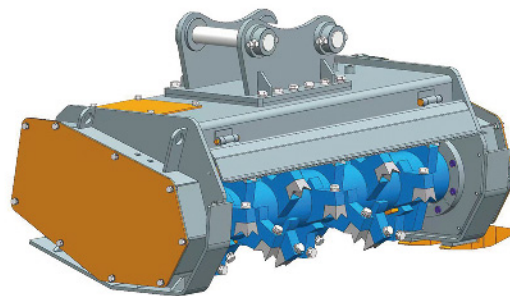

Model	Unit	ELB400	ELB800	ELB1200
Working width	(mm)	1000	1500	1800
Working pressure	(Bar)	110-140	145-165	190-220
Working Flow	(L/min)	40-70	80-110	120-180
Used for	(Ton)	3-9	10-16	20-30
Cutting Tree diameter	(mm)	120	250	400
Production Size	(mm)	529*1229*794	953*1820*994	1123*2071*1103
Weight	(kg)	400	800	1213

Hydraulic Plate Compactor



- Efficient Compaction.
- Equipped With Permco Motor,
- NTN Bearing.

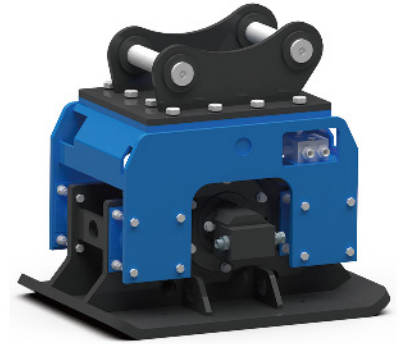

Model	Unit	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0300
Length	mm	800	900	900	1160	1300	1500
Height	mm	435	530	530	650	720	730
Width	mm	442	550	550	700	900	900
Impulse force	ton	3	4	4	6.5	11	15
Vibration frequency	rpm/min	2000	2000	2000	2000	2200	2200
Oil flow	l/min	30-60	45-85	45-85	85-105	120-170	120-170
Operating pressure	kg/cm ²	100-130	100-130	100-130	100-150	150-200	150-200
Bottom measurement	mm	800*442	900*550	900*550	1160*700	1300*900	1500*1000
Excavator weight	ton	2-4	4-6	6-10	12-16	18-24	30-40
Weight	kg	200	350-500	350-500	650-800	900-1000	1100-1300


RT- Sorting Grapple

- Cylinder Equipped With Hallite Seals, sun Valve.
- Q355+nm450 Steel, 42crmo Pins;
- Replaceable Teeth Blade;

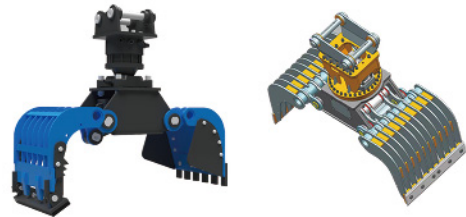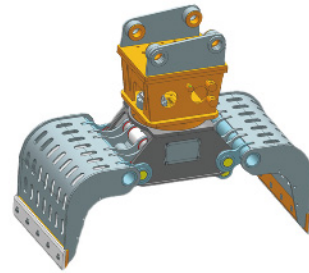

Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0300
Excavator weight	ton	1-2	3-4	4-6	6-10	12-16	17-26	26-33T
Open width	mm	800	1200	1430	1540	1700	1980	2100
Hight	mm	200	325	410	430	445	540	570
Width	mm	350	450	500	600	800	1030	1100
Weight	kg	108	240	390	460	845	1350	1750
Motor Pressure(for rotating)	kg/cm ²	80-100	90-110	110-120	110-120	130-150	130-150	130-150
Motor Flow(for rotating)	lpm	15-25	20-35	30-55	30-55	40-70	40-70	40-70
Oil Cylinder Pressure	kg/cm ²	110-140	110-140	160-200	160-200	180-230	180-230	200-250
Oil Cylinder Force	ton	2.5	4	9	10	15	16	18
Operating flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140	100-150


Sorting Grapple

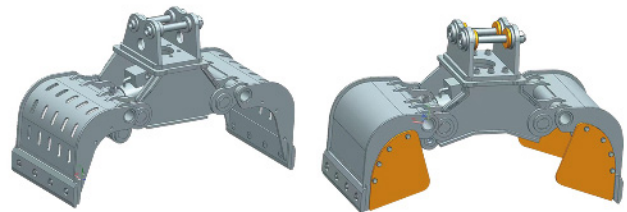

Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0300
Excavator weight	ton	1-2	3-4	4-6	6-10	12-16	17-26	26-33T
Open width	mm	800	1200	1430	1540	1700	1980	2100
Hight	mm	200	325	410	430	445	540	570
Width	mm	350	450	500	600	800	1030	1100
Weight	kg	82	170	293	360	660	1100	1400
Oil Cylinder Pressure	kg/cm ²	110-140	110-140	160-200	160-200	180-230	180-230	200-250
Oil Cylinder Force	ton	2.5	4	9	10	15	16	18
Operating flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140	100-150

RT-Grapple


- 360 Degree Rotation With M+s /parker Motor.
- Cylinder Equipped With Hallite Seals,sun Valve.
- Q355+nm450 Steel, 42crmo Pins;
- Replaceable Teeth.

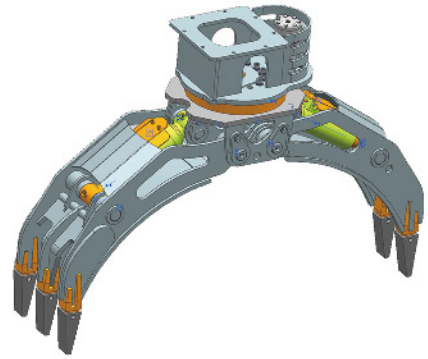

Model	Unit	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0300
Excavator weight	ton	3-4	4-6	6- 10	12- 16	17-26	26-33T
Open width	mm	1140	1410	1510	1650	2450	2550
Hight	mm	460	580	660	770	970	1100
Width	mm	370	386	400	550	700	800
Weight	kg	230	390	420	780	1420	1700
Motor Pressure (for rotating)	kg/cm ²	90-110	110-120	110-120	130-150	130-150	130-150
Motor Flow (for rotating)	lpm	20-35	30-55	30-55	40-70	40-70	40-70
Oil Cylinder Pressure	kg/cm ²	110-140	160-200	160-200	180-230	180-230	200-250
Oil Cylinder Force	ton	4	7	8	14	22	27.5
Operating flow	lpm	25-40	30-55	50- 100	90- 110	100- 140	100-150

RT-Timber Grapple

- 360 Degree Rotation With M+s /parker Motor.
- Cylinder Equipped With Hallite Seals,sun Valve.
- Q355+nm450 Steel, 42crmo Pins;
- Replaceable Teeth.

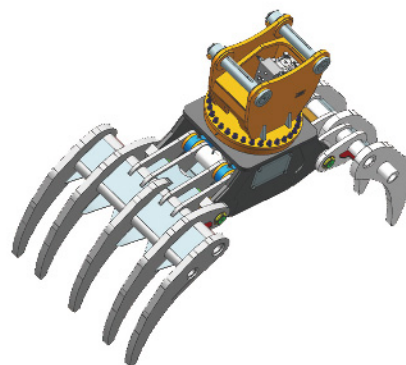

Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200
Excavator weight	ton	1-2	3-4	4-6	6-10	12-16	17-26
Open width	mm	1000	1270	1350	1525	1845	2500
Hight	mm	215	395	430	450	500	550
Width	mm	360	450	550	650	775	850
Weight	kg	136	280	445	540	1000	1150
Motor Pressure(for rotating)	kg/cm ²	80-100	90-110	110-120	110-120	130-150	130-150
Motor Flow(for rotating)	lpm	15-25	20-35	30-55	30-55	40-70	40-70
Oil Cylinder Pressure	kg/cm ²	110-140	110-140	160-200	160-200	180-230	180-230
Operating flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140


Timber Grapple



Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200
Excavator weight	ton	1-2	3-4	4-6	6-10	12-16	17-26
Open width	mm	1000	1270	1350	1525	1845	2500
Hight	mm	215	395	430	450	500	550
Width	mm	360	450	550	650	775	850
Weight	kg	110	215	340	440	810	900
Oil Cylinder Pressure	kg/cm ²	110-140	110-140	160-200	160-200	180-230	180-230
Operating flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140


Finger Grab

- Cylinder Equipped With Hallite Seals, sun Valve.
- Q355+nm450 Steel, 42crmo Pins;
- Replaceable Teeth.



Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200
Excavator weight	ton	1-2	3-4	4-6	6- 10	12- 16	17-26
Open width	mm	610	745	820	900	1200	1509
Hight	mm	400	500	600	630	810	980
Width	mm	430	400	490	540	620	820
Weight	kg	110	180	290	370	630	780
Oil Cylinder Pressure	kg/cm ²	110- 140	110-140	160-200	160-200	180-230	180-230
Operating flow	lpm	25-40	25-40	30-55	50- 100	90- 110	100- 140

High Finger Grab



Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200
Excavator weight	ton	1-2	3-4	4-6	6- 10	12- 16	17-26
Open width	mm	1000	1270	1350	1525	1845	2080
Hight	mm	215	395	430	450	500	2100
Width	mm	360	450	550	650	775	740
Weight	kg	110	215	340	440	810	1080
Oil Cylinder Pressure	kg/cm ²	110- 140	110-140	160-200	160-200	180-230	180-230
Operating flow	lpm	25-40	25-40	30-55	50- 100	90- 110	100- 140

Grab Bucket



Model	Unit	ELB0015	ELB0030	ELB0050	ELB0080	ELB0135	ELB0200	ELB0300
Excavator weight	ton	1-2	3-4	4-6	6- 10	12- 16	17-26	26-33T
Open width	mm	700	900	1300	1335	1800	2275	2300
Bucket Width	mm	300	350	400	400	530	700	1000
Weight	kg	110	155	260	300	730	1260	1550
Oil Cylinder Pressure	kg/cm ²	110- 140	110-140	160-200	160-200	180-230	180-230	200-250
Operating flow	lpm	25-40	25-40	30-55	50- 100	90- 110	100- 140	100-150



Yantai Everlead Machinery Equipment Co., Ltd.

Address: No.61 Hongfu Street, Fushan district, Yantai City, Shandong province, China

Tel: +86-136-7535-5230

Email: admin@yteverlead.com

Http: www.yteverlead.com