

线性推杆 Linear Actuator OM4

Application 应用


Applications: construction machinery, agricultural machinery, industrial automation, solar energy and other applications.
工程机械 农用机械 工业自动化 太阳能及其他应用

Technical Specification 技术参数

Rated Voltage:DC12V / 24V
额定电压
Current Without Load:0.6A
空载电流
Rated Current:3.5A
额定电流
Maximum Torque:0.30N.m
最大扭力
Motor Speed: 45~180RPM
电机转速
Installation Size:45mm
安装尺寸
Installation Diameter:M6
安装孔径
Working Frequency:10%(2 minutes longest continuous operation)
工作频率
Working Temperature: -5~45℃
工作温度



Installation Dimension 安装尺寸

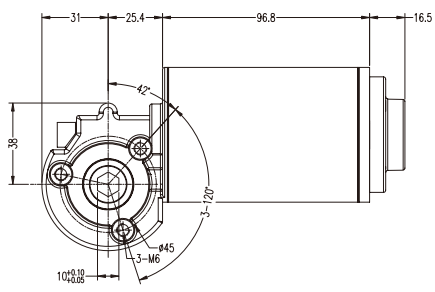

线性推杆 Linear Actuator OD3

Application 应用


Applications: construction machinery, agricultural machinery, industrial automation, solar energy and other applications.
工程机械 农用机械 工业自动化 太阳能及其他应用

Technical Specification 技术参数

Rated Voltage: DC 12V/24V/36V
额定电压
Electricity: 22A/11A/6A
电 流
Rated Power: 144W
额定功率
Stroke Length: 100-1000mm
行 程
Max Load: 15000N/10000N/8000N/5000N/2600N/1700N
最大负载
Speed Without Load: 2.5/5/11/25/41/68mm/s
空载速度
Waterproof Grade: IP67
防護等級
Self-locking Device: Mechanical Self-locking Device
自鎖裝置
Tail Mode: Allow Rotated 30 degrees To Adjust
尾部方式
Position Device: Built In Limit Switches
限位裝置
Signal Feedback: Potentiometer (10 turns)/hall Switch signal feedback
信號反饋
Manual Operation: Manual Crank/Manual Operation(Optional)
手動操作
Working Temperature: -40℃~65℃
工作溫度
Working Frequency: 10% (Max 15%)
工作頻率
Safety Certification: CE
安規認證



Installation Dimension 安 装 尺 寸

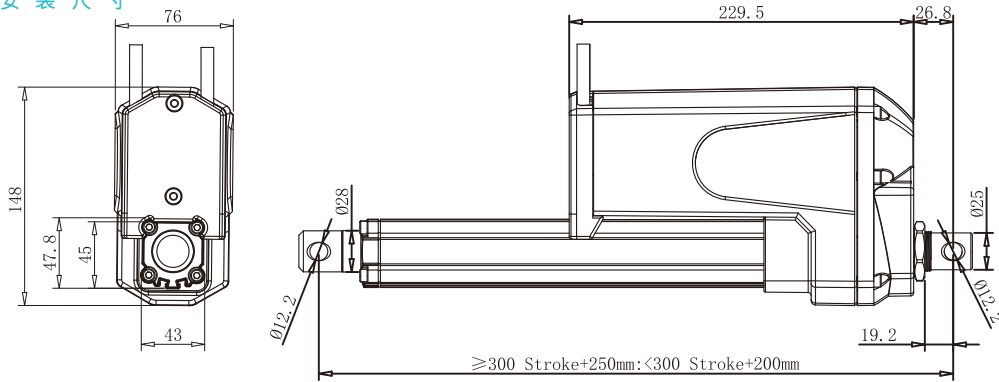


ONEPOWER[®]
Innovation moving the world

Tel:+86-752-3865115 Fax:+86-752-3865116
Email: dukelai@h-antech.tw Website: www.h-antech.com.tw
Factory address:No.2,Area A, Qiaosheng Industrial Area,Panli,
LilingTown, Zhongkai high tech Zone Huizhou,Guangdong

電話: +86-752-3865115 傳真: +86-752-3865116
郵箱: dukelai@h-antech.tw 網址: www.h-antech.com.tw
工廠地址: 廣東省惠州市仲愷高新區滘林鎮洋滘村橋勝工業區A區2號



ONEPOWER[®]
Innovation moving the world

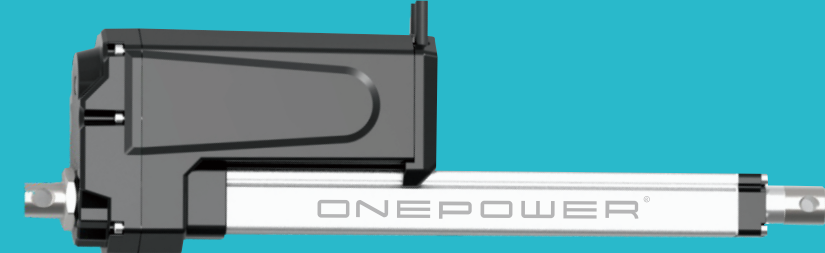

HuiZhou H-antech Motion System CO.,Ltd
惠 州 市 汉 泰 科 传 动 系 统 有 限 公 司

Global Professional Linear Actuator Provider of Animal Husbandry
线性推杆全球专业提供商



公 司 簡 介

HuiZhou H-antech Motion System CO., Ltd is a high-tech enterprise integrating design, manufacturing, and marketing. It focuses on the research, development and production of linear actuators for more than 30 years. The brands are ONEPOWER and H-ANTECH. Its products are widely used in the fields of construction machinery, agricultural machinery, animal husbandry, medical rehabilitation equipment, and so on. The products have obtained CE, FCC, UL (CUL), CSA, EMC, IEC60601, and ISO9001 quality system certification. H-antech has become a professional linear actuator provider in the field of transmission by the innovation high-quality products, competitive price and quality service.

惠州市漢泰科傳動系統有限公司是設計、製造、營銷一體的高新技術企業，專注线性推杆研發生產30年+，品牌ONEPOWER/H-ANTECH，產品廣泛用于工程機械，農用機械，畜牧養殖業 太陽能跟蹤，醫療康復設備等領域，已獲得CE、FCC、UL (CUL)、CSA、EMC、IEC60601、ISO9001質量認證體系認證。以創新的理念、高品質的產品、極具競爭的單價和優質的服務，漢泰科已成為线性推杆全球專業提供商。

线性推杆 Linear Actuator OD1 OD1P

Application 应用


Applications: construction machinery, agricultural machinery, industrial automation, solar energy and other applications.
工程机械 农用机械 工业自动化 太阳能及其他应用

Technical Specification 技术参数

Rated Voltage: DC 12V/24V/36V
额定电压
Rated Power: 42W
额定功率
Stroke Length: 50-700mm
行 程
Max Load: 1200N/1000N/750N/500N/240N/120N
最大负载
Speed Without Load: 58/10/17/30/57mm/s
空载速度
Waterproof Grade: IP65
防護等級
Position Device: Built In Limit Switches
限位裝置
Signal Feedback: Potentiometer (10 turns)/hall Switch signal feedback (optional)
信號反饋
Working Temperature: -40℃~65℃
工作溫度
Working Frequency: 10% (Max 15%)
工作頻率
Safety Certification: CE
安規認證



Installation Dimension 安 装 尺 寸

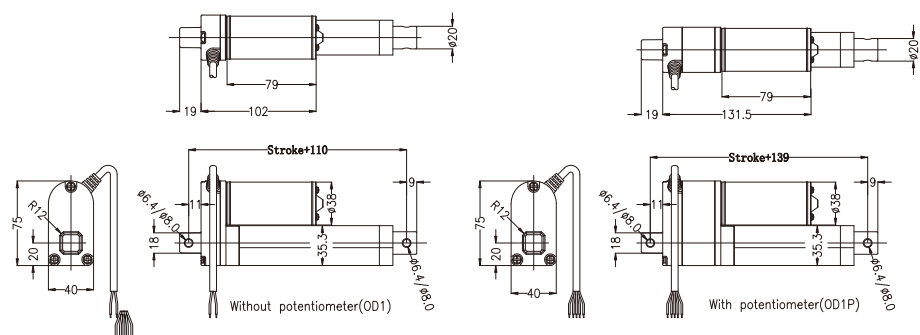

线性推杆 Linear Actuator 6410A

Application 应用


Applications: Engineering machinery, agricultural machinery, industrial automation, medical fitness, and other applications
工程机械 农用机械 工业自动化 健身器材及其他应用

Technical Specification 技术参数

Rated Voltage: AC 120/240V DC 12V/24V
额定电压
Rated Power: 6000N
额定功率
Stroke Length: 4000N
行 程
Max Load: 50-900mm
最大负载
Speed Without Load: 4.1/4.8/5.4/6.4mm/s
空载速度
Position Device: Built In Limit Switches
限位裝置
Signal Feedback: Potentiometer (10 turns)
信號反饋
Working Temperature: 0℃~65℃
工作溫度
Working Frequency: 10% (Max 15%)
工作頻率
Safety Certification: UL
安規認證



Installation Dimension 安 装 尺 寸

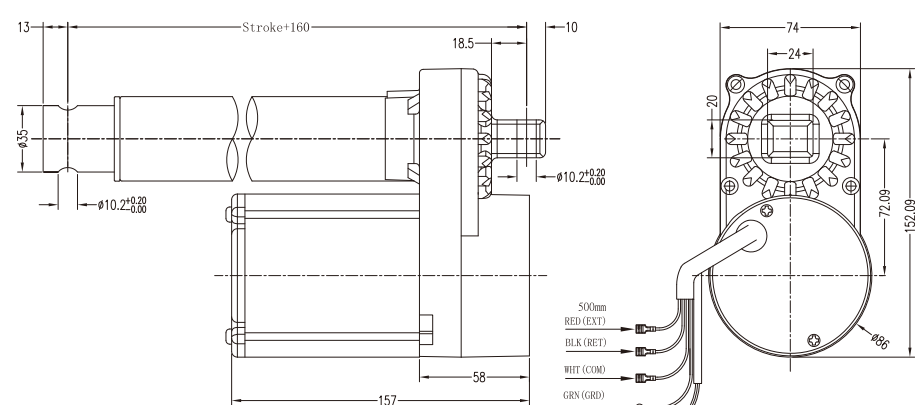

线性推杆 Linear Actuator OD26

Application 应用


Applications: construction machinery, agricultural machinery, industrial automation, solar energy and other applications.
工程机械 农用机械 工业自动化 太阳能及其他应用

Technical Specification 技术参数

Rated Voltage: DC 12V/24V
额定电压
Electricity: 8A
电 流
Rated Power: 240W
额定功率
Stroke Length: 100-800mm
行 程
Max Load: 110000N
最大负载
Speed Without Load: 1.5mm/s
空载速度
Waterproof Grade: IP65
防護等級
Self-locking Device: Mechanical Self-locking Device
自鎖裝置
Tail Mode: Allow Rotated 30 degrees To Adjust
尾部方式
Position Device: Built In Limit Switches
限位裝置
Signal Feedback: Hall Sensor Switch (Optional)
信號反饋
Manual Operation: Manual Crank/Manual Operation(Optional)
手動操作
Working Temperature: -40℃~65℃
工作溫度
Working Frequency: 10% (Max 15%)
工作頻率



Installation Dimension 安 装 尺 寸

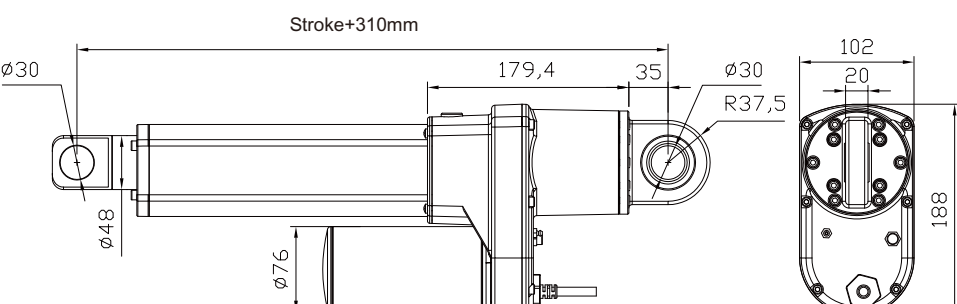

线性推杆 Linear Actuator OD28

Application 应用


Applications: construction machinery, agricultural machinery, industrial automation, solar energy and other applications.
工程机械 农用机械 工业自动化 太阳能及其他应用

Technical Specification 技术参数

Rated Voltage: DC 12V/24V
额定电压
Rated Power: 3000N
额定功率
Stroke Length: 50-600mm
行 程
Max Load: 3000N/1500N
最大负载
Speed Without Load: 4.0/8.0mm/s
空载速度
Position Device: Built In Limit Switches
限位裝置
Signal Feedback: hall /Switch signal feedback (optional)
信號反饋
Working Temperature: -25℃~65℃
工作溫度
Working Frequency: 10% (Max 15%)
工作頻率
Waterproof Grade: IP65
防護等級



Installation Dimension 安 装 尺 寸

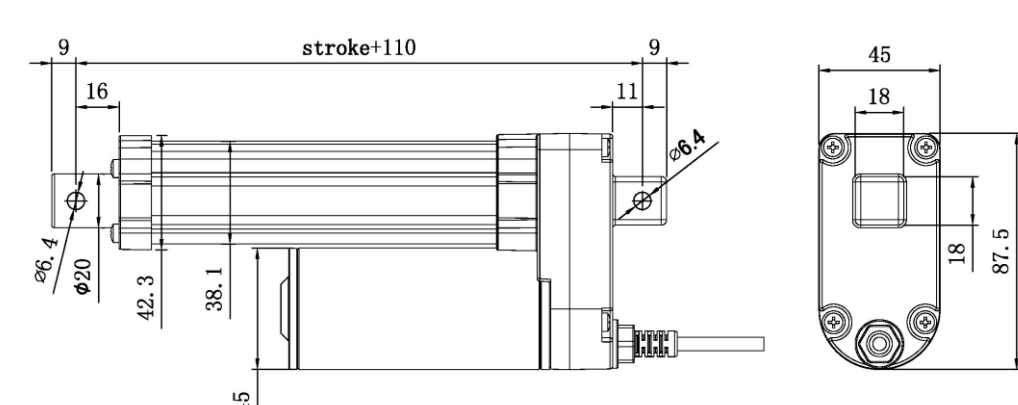

线性推杆 Linear Actuator OD28P

Application 应用


Applications: construction machinery, agricultural machinery, industrial automation, solar energy and other applications.
工程机械 农用机械 工业自动化 太阳能及其他应用

Technical Specification 技术参数

Rated Voltage: DC 12V/24V
额定电压
Rated Power: 42W
额定功率
Stroke Length: 3000N
行 程
Max Load: 2500N
最大负载
Stroke Length: 50-600mm
行 程
Max Load: 3000N/1500N
最大负载
Speed Without Load: 4.0/8.0mm/s
空载速度
Position Device: Built In Limit Switches
限位裝置
Signal Feedback: Potentiometer (10 turns)/ hall /Switch signal feedback (optional)
信號反饋
Working Temperature: -25℃~65℃
工作溫度
Working Frequency: 10% (Max 15%)
工作頻率
Waterproof Grade: IP65
防護等級



Installation Dimension 安 装 尺 寸

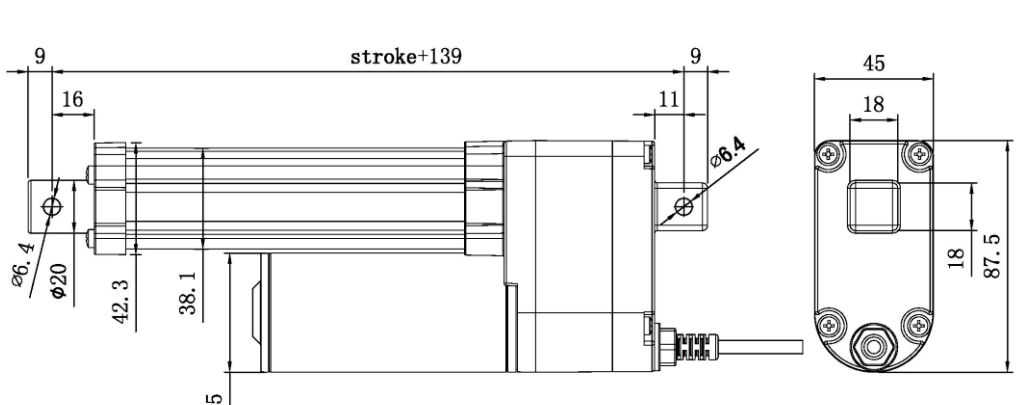

料号

300g双铜