

TJBC

地址(Add): 天津市静海开发区广海道19号
No.19 Guanghai Road, Jinghai New Economic Developed Zone, Tianjin City.
Http: //www.tjbchg.com
E-mail: tjbtc@tjbchg.com
邮编(P.C): 301600
国际市场部(Tel): 86-022-68771238 86-022-68772466 86-022-68771191
国内市场部(Tel): 022-68772455 022-68773298 022-68771258



TJBC[®]
宝成喉箍

公司简介

Company Introduction

TJBC[®]

天津市凯诺实业有限公司成立于1990年，历经三十多年的不懈努力，从一个小小的校办喉箍厂，发展为拥有千名员工、占地34万平方米、销售额超五亿元、拥有中、泰两大生产基地的中国喉箍行业的领军企业。

多年来，公司秉承着“重诺守信，协作共赢”的经营理念，和“坚持持续改进，达到客户满意”的质量方针，不仅与终端客户形成了研发共同体，还主动参与客户总成及零部件的验证与评估。其自主建立的并通过了国家CNAS认证的测试中心，是国内首家具有权威性的针对喉箍类产品的全面验证的实验室。

工欲善其事，必先利其器。模具，是保证质量最重要的环节。为了配合产品从研发到批产的高效转换，公司配备了高精尖的模具加工设备，技术经验丰富的模具开发团队，从而为产品质量的一致性、稳定性提供了有力保证。

凯诺实业根据不同产品分为德式车间、德偏车间、强力车间，A型管束车间，开发区喉箍车间、欧标管束车间等。公司还配备了支持成品生产的辅助车间，包括：纵剪车间、橡胶车间（包含天行健车间和硫化车间）、仪表车间、电镀车间、热处理车间等，完整的产业链，保证了订单交付的及时性、产品质量的稳定性。

公司不断引进国外先进的加工技术，实现产业升级，先后与日本和韩国企业合作成立中外合资企业。

随着企业的发展，凯诺实业的服务范围也不断扩大，产品配套已经覆盖商用车、乘用车、动力总成、工程机械、农业设备、特种设备、新能源等行业；服务的60多个重点客户都是各行业的领军企业，例如：中国一汽、北汽集团、福田集团、中国重汽、陕汽集团、潍柴动力、玉柴动力、云内动力、解放动力、比亚迪汽车、长安汽车、上汽集团、五菱柳机、中国中车、中国一拖、沃尔沃机械、徐工集团、三一集团、中联重工等。凯诺实业在扎根中国市场的同时，也获得了国际市场的认可，产品已经远销德国、荷兰、比利时、法国、西班牙、意大利、美国、加拿大、墨西哥、南非、巴西等80多个国家及地区。

Established in 1990, Tianjin KAINUO Industrial Co., Ltd., through over thirty years of unremitting effort, has developed from a small school-run clamp manufacturer to a leading enterprise in the clamp industry in China. KAINUO now has more than 1,000 employees, covering an area of 340,000 square meters. Its sales revenue exceeding five hundred million yuan, and it has two major production bases in China and Thailand.

For decades, KAINUO has adhered to the business philosophy of “promise and reliability, cooperation and win-win” and the quality policy of “continuous improvement to meet the customers’ requirement”. It has built a R&D Community with its customers, and it also actively involved in verifying and assessing clients' assemblies and component parts. KAINUO’ s own testing center, which has been certified by CNAS (China National Accreditation Service for Conformity Assessment), is the first authoritative lab in China that conducts comprehensive verification of hose clamp products.

"He that would perfect his work must first sharpen his tools". The mold, is the most critical tool to ensure product quality. In order to efficiently transfer products from R&D to mass production, the company is equipped with high-precision mold processing equipment and an experienced mold development team. This provides a strong guarantee for the consistency and stability of product quality.






KAINUO has different workshops specialized in manufacturing specific products. For example, it has dedicated workshops for German type clamps, non-perforated type clamps without welded housing design, heavy duty clamps and A-type No-Hub couplings, it also has a Development Zone clamp workshop and workshops for European standard No-Hub couplings. Also, it has different auxiliary workshops to facilitate production, including the slitting workshop, rubber workshop, instrument workshop, electroplating workshop, heat treatment workshop etc. KAINUO’ s complete industrial chain secured product delivery cycle and the stability of product quality.

KAINUO continues to introduce advanced foreign processing technology to achieve industrial upgrades. It has established joint ventures with Japanese and Korean enterprises respectively.

As KAINUO grows, its product line keeps expanding, with product covering industries such as commercial vehicles, passenger vehicles, powertrains, construction machinery, agricultural equipment, special equipment, and new energy and more. It's serving over 60 key customers who are all industry-leading companies like China FAW Group Co., Ltd., Beijing Automotive Group, Foton Motor Group, Shandong Heavy Industry Group, Shaanxi Heavy Duty Automobile Group, Weichai Power Co., Ltd., Yuchai Heavy Industry Co., Ltd., Yunnan Yunnei Power Group Co., Ltd., Faw Jiefang Automotive Co., Ltd., BYD Auto Co., Ltd., Chang'an Automobile Co., Ltd., SAIC Motor Co., Ltd., LiuZhou Wuling Liuji Power Co., Ltd., CRRC Co., Ltd., YTO Group Corporation, Volvo Construction Equipment, Xuzhou Construction Machinery Group, Sany Heavy Industry Co., Ltd., Zoomlion Heavy Industry Science & Technology Development Co., Ltd., and more. While KAINUO is deeply rooted in the Chinese market, it has also gained recognition in the international market. The products have been exported to over 80 countries, including Germany, the Netherlands, Belgium, France, Spain, Italy, the United States, Canada, Mexico, South Africa, Brazil, and more.


■ Workshop 生产厂房

■ Certificate 证书

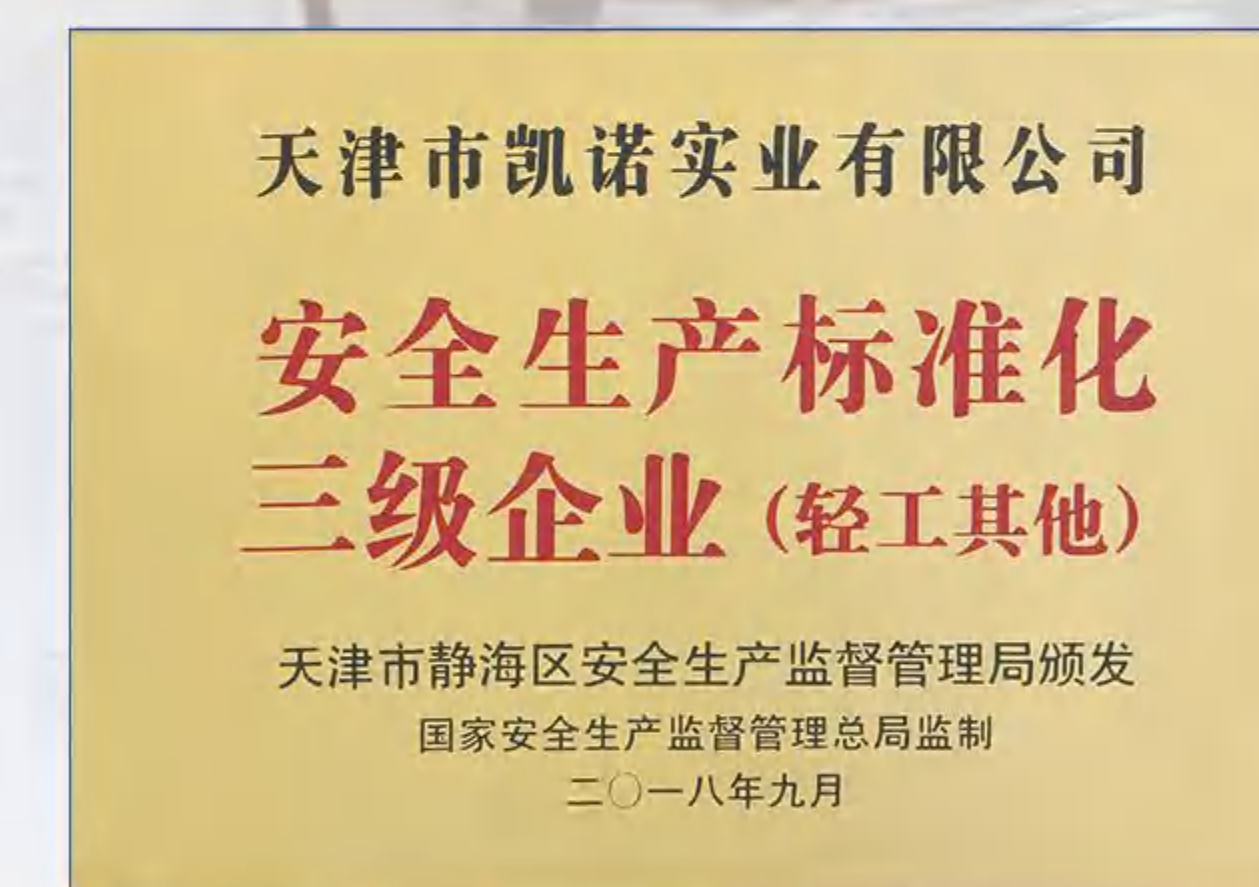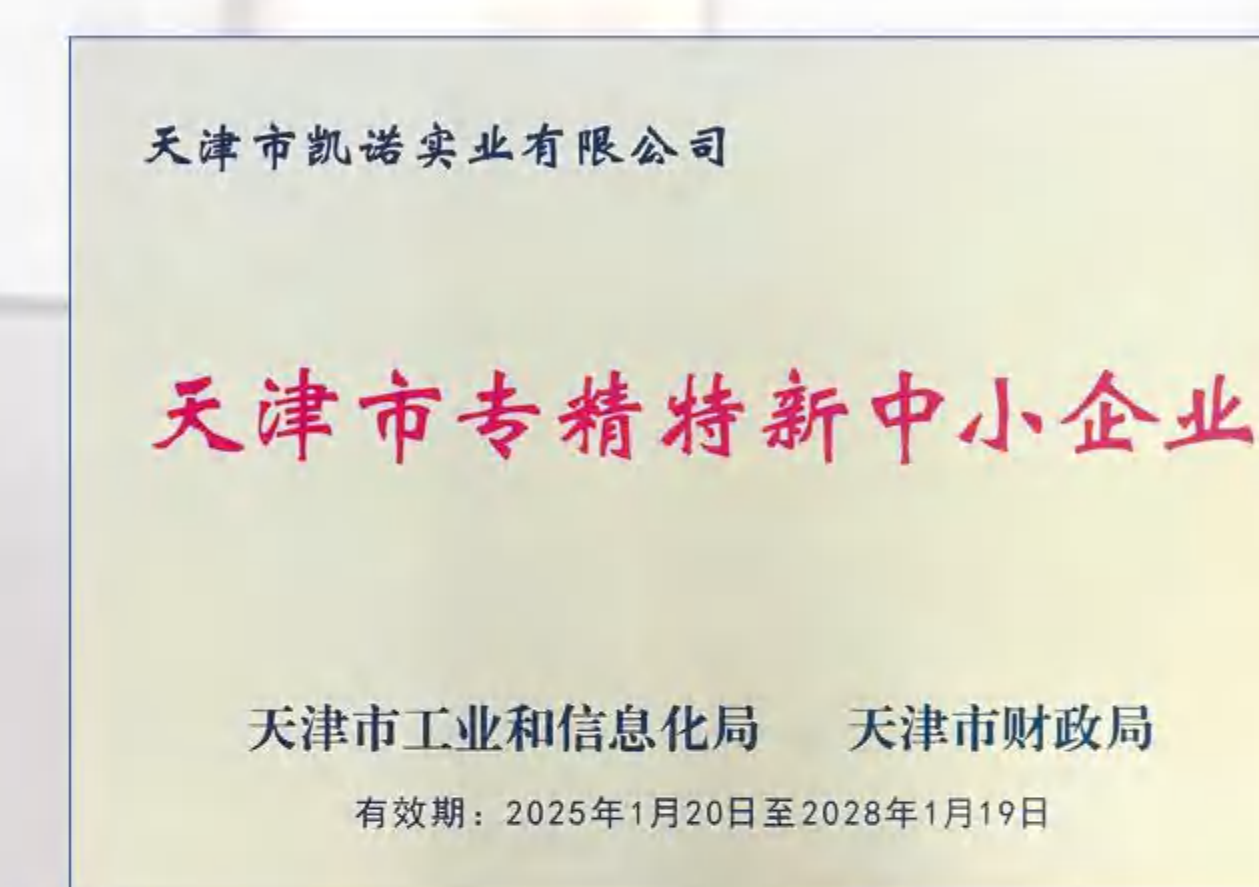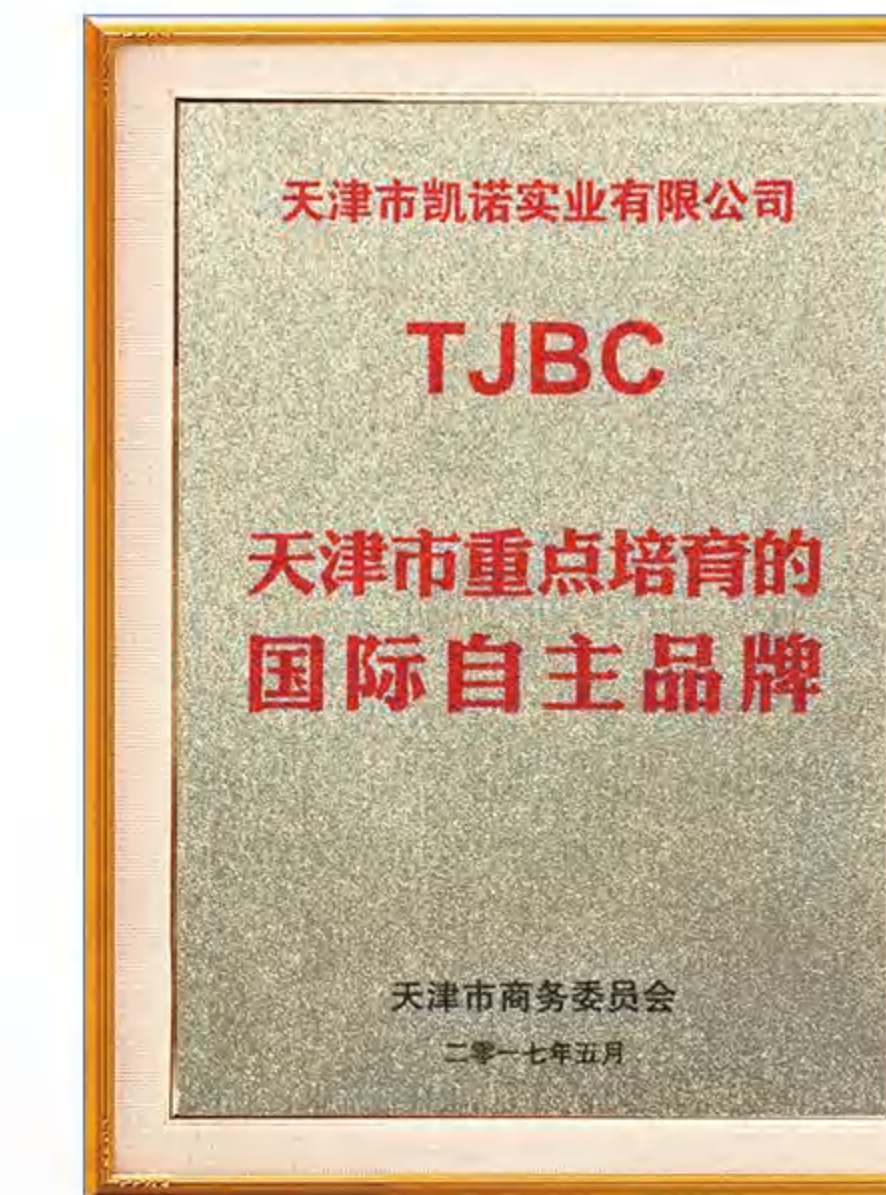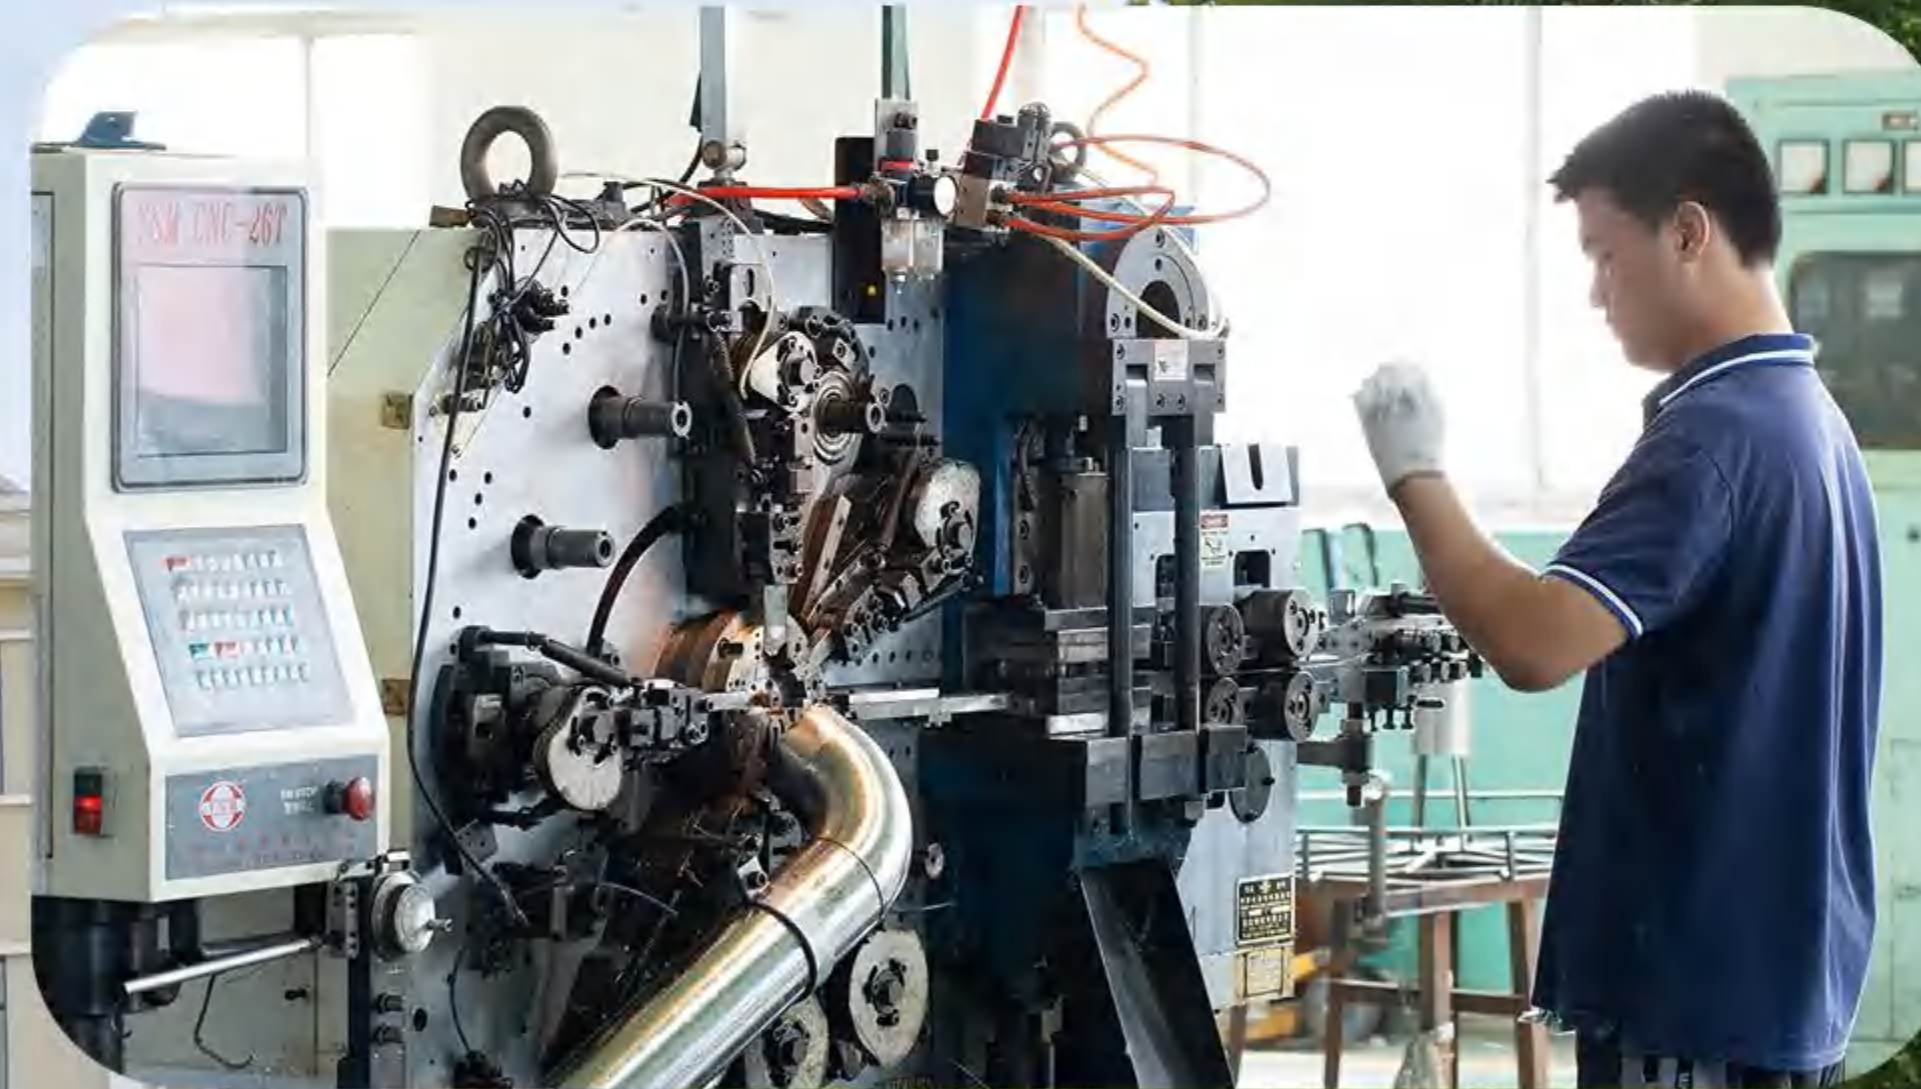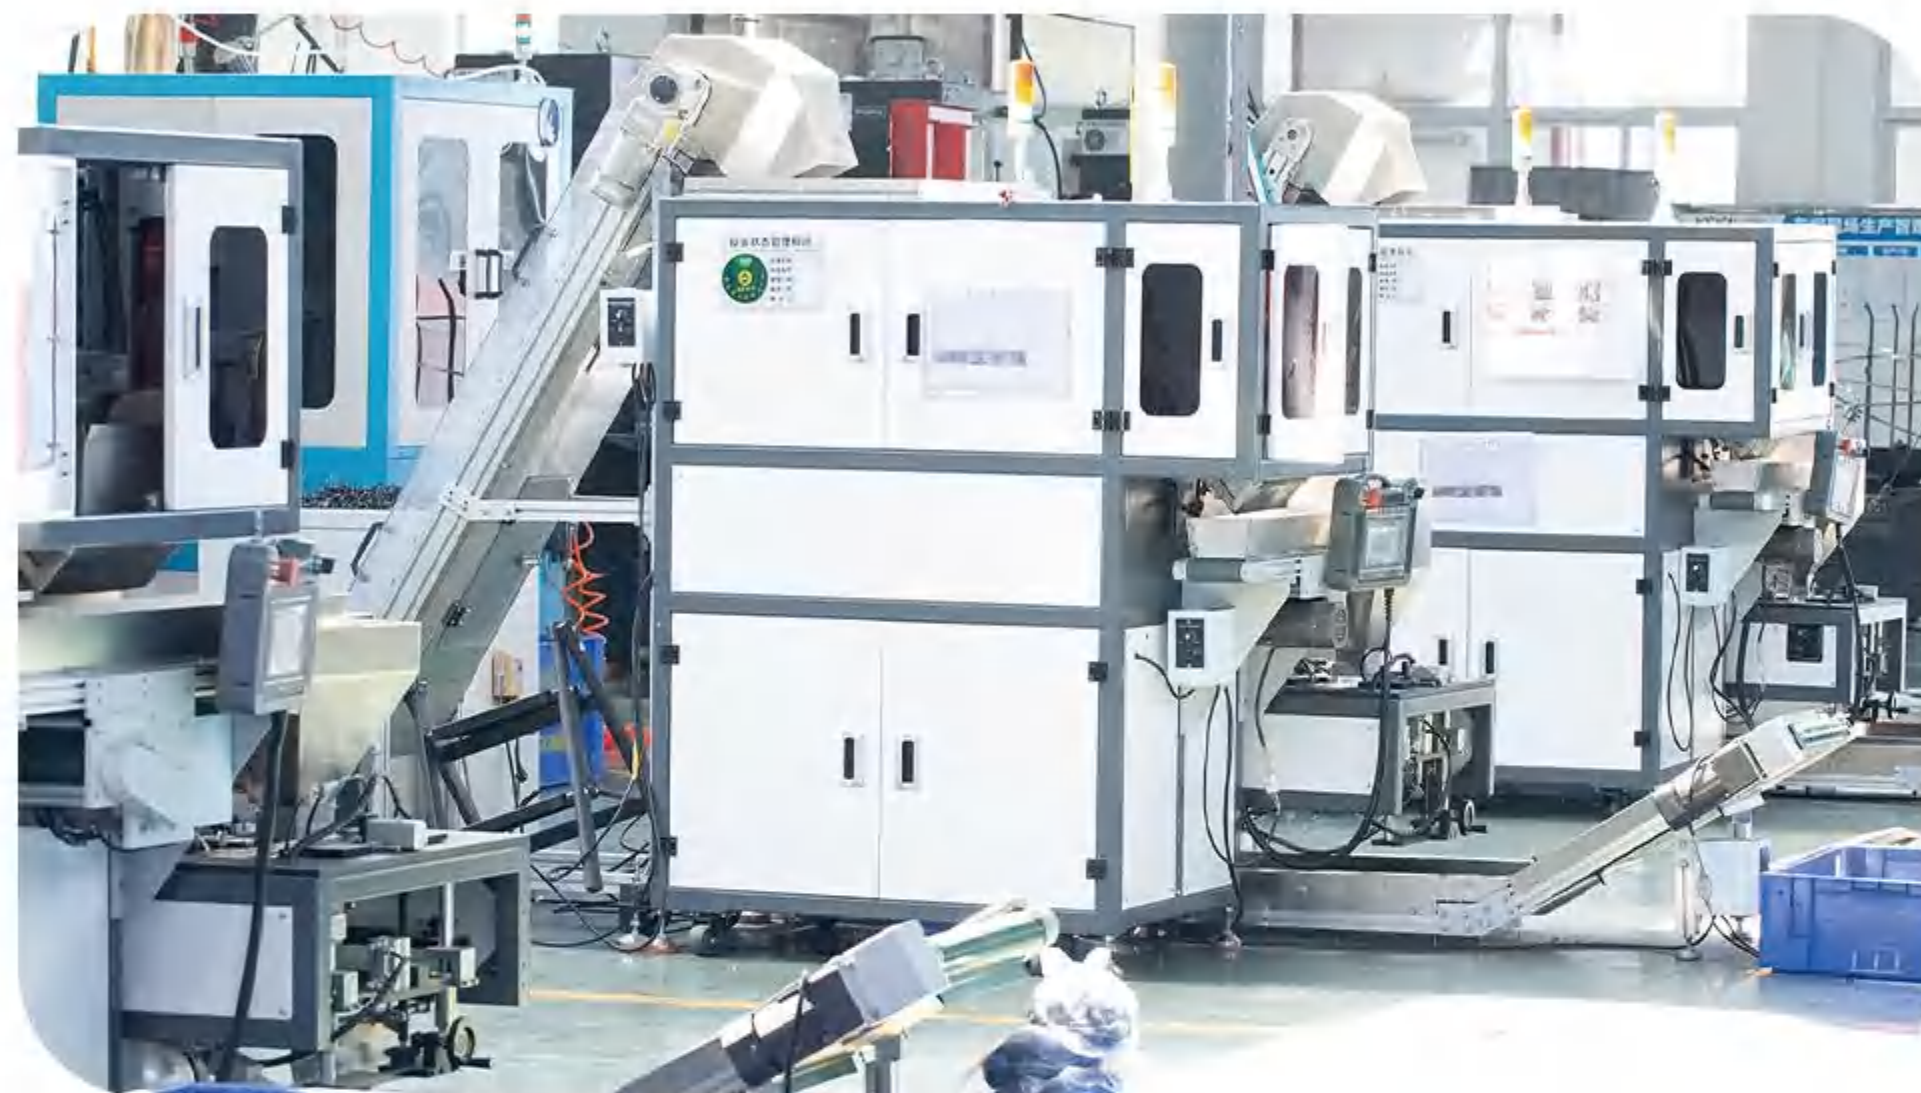

■ Experimental equipment

实验设备

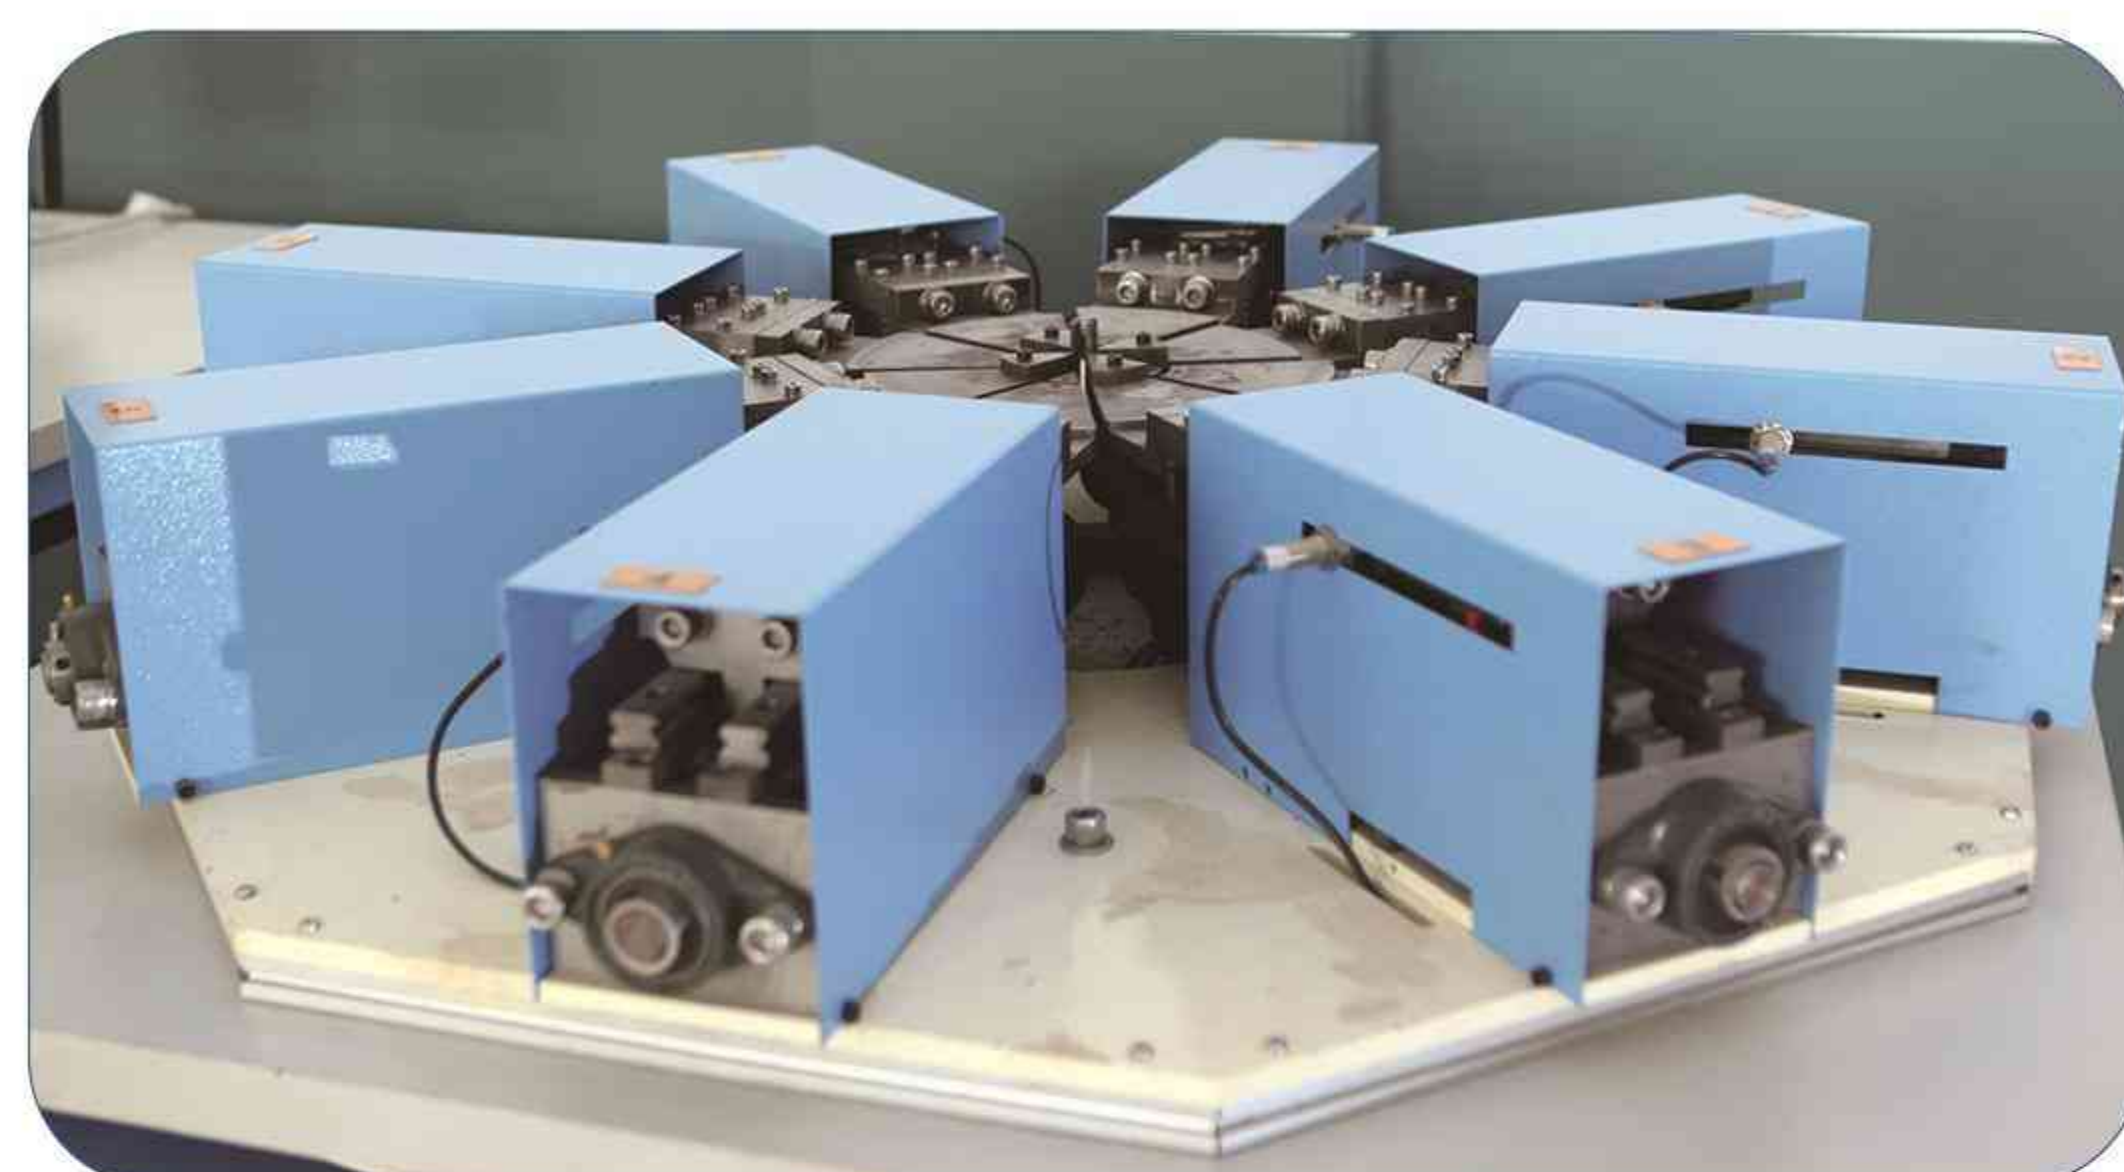

镀层测厚仪
The equipment for zinc
coating thickness testing

盐雾试验机
Salt spray testing machine

轮廓仪
The equipment for
tooling dimensions checking

杯突试验机
Guping testing machine

八方测力仪
to test the force
from eight direction

金相显微镜
metallographic microscope

三坐标测量仪
trilinear coordinates
measuring instrument

实验室全景
Laboratory panorama

■ Experimental equipment

实验设备



扭矩检测仪
To test the torque on basis of
certain rotate speed



脉冲实验台
Pulse experiment



光谱仪
To test the composition
of the raw material



维氏硬度计
HV (Vickers)



洛氏硬度计HRC
Rockwell apparatus

DS03德式偏头式9mm带宽（9mm non-perforated type without welded housing design）

加紧范围 size	产品货号 ItemNo					只/袋	只/箱
mm	W1	W2	W3	W4	W5	pcs/bag	pcs/carton
8-12	DS03A9812	DS03B9812	DS03C9812	DS03D9812	DS03E9812	100	1000
10-16	DS03A91016	DS03B91016	DS03C91016	DS03D91016	DS03E91016	100	1000
12-22	DS03A91222	DS03B91222	DS03C91222	DS03D91222	DS03E91222	100	1000
16-27	DS03A91627	DS03B91627	DS03C91627	DS03D91627	DS03E91627	100	1000
20-32	DS03A92032	DS03B92032	DS03C92032	DS03D92032	DS03E92032	50	1000
25-40	DS03A92540	DS03B92540	DS03C92540	DS03D92540	DS03E92540	50	500
30-45	DS03A93045	DS03B93045	DS03C93045	DS03D93045	DS03E93045	50	500
35-50	DS03A93550	DS03B93550	DS03C93550	DS03D93550	DS03E93550	50	500
40-60	DS03A94060	DS03B94060	DS03C94060	DS03D94060	DS03E94060	50	500
50-70	DS03A95070	DS03B95070	DS03C95070	DS03D95070	DS03E95070	50	500
60-80	DS03A96080	DS03B96080	DS03C96080	DS03D96080	DS03E96080	10	500
70-90	DS03A97090	DS03B97090	DS03C97090	DS03D97090	DS03E97090	10	500
80-100	DS03A980100	DS03B980100	DS03C980100	DS03D980100	DS03E980100	10	250
90-110	DS03A990110	DS03B990110	DS03C990110	DS03D990110	DS03E990110	10	250
100-120	DS03A9100120	DS03B9100120	DS03C9100120	DS03D9100120	DS03E9100120	10	250
110-130	DS03A9110130	DS03B9110130	DS03C9110130	DS03D9110130	DS03E9110130	10	250
120-140	DS03A9120140	DS03B9120140	DS03C9120140	DS03D9120140	DS03E9120140	10	250
130-150	DS03A9130150	DS03B9130150	DS03C9130150	DS03D9130150	DS03E9130150	10	250
140-160	DS03A9140160	DS03B9140160	DS03C9140160	DS03D9140160	DS03E9140160	10	200



DS03德式偏头式7.5mm带宽(7.5mm non-perforated type without welded housing design)

加紧范围 size	产品货号 ItemNo			只/袋	只/箱
mm	W1	W2	W4	pcs/bag	pcs/carton
8-12	DS03A7.5812	DS03B7.5812	DS03D7.5812	100	1000
10-16	DS03A7.51016	DS03B7.51016	DS03D7.51016	100	1000
12-22	DS03A7.51222	DS03B7.51222	DS03D7.51222	100	1000



DS03德式偏头式12mm带宽（12mm non-perforated type without welded housing design）

加紧范围 size	产品货号 ItemNo					只/袋	只/箱
mm	W1	W2	W3	W4	W5	pcs/bag	pcs/carton
16-27	DS03A121627	DS03B121627	DS03C121627	DS03D121627	DS03E121627	50	100
20-32	DS03A122032	DS03B122032	DS03C122032	DS03D122032	DS03E122032	50	1000
25-40	DS03A122540	DS03B122540	DS03C122540	DS03D122540	DS03E122540	50	500
30-45	DS03A123045	DS03B123045	DS03C123045	DS03D123045	DS03E123045	50	500
40-60	DS03A124060	DS03B124060	DS03C124060	DS03D124060	DS03E124060	25	500
50-70	DS03A125070	DS03B125070	DS03C125070	DS03D125070	DS03E125070	10	500
60-80	DS03A126080	DS03B126080	DS03C126080	DS03D126080	DS03E126080	10	250
70-90	DS03A127090	DS03B127090	DS03C127090	DS03D127090	DS03E127090	10	250
80-100	DS03A1280100	DS03B1280100	DS03C1280100	DS03D1280100	DS03E1280100	10	250
90-110	DS03A1290110	DS03B1290110	DS03C1290110	DS03D1290110	DS03E1290110	10	250
100-120	DS03A12100120	DS03B12100120	DS03C12100120	DS03D12100120	DS03E12100120	10	250
110-130	DS03A12110130	DS03B12110130	DS03C12110130	DS03D12110130	DS03E12110130	10	200
120-140	DS03A12120140	DS03B12120140	DS03C12120140	DS03D12120140	DS03E12120140	10	200
130-150	DS03A12130150	DS03B12130150	DS03C12130150	DS03D12130150	DS03E12130150	10	200
140-160	DS03A12140160	DS03B12140160	DS03C12140160	DS03D12140160	DS03E12140160	10	200
150-170	DS03A12150170	DS03B12150170	DS03C12150170	DS03D12150170	DS03E12150170	10	200
160-180	DS03A12160180	DS03B12160180	DS03C12160180	DS03D12160180	DS03E12160180	10	200
170-190	DS03A12170190	DS03B12170190	DS03C12170190	DS03D12170190	DS03E12170190	10	200
180-200	DS03A12180200	DS03B12180200	DS03C12180200	DS03D12180200	DS03E12180200	10	200
190-210	DS03A12190210	DS03B12190210	DS03C12190210	DS03D12190210	DS03E12190210	10	200



根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification


DS04 9mm德偏力矩补偿双面扣卡箍 (9mm Constant Tension Clamp with two-sided teeth)

加紧范围 Size	W2 产品货号 W2 Item No.	W3 产品货号 W3 Item No.	W4 产品货号 W4 Item No.
10-16	DS04B91016	DS04C91016	DS04D91016
13-18	DS04B91318	DS04C91318	DS04D91318
12-22	DS04B91222	DS04C91222	DS04D91222
16-27	DS04B91627	DS04C91627	DS04D91627
20-32	DS04B92032	DS04C92032	DS04D92032
25-40	DS04B92540	DS04C92540	DS04D92540
30-45	DS04B93045	DS04C93045	DS04D93045
32-50	DS04B93250	DS04C93250	DS04D93250
35-55	DS04B93555	DS04C93555	DS04D93555
40-60	DS04B94060	DS04C94060	DS04D94060
50-70	DS04B95070	DS04C95070	DS04D95070
60-80	DS04B96080	DS04C96080	DS04D96080
70-90	DS04B97090	DS04C97090	DS04D97090
75-95	DS04B97595	DS04C97595	DS04D97595
80-100	DS04B980100	DS04C980100	DS04D980100
90-110	DS04B990110	DS04C990110	DS04D990110
100-120	DS04B9100120	DS04C9100120	DS04D9100120
110-130	DS04B9110130	DS04C9110130	DS04D9110130

DS04 12mm德偏力矩补偿卡箍双面扣卡箍 (12mm Constant Tension Clamp with two-sided teeth)

加紧范围 Size	W2 产品货号 W2 Item No.	W3 产品货号 W3 Item No.	W4 产品货号 W4 Item No.
16-27	DS04B121627	DS04C121627	DS04D121627
20-32	DS04B122032	DS04C122032	DS04D122032
25-40	DS04B122540	DS04C122540	DS04D122540
30-45	DS04B123045	DS04C123045	DS04D123045
35-50	DS04B123550	DS04C123550	DS04D123550
40-60	DS04B124060	DS04C124060	DS04D124060
45-65	DS04B124565	DS04C124565	DS04D124565
50-70	DS04B125070	DS04C125070	DS04D125070
60-80	DS04B126080	DS04C126080	DS04D126080
70-90	DS04B127090	DS04C127090	DS04D127090
90-110	DS04B1290110	DS04C1290110	DS04D1290110

材质 Material	箍头 Housing	钢带 Band	螺丝 Screw	建议安装扭力 suggested install torque
W2	430ss/304ss	430ss/304ss	zinc plated steel	6 Nm
W3	430ss	430ss	430ss with zinc coating or Tin coating	
W4	304ss	304ss	304ss with zinc coating or Tin coating	

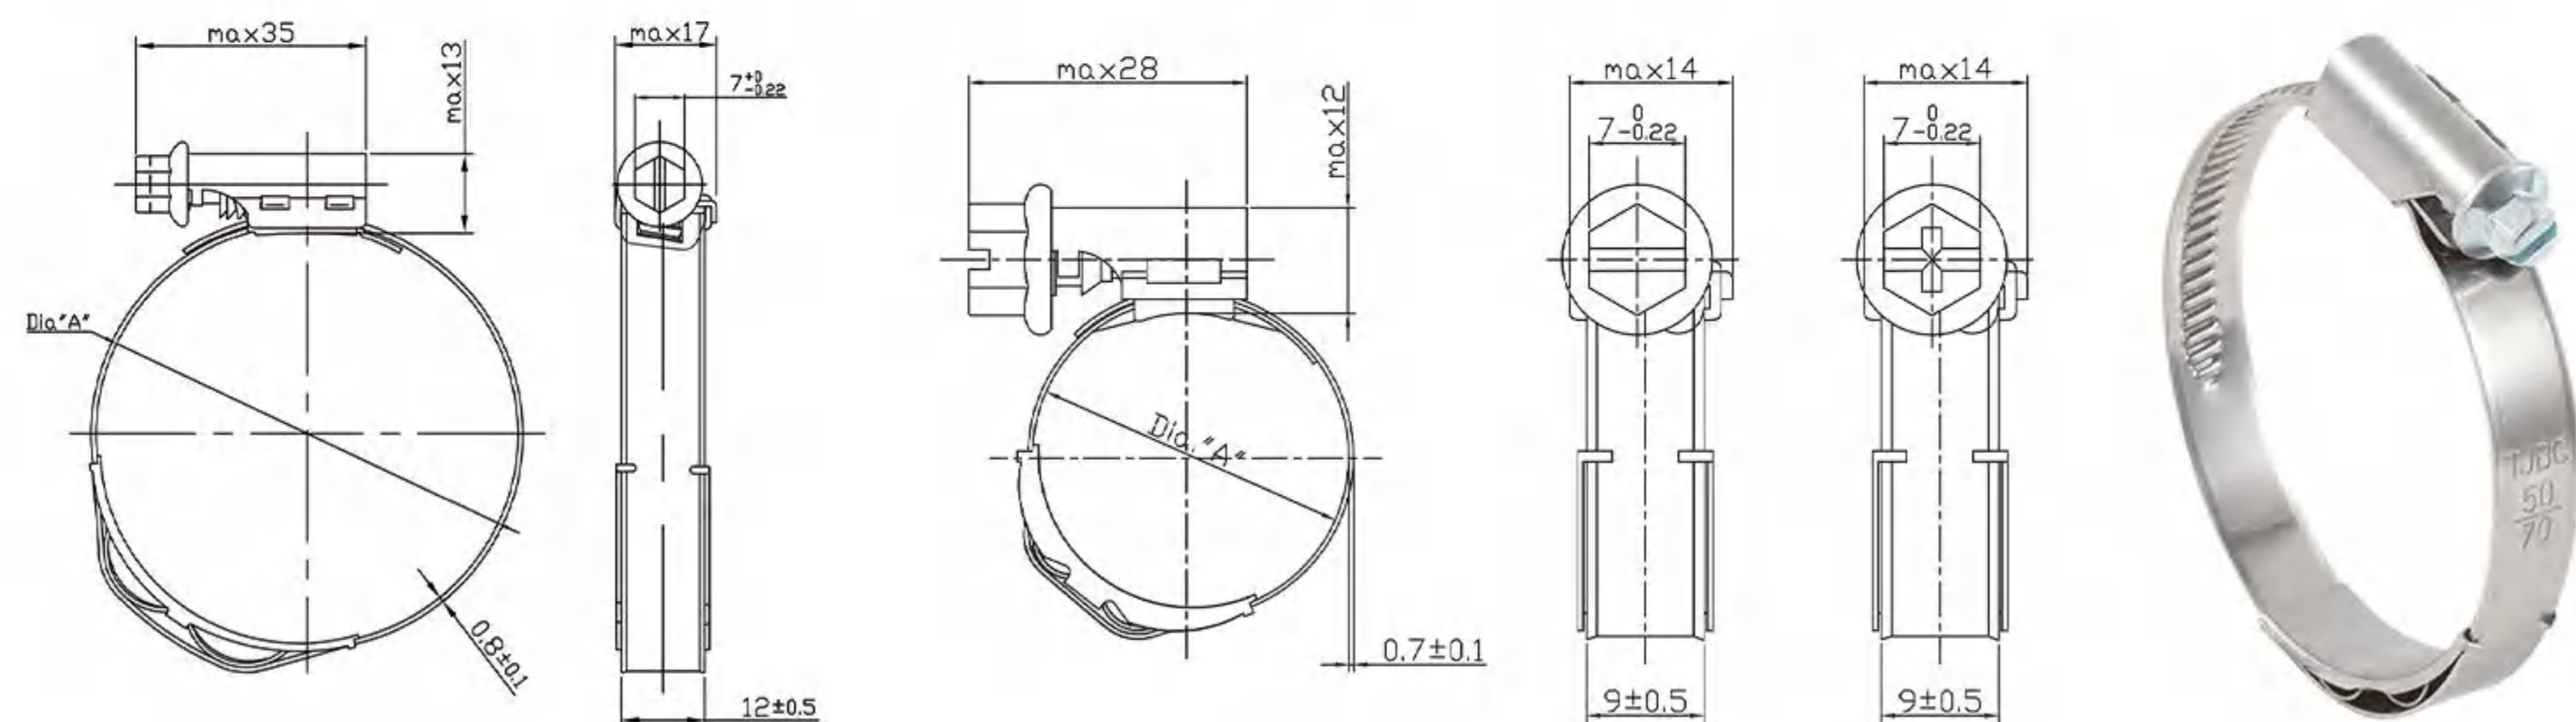


根据客户要求，其他规格和材质也能够提供
According to the requirementment of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

DS05 9/12mm德偏力矩补偿单面扣 (9/12mm Constant Tension Clamp with outside teeth)

加紧范围 Size	产品货号 ItemNo			建议安装扭力
mm	W2	W3	W4	suggested install torque
10-16	DS05B91016	DS05C91016	DS05D91016	3.5Nm
13-18	DS05B91318	DS05C91318	DS05D91318	3.5Nm
16-27	DS05B121627	DS05C121627	DS05D121627	6Nm
20-32	DS05B122032	DS05C122032	DS05D122032	6Nm
23-35	DS05B122335	DS05C122335	DS05D122335	6Nm
25-40	DS05B122540	DS05C122540	DS05D122540	6Nm
30-45	DS05B123045	DS05C123045	DS05D123045	6Nm
35-50	DS05B123550	DS05C123550	DS05D123550	6Nm
40-60	DS05B124060	DS05C124060	DS05D124060	6Nm
45-65	DS05B124565	DS05C124565	DS05D124565	6Nm
50-70	DS05B125070	DS05C125070	DS05D125070	6Nm
50-75	DS05B125075	DS05C125075	DS05D125075	6Nm
60-80	DS05B126080	DS05C126080	DS05D126080	6Nm
65-85	DS05B126585	DS05C126585	DS05D126585	6Nm
70-90	DS05B127090	DS05C127090	DS05D127090	6Nm

材质 Material	箍头 Housing	钢带 Band	螺丝 Screw	建议安装扭力 suggested install torque
W2	430ss/304ss	430ss/304ss	zinc plated steel	6 Nm
W3	430ss	430ss	430ss with zinc coating or Tin coating	
W4	304ss	304ss	304ss with zinc coating or Tin coating	

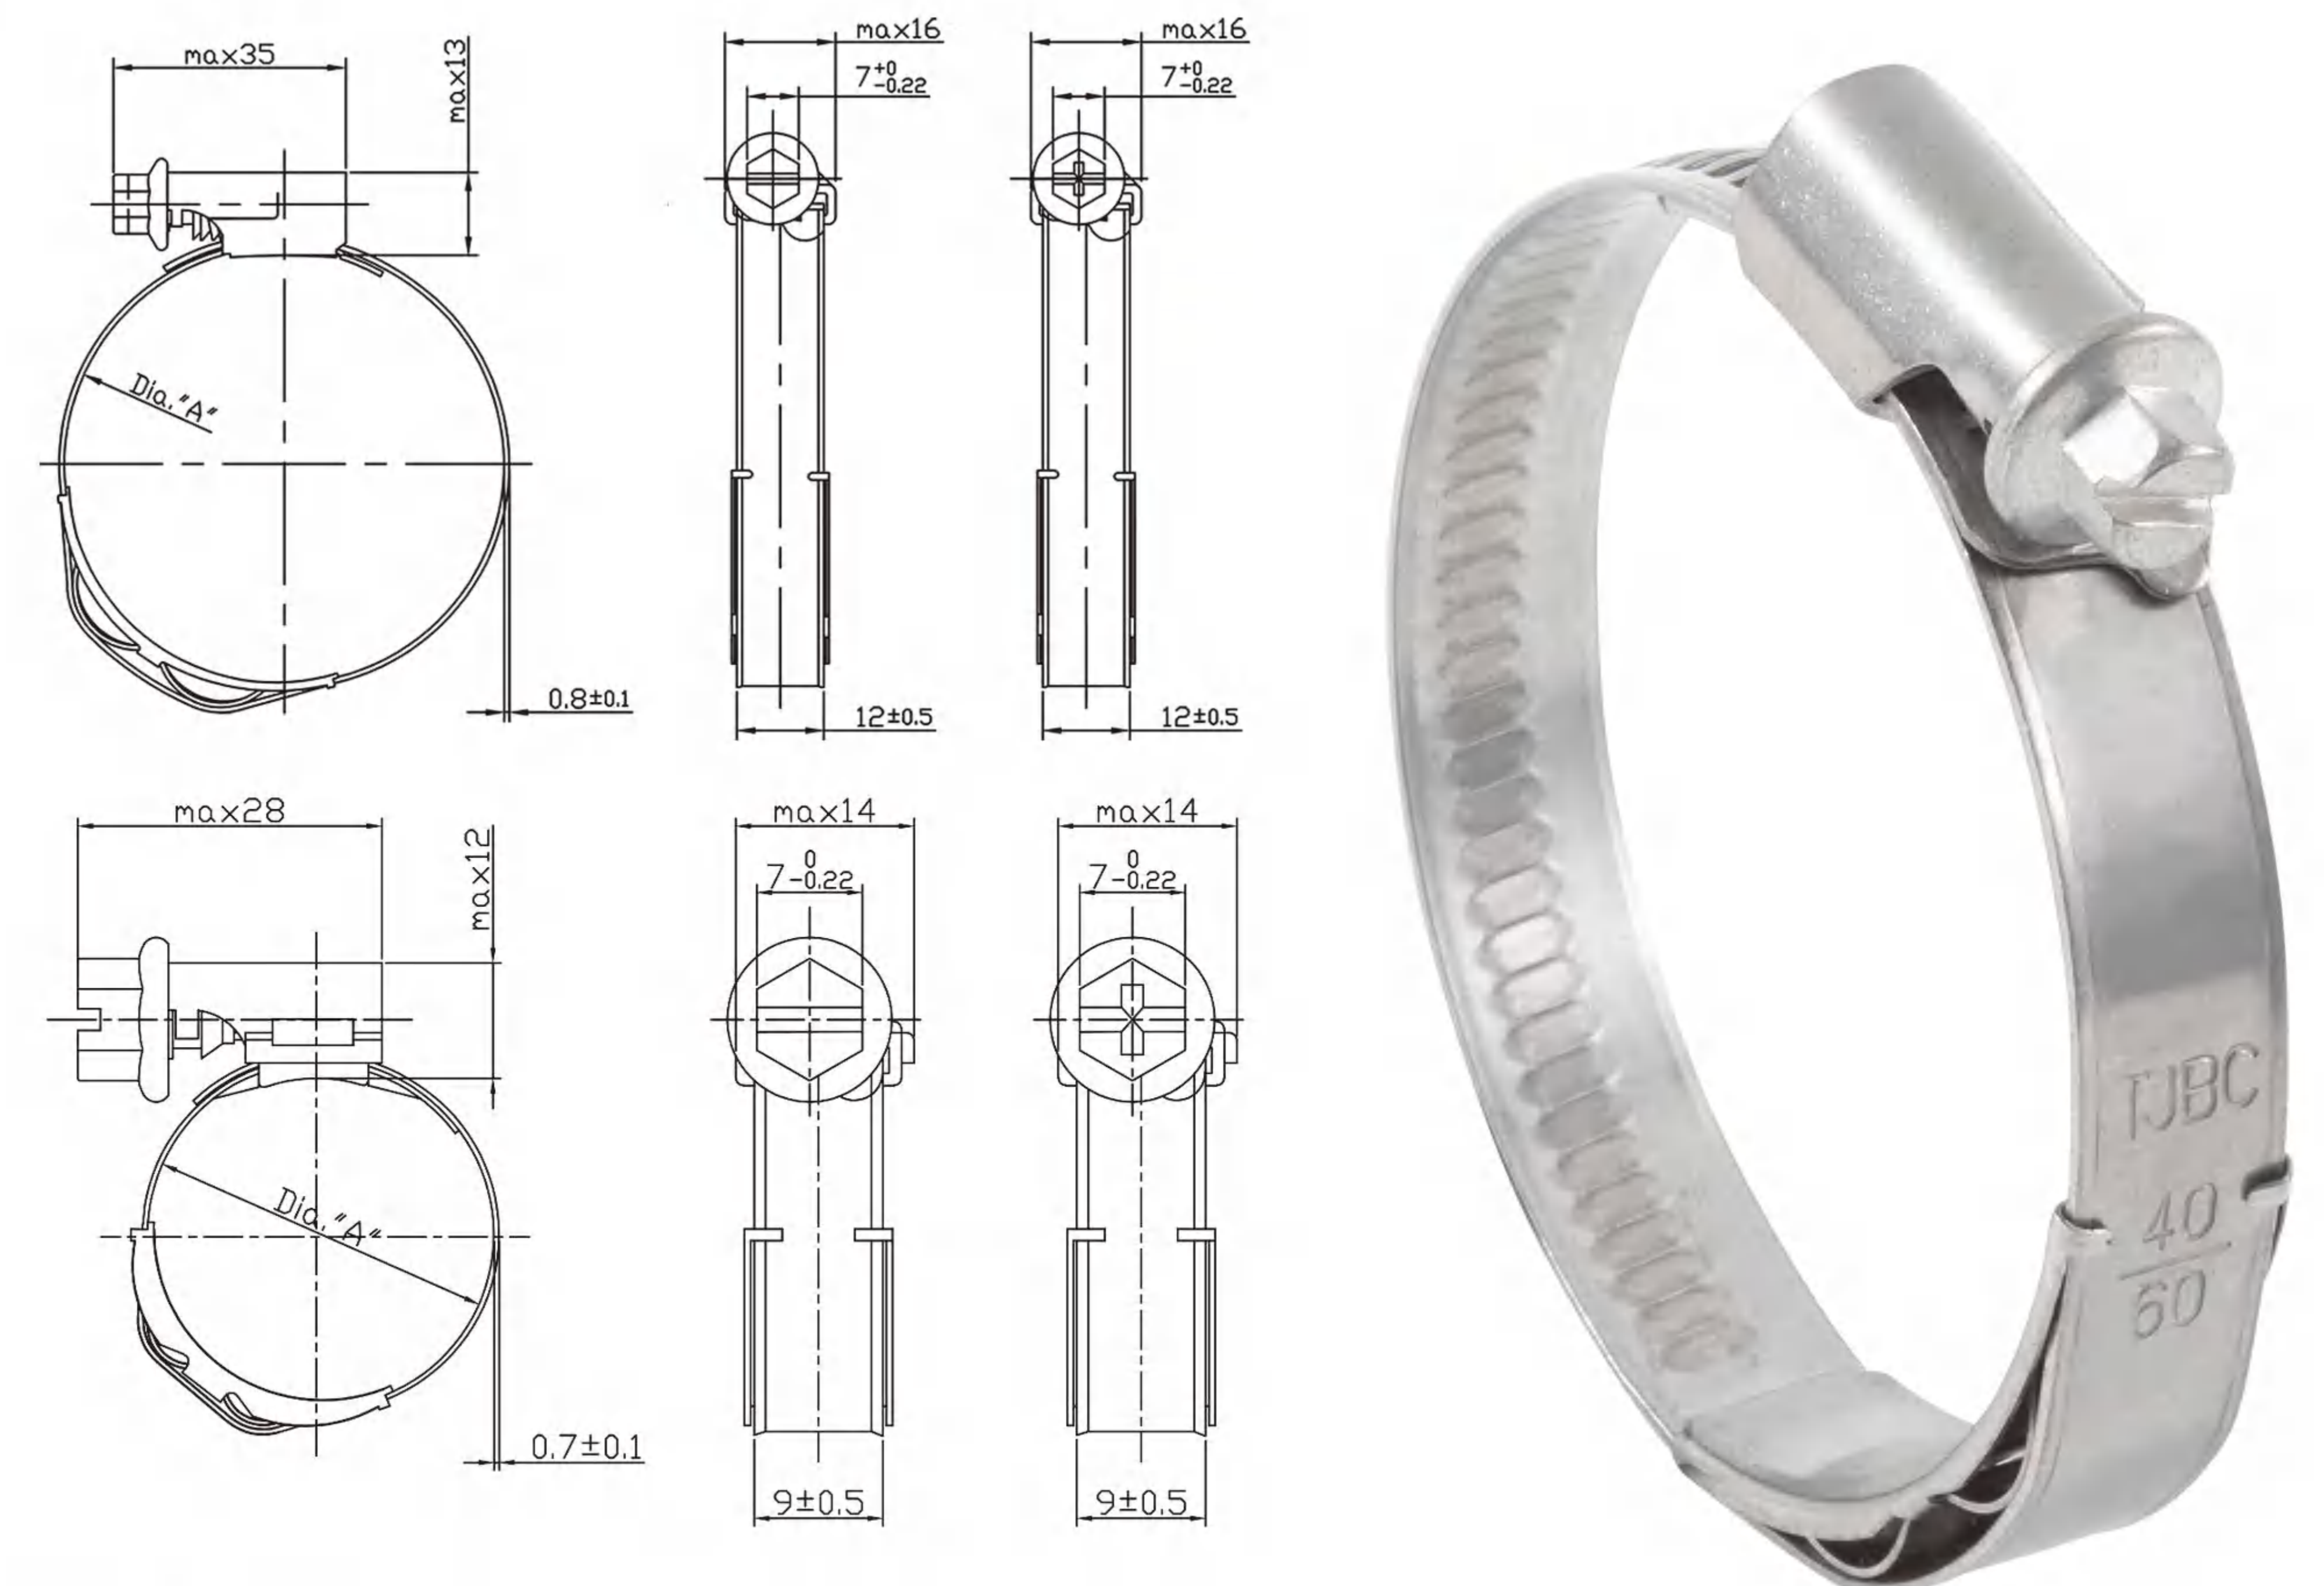


根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification

YIS01 意大利式喉箍(Italy type hose clmap)

加紧范围 Size	产品货号 ItemNo				只/袋	只/箱
	9.7mm带宽 (bandwidth 9.7mm)		12.7mm带宽 (bandwidth 12.7mm)			
mm	W2	W4	W2	W4	pcs/bag	pcs/carton
8-12	YIS01B10812	YIS01D10812	—	—	200	2000
10-16	YIS01B101016	YIS01D101016	—	—	200	2000
12-22	YIS01B101222	YIS01D101222	—	—	200	2000
16-27	YIS01B101627	YIS01D101627	YIS01B131627	YIS01D131627	200	1000
25-40	YIS01B102540	YIS01D102540	YIS01B132540	YIS01D132540	50	500
30-45	YIS01B103045	YIS01D103045	YIS01B133045	YIS01D133045	50	500
32-50	YIS01B103250	YIS01D103250	YIS01B133250	YIS01D133250	50	500
40-60	YIS01B104060	YIS01D104060	YIS01B134060	YIS01D134060	50	500
50-70	YIS01B105070	YIS01D105070	YIS01B135070	YIS01D135070	50	250
60-80	YIS01B106080	YIS01D106080	YIS01B136080	YIS01D136080	25	200
70-90	YIS01B107090	YIS01D107090	YIS01B137090	YIS01D137090	25	200
80-100	YIS01B1080100	YIS01D1080100	YIS01B1380100	YIS01D1380100	25	200
90-110	YIS01B1090110	YIS01D1090110	YIS01B1390110	YIS01D1390110	25	200
100-120	YIS01B10100120	YIS01D10100120	YIS01B13100120	YIS01D13100120	25	200
110-130	YIS01B10110130	YIS01D10110130	YIS01B13110130	YIS01D13110130	25	200
120-140	YIS01B10120140	YIS01D10120140	YIS01B13120140	YIS01D13120140	25	100
130-150	YIS01B10130150	YIS01D10130150	YIS01B13130150	YIS01D13130150	25	100
140-160	YIS01B10140160	YIS01D10140160	YIS01B13140160	YIS01D13140160	25	100
150-170	YIS01B10150170	YIS01D10150170	YIS01B13150170	YIS01D13150170	25	100
160-180	YIS01B10160180	YIS01D10160180	YIS01B13160180	YIS01D13160180	25	100
170-190	YIS01B10170190	YIS01D10170190	YIS01B13170190	YIS01D13170190	25	100
180-200	YIS01B10180200	YIS01D10180200	YIS01B13180200	YIS01D13180200	25	100

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W2	AISI 203SS/301SS	AISI 203SS/301SS	Zinc plated steel	9.7mm bandwidth 4.9Nm 12.7mm bandwidth 5.2Nm
W4	AISI 301SS/304SS	AISI 301SS/304SS	AISI 301SS/304SS	

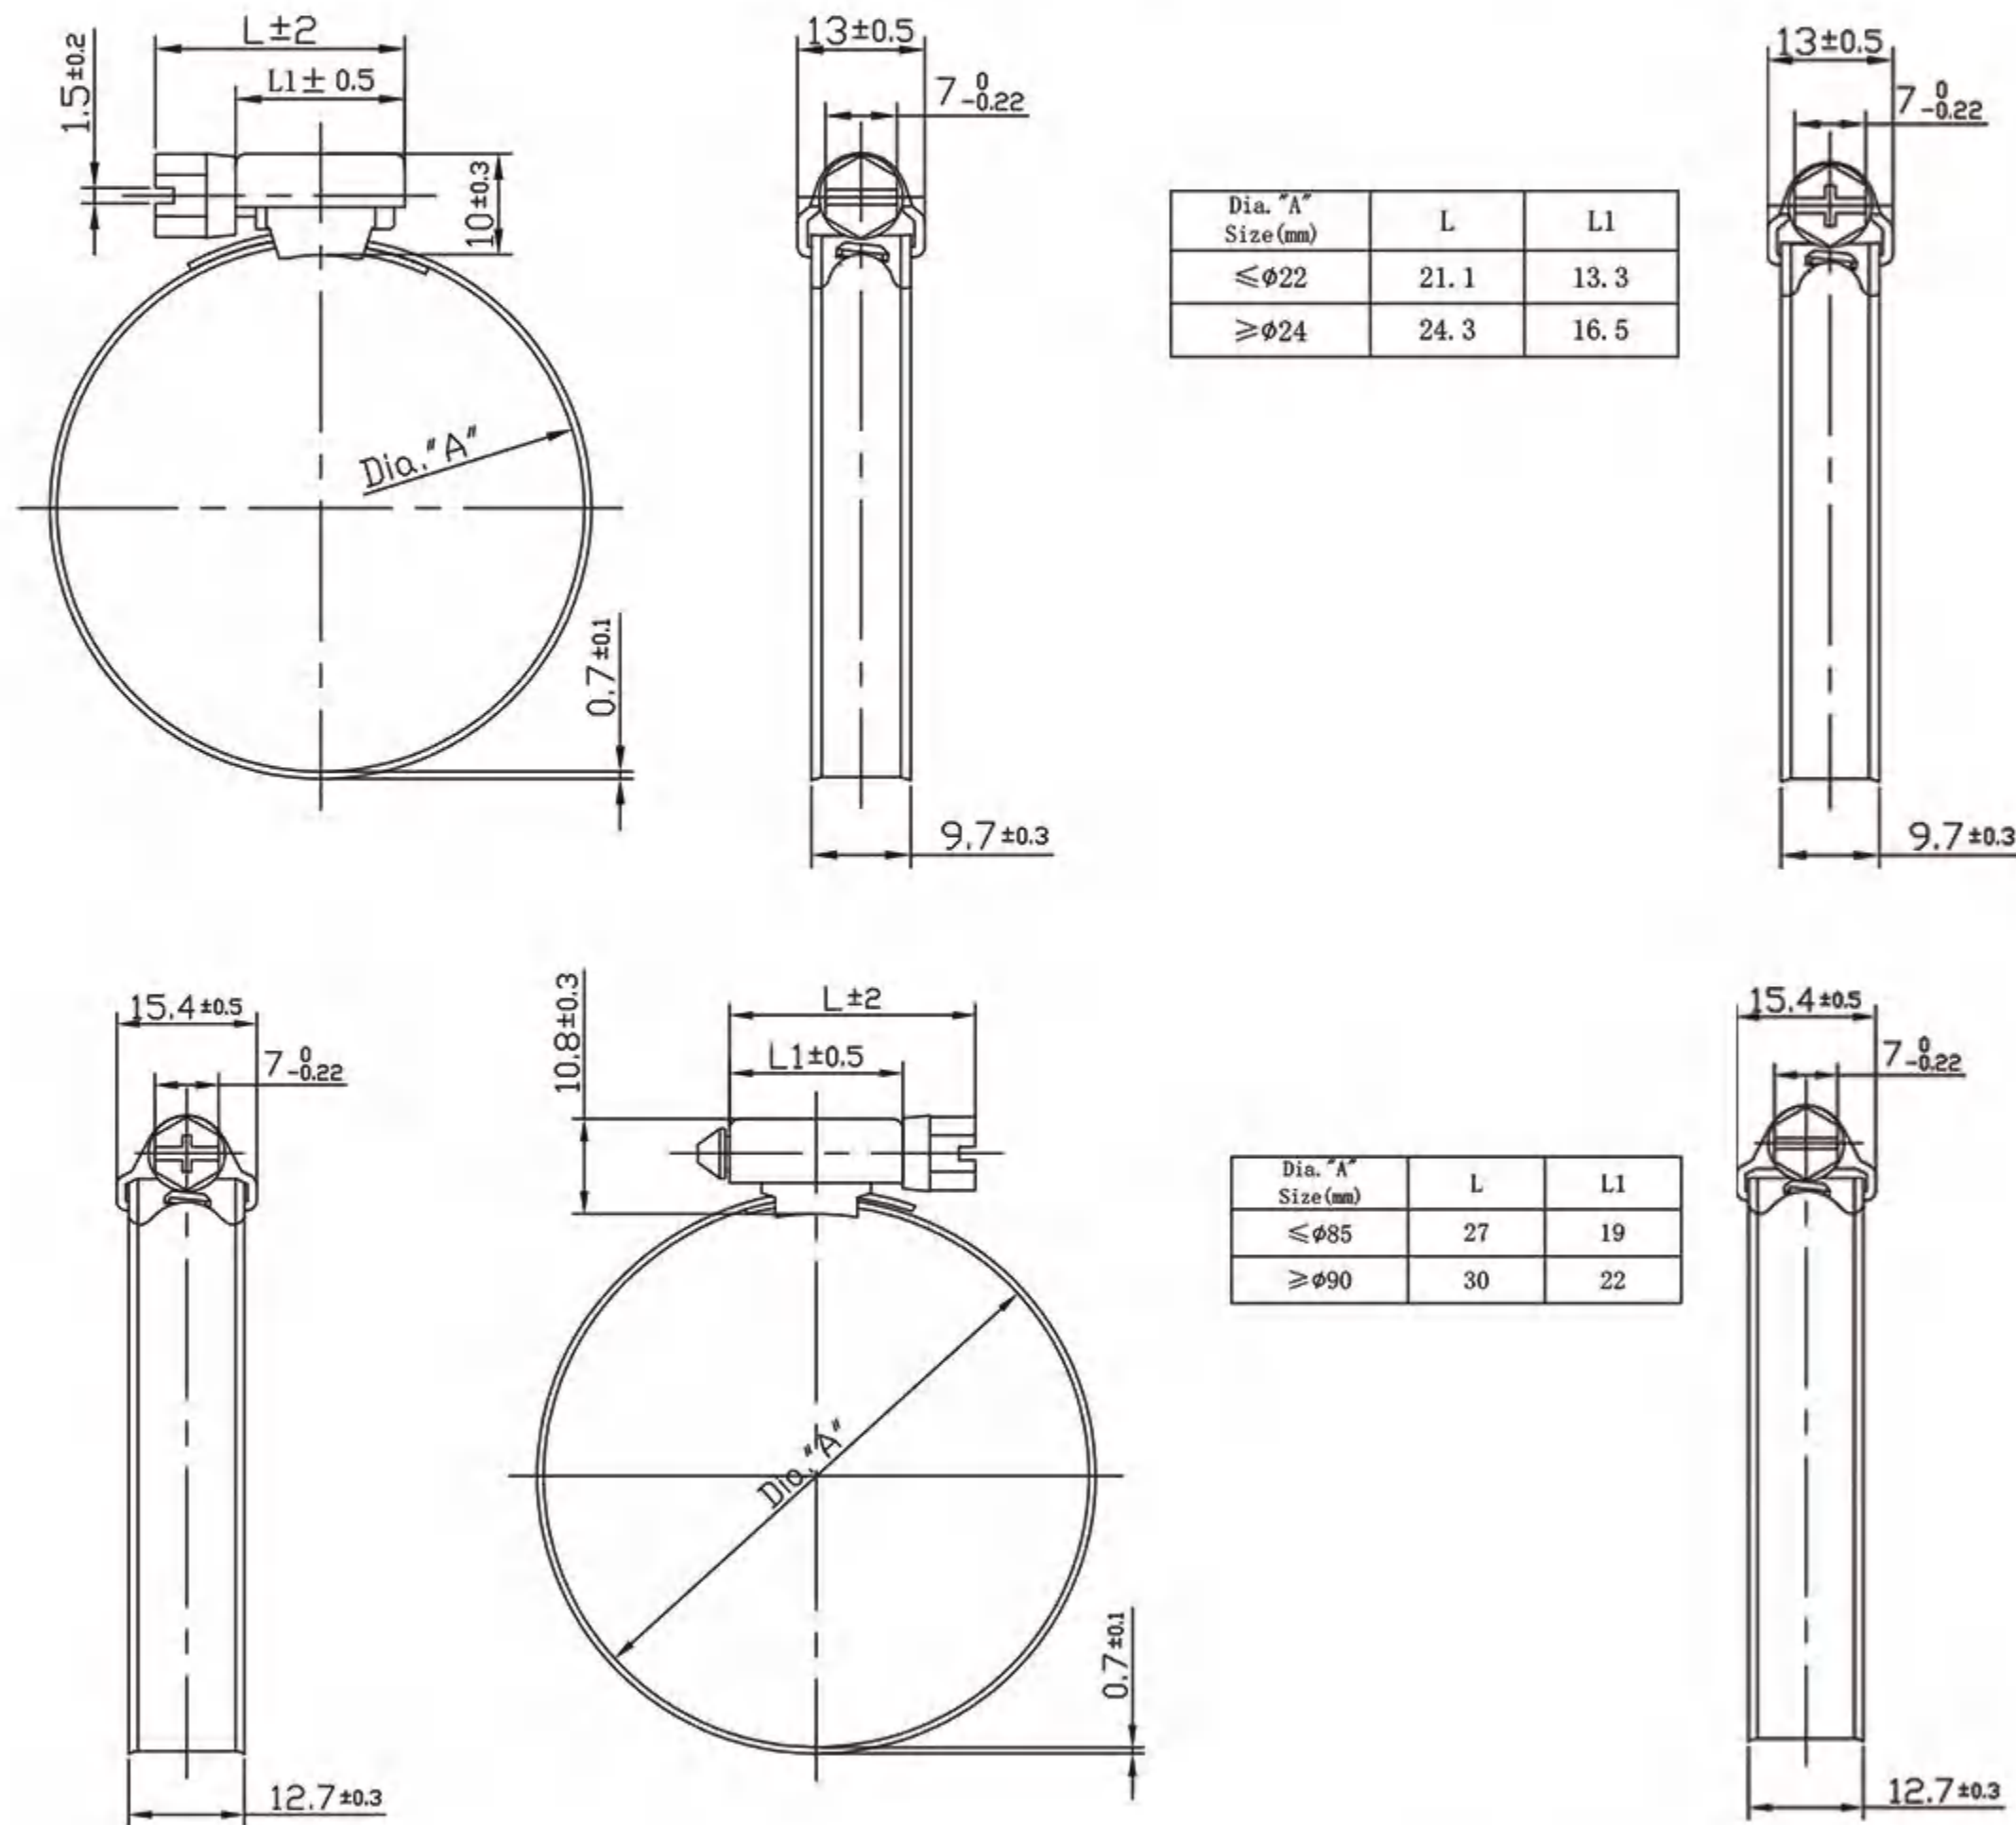

根据客人要求, 其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考, 不作为技术规范
All the information is just for your reference, can't be used as specification

YS01英式挂头式喉箍 (British type hose clamp with tube housing)

加紧范围 Size	带宽 bandwidth	产品货号 ItemNo			只/袋	只/箱	建议安装扭力 suggested install torque
		W1	W2	W4			
mm	mm				pcs/bag	pcs/carton	
8-14	9.7	YS01A9814	YS01B9814	YS01D9814	100	2000	3.0Nm
11-17	9.7	YS01A91117	YS01B91117	YS01D91117	100	2000	3.0Nm
13-20	9.7	YS01A91320	YS01B91320	YS01D91320	100	2000	3.0Nm
15-24	9.7	YS01A91524	YS01B91524	YS01D91524	100	2000	3.0Nm
18-28	9.7	YS01A91828	YS01B91828	YS01D91828	100	2000	3.0Nm
22-32	9.7	YS01A92232	YS01B92232	YS01D92232	50	1000	3.0Nm
26-38	9.7	YS01A92638	YS01B92638	YS01D92638	50	500	3.0Nm
32-44	9.7	YS01A93244	YS01B93244	YS01D93244	50	500	3.0Nm
38-50	9.7	YS01A93850	YS01B93850	YS01D93850	50	500	3.0Nm
44-56	9.7	YS01A94456	YS01B94456	YS01D94456	25	500	3.0Nm
50-65	9.7	YS01A95065	YS01B95065	YS01D95065	25	250	3.0Nm
58-75	9.7	YS01A95875	YS01B95875	YS01D95875	25	250	3.0Nm
68-85	9.7	YS01A96885	YS01B96885	YS01D96885	10	250	3.0Nm
77-95	9.7	YS01A97795	YS01B97795	YS01D97795	10	250	3.0Nm
15--24	11.7	YS01A121524	YS01B121524	YS01D121524	50	500	4.8Nm
19--28	11.7	YS01A121928	YS01B121928	YS01D121928	50	500	4.8Nm
22--32	11.7	YS01A122232	YS01B122232	YS01D122232	50	500	4.8Nm
26--38	11.7	YS01A122638	YS01B122638	YS01D122638	50	500	4.8Nm
32--44	11.7	YS01A123244	YS01B123244	YS01D123244	50	500	5.2Nm
38--50	11.7	YS01A123850	YS01B123850	YS01D123850	50	500	5.2Nm
44--56	11.7	YS01A124456	YS01B124456	YS01D124456	25	500	5.2Nm
50--65	11.7	YS01A125065	YS01B125065	YS01D125065	25	500	5.2Nm
58--75	11.7	YS01A125875	YS01B125875	YS01D125875	25	200	5.2Nm
68--85	11.7	YS01A126885	YS01B126885	YS01D126885	25	200	5.2Nm
77--95	11.7	YS01A127795	YS01B127795	YS01D127795	10	200	5.2Nm
87--112	11.7	YS01A1287112	YS01B1287112	YS01D1287112	10	200	5.2Nm
104--138	11.7	YS01A12104138	YS01B12104138	YS01D12104138	10	100	5.2Nm
130--165	11.7	YS01A12130165	YS01B12130165	YS01D12130165	-	100	5.2Nm
150--180	11.7	YS01A12150180	YS01B12150180	YS01D12150180	-	100	5.2Nm
175--205	11.7	YS01A12175205	YS01B12175205	YS01D12175205	-	100	5.2Nm
200--231	11.7	YS01A12200231	YS01B12200231	YS01D12200231	-	50	5.2Nm
226--256	11.7	YS01A12226256	YS01B12226256	YS01D12226256	-	50	5.2Nm
251--282	11.7	YS01A12251282	YS01B12251282	YS01D12251282	-	50	5.2Nm
277--307	11.7	YS01A12277307	YS01B12277307	YS01D12277307	-	50	5.2Nm



材质 Material	钢带 Band	箍头 Housing	螺丝 Screw
W1	Zinc plated steel	Steel with zinc coating or Painting	Zinc plated steel
W2	AISI 430SS	AISI 304SS	Zinc plated steel
W4	AISI 304SS	AISI 304SS	AISI 304SS
W5	AISI 316SS	AISI 316SS	AISI 316SS



根据客人要求, 其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考, 不作为技术规范:
All the information is just for your reference, can't be used as specification

YS02英式点焊喉箍（British type hose clamp with welded housing）

加紧范围 Size		带宽 bandwidth	产品货号 ItemNo		只/袋	只/箱	建议安装扭力
mm	NO	mm	W1	W4	pcs/bag	pcs/carton	suggested install torque
10-16	000	9.7	YS02A1016	YS02D1016	100	2000	3.0Nm
13-19	00	9.7	YS02A1319	YS02D1319	100	2000	3.0Nm
16-25	0	9.7	YS02A1625	YS02D1625	100	2000	3.0Nm
19-29	0X	9.7	YS02A1929	YS02D1929	100	1000	3.0Nm
22-32	1A	11.7	YS02A2232	YS02D2232	50	500	4.8Nm
25-38	1	11.7	YS02A2538	YS02D2538	50	500	4.8Nm
32-44	1X	11.7	YS02A3244	YS02D3244	50	500	5.2Nm
35-51	2A	11.7	YS02A3551	YS02D3551	50	500	5.2Nm
38-57	2	11.7	YS02A3857	YS02D3857	25	500	5.2Nm
44-64	2X	11.7	YS02A4464	YS02D4464	25	500	5.2Nm
51-70	3	11.7	YS02A5170	YS02D5170	25	250	5.2Nm
64-76	3X	11.7	YS02A6476	YS02D6476	25	250	5.2Nm
70-89	4	11.7	YS02A7089	YS02D7089	10	200	5.2Nm
76-92	4X	11.7	YS02A7692	YS02D7692	10	200	5.2Nm
80-100	5	11.7	YS02A80100	YS02D80100	10	200	5.2Nm
90-110	5X	11.7	YS02A90110	YS02D90110	10	200	5.2Nm
100-120	6	11.7	YS02A100120	YS02D100120	10	200	5.2Nm
110-130	6X	11.7	YS02A110130	YS02D110130	10	200	5.2Nm
120-140	7	11.7	YS02A120140	YS02D120140	10	100	5.2Nm
130-150	7X	11.7	YS02A130150	YS02D130150	-	100	5.2Nm
140-160	8	11.7	YS02A140160	YS02D140160	-	50	5.2Nm
150-170	-	11.7	YS02A150170	YS02D150170	-	50	5.2Nm
160-180	-	11.7	YS02A160180	YS02D160180	-	50	5.2Nm
170-190	-	11.7	YS02A170190	YS02D170190	-	50	5.2Nm
180-200	-	11.7	YS02A180200	YS02D180200	-	50	5.2Nm
190-210	-	11.7	YS02A190210	YS02D190210	-	50	5.2Nm
200-220	-	11.7	YS02A200220	YS02D200220	-	50	5.2Nm
220-240	-	11.7	YS02A220240	YS02D220240	-	50	5.2Nm
230-250	-	11.7	YS02A230250	YS02D230250	-	50	5.2Nm
240-260	-	11.7	YS02A240260	YS02D240260	-	50	5.2Nm
280-300	-	11.7	YS02A280300	YS02D280300	-	50	5.2Nm
300-320	-	11.7	YS02A300320	YS02D300320	-	50	5.2Nm

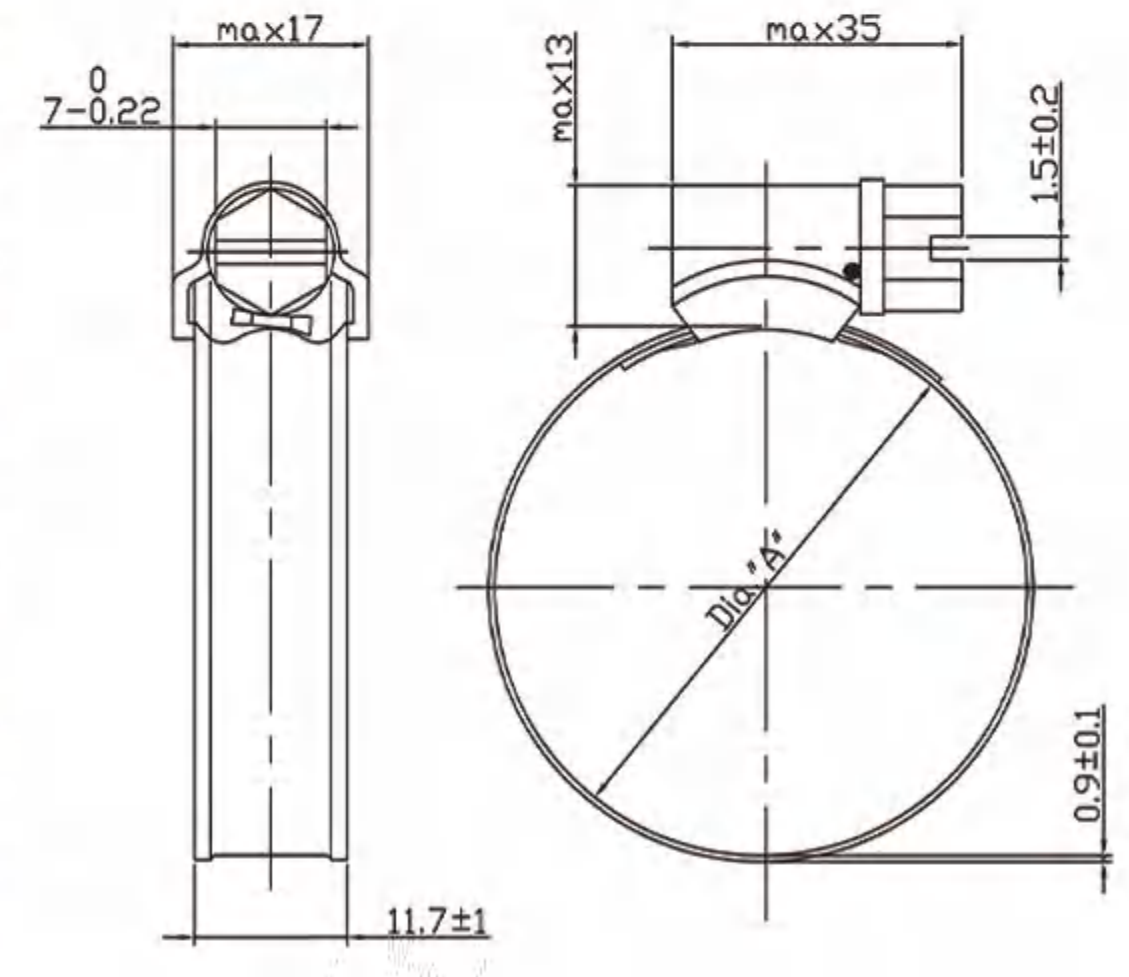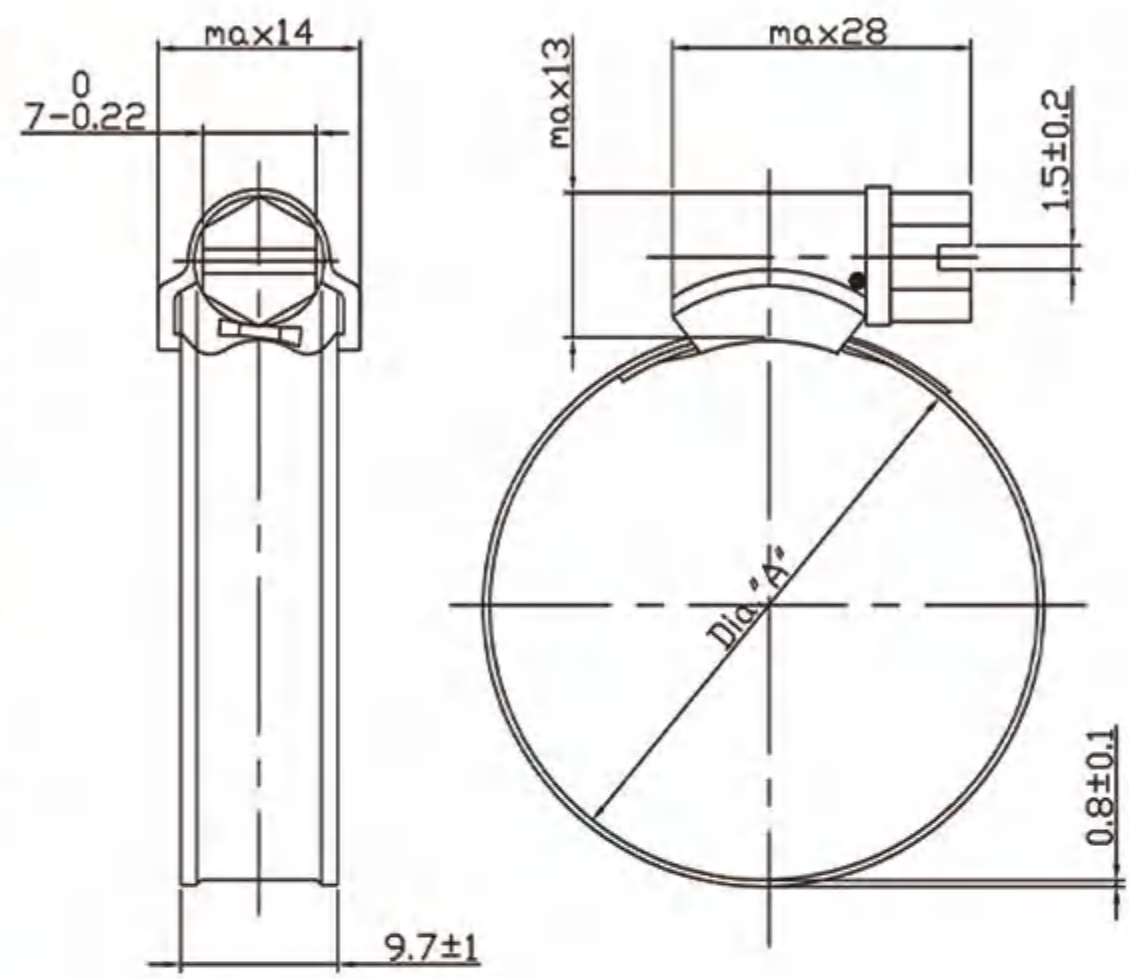

YS03英式铆头喉箍（British type hose clamp with riveted housing）

加紧范围 Size		带宽 bandwidth	产品货号 ItemNo		只/袋	只/箱	建议安装扭力
mm	NO	mm	W1	W4	pcs/bag	pcs/carton	suggested install torque
9.5-12	000	9.7	YS03A912	YS03D912	100	2000	3Nm
11-16	M00	9.7	YS03A1116	YS03D1116	100	2000	3Nm
13-20	00	9.7	YS03A1320	YS03D1320	100	2000	3Nm
16-22	0	11.7	YS03A1622	YS03D1622	50	1000	4.8Nm
18-25	0X	11.7	YS03A1825	YS03D1825	50	1000	4.8Nm
22-30	1A	11.7	YS03A2230	YS03D2230	50	1000	4.8Nm
25-35	1	11.7	YS03A2535	YS03D2535	50	500	4.8Nm
27-40	1X	11.7	YS03A2740	YS03D2740	50	500	4.8Nm
35-50	2A	11.7	YS03A3550	YS03D3550	50	500	5.2Nm
40-55	2	11.7	YS03A4055	YS03D4055	25	500	5.2Nm
45-60	2X	11.7	YS03A4560	YS03D4560	25	500	5.2Nm
55-70	3	11.7	YS03A5570	YS03D5570	25	250	5.2Nm
60-80	3X	11.7	YS03A6080	YS03D6080	25	200	5.2Nm
70-90	4	11.7	YS03A7090	YS03D7090	10	200	5.2Nm
85-100	4X	11.7	YS03A85100	YS03D85100	10	200	5.2Nm
90-120	5	11.7	YS03A90120	YS03D90120	10	200	5.2Nm
120-140		11.7	YS03A120140	YS03D120140	10	200	5.2Nm
140-160		11.7	YS03A140160	YS03D140160	-	100	5.2Nm
160-180		11.7	YS03A160180	YS03D160180	-	100	5.2Nm

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
W4	AISI 304ss	AISI 304ss	AISI 304ss
W5	AISI 316ss	AISI 316ss	AISI 316ss

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

SFS01 9mm带宽速放式
(9mm quick release clamp)



加紧范围 Size	产品货号 ItemNo	
mm	W1	W2
25--100	SFS01A100	SFS01B100
25--125	SFS01A125	SFS01B125
25--150	SFS01A150	SFS01B150
25--175	SFS01A175	SFS01B175
25--200	SFS01A200	SFS01B200
25--225	SFS01A225	SFS01B225
25--250	SFS01A250	SFS01B250
25--275	SFS01A275	SFS01B275
25--300	SFS01A300	SFS01B300
25--350	SFS01A350	SFS01B350
25--400	SFS01A400	SFS01B400
25--450	SFS01A450	SFS01B450
25--500	SFS01A500	SFS01B500
25--550	SFS01A550	SFS01B550
25--600	SFS01A600	SFS01B600
25--650	SFS01A650	SFS01B650
25--700	SFS01A700	SFS01B700
25--750	SFS01A750	SFS01B750

SFS02 法式速放式
(9mm quick release clamp with French design)

加紧范围 Size	产品货号 ItemNo	产品型号 Item No
mm	W1	W2
16-27	SFS02A1627	SFS02B1627
23-35	SFS02A2335	SFS02B2335
30-45	SFS02A3045	SFS02B3045
32-50	SFS02A3250	SFS02B3250
40-60	SFS02A4060	SFS02B4060
25--90	SFS02A90	SFS02B90
25--100	SFS02A100	SFS02B100
25--115	SFS02A115	SFS02B115
25--125	SFS02A125	SFS02B125
25--145	SFS02A145	SFS02B145
25--150	SFS02A150	SFS02B150
25--175	SFS02A175	SFS02B175
25--200	SFS02A200	SFS02B200
25--215	SFS02A215	SFS02B215
25--225	SFS02A225	SFS02B225
25--250	SFS02A250	SFS02B250
25--275	SFS02A275	SFS02B275
25--288	SFS02A288	SFS02B288
25--300	SFS02A300	SFS02B300
25--320	SFS02A320	SFS02B320
25--350	SFS02A350	SFS02B350
25--370	SFS02A370	SFS02B370
25--400	SFS02A400	SFS02B400
25--420	SFS02A420	SFS02B420
25--450	SFS02A450	SFS02B450
25--500	SFS02A500	SFS02B500
25--550	SFS02A550	SFS02B550
25--600	SFS02A600	SFS02B600
25--650	SFS02A650	SFS02B650
25--700	SFS02A700	SFS02B700
25--750	SFS02A750	SFS02B750

材质 Material	钢带 Band	箍头盖 Cover of housing	箍头底 Bottom of housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel	Zinc plated steel	2.6Nm
W2	AISI 430SS	Zinc plated steel	AISI 430SS	Zinc plated steel	

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification

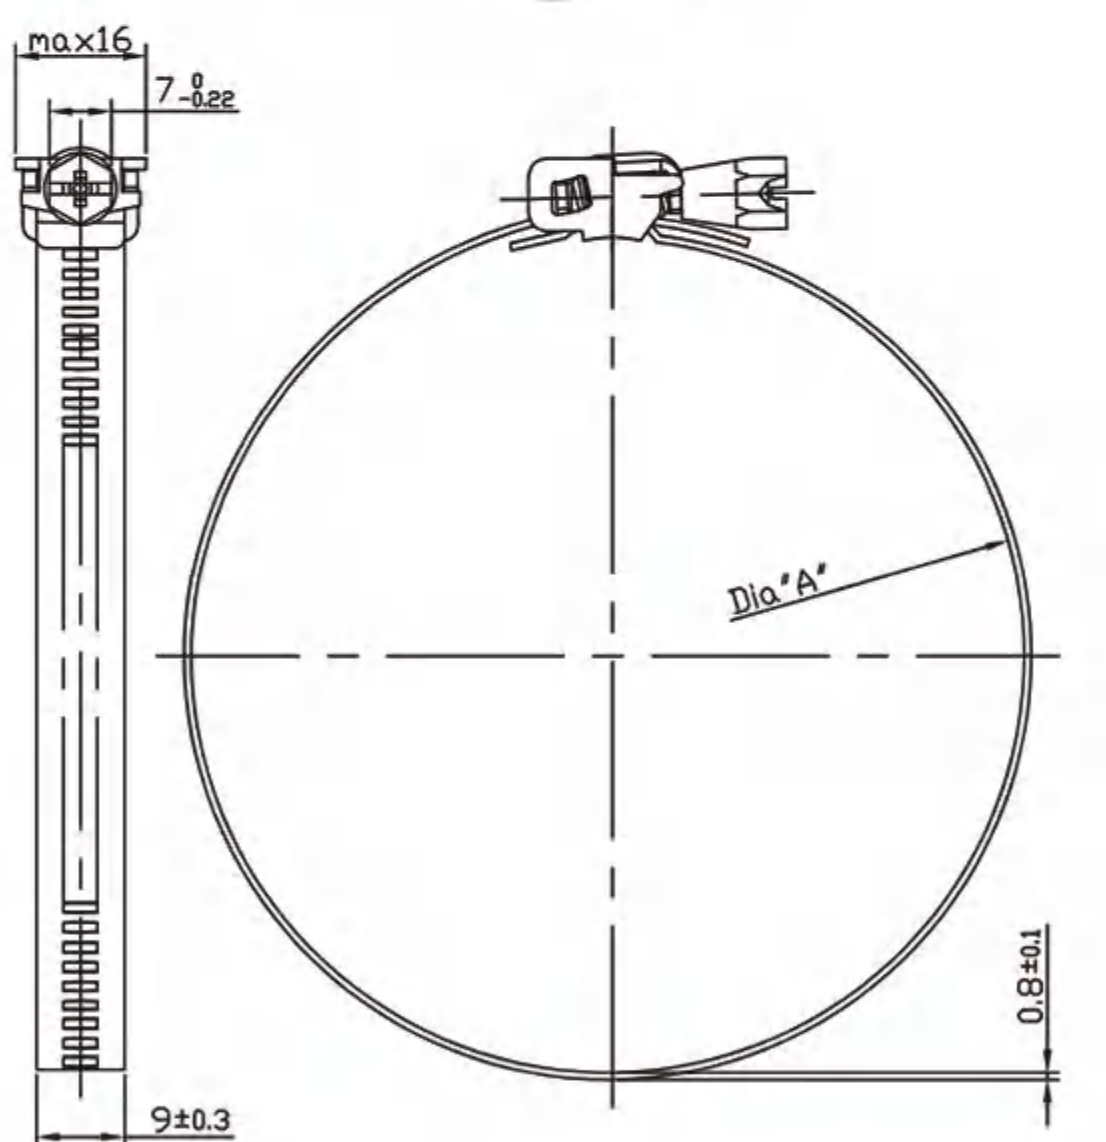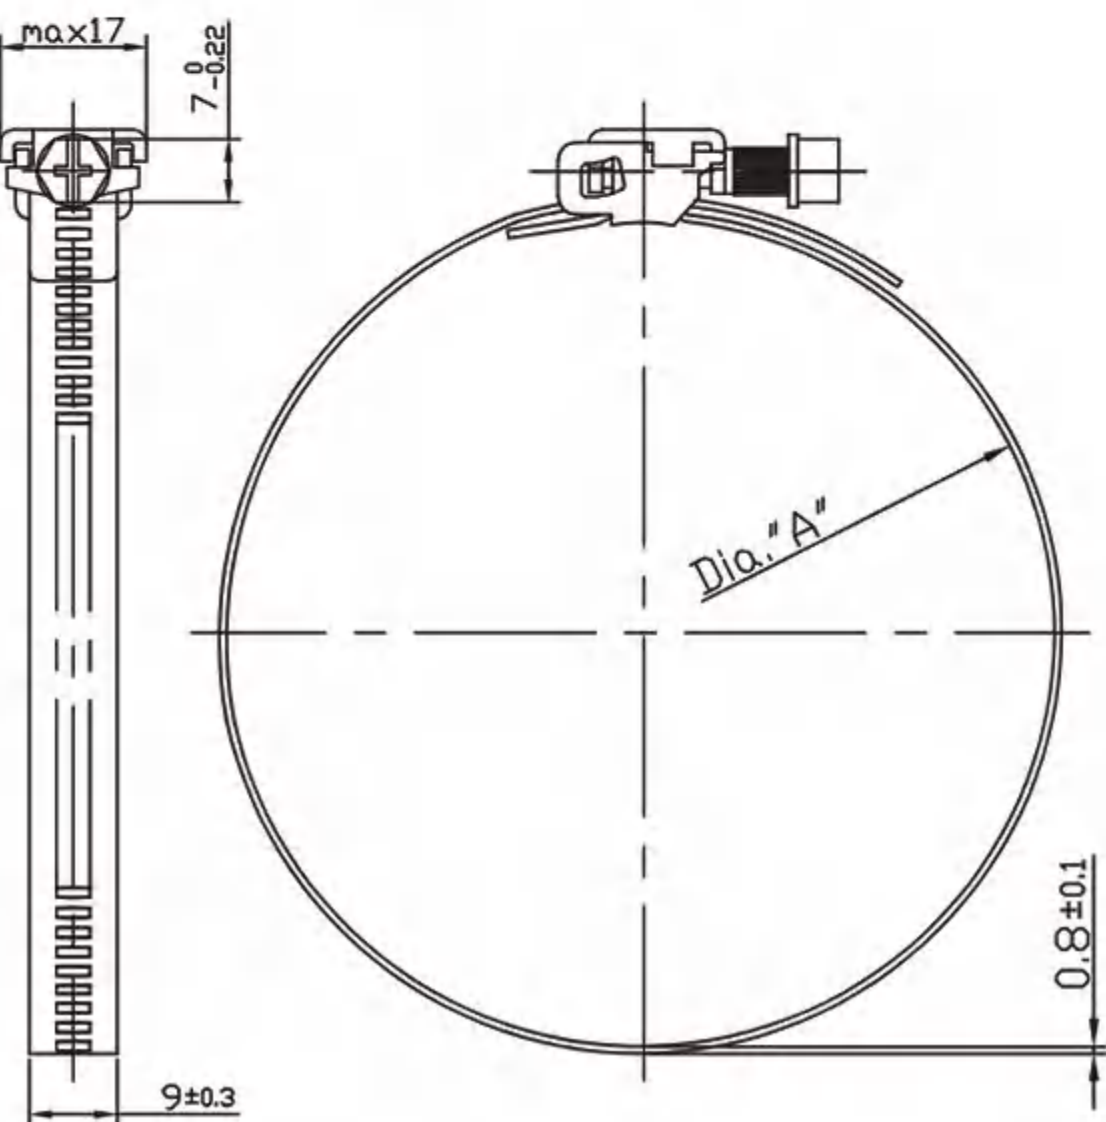

9mm速放式卡箍套装SFS04
non-perforatde band endless hose clamp SFS04



德式手柄式喉箱DSHandle
Germany type hose clamp with handle

加紧范围 Size
mm
8-12
10-16
12-20
12-22
16-27
20-32
25-40
30-45
35-50
40-60
50-70
60-80




XM04 德式中间式5mm带宽
5mm bandwidth non-perforated band hose clamp



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

XM01 小美式喉箍（8mm micro clamp）

型号	加紧范围 Size		产品货号 ItemNO				只/袋	只/箱
SAE no	mm	inch	W1	W2	W4	W5	pcs/bag	pcs/carton
4	6-16	0.25"-0.62"	XM01A4	XM01B4	XM01D4	XM01E4	100	2500
6	11-20	0.44"-0.78"	XM01A6	XM01B6	XM01D6	XM01E6	100	2500
8	13-23	0.5"-0.91"	XM01A8	XM01B8	XM01D8	XM01E8	100	1000
10	14-27	0.56"-1.06"	XM01A10	XM01B10	XM01D10	XM01E10	100	1000
12	18-32	0.69"-1.25"	XM01A12	XM01B12	XM01D12	XM01E12	50	1000

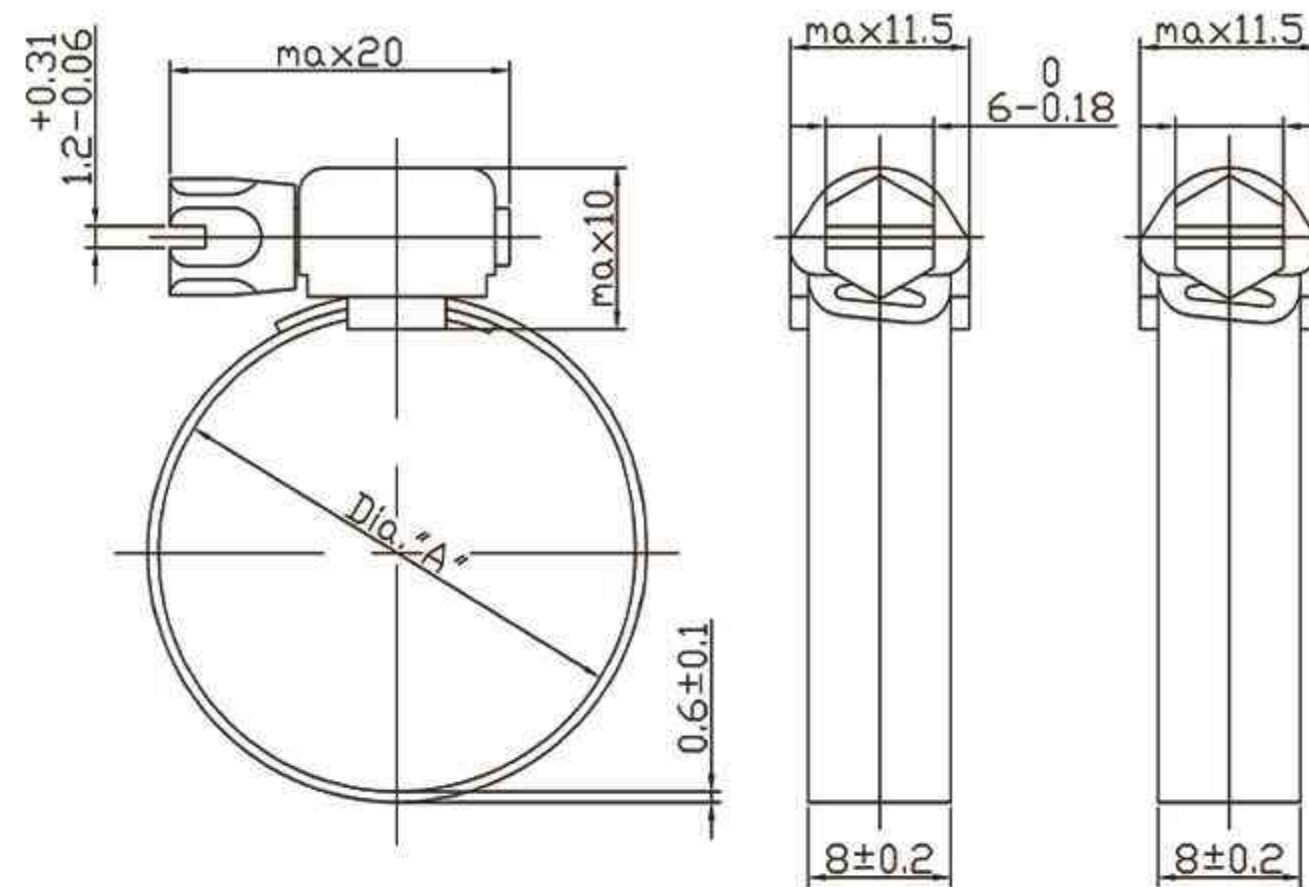

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel	2.0Nm
W2	200SS/300SS	200SS/300SS	Zinc plated steel	
W2B	AISI 200SS	Zinc plated steel	Zinc plated steel	
W4	AISI 201SS/301SS/304SS	AISI 201SS/301SS/304SS	AISI 201SS/301SS/304SS	
W5	AISI 316SS	AISI 316SS	AISI 316SS	




根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

MS01 大美式喉箍（12.7mm perforated and interlock design hose clamp）

型号	加紧范围 Size		产品货号 ItemNO				只/袋	只/箱
SAE no	mm	inch	W1	W2	W4	W5	pcs/bag	pcs/carton
6	11-20	0.44"-0.78"	MS01A6	MS01B6	MS01D6	MS01E6	100	1000
8	13-23	0.5"-0.91"	MS01A8	MS01B8	MS01D8	MS01E8	100	1000
10	14-27	0.56"-1.06"	MS01A10	MS01B10	MS01D10	MS01E10	100	1000
12	18-32	0.69"-1.25"	MS01A12	MS01B12	MS01D12	MS01E12	50	1000
16	21-38	0.81"-1.5"	MS01A16	MS01B16	MS01D16	MS01E16	50	1000
20	21-44	0.81"-1.75"	MS01A20	MS01B20	MS01D20	MS01E20	50	500
24	27-51	1.06"-2"	MS01A24	MS01B24	MS01D24	MS01E24	50	500
28	33-57	1.31"-2.25"	MS01A28	MS01B28	MS01D28	MS01E28	50	500
32	40-64	1.56"-2.5"	MS01A32	MS01B32	MS01D32	MS01E32	50	500
36	46-70	1.81"-2.75"	MS01A36	MS01B36	MS01D36	MS01E36	50	500
40	50-76	2"-3"	MS01A40	MS01B40	MS01D40	MS01E40	20	500
44	59-83	2.31"-3.25"	MS01A44	MS01B44	MS01D44	MS01E44	20	500
48	65-89	2.56"-3.5"	MS01A48	MS01B48	MS01D48	MS01E48	20	500
52	72-95	2.81"-3.75	MS01A52	MS01B52	MS01D52	MS01E52	20	500
56	78-102	3.06"-4"	MS01A56	MS01B56	MS01D56	MS01E56	10	250
60	84-108	3.31"-4.25"	MS01A60	MS01B60	MS01D60	MS01E60	10	250
64	91-114	3.56"-4.5"	MS01A64	MS01B64	MS01D64	MS01E64	10	250
72	103-127	4.06"-5"	MS01A72	MS01B72	MS01D72	MS01E72	10	250
80	117-140	4.62"-5.5"	MS01A80	MS01B80	MS01D80	MS01E80	10	250
88	130-152	5.12"-6"	MS01A88	MS01B88	MS01D88	MS01E88	10	250
96	141-165	5.56"-6.5"	MS01A96	MS01B96	MS01D96	MS01E96	10	250
104	157-178	6.18"-7"	MS01A104	MS01B104	MS01D104	MS01E104	10	250

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel	3.8Nm
W2	AISI 200SS/300SS	AISI 200SS/300SS	Zinc plated steel	6Nm
W2B	AISI 200SS	Zinc plated steel	Zinc plated steel	
W4	AISI 201SS/301SS/304SS	AISI 201SS/301SS/304SS	AISI 201SS/301SS/304SS	
W5	AISI 316SS	AISI 316SS	AISI 316SS	

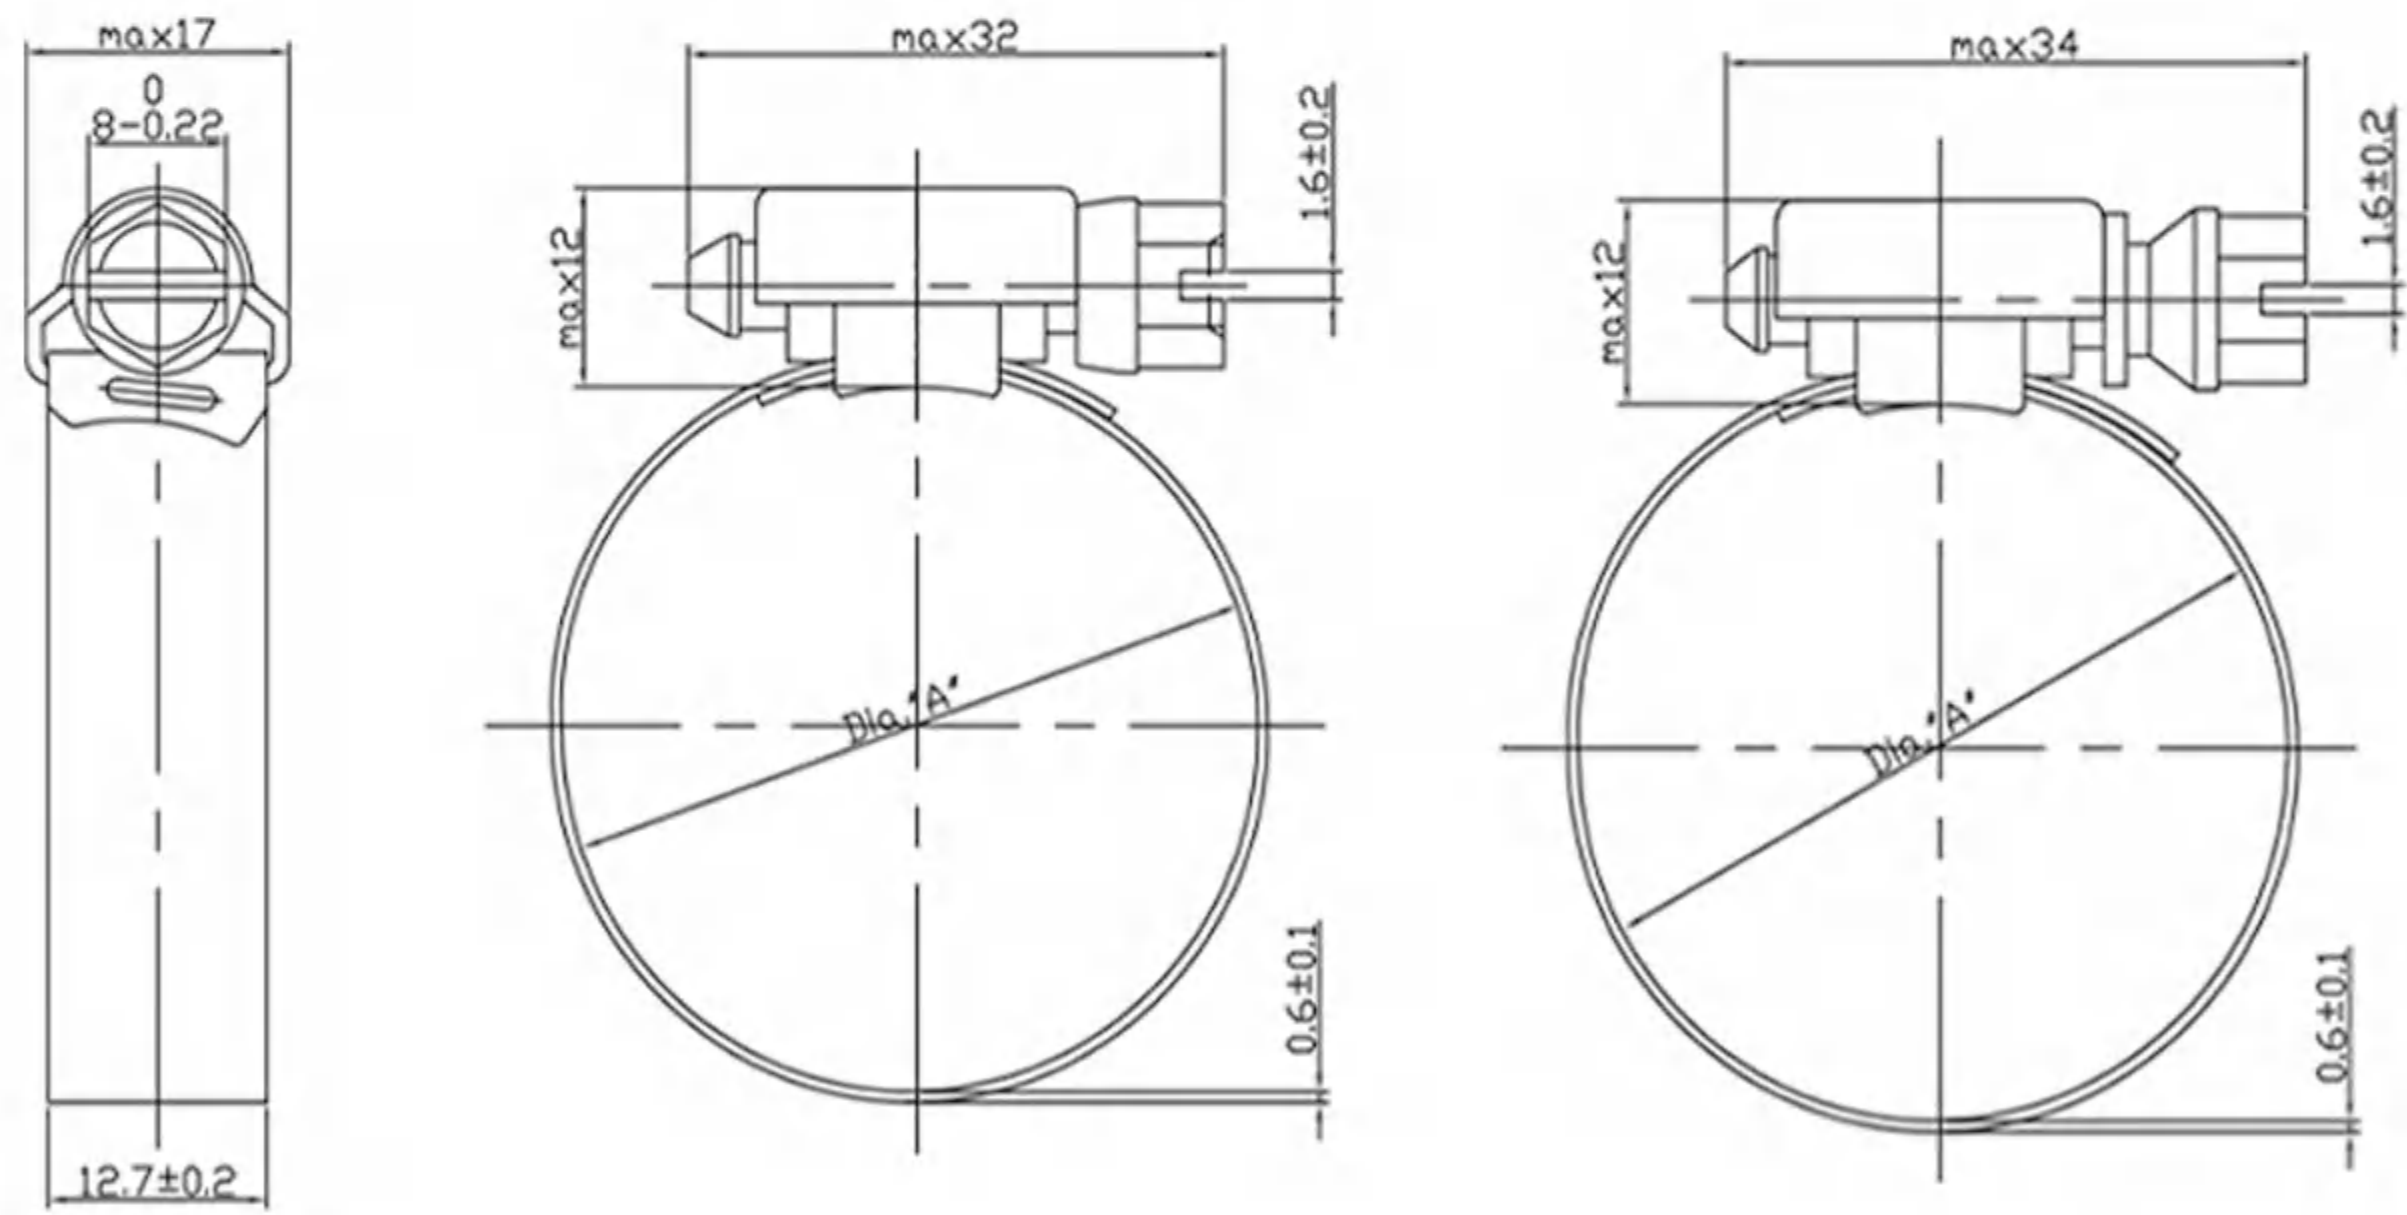


根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification.

MS21 美式力矩补偿卡箍（American type hose clamp with W Lining）

加紧范围Size	产品货号 Item no	
mm	W2	W4
25-40	MS21B2540	MS21D2540
21-45	MS21B2145	MS21D2145
30-54	MS21B3054	MS21D3054
33-57	MS21B3357	MS21D3357
44-60	MS21B4460	MS21D4460
40-64	MS21B4064	MS21D4064
46-67	MS21B4667	MS21D4667
50-70	MS21B5070	MS21D5070
55-75	MS21B5575	MS21D5575
52-76	MS21B5276	MS21D5276
58-83	MS21B5883	MS21D5883
65-89	MS21B6589	MS21D6589


材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	内衬圈 Lining
W2	AISI 200SS/300SS	AISI 200SS/300SS	Zinc plated steel	AISI 304SS
W4	AISI 200SS/300SS	AISI 200SS/300SS	AISI 304SS/410SS	AISI 304SS

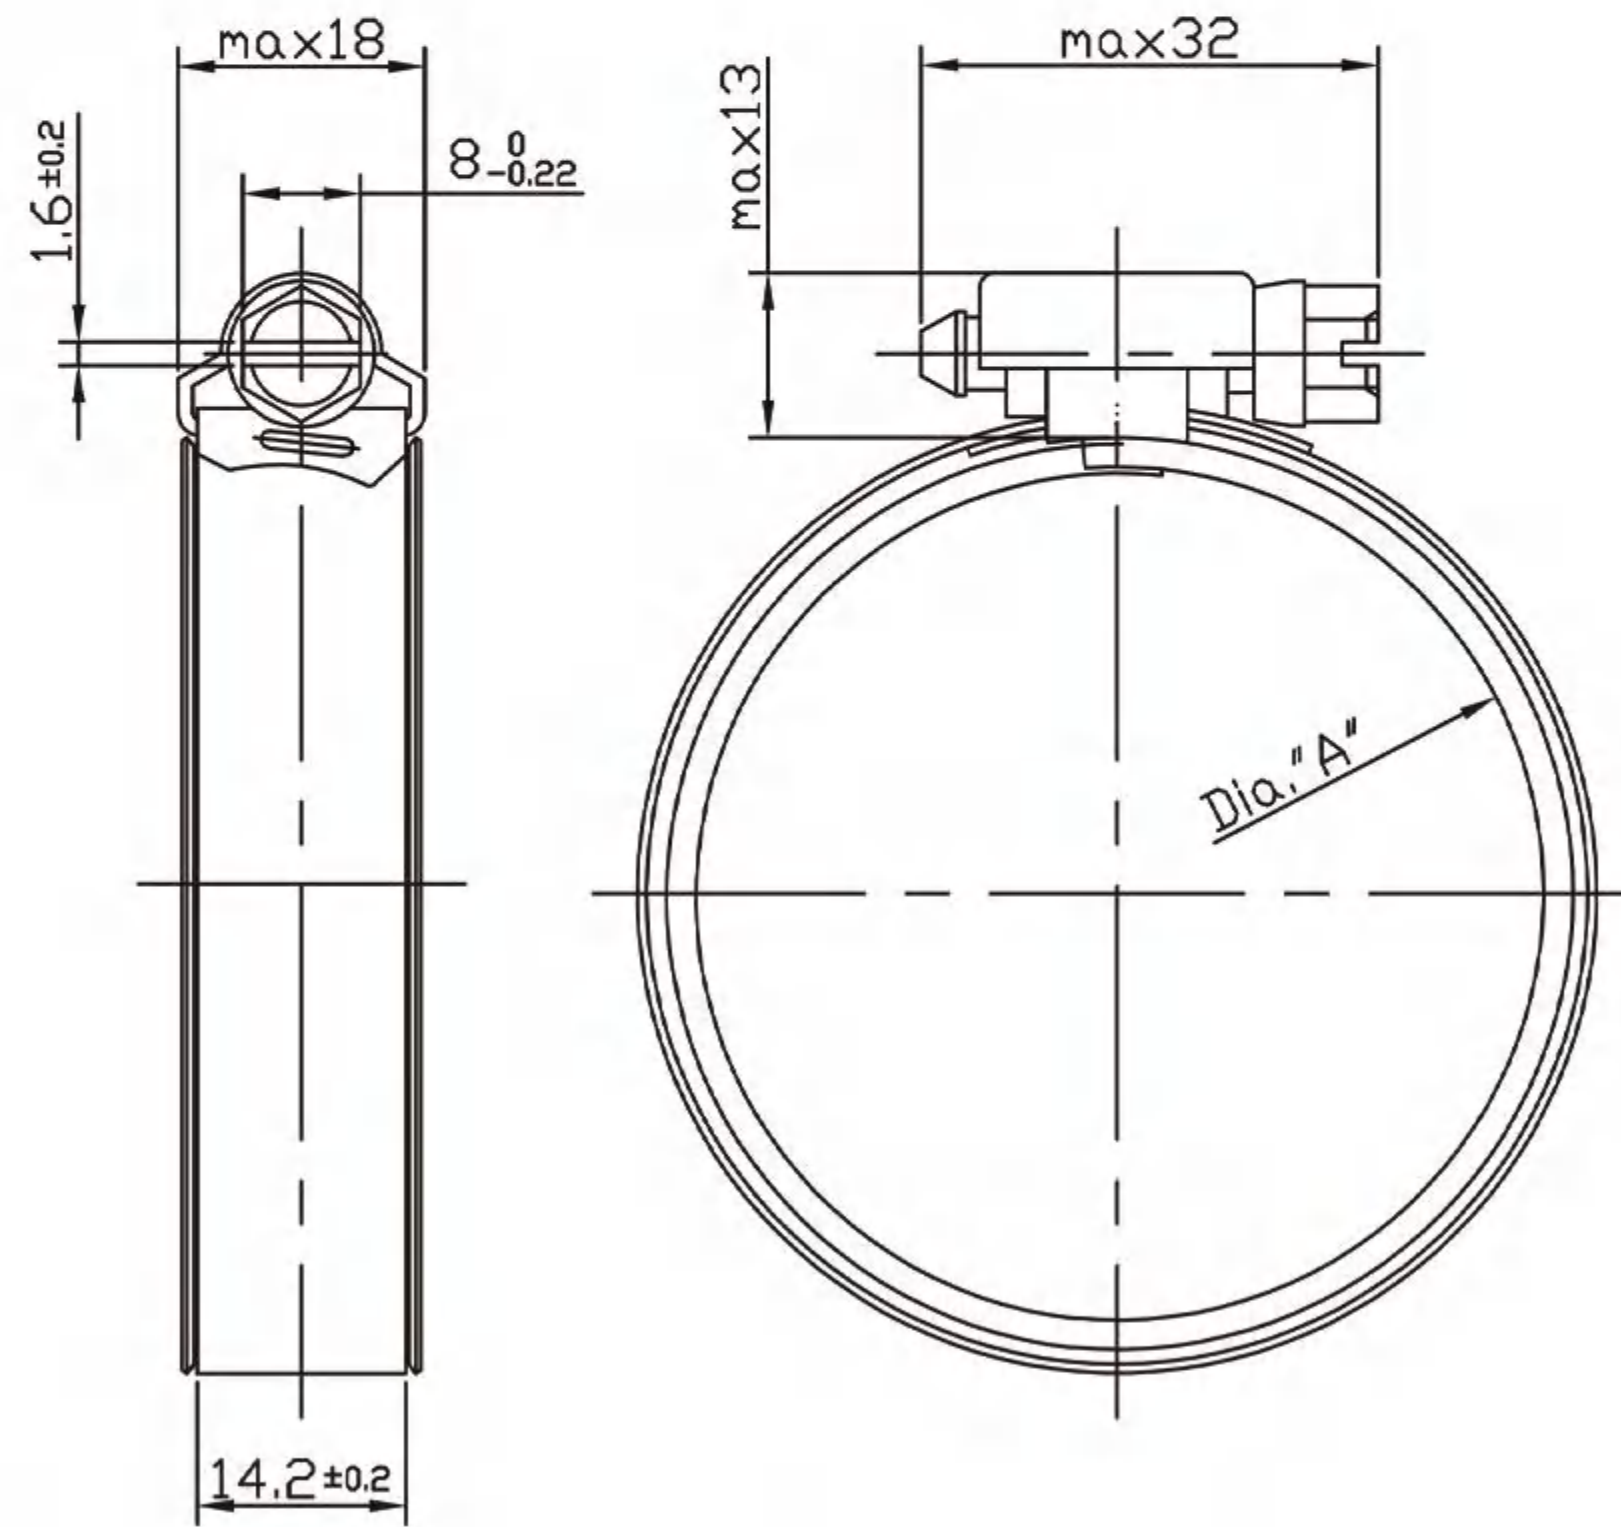

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification.

MS08 美式扣盖喉箍
(2-pcs housing perforated hose clamp--15.8mm bandwidth)

加紧范围Size		产品货号 Item NO
		15.8mm带宽 (bandwidth 15.8mm)
mm	inch	W4
25-45	1"*1-3/4"	MS08D2545
32-54	1-1/4"*2-1/8"	MS08D3254
45-67	1-3/4"*2-5/8"	MS08D4567
57-79	2-1/4"*3-1/8"	MS08D5779
70-92	2-3/4"*3-5/8"	MS08D7092
83-105	3-1/4"*4-1/8"	MS08D83105
95-118	3-3/4"*4-5/8"	MS08D95118
108-130	4-1/4"*5-1/8"	MS08D108130
121-143	4-3/4"*5-5/8"	MS08D121143
133-156	5-1/4"*6-1/8"	MS08D133156
146-168	5-3/4"*6-5/8"	MS08D146168
159-181	6-1/4"*7-1/8"	MS08D159181
172-194	6-3/4"*7-5/8"	MS08D172194
184-206	7-1/4"*8-1/8"	MS08D184206
197-219	7-3/4"*8-5/8"	MS08D197219
210-232	8-1/4"*9-1/8"	MS08D210232

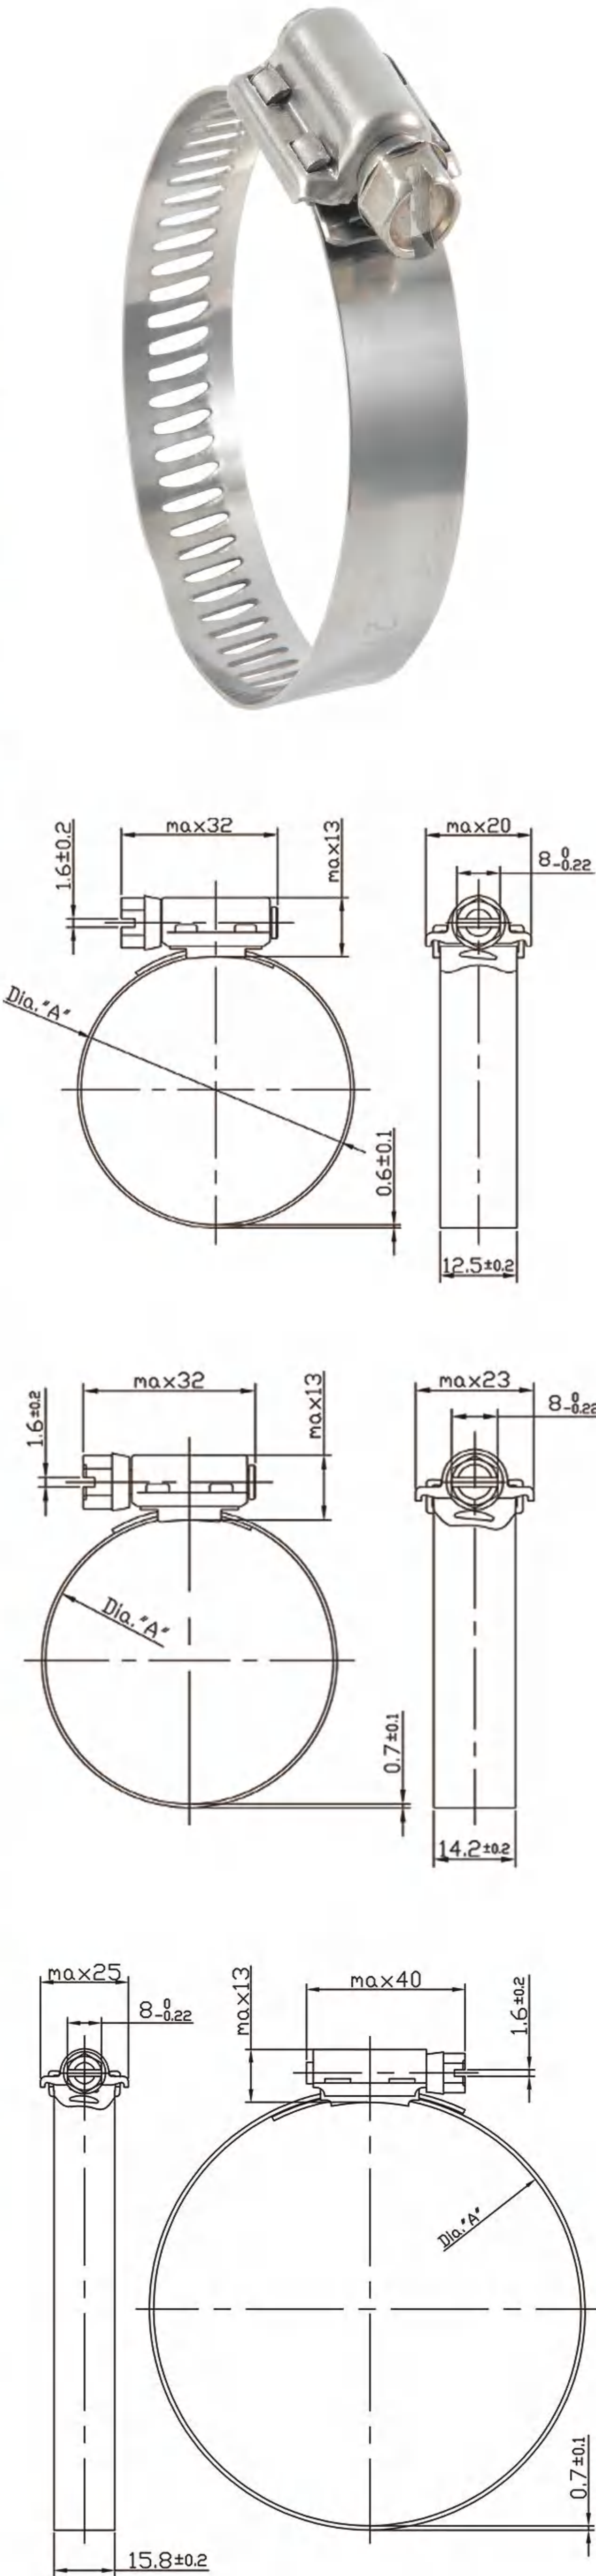

MS05&MS06 美式扣盖喉箍
(2-pcs housing perforated hose clamp)

型号	加紧范围 Size		产品货号 ItemNO			
	mm	inch	12.5mm带宽 (bandwidth 12.5mm)	14.2mm带宽 (bandwidth 14.2mm)	W2	W4
SAE no	mm	inch	W2	W4	W1	W4
6	11-20	0.44"-0.78"	MS05B6	MS05D6	\	\
8	13-23	0.5"-0.91"	MS05B8	MS05D8	\	\
10	14-27	0.56"-1.06"	MS05B10	MS05D10	\	MS06D10
12	18-32	0.69"-1.25"	MS05B12	MS05D12	\	MS06D12
16	21-38	0.81"-1.5"	MS05B16	MS05D16	MS06A16	MS06D16
20	21-44	0.81"-1.75"	MS05B20	MS05D20	MS06A20	MS06D20
24	27-51	1.06"-2"	MS05B24	MS05D24	MS06A24	MS06D24
28	33-57	1.31"-2.25"	MS05B28	MS05D28	MS06A28	MS06D28
32	40-64	1.56"-2.5"	MS05B32	MS05D32	MS06A32	MS06D32
36	46-70	1.81"-2.75"	MS05B36	MS05D36	MS06A36	MS06D36
40	50-76	2.06"-3"	MS05B40	MS05D40	MS06A40	MS06D40
44	59-83	2.31"-3.25"	MS05B44	MS05D44	MS06A44	MS06D44
48	65-89	2.56"-3.5"	MS05B48	MS05D48	MS06A48	MS06D48
52	72-95	2.81"-3.75"	MS05B52	MS05D52	MS06A52	MS06D52
56	78-102	3.06"-4"	MS05B56	MS05D56	MS06A56	MS06D56
60	84-108	3.31"-4.25"	MS05B60	MS05D60	MS06A60	MS06D60
64	91-114	3.56"-4.5"	MS05B64	MS05D64	MS06A64	MS06D64
72	103-127	4.06"-5"	MS05B72	MS05D72	MS06A72	MS06D72
80	117-140	4.62"-5.5"	MS05B80	MS05D80	MS06A80	MS06D80
88	130-152	5.12"-6"	MS05B88	MS05D88	MS06A88	MS06D88
96	141-165	5.56"-6.5"	MS05B96	MS05D96	MS06A96	MS06D96
104	157-178	6.18"-7"	MS05B104	MS05D104	MS06A104	MS06D104


材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 suggested install torque
W1	galvanized steel	galvanized steel	Zinc plated steel	MS05 5.3Nm
W2	AISI 300SS	AISI 300SS	Zinc plated steel	MS06 7.5Nm
W4	AISI 304SS	AISI 304SS	AISI 304SS	MS08 11Nm

SFS03 12.7mm美式速放式喉箍 (12.7mm Quick release hose clamp)

型号	加紧范围 Size		产品货号 Item no	
SAE no	mm	inch	W2	W4
12	13-32	1.25"	SFS03B1332	SFS03D1332
20	19-44	1.75"	SFS03B1944	SFS03D1944
24	26-51	2"	SFS03B2651	SFS03D2651
28	26-57	2.25"	SFS03B2657	SFS03D2657
36	26-70	2.75"	SFS03B2670	SFS03D2670
48	38-89	3.5"	SFS03B3889	SFS03D3889
56	25-101	4"	SFS03B25101	SFS03D25101
72	51-127	5"	SFS03B51127	SFS03D51127
88	51-152	6"	SFS03B51152	SFS03D51152
104	44-178	7"	SFS03B44178	SFS03D44178
116	44-197	7.8"	SFS03B44197	SFS03D44197
128	44-217	8.5"	SFS03B44217	SFS03D44217
136	44-228	9"	SFS03B44228	SFS03D44228
152	51-254	10"	SFS03B51254	SFS03D51254
188	52-312	12"	SFS03B52312	SFS03D52312
---	362-457	18"	SFS03B362457	SFS03D362457
---	355-508	20"	SFS03B355508	SFS03D355508
---	44-509	20"	SFS03B44509	SFS03D44509



材质 Material	钢带 Band	箍头 Housing	固定片 Washer	螺丝 Screw	建议安装扭力 suggested install torque
W2	AISI 201SS/301SS	AISI 304SS	AISI 410SS	zinc plated steel	4Nm
W4	AISI 301SS/304SS	AISI 304SS	AISI 410SS	AISI 301ss/304ss	

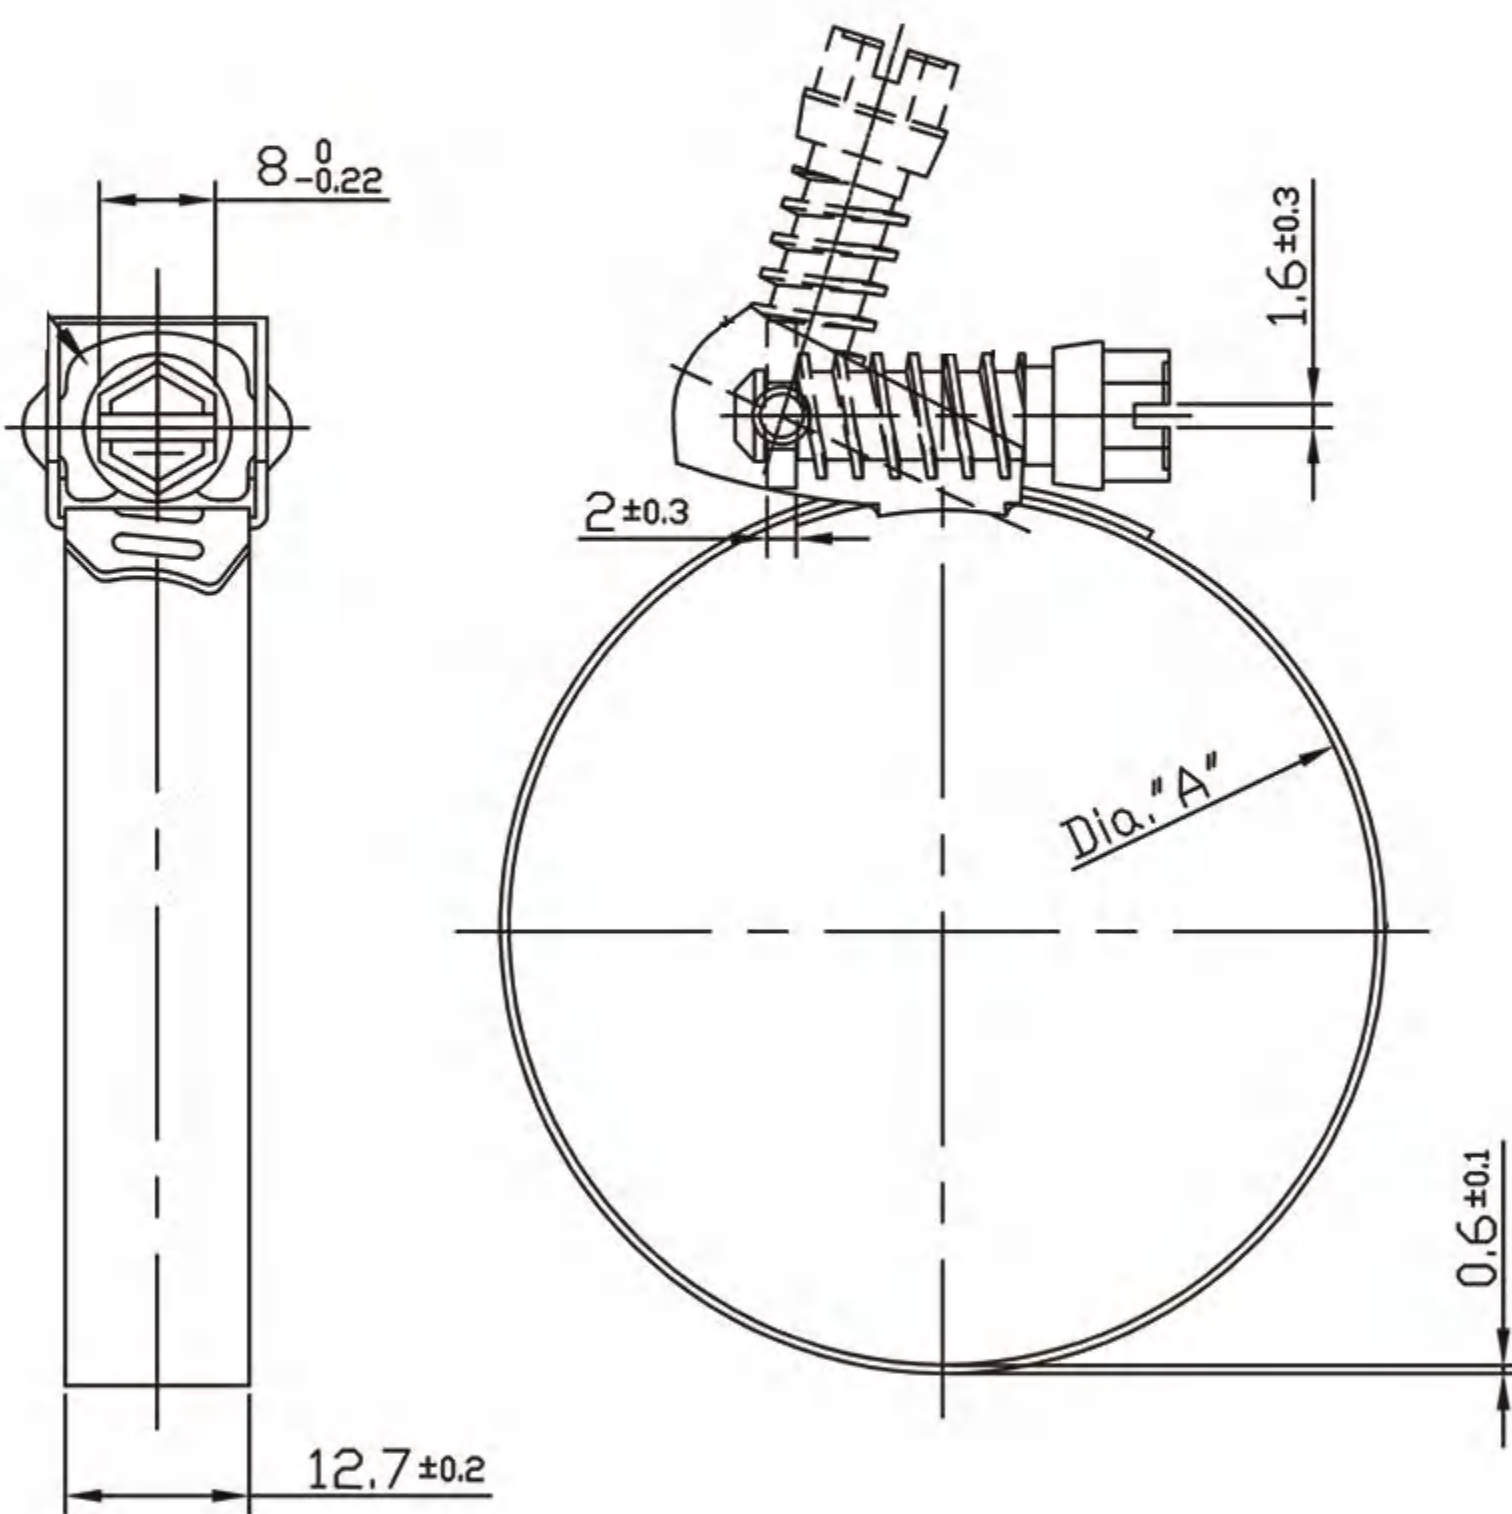

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification


根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

MS09 15.8mm重型美式带垫片带内衬喉箍（15.8mm Constant Tension Clamp）

加紧范围 Size		产品货号 Item no		建议安装扭力
mm	inch	W2	W4	suggested install torque
26-45	1"*1-3/4"	MS09B2645	MS09D2645	11Nm
32-54	1-1/4"*2-1/8"	MS09B3254	MS09D3254	
45-67	1-3/4"*2-5/8"	MS09B4567	MS09D4567	
57-79	2-1/4"*3-1/8"	MS09B5779	MS09D5779	
70-92	2-3/4"*3-5/8"	MS09B7092	MS09D7092	
83-105	3-1/4"*4-1/8"	MS09B83105	MS09D83105	
96-118	3-3/4"*4-5/8"	MS09B96118	MS09D96118	
108-130	4-1/4"*5-1/8"	MS09B108130	MS09D108130	
121-143	4-3/4"*5-5/8"	MS09B121143	MS09D121143	
134-156	5-1/4"*6-1/8"	MS09B134156	MS09D134156	
146-168	5-3/4"*6-5/8"	MS09B146168	MS09D146168	
159-181	6-1/4"*7-1/8"	MS09B159181	MS09D159181	
172-194	6-3/4"*7-5/8"	MS09B172194	MS09D172194	
184-206	7-1/4"*8-1/8"	MS09B184206	MS09D184206	
197-219	7-3/4"*8-5/8"	MS09B197219	MS09D197219	
210-232	8-1/4"*9-1/8"	MS09B210232	MS09D210232	

MS07 14.2mm重型美式带垫片带内衬喉箍（14.2mm Constant Tension Clamp）

加紧范围 Size	产品货号 Item no		建议安装扭力
mm	W2	W4	suggested install torque
16-27	MS07B1627	MS07D1627	7.5Nm
20-32	MS07B2032	MS07D2032	
25-40	MS07B2540	MS07D2540	
30-45	MS07B3045	MS07D3045	
35-50	MS07B3550	MS07D3550	

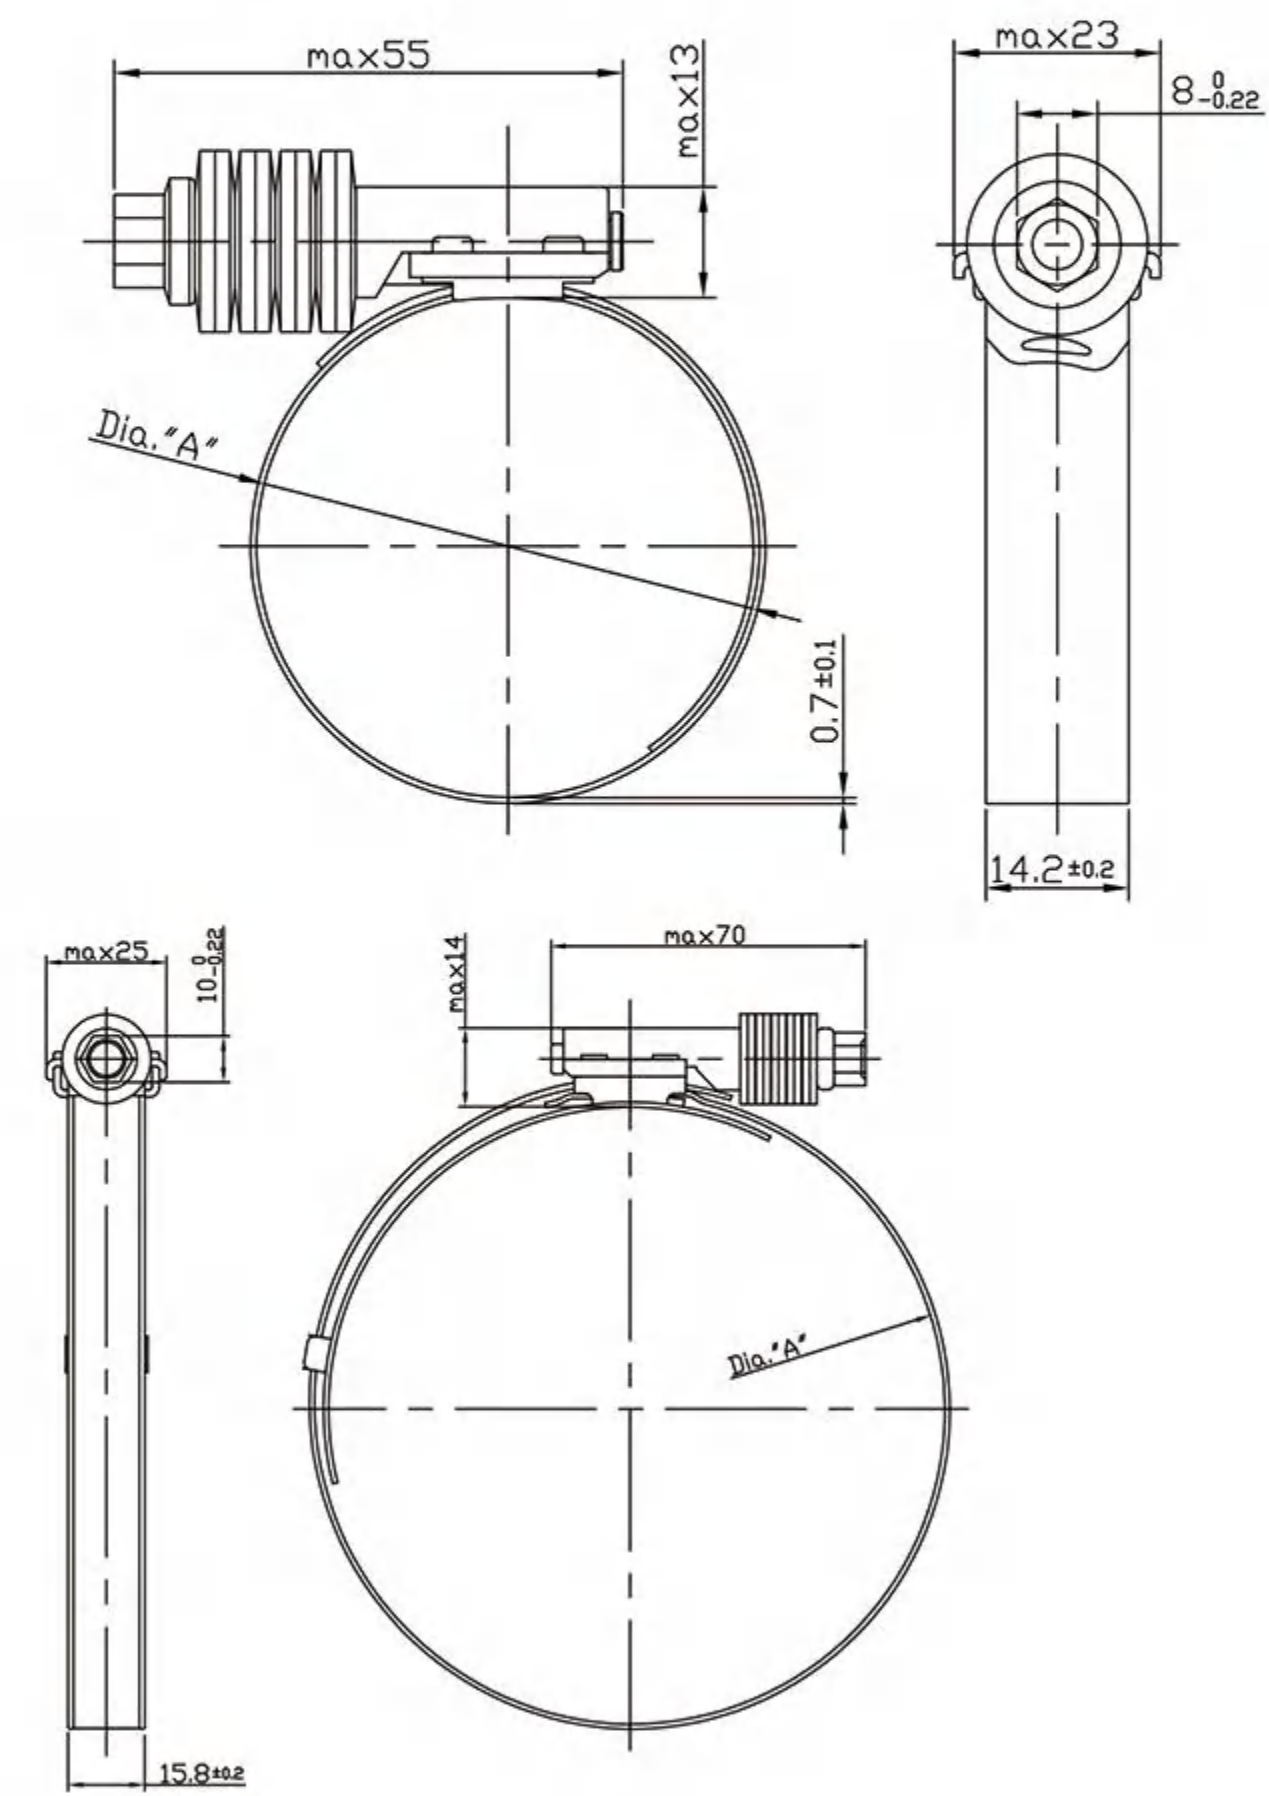

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	垫圈 washers
W2	AISI 301SS/304SS	AISI 301SS/304SS	Zinc plated steel	AISI 301ss
W4	AISI 301SS/304SS	AISI 301SS/304SS	AISI 301ss/304ss/400ss	AISI 301ss



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

MS02&XM03 美式套装（Perforated endless clamp）

型号	钢带宽度	钢带长度	钢带厚度	材质	箍头数量	自由扭力
SAE no	bandwidth mm	length of band mm	thickness of band mm	material	qty of housing	free torque Nm
MS03	12.7	3000	0.6	201ss/301ss/304ss/316ss	6	0.6
XM02	8	3000	0.6	201ss/301ss/304ss/316ss	6	0.8



MSHandle 大美式手柄式喉箍
perforated clamp with handle


加紧范围Size	产品货号 Item NO	
SAE no	mm	inch
6	11-20	0.44"-0.78"
8	13-23	0.5"-0.91"
10	14-27	0.56"-1.06"
12	18-32	0.69"-1.25"
16	21-38	0.81"-1.5"
20	21-44	0.81"-1.75"
24	27-51	1.06"-2"
28	33-57	1.31"-2.25"
32	40-64	1.56"-2.5"
36	46-70	1.81"-2.75"
40	52-76	2.06"-3"



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

QL01 T型强力卡箍 (T-bolt clamp)


加紧范围 Size	产品货号 Item no	
mm	W2	W4
37-40	QL01B3740	QL01D3740
43-49	QL01B4349	QL01D4349
46-52	QL01B4652	QL01D4652
51-57	QL01B5157	QL01D5157
58-65	QL01B5865	QL01D5865
64-72	QL01B6472	QL01D6472
70-78	QL01B7078	QL01D7078
76-84	QL01B7684	QL01D7684
83-91	QL01B8391	QL01D8391
89-97	QL01B8997	QL01D8997
95-103	QL01B95103	QL01D95103
102-110	QL01B102110	QL01D102110
108-116	QL01B108116	QL01D108116
114-122	QL01B114122	QL01D114122
121-129	QL01B121129	QL01D121129
127-135	QL01B127135	QL01D127135
133-141	QL01B133141	QL01D133141
140-148	QL01B140148	QL01D140148
146-154	QL01B146154	QL01D146154
152-160	QL01B152160	QL01D152160
159-167	QL01B159167	QL01D159167
165-173	QL01B165173	QL01D165173
171-179	QL01B171179	QL01D171179
178-186	QL01B178186	QL01D178186
184-192	QL01B184192	QL01D184192

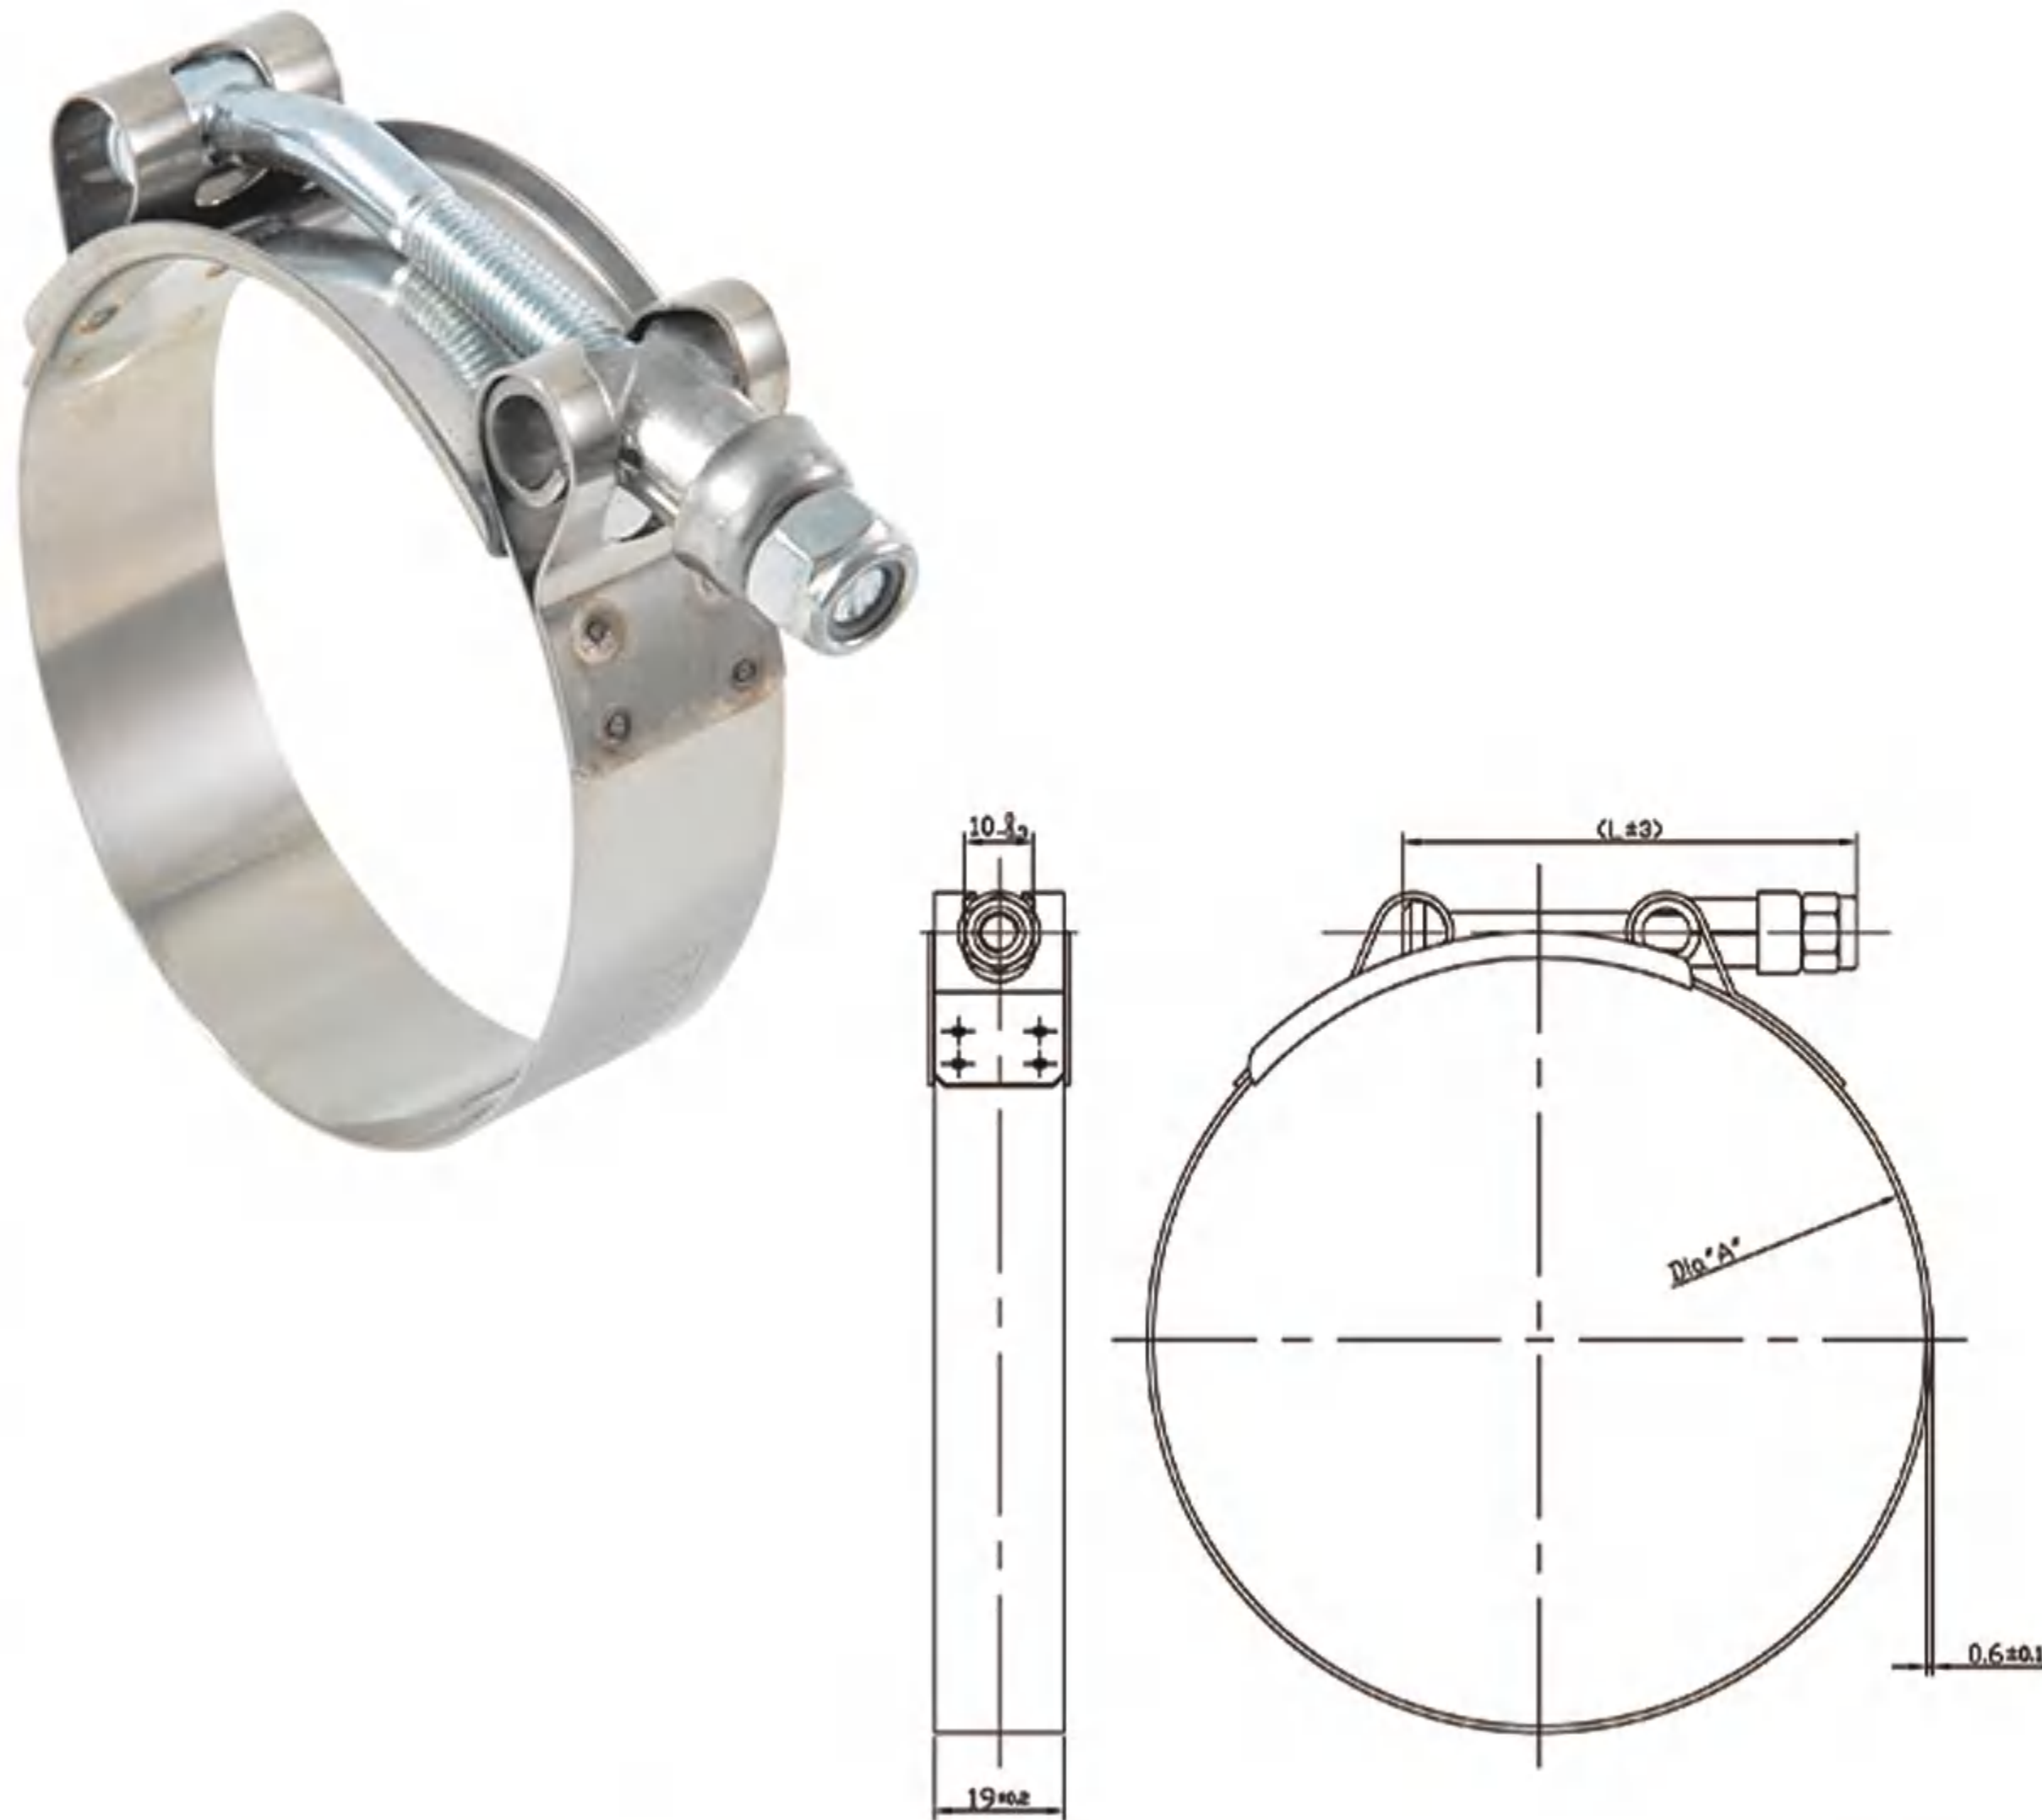

带宽 mm bandwidth	材质 material	钢带 band	舌板 bridge	三通管 trunnion	三通帽 cap	螺栓 bolt	螺母 nut	安装扭力 install torque
19	W2	301ss/304ss	301ss/304ss	304ss	304ss	zinc plated steel	zinc plated steel	9 Nm
19	W4	301ss/304ss	301ss/304ss	304ss	304ss	304ss/400ss	304ss	9 Nm

QL02 T型弹簧卡箍
(T-bolt with spring clamp)




加紧范围 Size	产品货号 Item no	
mm	W2	W4
63-70	QL02B6370	QL02D6370
67-75	QL02B6775	QL02D6775
70-78	QL02B7078	QL02D7078
72-80	QL02B7280	QL02D7280
73-81	QL02B7381	QL02D7381
76-84	QL02B7684	QL02D7684
77-85	QL02B7785	QL02D7785
79-87	QL02B7987	QL02D7987
83-90	QL02B8390	QL02D8390
86-94	QL02B8694	QL02D8694
87-95	QL02B8795	QL02D8795
89-97	QL02B8997	QL02D8997
92-100	QL02B92100	QL02D92100
95-103	QL02B95103	QL02D95103
99-106	QL02B99106	QL02D99106
102-109	QL02B102109	QL02D102109
103-110	QL02B103110	QL02D103110
105-113	QL02B105113	QL02D105113
107-115	QL02B107115	QL02D107115
108-116	QL02B108116	QL02D108116
111-119	QL02B111119	QL02D111119
112-120	QL02B112120	QL02D112120
114-122	QL02B114122	QL02D114122
130-138	QL02B130138	QL02D130138
132-140	QL02B132140	QL02D132140
138-146	QL02B138146	QL02D138146
140-148	QL02B140148	QL02D140148
152-160	QL02B152160	QL02D152160
155-164	QL02B155164	QL02D155164
182-190	QL02B182190	QL02D182190
187-195	QL02B187195	QL02D187195

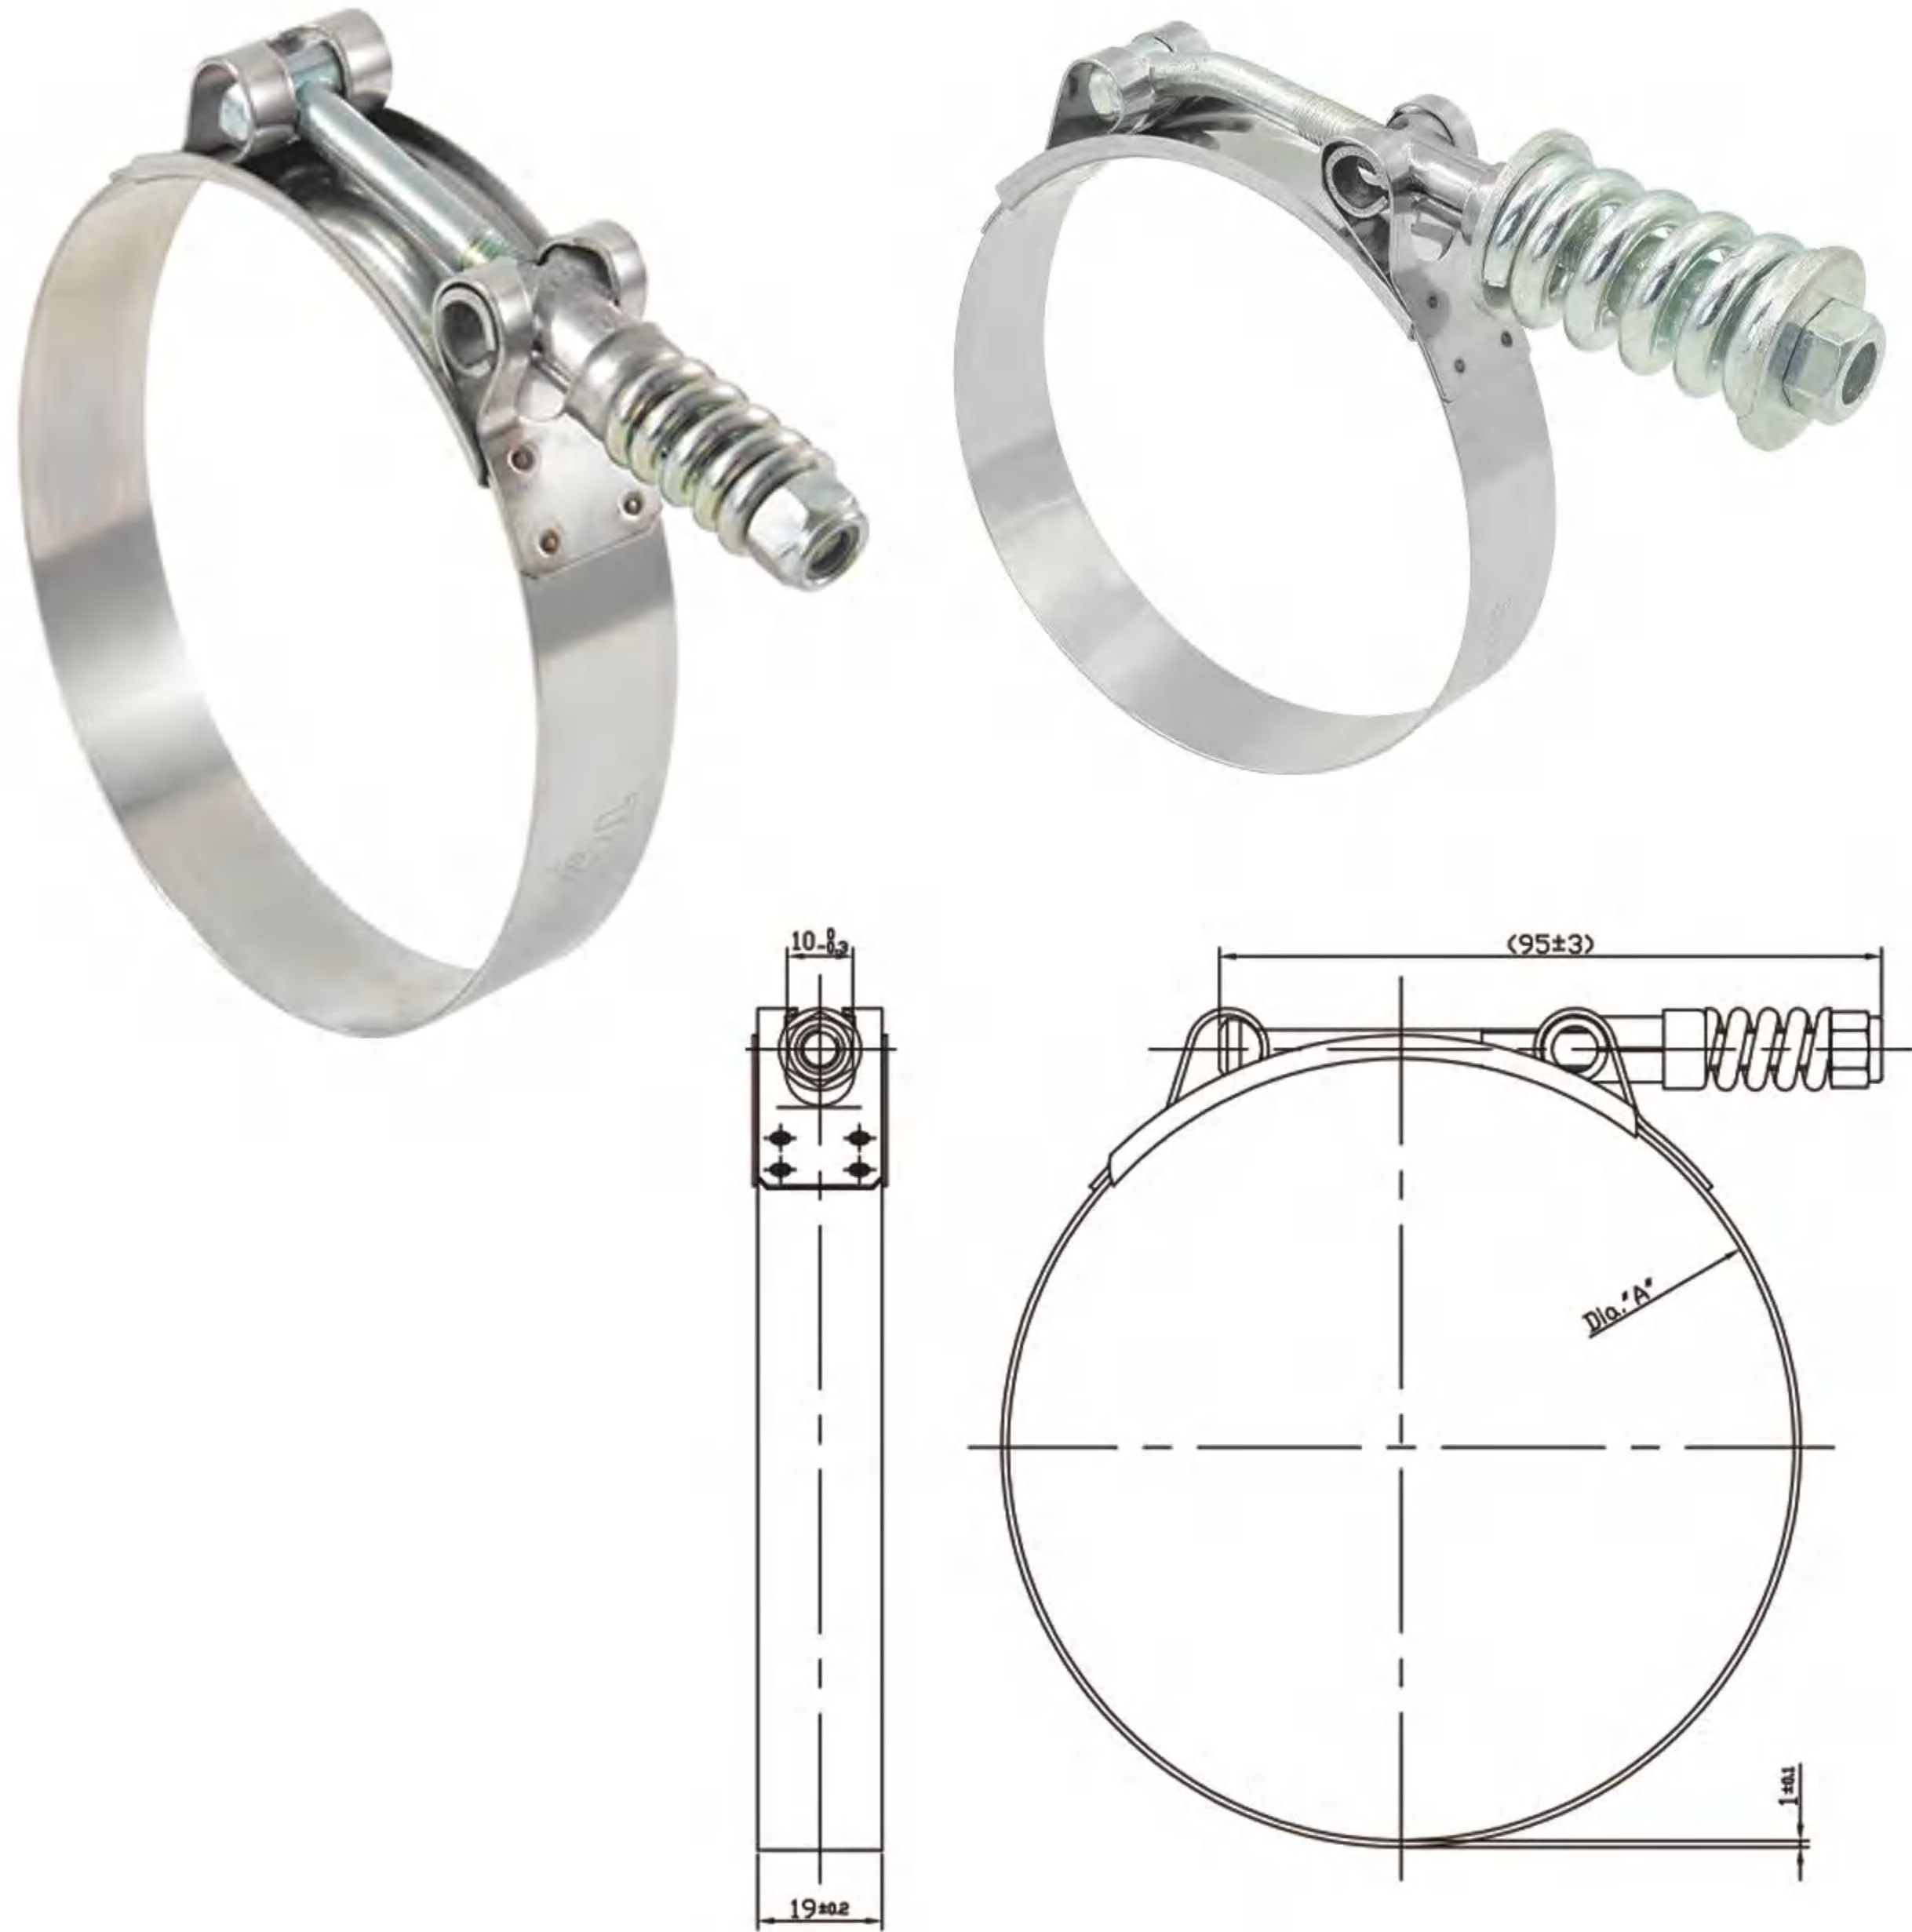


带宽 mm bandwidth	材质 material	钢带 band	舌板 bridge	三通管 trunnion	三通帽 cap	弹簧 spring	螺栓 bolt	螺母 nut	安装扭力 install torque
19	W2	301ss/304ss	301ss/304ss	304ss	304ss	zinc plated steel	zinc plated steel	zinc plated steel	9 Nm
19	W4	301ss/304ss	301ss/304ss	304ss	304ss	304ss	304ss/400ss	304ss	9 Nm

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

沟槽 V-band super clamp

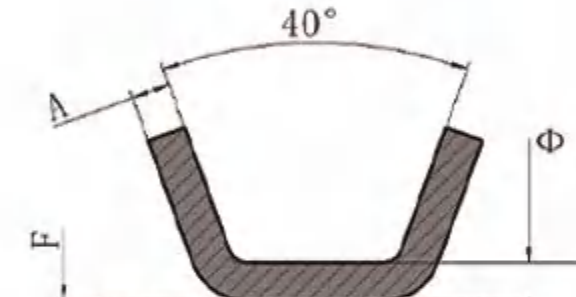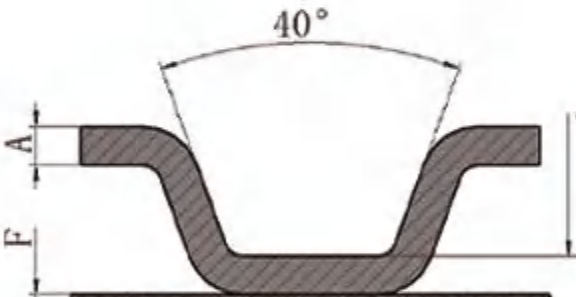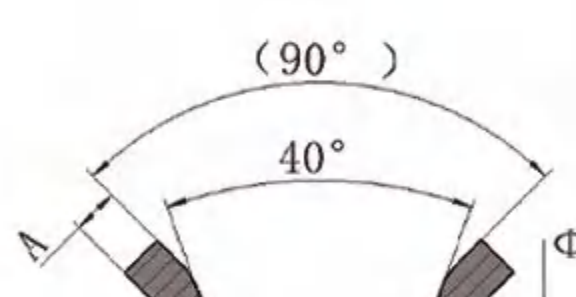槽型 shape of the V parts	法兰直径(φ) mm Diameter	卡箍外圆 outside clamp			V型槽 V-band		配件 Components		适用 产品类型 Application type	适用环境 Application Environment
		外圈宽度(E)	外圈厚度(F)	材质 Material	V型槽厚度(A)	材质 Material	螺钉 Screw	螺母 Nut		
		bandwidth mm	thickness mm		width mm					
	60≤φ≤80	19/22	1.0/1.2	300ss	1.2/1.5	400ss 300ss	400ss 300ss	400ss 300ss	I 类 II 类 III类IV类 V类VI类	≤650℃ (600-1200℃ 解决方案请与 凯诺技术工程 师沟通) If the temperperure requirement between 600-1200℃, please contact us, our engineer will provide you the solution.
	80<φ≤100	19/22/25/30	1.0/1.2/1.5		1.2/1.5/2.0					
	100<φ≤150		1.2/1.5/2.0							
	150<φ≤300	22/25/30	1.5/2.0/2.5		2.0/2.5					
	φ>300	25/30	2.0/2.5		2.5/3.0					

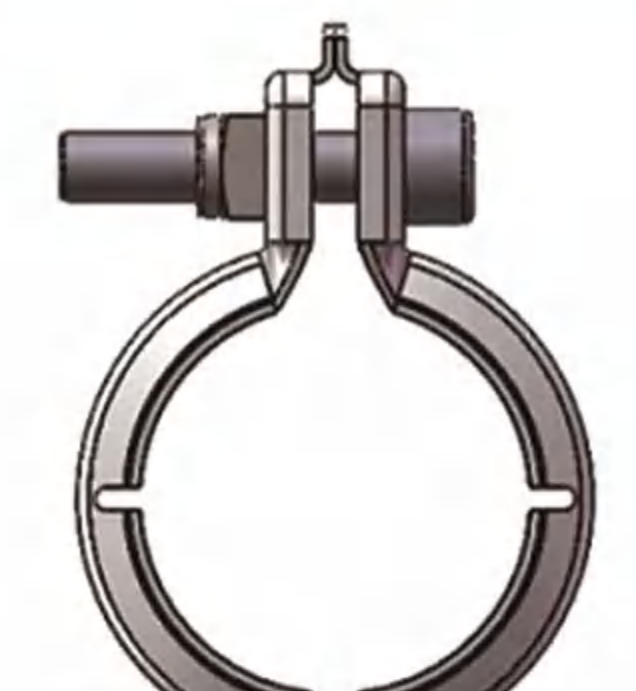产品类型	整体式 (I 类)	快装式 (II 类)	快装式 (III 类)
常规 V 型槽类			
产品类型	连接片式 (IV 类)	一体式 (V 类)	蜗轮蜗杆式 (VI 类)
其他 V 型槽类			



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification

QL03 单头实心强力 (Unitary Clamp) W1

夹紧范围 size mm	螺丝 Screw	产品货号 Item No.	带宽和料厚 bandwidth & thickness mm	建议安装扭力 Suggested Install Torque Nm	只/箱 pcs/ carton
17-19	M5×40	QL03A181719	18*0.6	4.5	200
19-21	M5×40	QL03A181921	18*0.6	4.5	200
20-22	M5×40	QL03A182022	18*0.6	4.5	200
21-23	M5×40	QL03A182123	18*0.6	4.5	200
23-25	M5×40	QL03A182325	18*0.6	4.5	200
24-26	M5×40	QL03A182426	18*0.6	4.5	200
25-27	M5×40	QL03A182527	18*0.6	4.5	200
26-28	M5×40	QL03A182628	18*0.6	4.5	200
27-29	M5×40	QL03A182729	18*0.6	4.5	200
29-31	M5×40	QL03A182931	18*0.6	4.5	200
32-35	M5×40	QL03A183235	18*0.6	4.5	200
35-38	M5×40	QL03A183538	18*0.6	4.5	200
36-39	M5×40	QL03A183639	18*0.6	4.5	200
38-41	M5×40	QL03A183841	18*0.6	4.5	200
40-43	M5×40	QL03A184043	18*0.6	4.5	200
29-31	M6×50	QL03A202931	20*0.8	9	200
30-33	M6×50	QL03A203033	20*0.8	9	200
32-35	M6×50	QL03A203235	20*0.8	9	200
34-37	M6×50	QL03A203437	20*0.8	9	200
36-39	M6×50	QL03A203639	20*0.8	9	200
38-41	M6×50	QL03A203841	20*0.8	9	200
40-43	M6×50	QL03A204043	20*0.8	9	200
43-46	M6×50	QL03A204346	20*0.8	9	100
44-47	M6×50	QL03A204447	20*0.8	9	100
48-51	M6×50	QL03A204851	20*0.8	9	100
52-55	M6×50	QL03A205255	20*0.8	9	100
56-59	M6×50	QL03A205659	20*0.8	9	100
60-63	M6×50	QL03A206063	20*0.8	9	100
64-67	M6×50	QL03A206467	20*0.8	9	100
44-47	M6×55	QL03A224447	22*1.2	9	100
48-51	M6×55	QL03A224851	22*1.2	9	100
52-55	M6×55	QL03A225255	22*1.2	9	100
56-59	M6×55	QL03A225659	22*1.2	9	100
60-63	M6×55	QL03A226063	22*1.2	9	100
64-67	M8×70	QL03A226467	22*1.5	18	100
66-70	M8×70	QL03A226670	22*1.5	18	100
68-73	M8×70	QL03A226873	22*1.5	18	100



根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

QL03 单头实心强力 (Unitary Clamp) W2-430 & W2-304 & W4-304 & W5-316

加紧范围 Size	螺丝 Screw	W2-430 产品货号 Item No.	带宽和料厚 bandwidth & thickness mm	W2-304 产品货号 Item No.	W4-304 产品货号 Item No.	W5-316 产品货号 Item No.	带宽和料厚 bandwidth & thickness mm	建议安装扭力 Suggested Install Torque Nm	只/箱 pcs/ carton
17-19	M5×40	QL03B181719	18*0.7	QL03B181719	QL03D181719	QL03E181719	18*0.6	4.5	200
19-21	M5×40	QL03B181921	18*0.7	QL03B181921	QL03D181921	QL03E181921	18*0.6	4.5	200
20-22	M5×40	QL03B182022	18*0.7	QL03B182022	QL03D182022	QL03E182022	18*0.6	4.5	200
21-23	M5×40	QL03B182123	18*0.7	QL03B182123	QL03D182123	QL03E182123	18*0.6	4.5	200
23-25	M5×40	QL03B182325	18*0.7	QL03B182325	QL03D182325	QL03E182325	18*0.6	4.5	200
26-28	M5×40	QL03B182628	18*0.7	QL03B182628	QL03D182628	QL03E182628	18*0.6	4.5	200
27-29	M5×40	QL03B182729	18*0.7	QL03B182729	QL03D182729	QL03E182729	18*0.6	4.5	200
29-31	M6×50	QL03B202931	20*0.7	QL03B202931	QL03D202931	QL03E202931	20*0.6	9	200
30-33	M6×50	QL03B203033	20*0.7	QL03B203033	QL03D203033	QL03E203033	20*0.6	9	200
31-34	M6×50	QL03B203134	20*0.7	QL03B203134	QL03D203134	QL03E203134	20*0.6	9	200
32-35	M6×50	QL03B203235	20*0.7	QL03B203235	QL03D203235	QL03E203235	20*0.6	9	200
34-37	M6×50	QL03B203437	20*0.7	QL03B203437	QL03D203437	QL03E203437	20*0.6	9	200
36-39	M6×50	QL03B203639	20*0.7	QL03B203639	QL03D203639	QL03E203639	20*0.6	9	200
37-40	M6×50	QL03B203740	20*0.7	QL03B203740	QL03D203740	QL03E203740	20*0.6	9	200
38-41	M6×50	QL03B203841	20*0.7	QL03B203841	QL03D203841	QL03E203841	20*0.6	9	200
40-43	M6×50	QL03B204043	20*0.7	QL03B204043	QL03D204043	QL03E204043	20*0.6	9	200
43-46	M6×50	QL03B204346	20*0.7	QL03B204346	QL03D204346	QL03E204346	20*0.6	9	100
44-47	M6×55	QL03B224447	22*0.8	QL03B224447	QL03D224447	QL03E224447	22*0.8	9	100
48-51	M6×55	QL03B224851	22*0.8	QL03B224851	QL03D224851	QL03E224851	22*0.8	9	100
52-55	M6×55	QL03B225255	22*0.8	QL03B225255	QL03D225255	QL03E225255	22*0.8	9	100
56-59	M6×55	QL03B225659	22*0.8	QL03B225659	QL03D225659	QL03E225659	22*0.8	9	100
60-63	M6×55	QL03B226063	22*0.8	QL03B226063	QL03D226063	QL03E226063	22*0.8	9	100
64-67	M8×70	QL03B226467	22*0.8	QL03B226467	QL03D226467	QL03E226467	22*0.8	18	100
68-73	M8×70	QL03B246873	24*0.8	QL03B246873	QL03D246873	QL03E246873	24*0.8	18	100
74-79	M8×70	QL03B247479	24*0.8	QL03B247479	QL03D247479	QL03E247479	24*0.8	18	100
65-70	M8×70	QL03B246570	24*0.8	QL03B246570	QL03D246570	QL03E246570	24*0.8	18	100
77-82	M8×70	QL03B247782	24*0.8	QL03B247782	QL03D247782	QL03E247782	24*0.8	18	100
80-85	M8×70	QL03B248085	24*0.8	QL03B248085	QL03D248085	QL03E248085	24*0.8	18	100
86-91	M8×70	QL03B248691	24*0.8	QL03B248691	QL03D248691	QL03E248691	24*0.8	18	50
92-97	M8×70	QL03B249297	24*0.8	QL03B249297	QL03D249297	QL03E249297	24*0.8	18	50
98-103	M8×70	QL03B2498103	24*0.8	QL03B2498103	QL03D2498103	QL03E2498103	24*0.8	18	50
102-108	M8×80	QL03B24102108	24*0.8	QL03B24102108	QL03D24102108	QL03E24102108	24*0.8	18	50
104-112	M8×80	QL03B24104112	24*0.8	QL03B24104112	QL03D24104112	QL03E24104112	24*0.8	18	50
110-118	M8×80	QL03B24110118	24*0.8	QL03B24110118	QL03D24110118	QL03E24110118	24*0.8	18	50
113-121	M8×80	QL03B24113121	24*0.8	QL03B24113121	QL03D24113121	QL03E24113121	24*0.8	18	50
118-123	M8×80	QL03B24118123	24*0.8	QL03B24118123	QL03D24118123	QL03E24118123	24*0.8	18	50
122-130	M8×80	QL03B24122130	24*0.8	QL03B24122130	QL03D24122130	QL03E24122130	24*0.8	18	50
131-139	M10×90	QL03B26131139	26*1.0	QL03B26131139	QL03D26131139	QL03E26131139	26*1.0	30	50
140-148	M10×90	QL03B26140148	26*1.0	QL03B26140148	QL03D26140148	QL03E26140148	26*1.0	30	50
149-161	M10×110	QL03B26149161	26*1.0	QL03B26149161	QL03D26149161	QL03E26149161	26*1.0	30	50
162-174	M10×110	QL03B26162174	26*1.0	QL03B26162174	QL03D26162174	QL03E26162174	26*1.0	30	25
175-187	M10×110	QL03B26175187	26*1.0	QL03B26175187	QL03D26175187	QL03E26175187	26*1.0	30	25
188-200	M10×110	QL03B26188200	26*1.0	QL03B26188200	QL03D26188200	QL03E26188200	26*1.0	30	25

材质 Material	钢带 Band	舌板 bridge	轴 Trunnion	套管 sleeving	螺栓 bolt
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel	Zinc plated steel	Zinc plated steel
W2	430ss/304ss	430ss/304ss	Zinc plated steel	Zinc plated steel	Zinc plated steel
W4	304ss	304ss	304ss	304ss	A2-70 Zinc plated
W5	316ss	316ss	316ss	316ss	A4-70 Zinc plated

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

QL04 单头双层实心强力卡箍 Unitary clamp with double bands

加紧范围 Size	产品货号 Item no.			带宽 bandwidth mm	螺丝 screw	料厚 thickness of band mm	建议安装扭力 suggested install torque	只/箱 pcs/carton
	W1	W4	W5					
mm								
35-40	QL04A3540	QL04D3540	QL04E3540	20	M6*45	1.0	9Nm	50
40-45	QL04A4045	QL04D4045	QL04E4045			1.0		50
45-50	QL04A4550	QL04D4550	QL04E4550			1.0		50
50-55	QL04A5055	QL04D5055	QL04E5055			1.0		50
55-60	QL04A5560	QL04D5560	QL04E5560			1.0		50
60-65	QL04A6065	QL04D6065	QL04E6065			1.0		50
65-70	QL04A6570	QL04D6570	QL04E6570			1.0		50
70-75	QL04A7075	QL04D7075	QL04E7075			1.0		50
75-80	QL04A7580	QL04D7580	QL04E7580			1.0		50
80-85	QL04A8085	QL04D8085	QL04E8085			1.0		50
85-90	QL04A8590	QL04D8590	QL04E8590			1.0		50
90-95	QL04A9095	QL04D9095	QL04E9095			1.0		50
95-100	QL04A95100	QL04D95100	QL04E95100			1.0		50
100-105	QL04A100105	QL04D100105	QL04E100105			1.0		50
105-110	QL04A105110	QL04D105110	QL04E105110			1.0		50
110-115	QL04A110115	QL04D110115	QL04E110115			1.0		50
115-120	QL04A115120	QL04D115120	QL04E115120			1.0		50
120-125	QL04A120125	QL04D120125	QL04E120125			1.0		50
125-130	QL04A125130	QL04D125130	QL04E125130			1.0		50
130-135	QL04A130135	QL04D130135	QL04E130135			1.0		50
135-140	QL04A135140	QL04D135140	QL04E135140			1.0		50
140-145	QL04A140145	QL04D140145	QL04E140145			1.0		50
145-150	QL04A145150	QL04D145150	QL04E145150			1.0		50
150-155	QL04A150155	QL04D150155	QL04E150155			1.0		50
155-160	QL04A155160	QL04D155160	QL04E155160			1.0		50

材质 Material	钢带 Band	舌板 bridge	轴 Trunnion	螺栓 bolt
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel	Zinc plated steel
W4	AISI 301SS/304SS	AISI 301SS/304SS	AISI 301SS/304SS	A2-70 zinc plated
W5	AISI 316SS	AISI 316SS	AISI 316SS	A4-70 zinc plated



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

QL05 双头双层实心强力（Double bolts and double bands super clamp）

加紧范围 Size mm	带宽 bandwidth mm	料厚 thickness of band mm	螺丝 screw	产品货号 Item no.			建议安装扭力 suggested install torque	只/箱 pcs/carton
				W1	W4	W5		
35--45	20	1.0	W1 M6*45 W4&W5 M6*50	QL05A3545	QL05D3545	QL05E3545	9Nm	100
40--50				QL05A4050	QL05D4050	QL05E4050		100
45--55				QL05A4555	QL05D4555	QL05E4555		100
50--60				QL05A5060	QL05D5060	QL05E5060		100
55--65				QL05A5565	QL05D5565	QL05E5565		100
60--70				QL05A6070-1	QL05D6070-1	QL05E6070-1		100
65--75				QL05A6575-1	QL05D6575-1	QL05E6575-1		100
70--80				QL05A7080-1	QL05D7080-1	QL05E7080-1		100
75--85				QL05A7585-1	QL05D7585-1	QL05E7585-1		100
80--90				QL05A8090-1	QL05D8090-1	QL05E8090-1		100
85--95				QL05A8595-1	QL05D8595-1	QL05E8595-1		100
60--70	24	1.0	M8*60	QL05A6070-2	QL05D6070-2	QL05E6070-2	18Nm	50
70--80				QL05A7080-2	QL05D7080-2	QL05E7080-2		50
80--90				QL05A8090-2	QL05D8090-2	QL05E8090-2		50
90--100				QL05A90100	QL05D90100	QL05E90100		50
110--110				QL05A100110	QL05D100110	QL05E100110		50
110--120				QL05A110120	QL05D110120	QL05E110120		50
120--130				QL05A120130	QL05D120130	QL05E120130		50
130--140				QL05A130140	QL05D130140	QL05E130140		50
140--150				QL05A140150	QL05D140150	QL05E140150		50
150--160				QL05A150160	QL05D150160	QL05E150160		50
160--170				QL05A160170	QL05D160170	QL05E160170		50
170--180				QL05A170180	QL05D170180	QL05E170180		50
180--190				QL05A180190	QL05D180190	QL05E180190		25
190--200				QL05A190200	QL05D190200	QL05E190200		25
200--210				QL05A200210	QL05D200210	QL05E200210		25
210--220				QL05A210220	QL05D210220	QL05E210220		25
220--230				QL05A220230	QL05D220230	QL05E220230		25
230--240				QL05A230240	QL05D230240	QL05E230240		25
240--250				QL05A240250	QL05D240250	QL05E240250		25
250--260				QL05A250260	QL05D250260	QL05E250260		25
260--270				QL05A260270	QL05D260270	QL05E260270		25
270--280				QL05A270280	QL05D270280	QL05E270280		25
290--300				QL05A290300	QL05D290300	QL05E290300		25

材质 Material	钢带 Band	舌板 bridge	轴 Trunnion	螺栓 bolt
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel	Zinc plated steel
W4	AISI 301SS/304SS	AISI 301SS/304SS	AISI 301SS/304SS	A2-70 zinc plated
W5	AISI 316SS	AISI 316SS	AISI 316SS	A4-70 zinc plated



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

QL06 单头超强强力(Heavy Duty clamp with single bolt)

加紧范围 Size	产品货号 Item no.	螺丝 screw	带宽 bandwidth mm	料厚 thickness of band mm	建议安装扭力 suggested install torque
	W1				
68-73	QL06A6873	M10x70	30	1.7	30Nm
74-79	QL06A7479	M10x70			
80-85	QL06A8085	M10x70			
86-91	OL06A8691	M10x70			
92-97	QL06A9297	M10x70			
98-103	QL06A98103	M10x80			
104-112	OL06A104112	M10x80			
113-121	Q106A113121	M10x80			
122-130	QL06A122130	M10x90			
131-139	QL06A131139	M10x90			
140-148	QL06A140148	M10x90			
149-161	QL06A149161	M10x90			
162-174	QL06A162174	M10x90			
175-187	QL06A175187	M10x90			
188-200	Q106A188200	M10x90			
201-213	QL06A201213	M10x100			
214-226	QL06A214226	M10x100			
227-239	QL06A227239	M10x100			
240-252	QL06A240252	M10x100			
248-260	QL06A248260	M10x100			

材质 material	钢带 Band	舌板 bridge	轴 Trunnion	垫片 washer	螺栓 bolt
W1	zine plated steel	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel



QL06-2 双头超强强力(Heavy Duty clamp with double bolts)

加紧范围 Size	产品货号 Item no.	螺丝 screw	带宽 bandwidth mm	料厚 thickness of band mm	建议安装扭力 suggested install torque
74-79	QL06-2A7479	M10x80	30	1.7	30Nm
80-85	QL06-2A8085	M10x80			
86-91	QL06-2A8691	M10x80			
92-97	QL06-2A9297	M10x80			
98-103	QL06-2A98103	M10x80			
104-112	QL06-2A104112	M10x80			
113-121	QL06-2A113121	M10x80			
122-130	QL06-2A122130	M10x90			
131-139	QL06-2A131139	M10x90			
149-161	QL06-2A149161	M10x90			
162-174	QL06-2A162174	M10x90			
175-187	QL06-2A175187	M10x90			
188-200	QL06-2A188200	M10x90			
200-220	QL06-2A200220	M10x90			
220-240	QL06-2A220240	M10x100			
240-260	QL06-2A240260	M10x100			
260-280	QL06-2A260280	M10x100			
280-300	QL06-2A280300	M10x100			
300-325	QL06-2A300325	M10x100			
325-375	QL06-2A325375	M10x100			
375-400	QL06-2A375400	M10x100			
400-425	QL06-2A400425	M10x100			
425-450	QL06-2A425450	M10x100			
450-475	QL06-2A450475	M10x100			
475-500	QL06-2A475500	M10x100			

材质 material	钢带 Band	舌板 bridge	轴 Trunnion	垫片 washer	螺栓 bolt
W1	zine plated steel	zinc plated steel	zinc plated steel	zinc plated steel	zinc plated steel



根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

YX12 单耳无极卡箍 (Single ear clamp)


带宽 bandwidth mm	料厚 thickness of band mm	规格 size mm	产品货号 Item No	材质W4 material W4
5	0.5	6.0-7.0	YX127	AISI 304ss
5	0.5	7.0-8.7	YX1287	AISI 304ss
5	0.5	7.8-9.5	YX1295	AISI 304ss
5	0.5	8.8-10.5	YX12105	AISI 304ss
7	0.6	9.4-11.9	YX12119	AISI 304ss
7	0.6	9.8-12.3	YX12123	AISI 304ss
7	0.6	10.3-12.8	YX12128	AISI 304ss
7	0.6	10.8-13.3	YX12133	AISI 304ss
7	0.6	11.3-13.8	YX12138	AISI 304ss
7	0.6	11.5-14.0	YX12140	AISI 304ss
7	0.6	12.0-14.5	YX12145	AISI 304ss
7	0.6	12.3-14.8	YX12148	AISI 304ss
7	0.6	12.8-15.3	YX12153	AISI 304ss
7	0.6	13.2-15.7	YX12157	AISI 304ss
7	0.6	13.7-16.2	YX12162	AISI 304ss
7	0.6	14.1-16.6	YX12166	AISI 304ss
7	0.6	14.3-16.8	YX12168	AISI 304ss
7	0.6	14.5-17.0	YX12170	AISI 304ss
7	0.6	15.0-17.5	YX12175	AISI 304ss
7	0.6	14.5-17.8	YX12178	AISI 304ss
7	0.6	14.8-18.0	YX12180	AISI 304ss
7	0.6	15.3-18.5	YX12185	AISI 304ss
7	0.6	16.0-19.2	YX12192	AISI 304ss
7	0.6	16.6-19.8	YX12198	AISI 304ss
7	0.6	17.8-21.0	YX12210	AISI 304ss
7	0.6	19.4-22.6	YX12226	AISI 304ss
7	0.6	20.3-23.5	YX12235	AISI 304ss
7	0.6	20.9-24.1	YX12241	AISI 304ss
7	0.6	22.4-25.6	YX12256	AISI 304ss
7	0.6	23.9-27.1	YX12271	AISI 304ss
7	0.6	25.4-28.6	YX12286	AISI 304ss
7	0.6	26.9-30.1	YX12301	AISI 304ss
7	0.6	27.6-30.8	YX12308	AISI 304ss
7	0.6	28.4-31.6	YX12316	AISI 304ss
7	0.6	29.9-33.1	YX12331	AISI 304ss
7	0.6	31.4-34.5	YX12345	AISI 304ss
7	0.6	32.9-36.1	YX12361	AISI 304ss
7	0.6	34.4-37.6	YX12376	AISI 304ss
7	0.6	34.9-38.1	YX12381	AISI 304ss
7	0.6	36.4-39.6	YX12396	AISI 304ss
7	0.6	37.8-41.0	YX12410	AISI 304ss
7	0.6	39.3-42.5	YX12425	AISI 304ss
7	0.6	40.8-44.0	YX12440	AISI 304ss
7	0.6	42.3-45.5	YX12455	AISI 304ss
7	0.6	43.6-47.0	YX12470	AISI 304ss
7	0.6	45.3-48.5	YX12485	AISI 304ss
7	0.6	46.8-50.0	YX12500	AISI 304ss




根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification

MN01 迷你喉箍 (Mini hose clamp)

加紧范围	带宽	产品货号 Item no		只/箱
Size mm	bandwidth mm	W1	W4	pcs/carton
6-8	9	MN01A0608	MN01D0608	2000
7-9		MN01A0709	MN01D0709	2000
8-10		MN01A0810	MN01D0810	2000
9-11		MN01A0911	MN01D0911	2000
10-12		MN01A1012	MN01D1012	2000
11-13		MN01A1113	MN01D1113	2000
12-14		MN01A1214	MN01D1214	2000
13-15		MN01A1315	MN01D1315	2000
14-16		MN01A1416	MN01D1416	2000
15-17		MN01A1517	MN01D1517	2000
16-18		MN01A1618	MN01D1618	2000
17-19		MN01A1719	MN01D1719	2000
18-20		MN01A1820	MN01D1820	2000
19-21		MN01A1921	MN01D1921	2000
20-22		MN01A2022	MN01D2022	2000
21-23		MN01A2123	MN01D2123	2000
22-24		MN01A2224	MN01D2224	2000
23-25		MN01A2325	MN01D2325	2000
24-26		MN01A2426	MN01D2426	2000
25-27		MN01A2527	MN01D2527	2000
26-28		MN01A2628	MN01D2628	2000
27-29		MN01A2729	MN01D2729	1000
28-30		MN01A2830	MN01D2830	1000
29-31		MN01A2931	MN01D2931	1000
30-32		MN01A3032	MN01D3032	1000
31-33		MN01A3133	MN01D3133	1000
32-34		MN01A3234	MN01D3234	1000

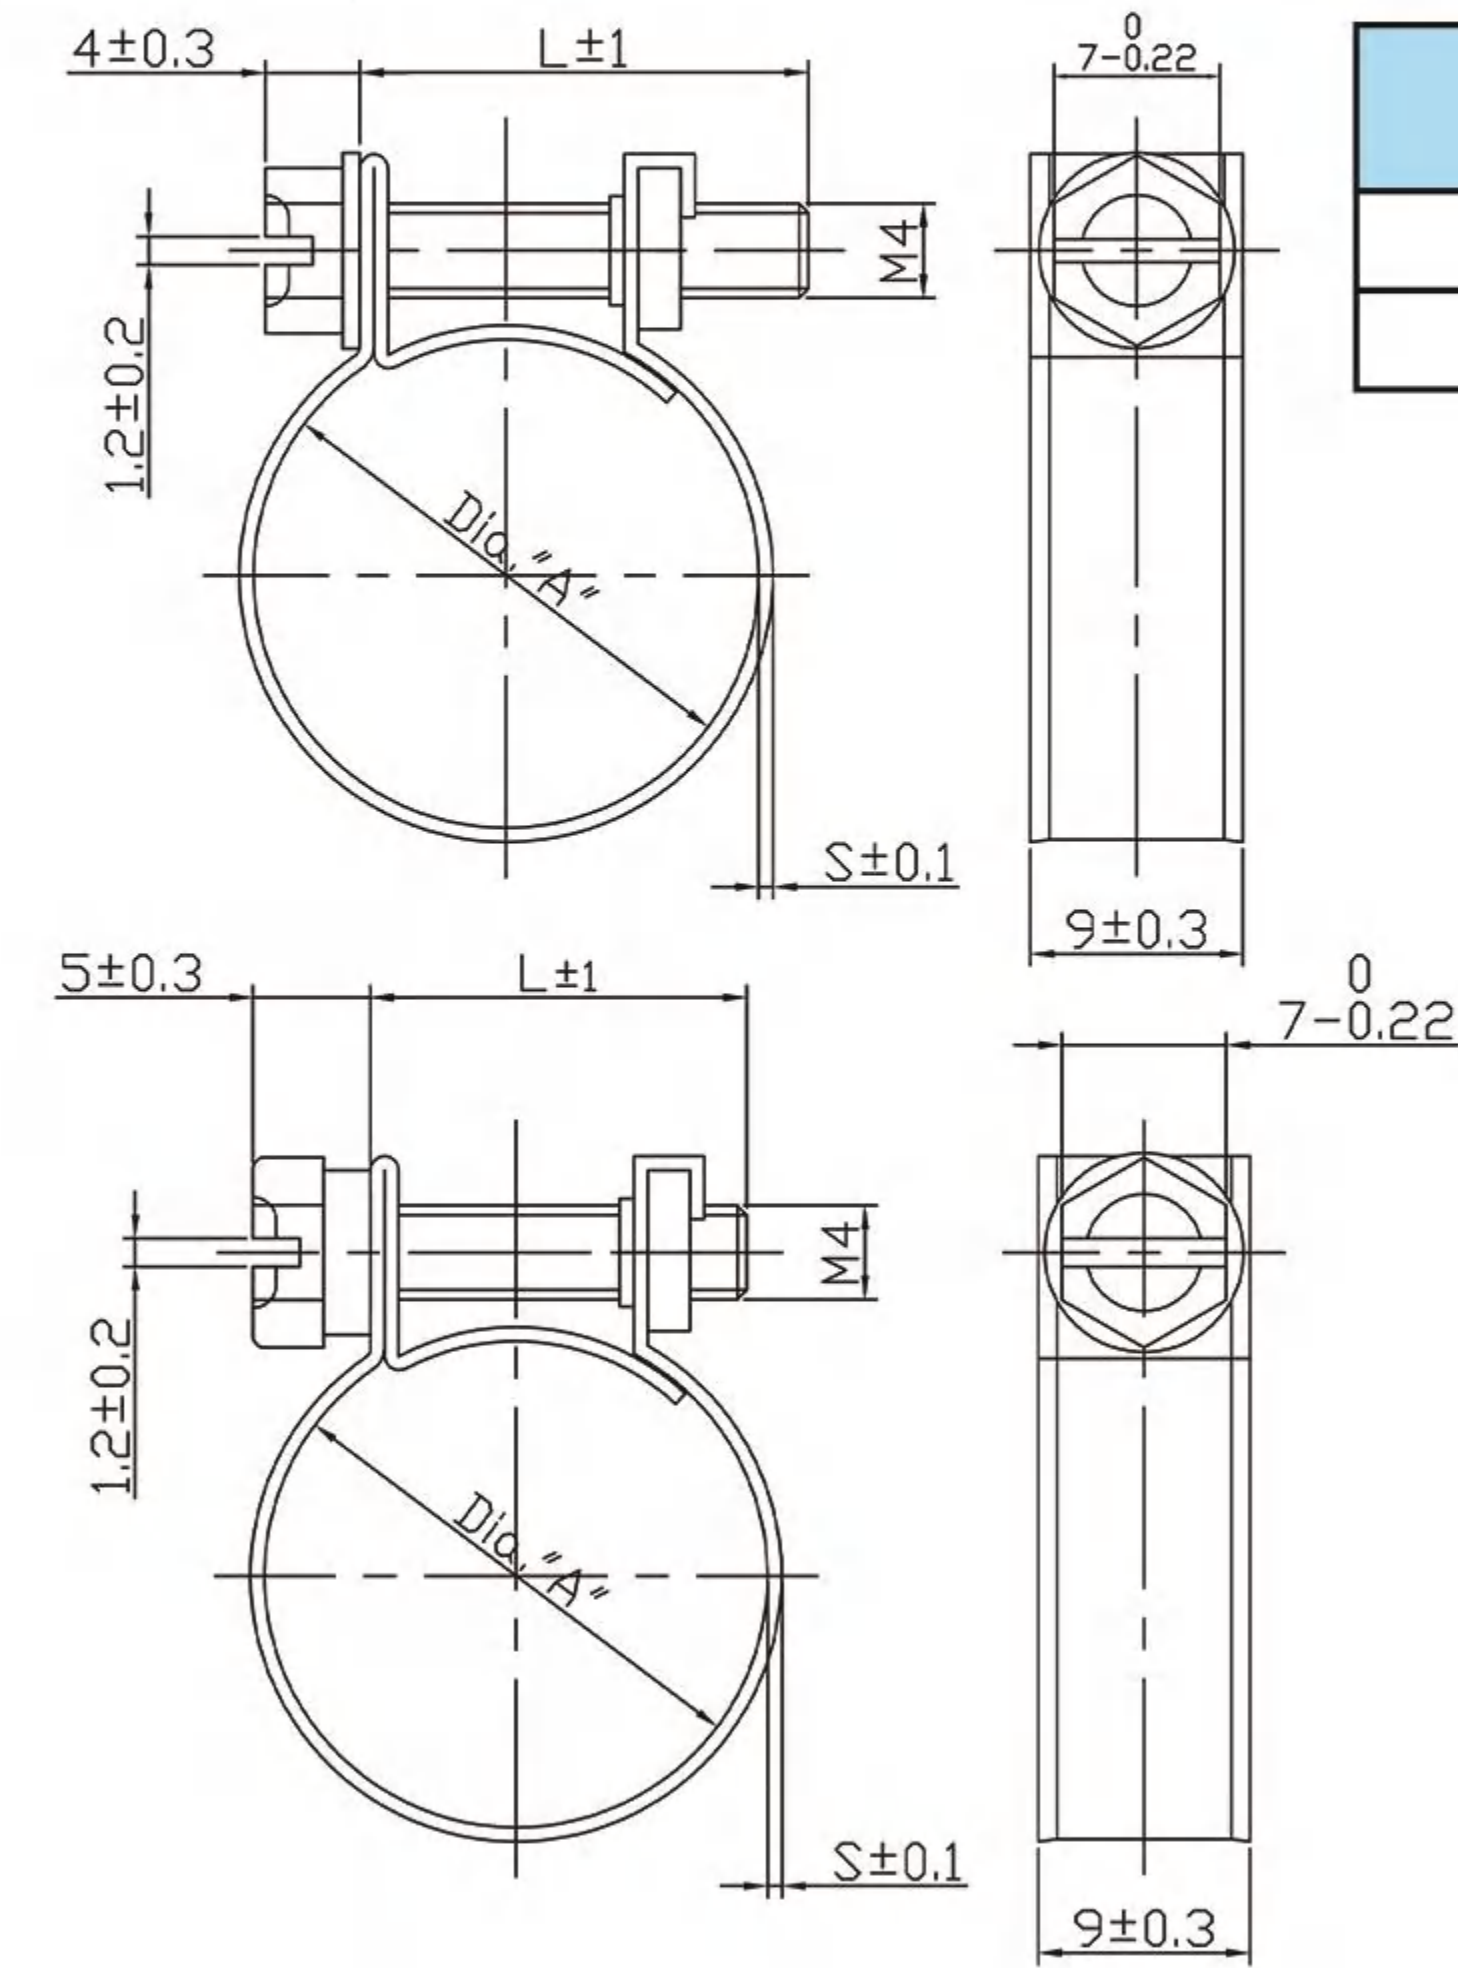

材质 Material	钢带 Band	螺丝 Screw	螺母 nut
W1	Zinc plated steel	Zinc plated steel	Zinc plated steel
W4	304ss	304ss	304ss

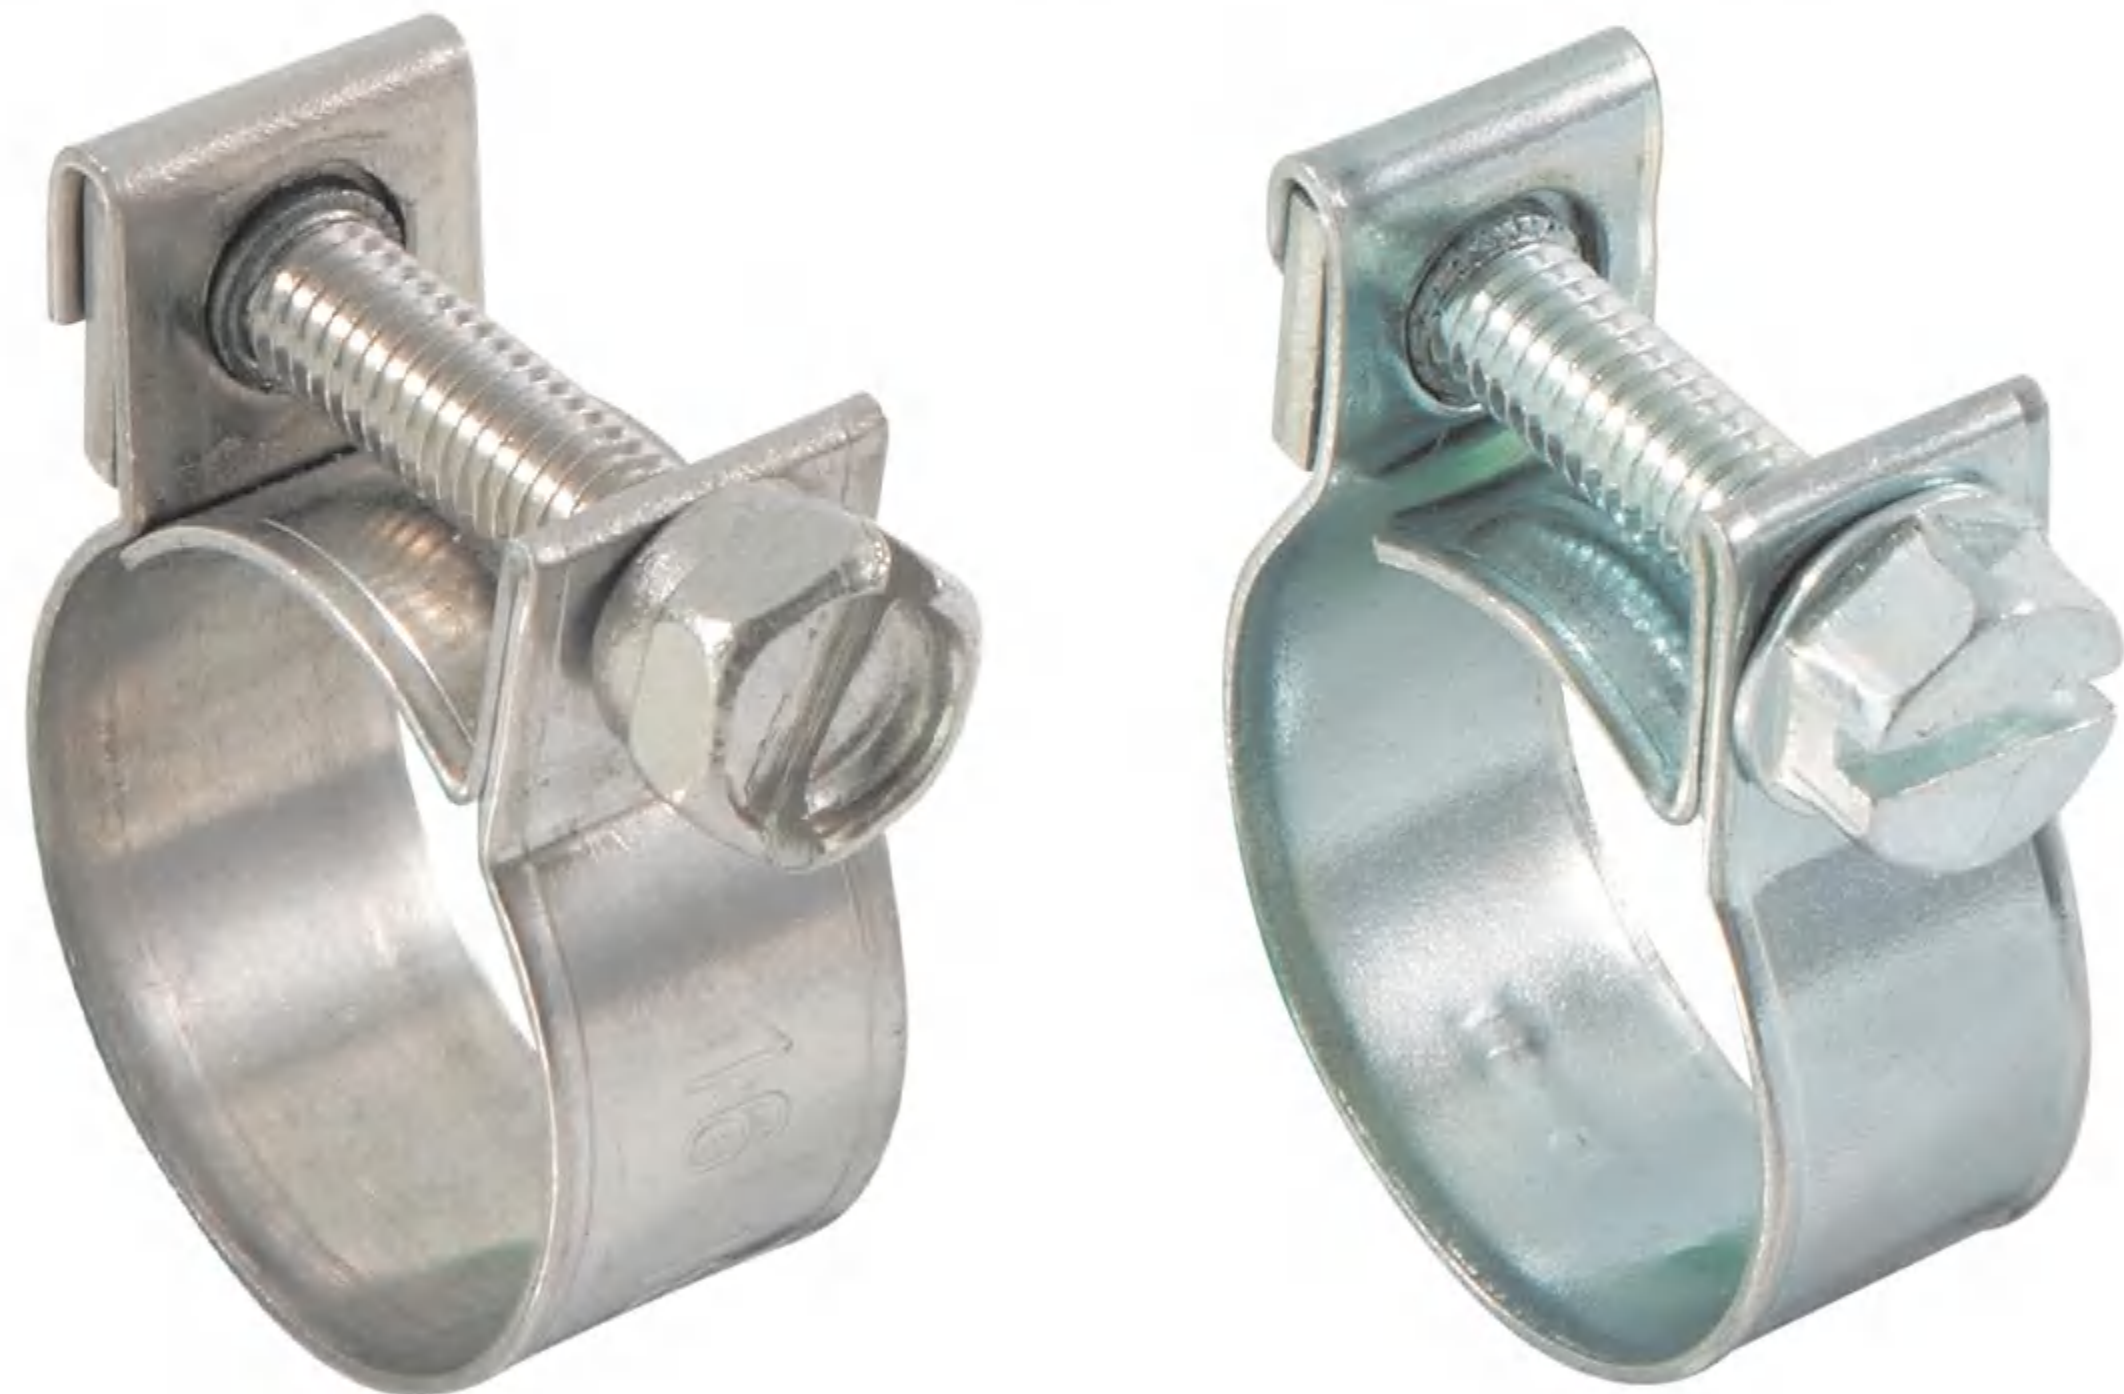

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

YX11 单耳可调卡箍 (CV joint clamp)

规格	产品货号 Item No		带宽	料厚	材质
size	W1	W4	bandwidth mm	thickness of band mm	material
25-40	—	YX11D2540	6.3	0.5	304ss
20-45	—	YX11D2045	6.3	0.5	304ss
45-120	—	YX11D45120	8	0.6	304ss
20-50	YX11A2050	—	7	0.6	Zinc plated steel
50-120	YX11A50120	—	9	0.8	Zinc plated steel



YX08 双耳卡箍 (Double ears hose clamp)


加紧范围	带宽	料厚	货号YX08	只/箱	材料W1
Size mm	bandwidth mm	thickness of band mm	Item no. YX08	pcs/carton	material W1
3--5	6	0.7	YX080305	2000	表面处理 方式为镀锌 或者 达克罗涂覆 zinc plated steel or decromet coating steel
5--7	6	0.7	YX080507	2000	
7--9	7	0.7	YX080709	2000	
9--11	7	0.9	YX080911	2000	
11--13	7	1	YX081113	2000	
13--15	7.5	1	YX081315	2000	
14--17	7.5	1.2	YX081417	2000	
15--18	7.5	1.2	YX081518	2000	
17--20	7.5	1.2	YX081720	2000	
20--23	9	1.3	YX082023	1000	
21--25	9	1.3	YX082125	1000	
23--27	9	1.4	YX082327	1000	
25--28	9	1.4	YX082528	1000	
28--31	9.5	1.4	YX082831	1000	
31--34	9.5	1.4	YX083134	1000	
34--37	9.5	1.5	YX083437	1000	
37--40	10	1.6	YX083740	1000	
40--43	10	1.6	YX084043	1000	
43--46	10	1.6	YX084346	1000	



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

TH01钢带式弹性软管夹箍普通型 (Spring band clamp Ordinary type)


公称直径dn ₁)	交货直径dn ₂) max	张开直径do ₃) min	最小功能直径 df	s ±0.4	a max	b ₄) max	h max	t ₅) max								
13	12	14.2	12.7	0.8	12	4	60	0.09								
14	13.3	15.8	13.7													
15	14	16.5	14.7													
16	14.9	17.5	15.7													
17	15.6	18.5	16.3													
18	16	19	17.3													
19	17.8	20.2	18.3	1.3					12	4	60	0.09				
20	18.4	21.5	19.3													
21	19.4	22.5	20.3													
22	20.5	24.2	21.3													
23	21	24.7	22.3													
24	22	26	23.3													
25	23.5	26.3	24	1.7			12						4	80	0.09	
26	24.3	28	25													
27	25.2	29	26													
28	26.1	30.2	27													
29	27	31.5	28													
30	28	32.5	29													
32	29.5	34.5	31													
34	30.6	36.4	33													
35	31.5	38	34													
36	32.5	39	35													
38	34.5	41.5	37													
40	35.5	42.5	39													
42	37.5	44.5	40.5	2.1				12			4			80		0.12
43	37.9	45.5	41.5													
44	38.5	46.5	42.5													
46	40.5	48.5	44.5													
47	41.5	50	45.5													

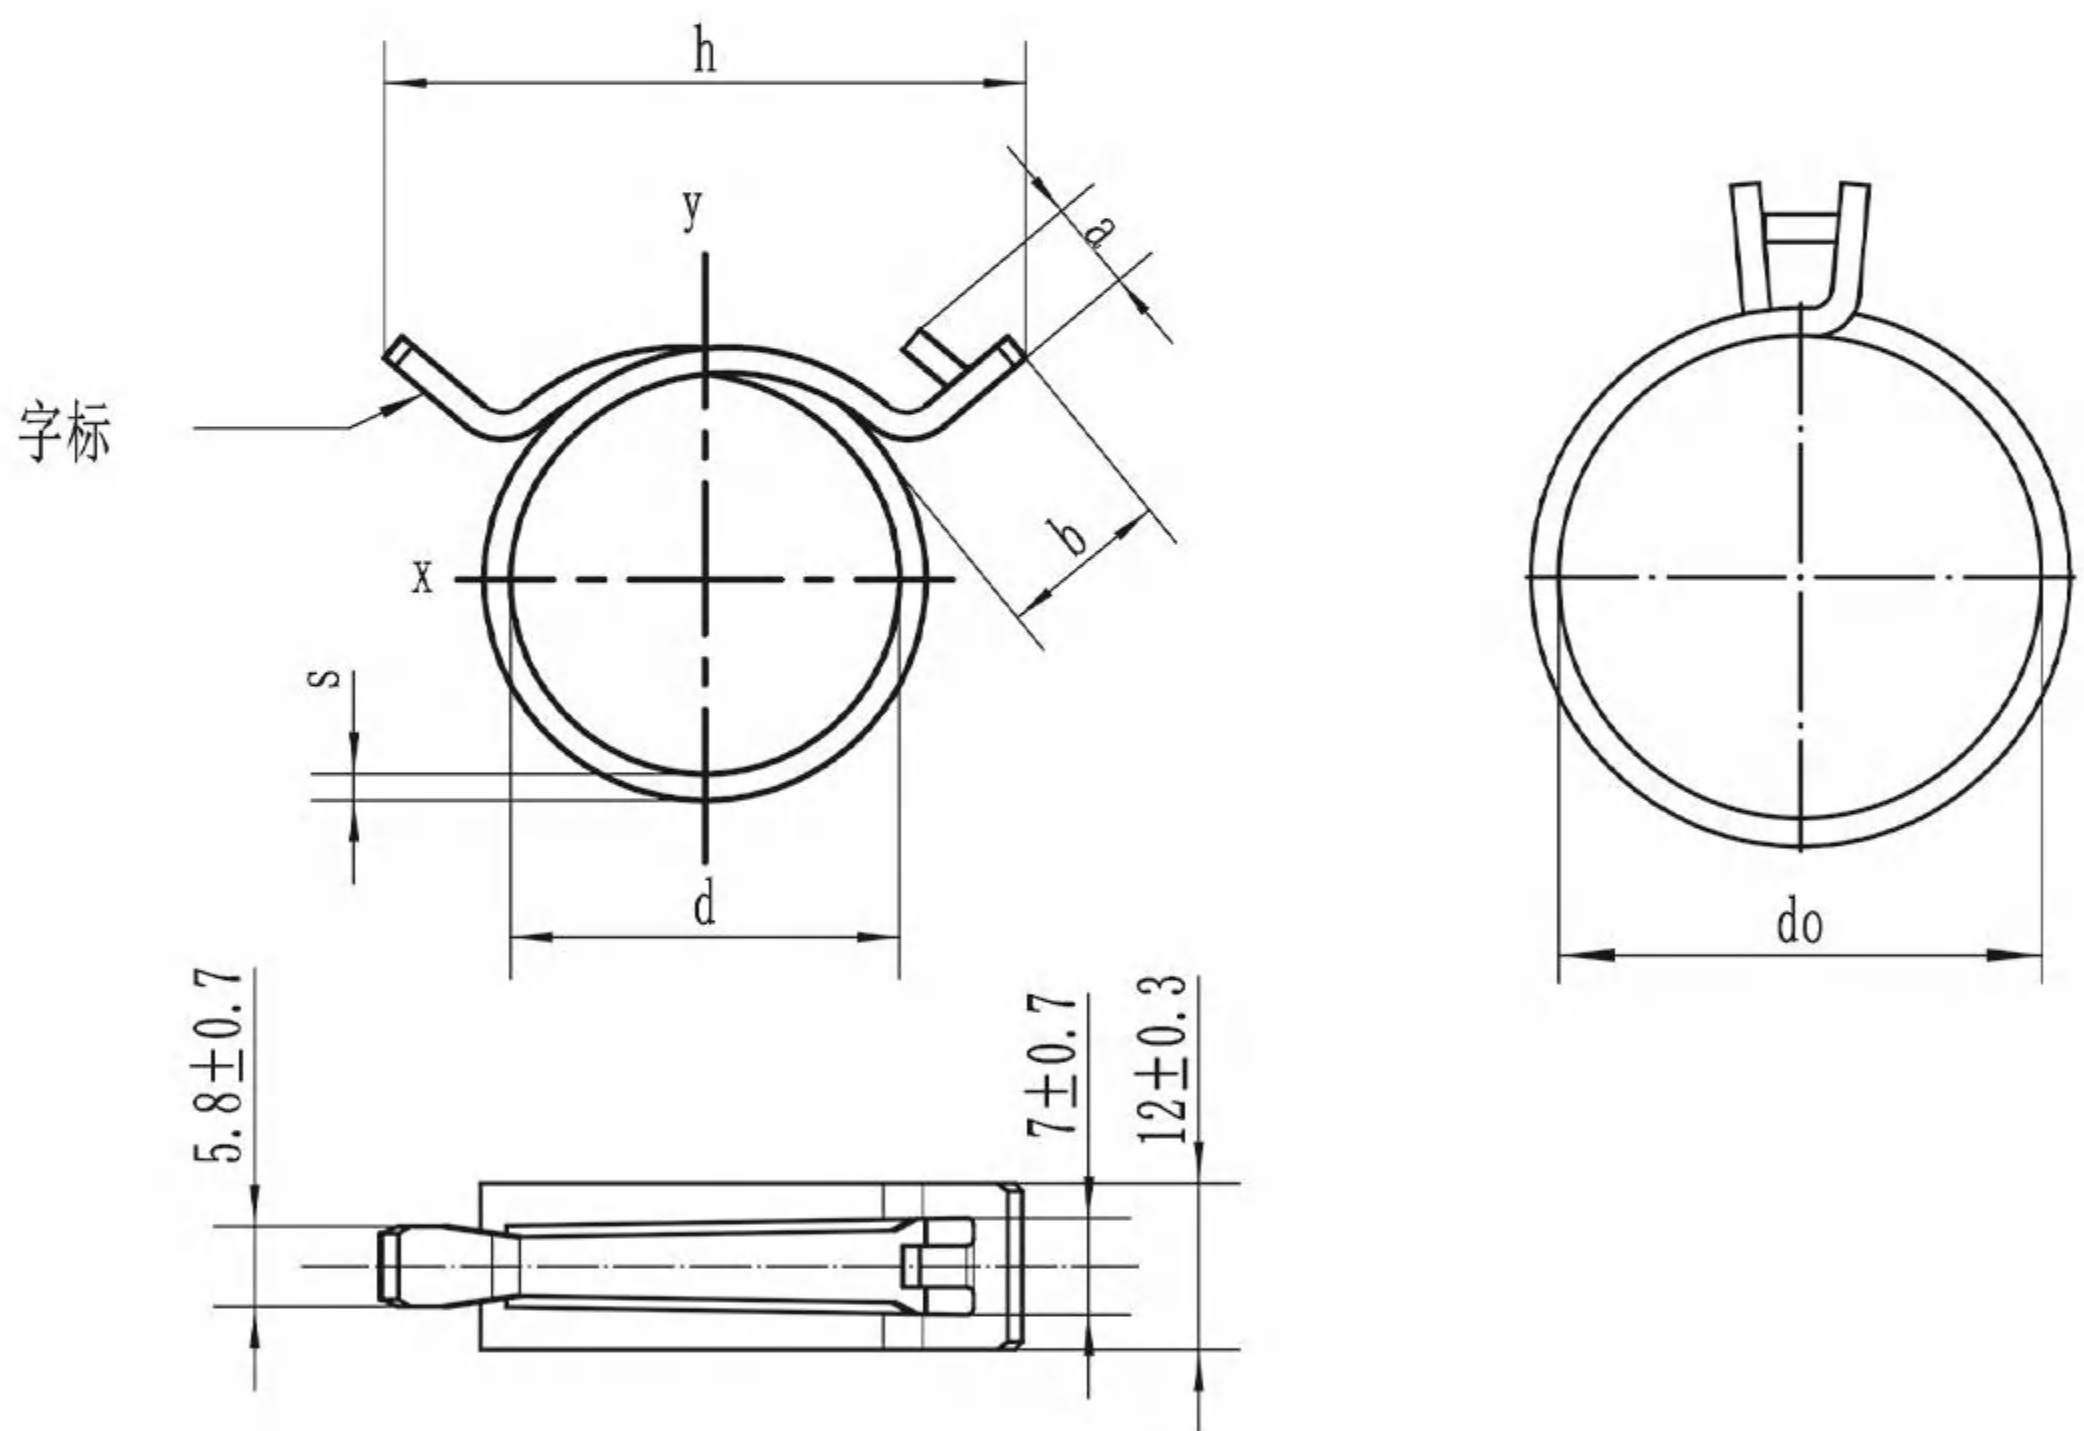

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

TH01钢带式弹性软管夹箍空间节约型 (Spring band clamp space saving type)


公称直径dn ₁)	交货直径dn ₂) max	张开直径do ₃) min	最小功能直径 df	s ±0.4	a max	b ₄) max	h max	t ₅) max								
13	12	14.2	12.7	0.8	12	4	60	0.09								
14	13.3	15.8	13.7													
15	14	16.5	14.7													
16	14.9	17.5	15.7													
17	15.6	18.5	16.3													
18	16	19	17.3													
19	17.8	20.2	18.3	1.3					12	4	60	0.09				
20	18.4	21.5	19.3													
21	19.4	22.5	20.3													
22	20.5	24.2	21.3													
23	21	24.7	22.3													
24	22	26	23.3													
25	23.5	26.3	24	1.7			12						4	80	0.09	
26	24.3	28	25													
27	25.2	29	26													
28	26.1	30.2	27													
29	27	31.5	28													
30	28	32.5	29													
32	29.5	34.5	31													
34	30.6	36.4	33													
35	31.5	38	34													
36	32.5	39	35													
38	34.5	41.5	37													
40	35.5	42.5	39													
42	37.5	44.5	40.5	2.1				12			4			80		0.12
43	37.9	45.5	41.5													
44	38.5	46.5	42.5													
46	40.5	48.5	44.5													
47	41.5	50	45.5													

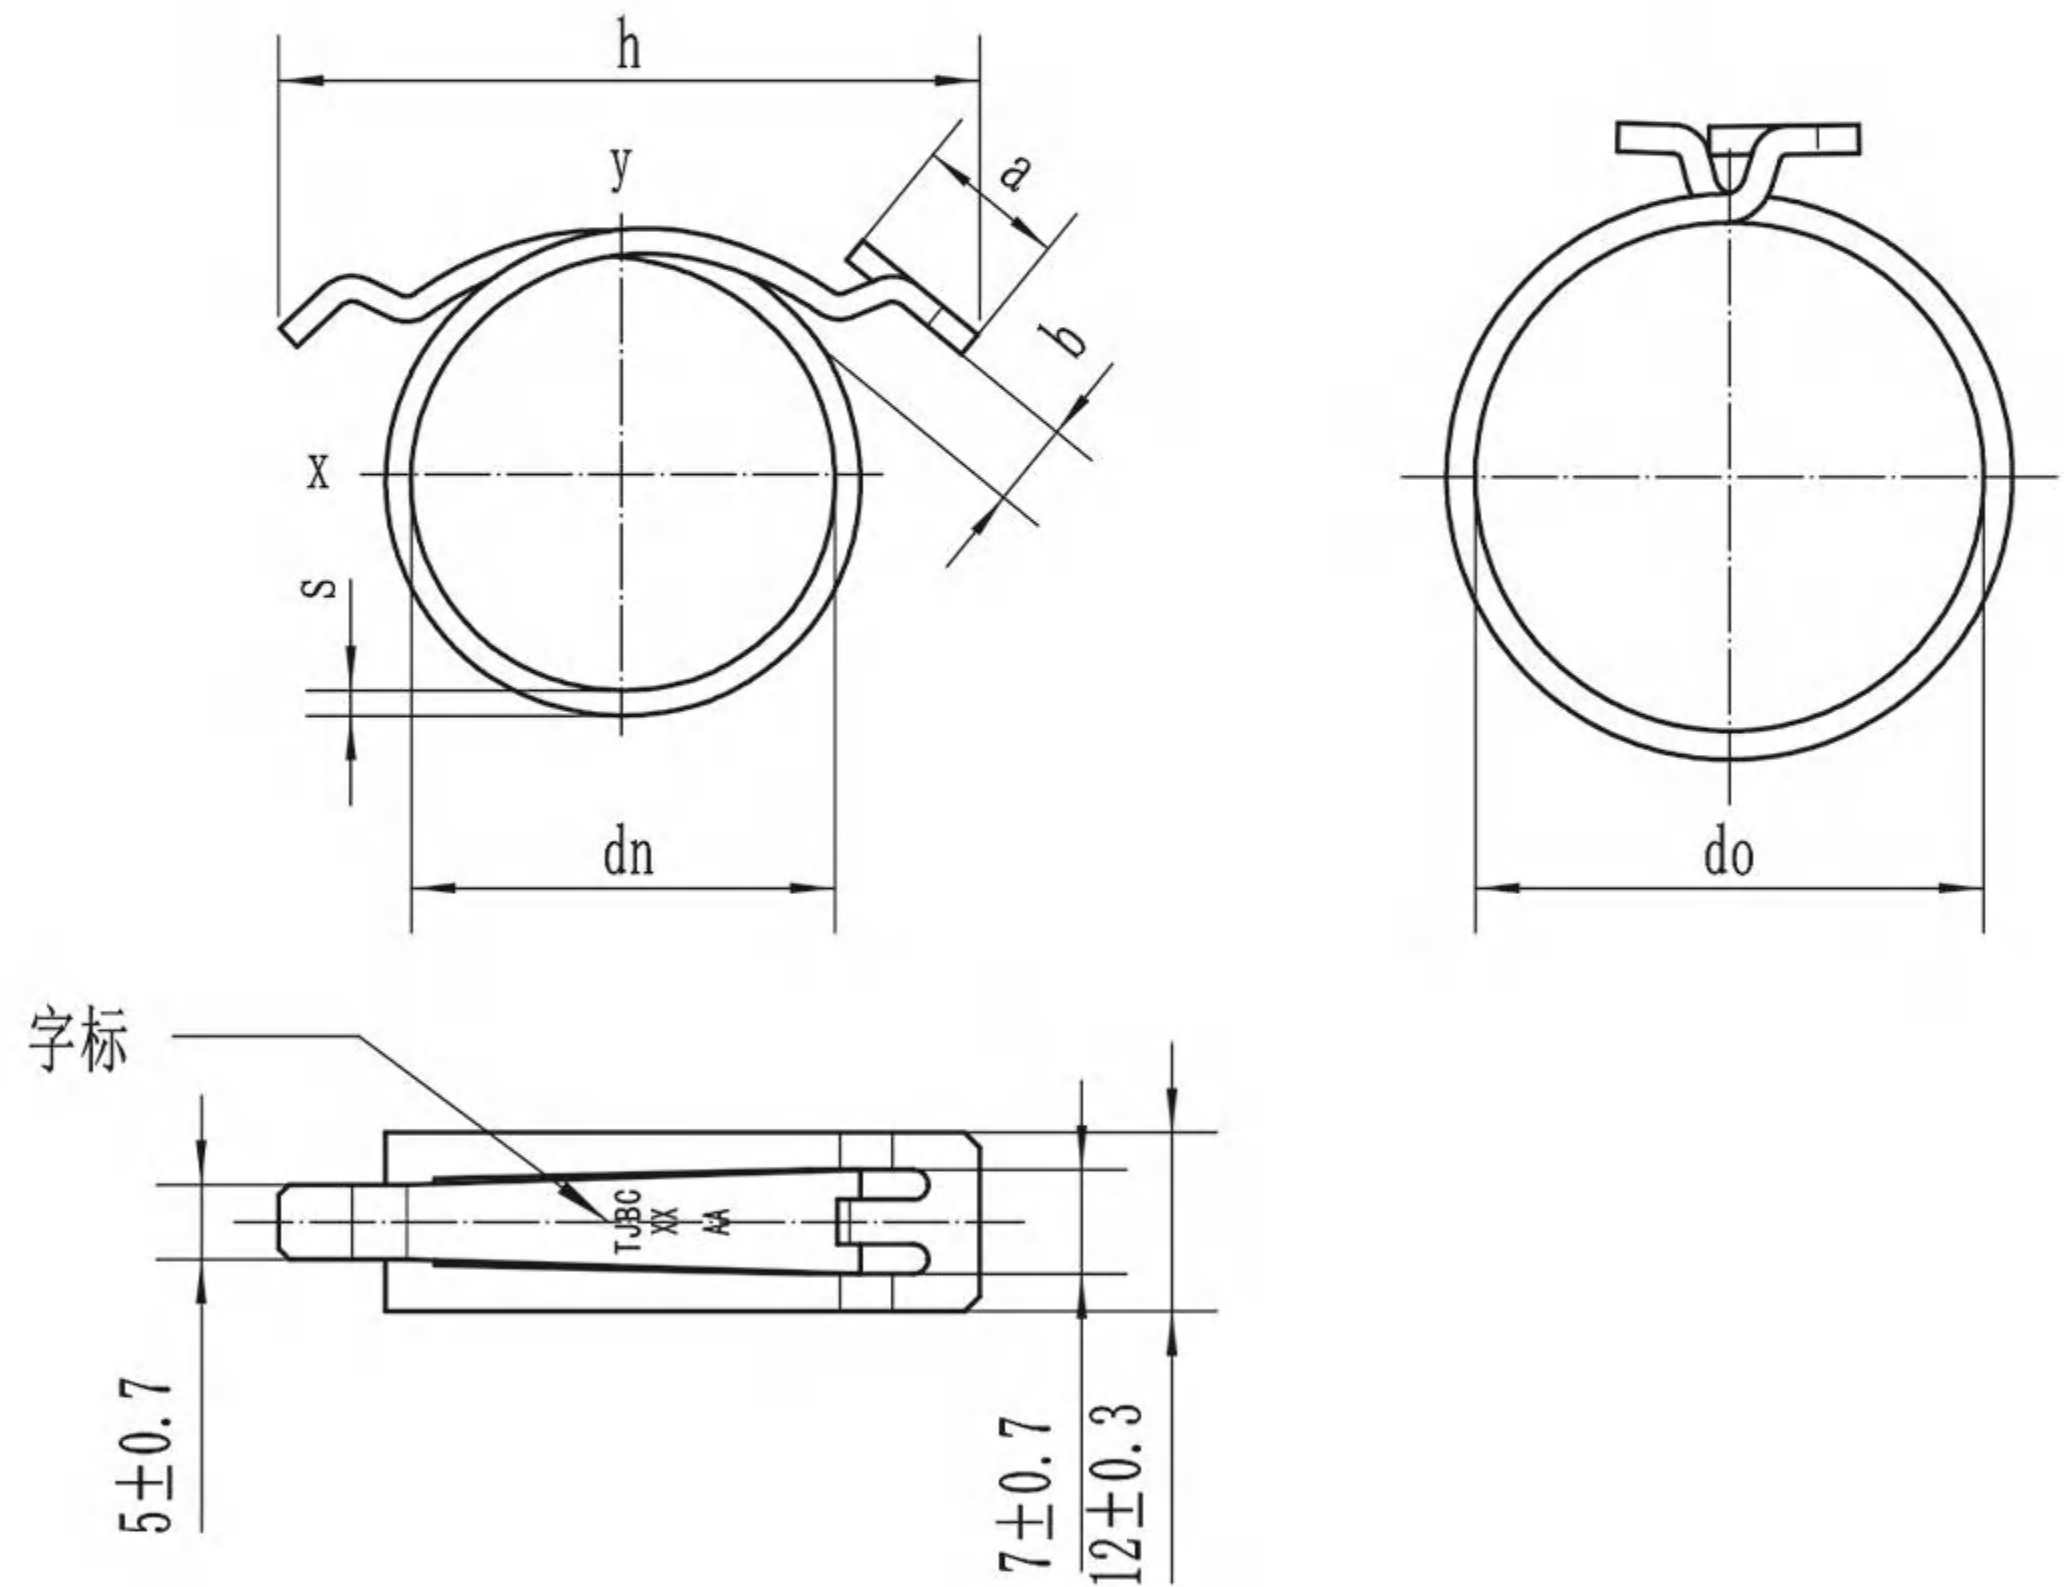

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

TH01钢带式弹性软管夹箍预张开普通型 (Spring band clamp Pre-opened ordinary type)


公称直径dn ₁)	交货直径dn ₂) max	张开直径do ₃) min	最小功能直径 df	s ±0.4	a max	b ₄) max	h max	t ₅) max													
13	12	13.8	12.7	0.8	9	10	40	0.09													
14	13.3	15.3	13.7																		
15	14	16	14.7																		
16	14.9	17	15.7																		
17	15.6	17.9	16.3																		
18	16	18.5	17.3																		
19	17.8	19.6	18.3	1.3					9	10	40	0.09									
20	18.4	21	19.3																		
21	19.4	21.8	20.3																		
22	20.5	23.5	21.3																		
23	21	24	22.3																		
24	22	25.3	23.3																		
25	23.5	26	24	1.7			9						10	40	0.09						
26	24.3	27.2	25																		
27	25.2	28.2	26																		
28	26.1	29.3	27																		
29	27	30.6	28																		
30	28	31.5	29																		
32	29.5	33.5	31								1.7					9	10	40	0.09		
34	30.6	35.3	33																		
35	31.5	36.8	34																		
36	32.5	37.8	35																		
38	34.5	40.2	37																		
40	35.5	41.2	39																		
42	37.5	43.1	40.5	2.1				9						10						40	0.09
43	37.9	44.1	41.5																		
44	38.5	45.1	42.5																		
46	40.5	47	44.5																		
47	41.5	48.5	45.5																		

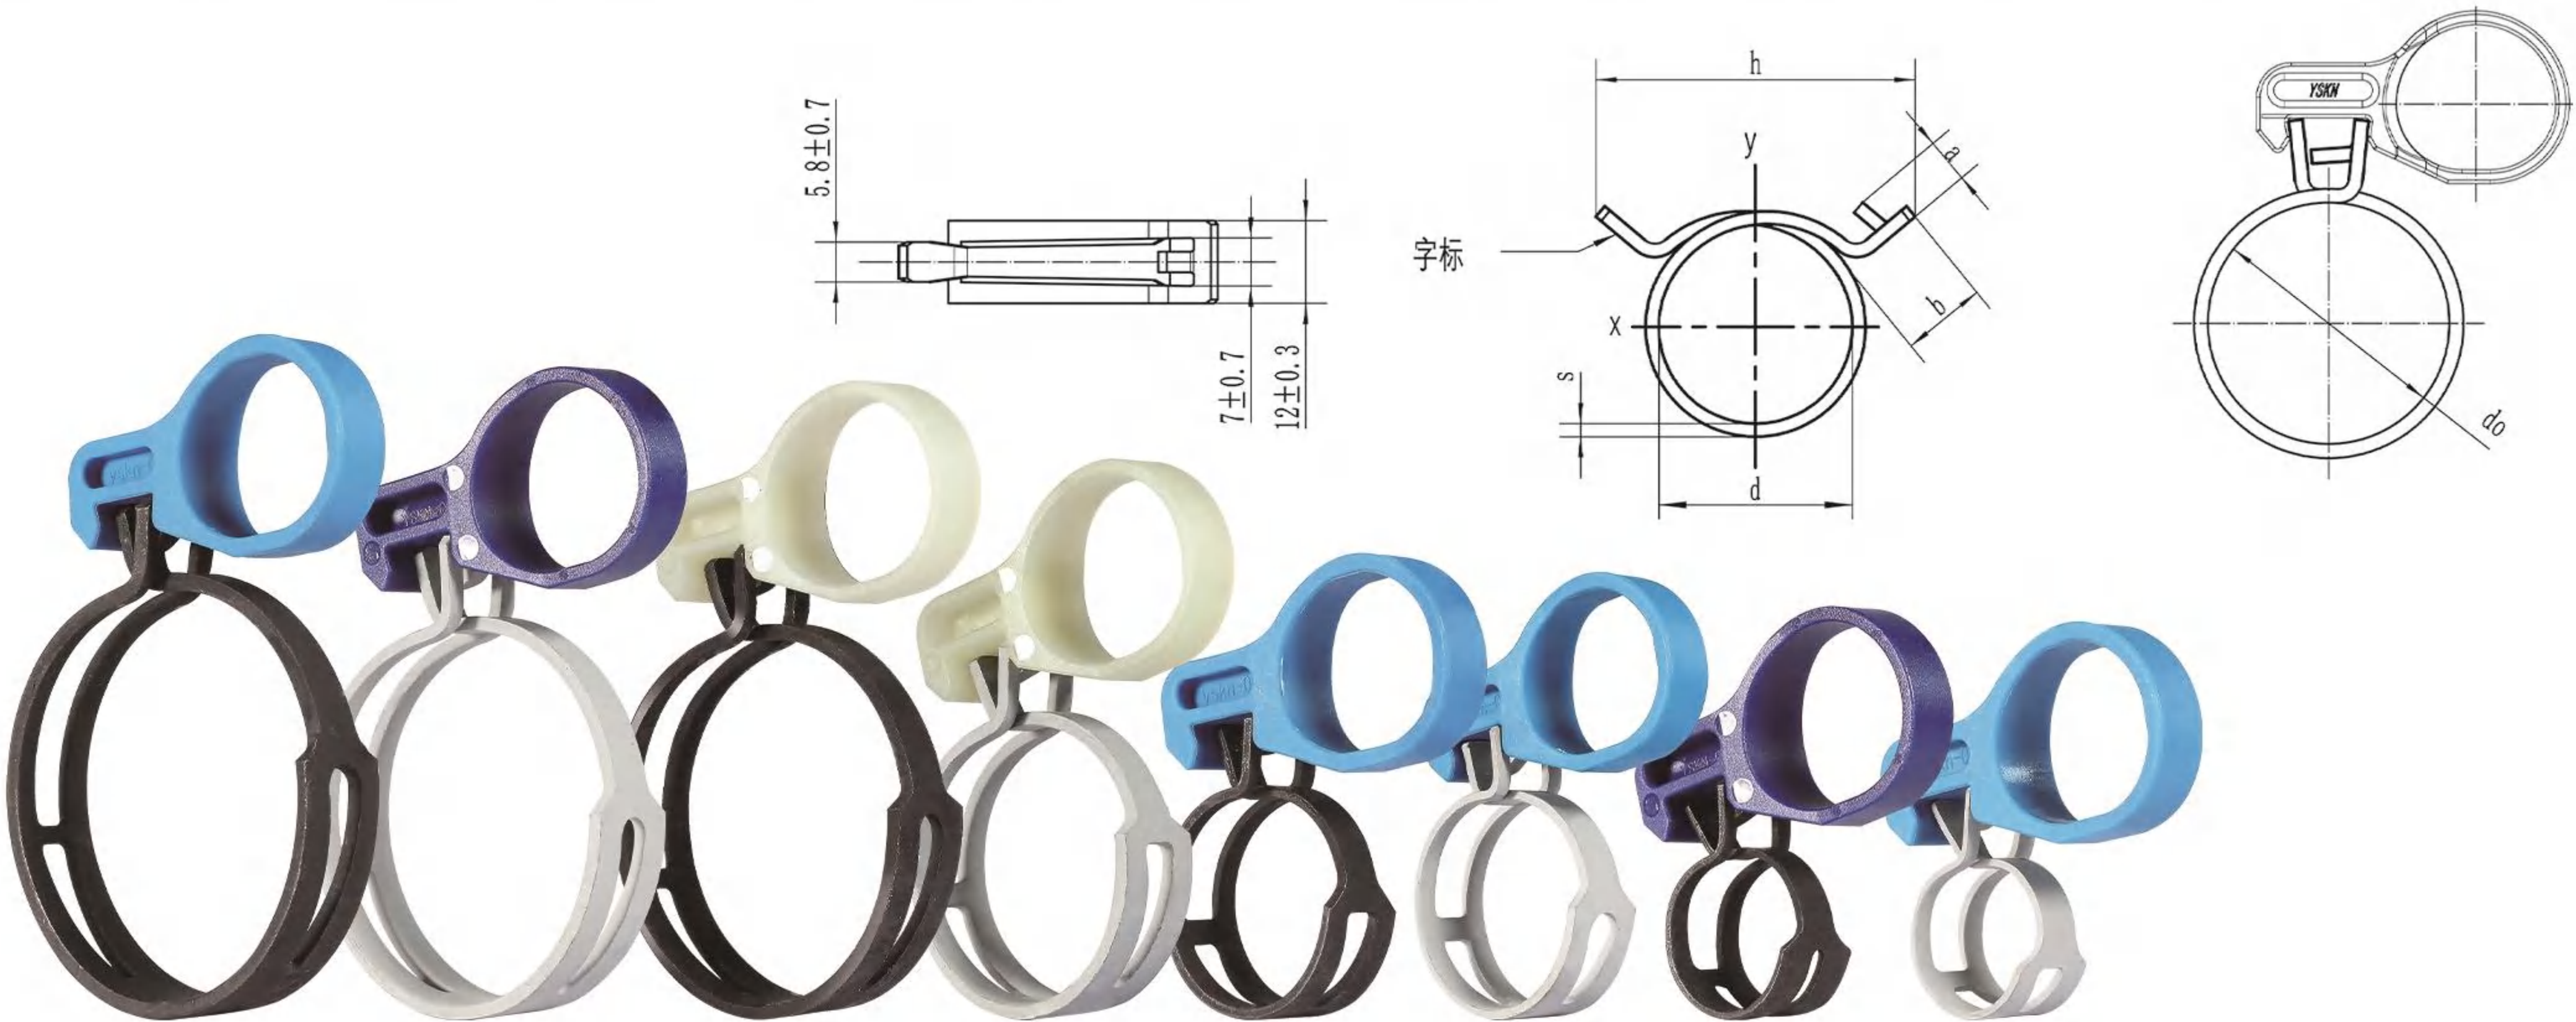


根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification

TH01钢带式弹性软管夹箍预张开空间节约型 (Spring band clamp Pre-opened space saving type)

公称直径dn ₁)	交货直径dn ₂) max	张开直径do ₂) min	最小功能直径 df	s ±0.4	a max	b ₄) max	h max	t ₅) max								
13	12	13.8	12.7	0.8	9	10	40	0.09								
14	13.3	15.3	13.7													
15	14	16	14.7													
16	14.9	17	15.7													
17	15.6	17.9	16.3													
18	16	18.5	17.3													
19	17.8	19.6	18.3	1.3					9	10	40	0.09				
20	18.4	21	19.3													
21	19.4	21.8	20.3													
22	20.5	23.5	21.3													
23	21	24	22.3													
24	22	25.3	23.3													
25	23.5	25.5	24	1.7			9						10	60	0.09	
26	24.3	27.2	25													
27	25.2	28.2	26													
28	26.1	29.3	27													
29	27	30.6	28													
30	28	31.5	29													
32	29.5	33.5	31													
34	30.6	35.3	33													
35	31.5	36.8	34													
36	32.5	37.8	35													
38	34.5	40.2	37													
40	35.5	41.2	39													
42	37.5	43.1	40.5	2.1				9			10			60		0.12
43	37.9	44.1	41.5													
44	38.5	45.1	42.5													
46	40.5	47	44.5													
47	41.5	48.5	45.5													

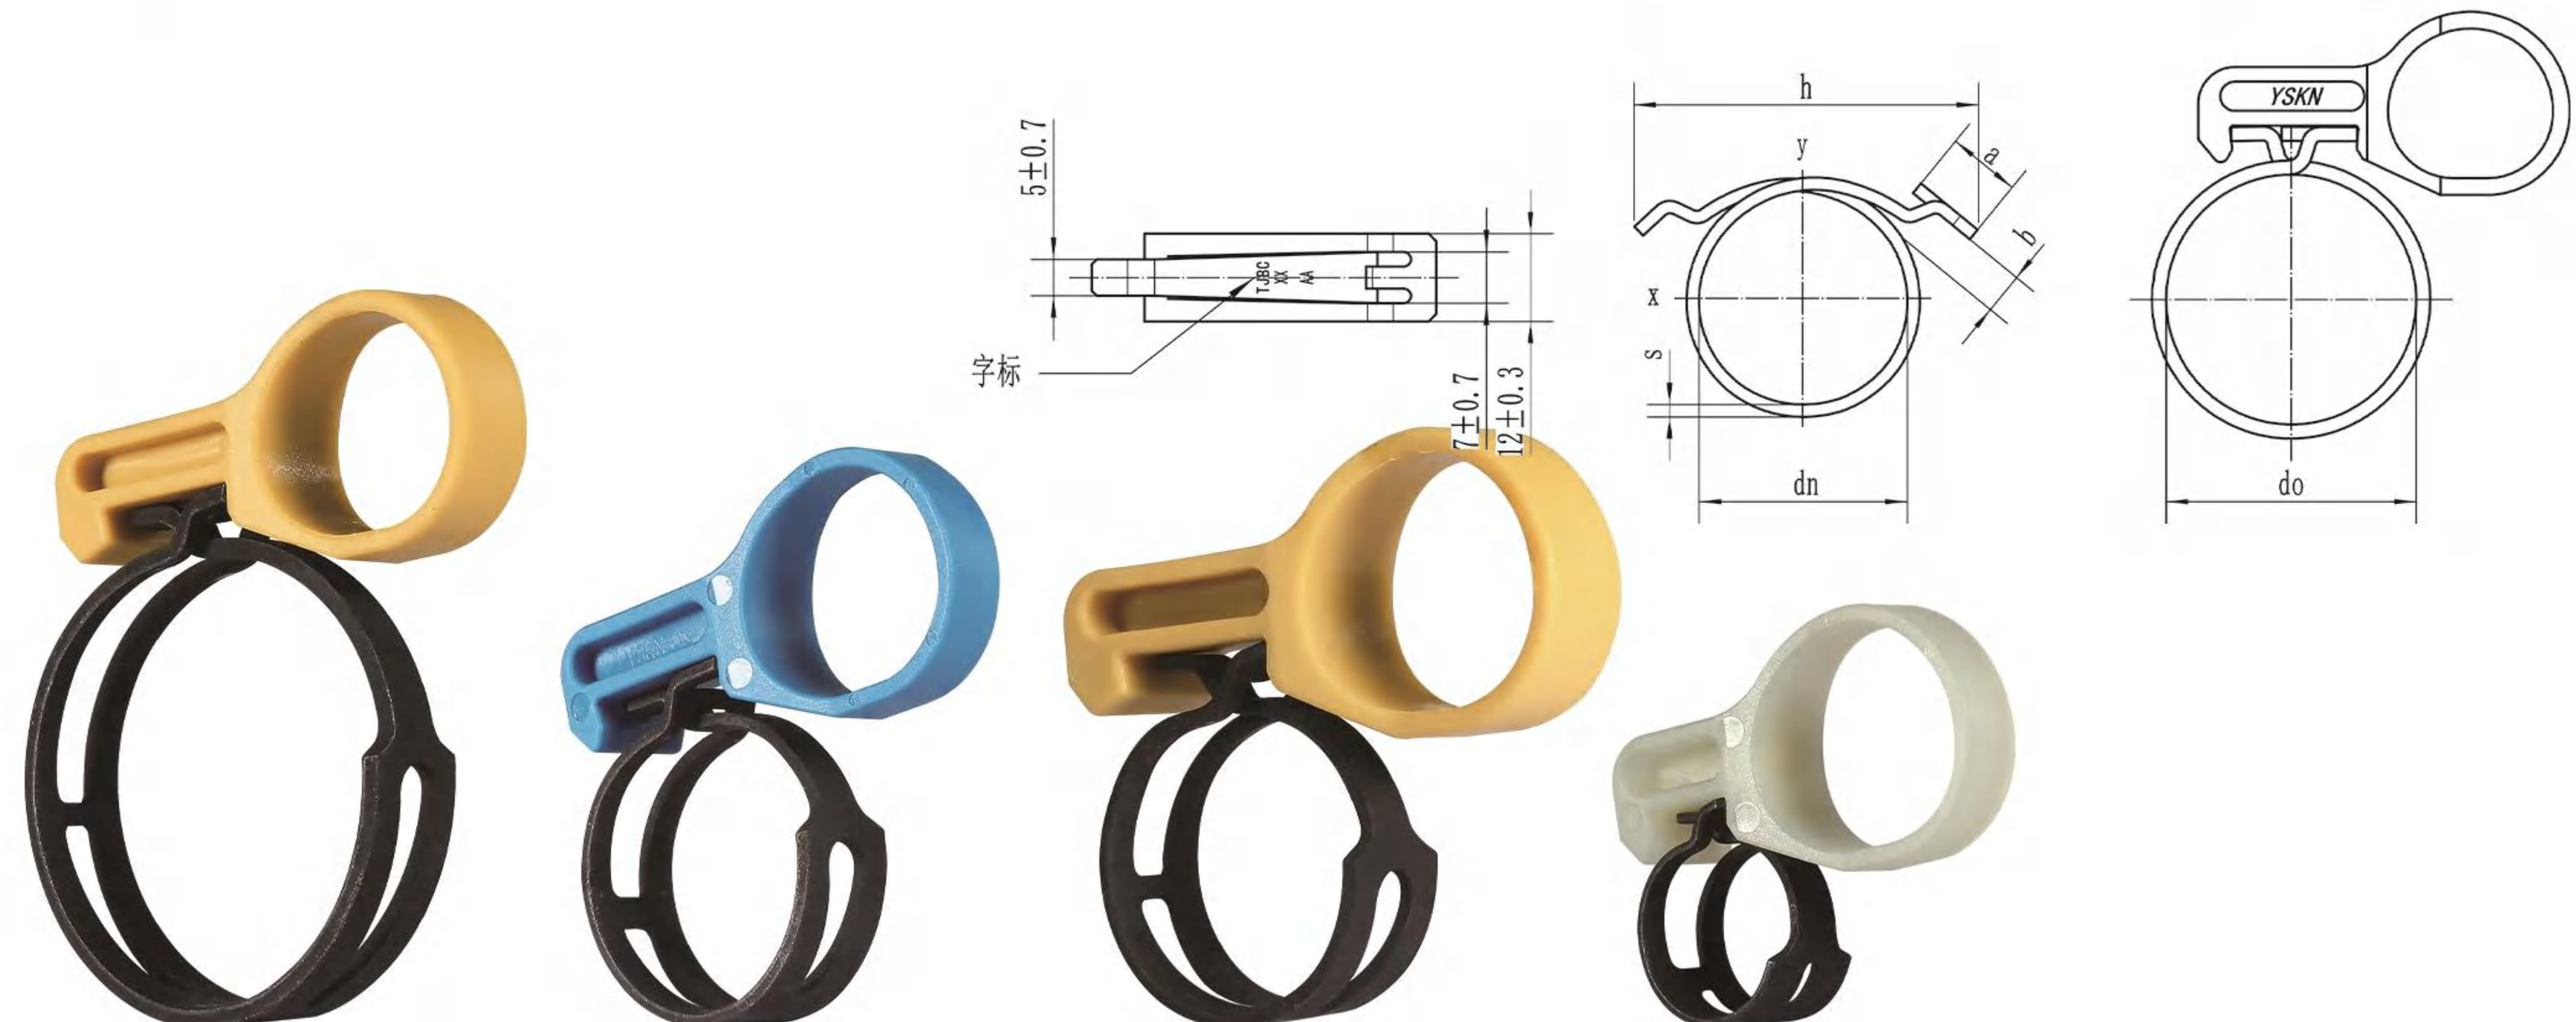

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范。
All the information is just for your reference, can't be used as specification

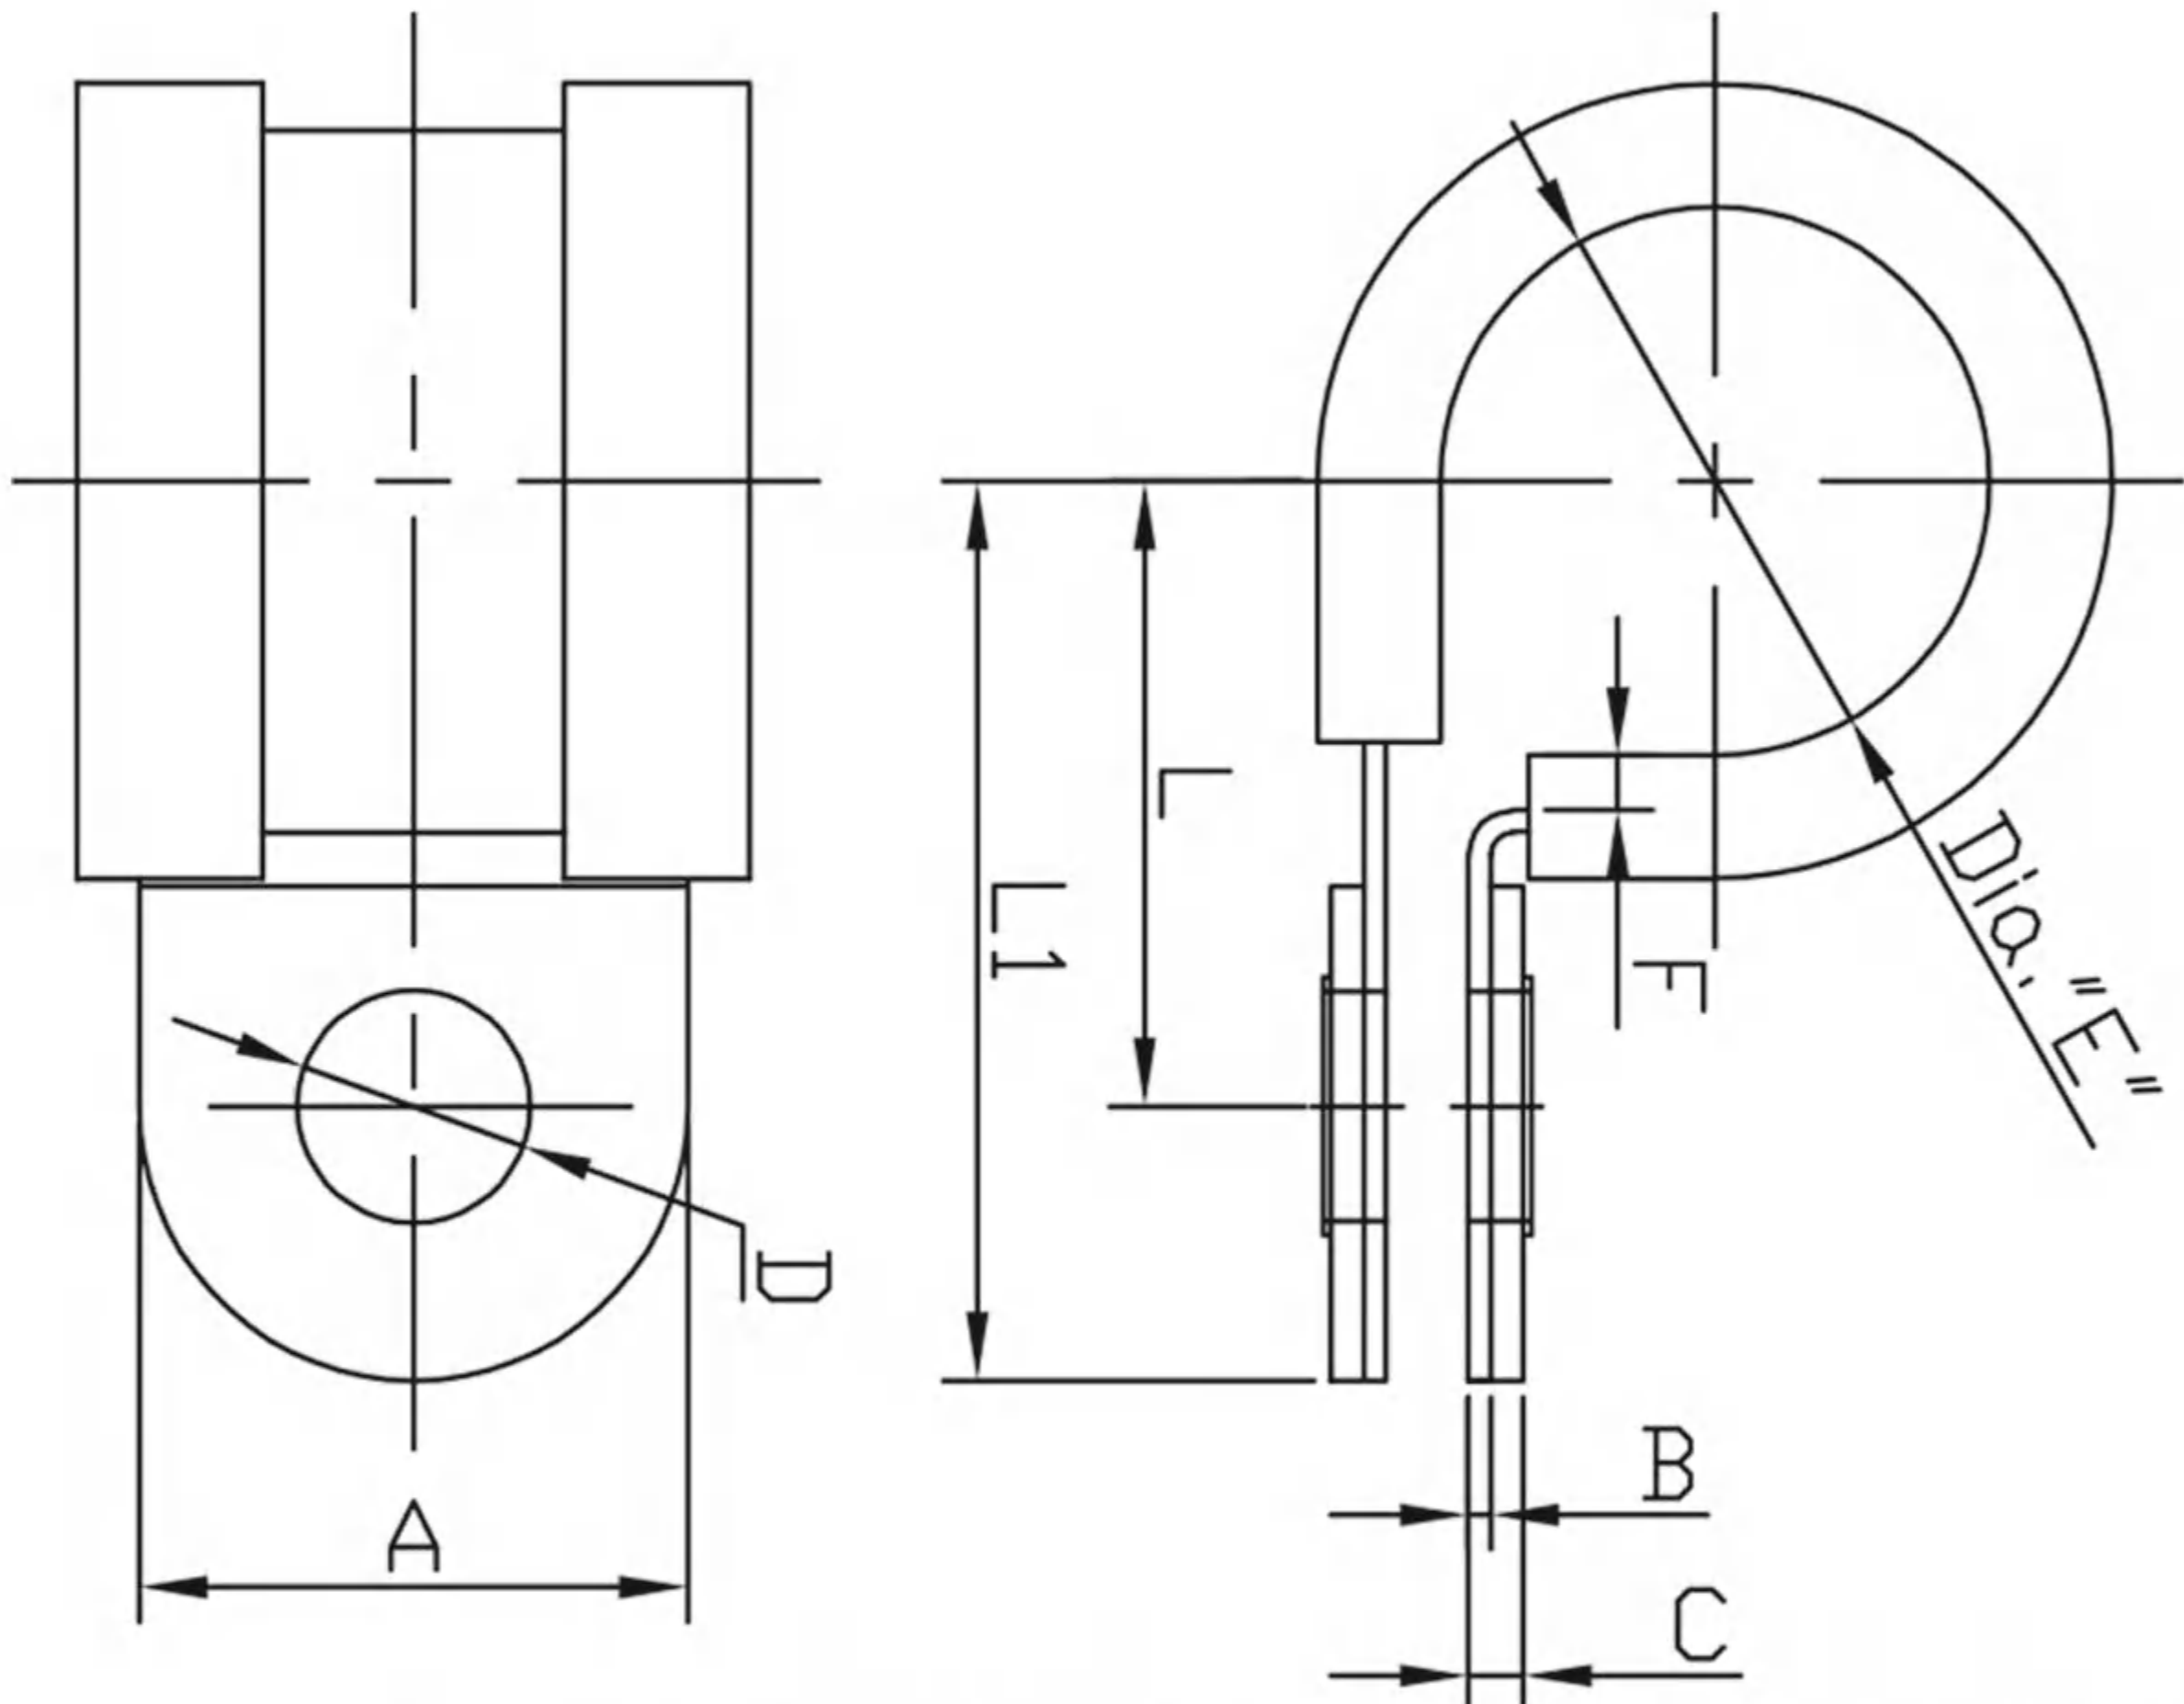

LJT01普通连胶条卡箍P-clip with rubber


Dia. "E"	A±0.5	B±0.1 (W1/W4)	C±0.2 (W1/W4)	D±0.2	F±0.3	L±2	L1±2
φ4-φ60	9	0.5	1.5	φ4.3	1.0	E/2+6.2	E/2+10.7
φ4-φ60	12	0.5	1.5	φ5.3	1.2	E/2+7.7	E/2+13.7
φ4-φ14	15	0.6	1.6	φ6.4	1.5	E/2+9.6	E/2+17.1
φ15-φ60		0.8	1.8			E/2+9.8	E/2+17.3
φ10-φ24	20	0.8	2.0	φ8.4	2.0	E/2+12.8	E/2+22.8
φ25-φ60		1.0	2.2			E/2+13	E/2+23
φ14-φ49	25	1.0	2.2	φ10.5	3.0	E/2+16.5	E/2+29
φ50-φ60		1.2	2.4			E/2+16.7	E/2+29.2



根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification

YX13 双钢丝卡箍（double wires hose clamp）

加紧范围 range mm	W1			W4			只/袋 pcs/bag	只/箱 pcs/carton
	产品货号 Item No	丝径 wire dia	螺钉尺寸 screw	产品货号 Item No	丝径 wire dia	螺钉尺寸 screw		
11-14	YX13A1114	1.5	M5×30	YX13D1114	2.0	M6×30	50	1000
13-16	YX13A1316	1.5	M5×30	YX13D1316	2.0	M6×30	50	1000
15-18	YX13A1518	1.5	M5×30	YX13D1518	2.0	M6×30	50	1000
17-20	YX13A1720	1.8	M5×30	YX13D1720	2.0	M6×30	50	1000
19-22	YX13A1922	1.8	M5×30	YX13D1922	2.0	M6×30	50	1000
20-24	YX13A2024	1.8	M5×30	YX13D2024	2.0	M6×30	50	1000
22-26	YX13A2226	1.8	M5×30	YX13D2226	2.0	M6×30	50	1000
24-28	YX13A2428	1.8	M5×30	YX13D2428	2.0	M6×35	50	1000
26-30	YX13A2630	2.2	M6×40	YX13D2630	2.0	M6×35	50	500
28-32	YX13A2832	2.2	M6×40	YX13D2832	2.0	M6×40	50	500
31-35	YX13A3135	2.2	M6×40	YX13D3135	2.0	M6×40	50	500
34-38	YX13A3438	2.2	M6×40	YX13D3438	2.0	M6×40	50	500
35-40	YX13A3540	2.2	M6×40	YX13D3540	2.0	M6×40	50	500
37-42	YX13A3742	2.2	M6×40	YX13D3742	2.0	M6×40	50	500
40-45	YX13A4045	2.2	M6×40	YX13D4045	2.0	M6×40	50	500
43-48	YX13A4348	2.2	M6×50	YX13D4348	2.0	M6×40	50	500
45-50	YX13A4550	2.2	M6×50	YX13D4550	2.3	M6×40	25	500
47-52	YX13A4752	2.2	M6×50	YX13D4752	2.3	M6×50	25	500
50-55	YX13A5055	2.2	M6×50	YX13D5055	2.3	M6×50	25	500
53-58	YX13A5358	2.2	M6×50	YX13D5358	2.3	M6×50	25	500
55-60	YX13A5560	2.2	M6×60	YX13D5560	2.3	M6×50	25	500
54-62	YX13A5462	2.2	M6×60	YX13D5462	2.3	M6×50	25	500
60-65	YX13A6065	2.5	M6×60	YX13D6065	2.3	M6×50	25	500
63-68	YX13A6368	2.5	M6×60	YX13D6368	2.3	M6×50	25	500
65-70	YX13A6570	2.5	M6×70	YX13D66570	2.3	M6×50	25	250
70-75	YX13A7075	2.5	M6×70	YX13D7075	2.3	M6×50	10	250
75-80	YX13A7580	2.5	M6×70	YX13D7580	2.3	M6×50	10	250
80-85	YX13A8085	2.5	M6×70	YX13D8085	2.3	M6×50	10	250
84-90	YX13A8490	2.5	M8×70	YX13D8490	2.3	M6×50	10	250
89-95	YX13A8995	2.5	M8×70	YX13D8995	2.3	M6×50	10	250
94-100	YX13A94100	2.5	M8×80	YX13D94100	2.3	M6×50	10	250
98-105	YX13A98105	2.5	M8×80	YX13D98105	2.3	M6×60	10	250
103-110	YX13A103110	2.5	M8×80	YX13D103110	2.3	M6×60	10	250
108-115	YX13A108115	2.5	M8×80	YX13D108115	2.3	M6×60	10	250
113-120	YX13A113120	2.5	M8×80	YX13D113120	2.3	M6×60	10	250

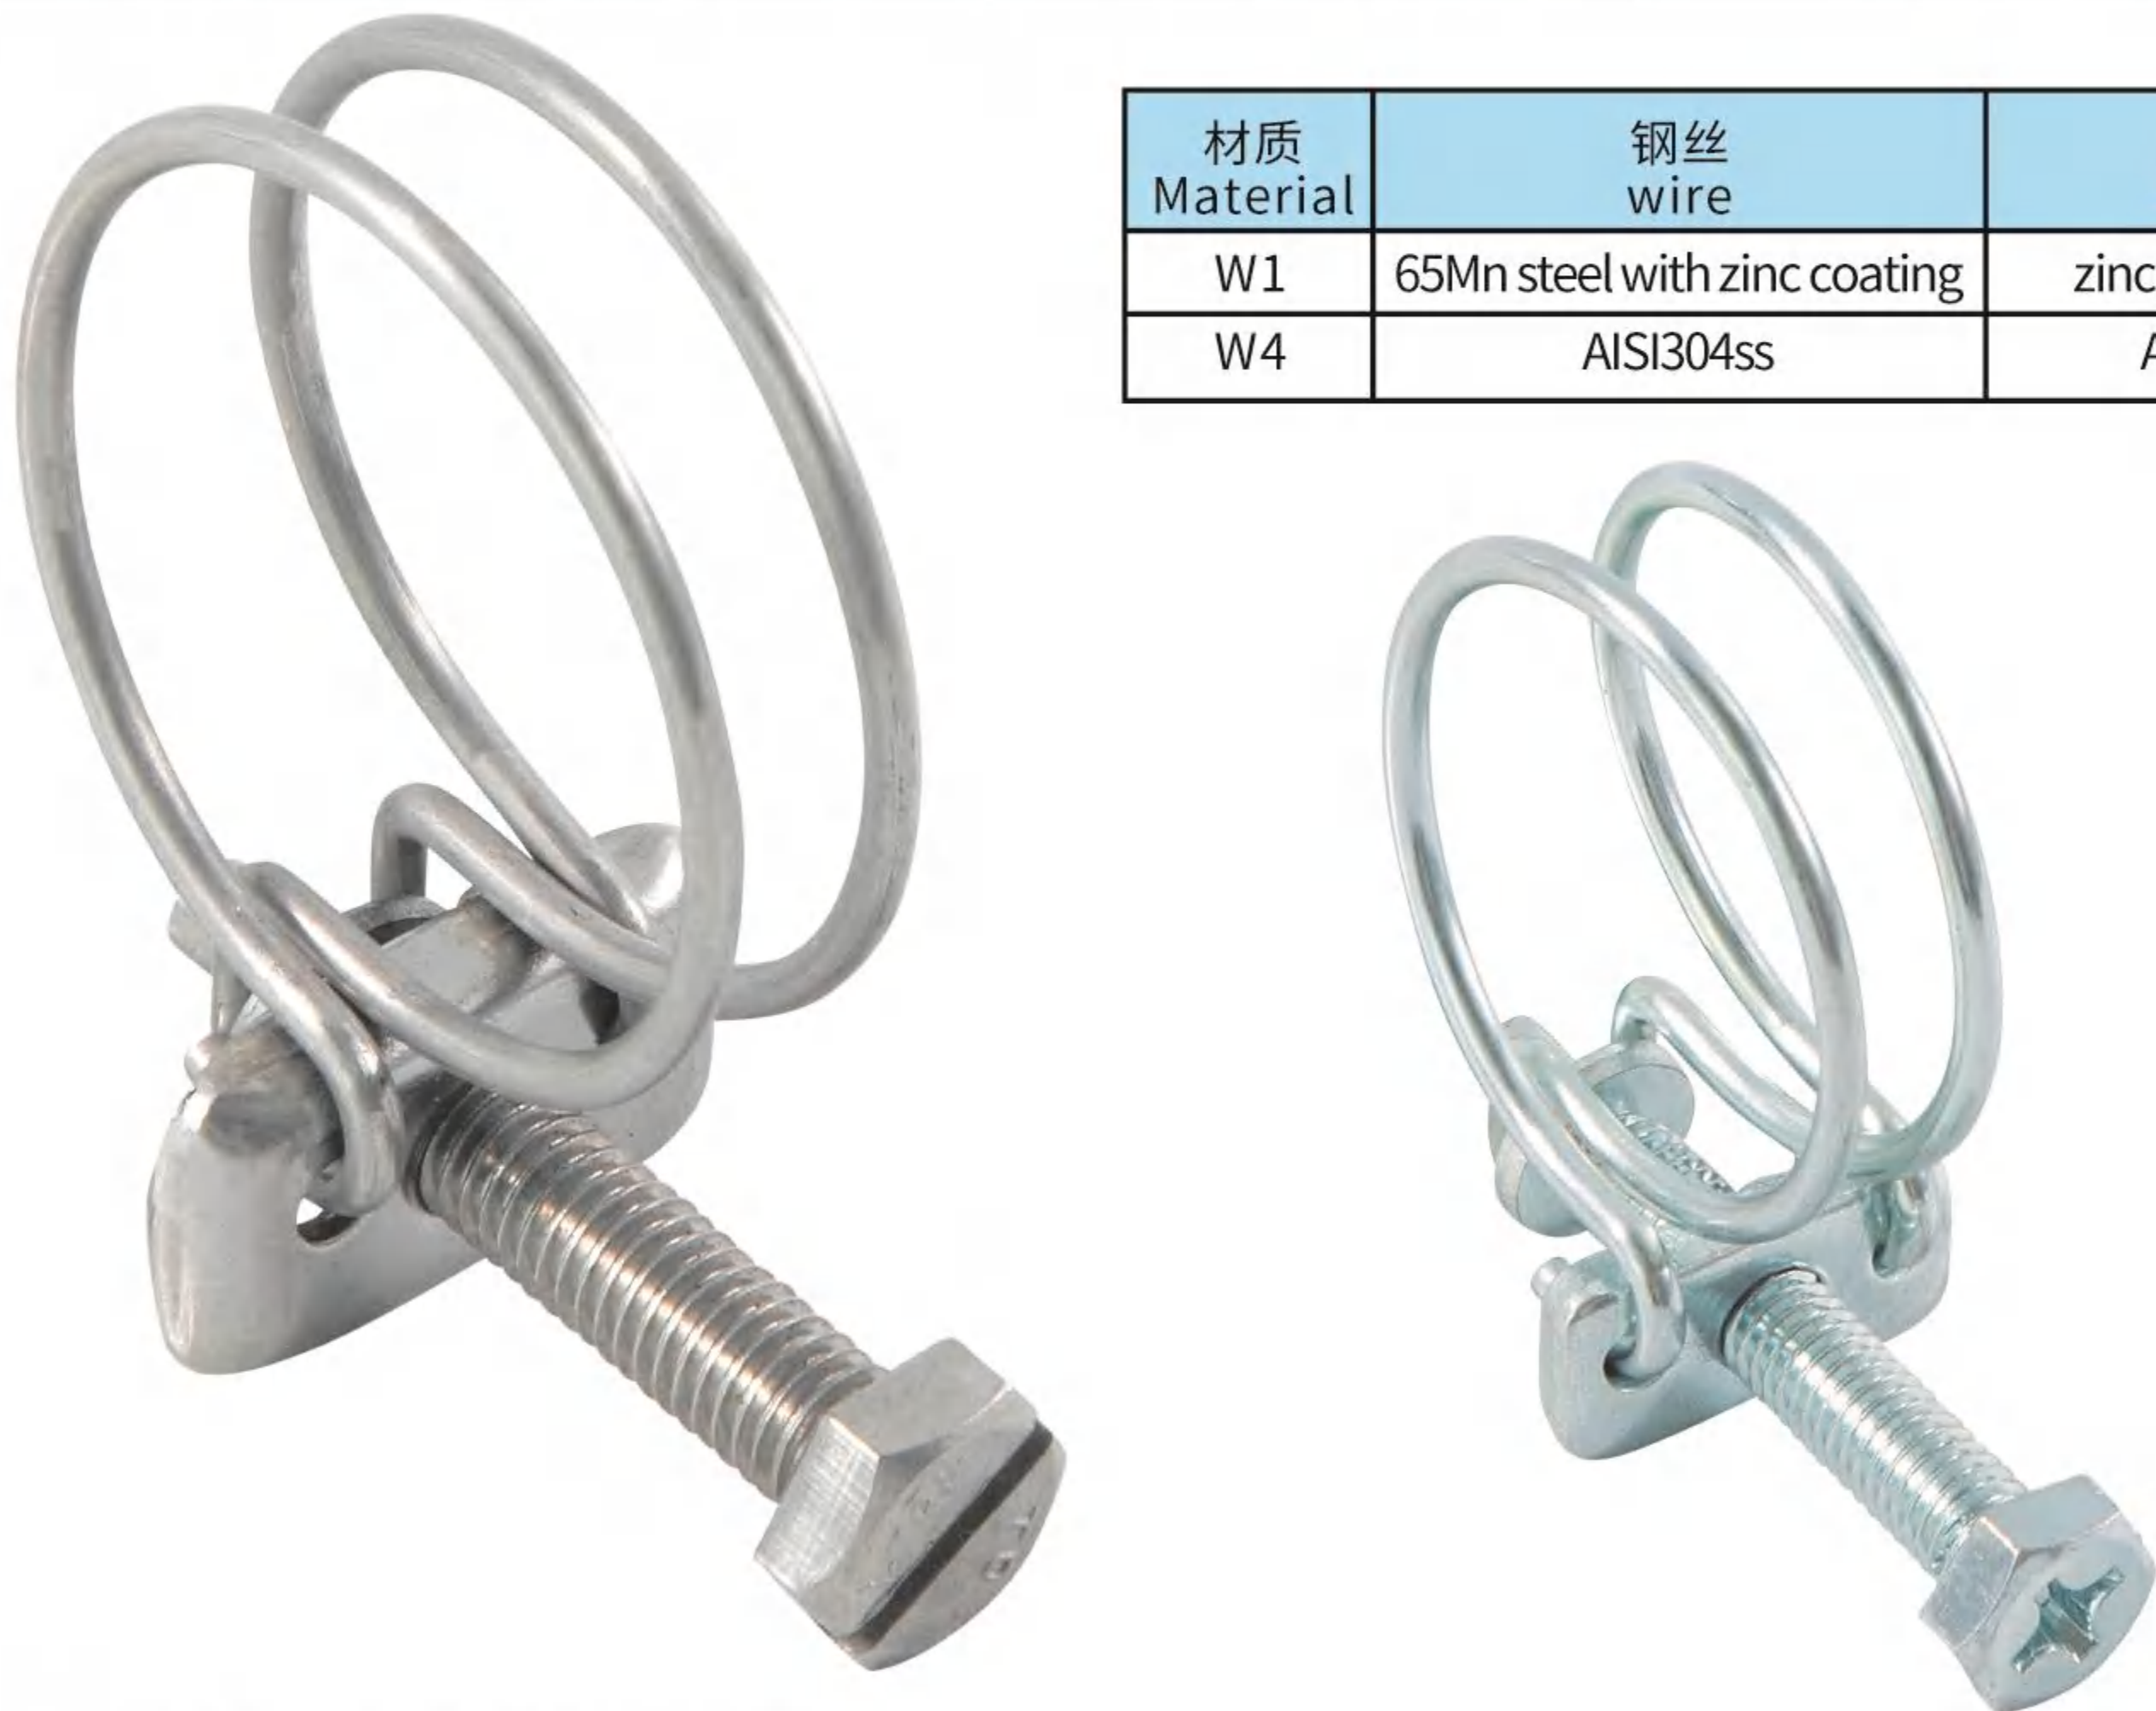

材质 Material	钢丝 wire	螺丝 screw	垫片 washer	耳板 plate
W1	65Mn steel with zinc coating	zinc plated steel	zinc plated steel	zinc plated steel
W4	AISI304ss	AISI304ss	AISI304ss	AISI304ss

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification

CD01&CD06 抽带式卡箍(15mm&19mm Throbbing clamp)

加紧范围 Size	产品货号 Item no.	
	15mm带宽 (bandwidth 15mm)	
mm	W1	W4
φ32	CD01A32	CD01D32
φ35	CD01A35	CD01D35
φ38	CD01A38	CD01D38
φ44	CD01A44	CD01D44
φ51	CD01A51	CD01D51
φ57	CD01A57	CD01D57
φ64	CD01A64	CD01D64
φ70	CD01A70	CD01D70
φ76	CD01A76	CD01D76
φ89	CD01A89	CD01D89
φ102	CD01A102	CD01D102
φ114	CD01A114	CD01D114
φ127	CD01A127	CD01D127
φ152	CD01A152	CD01D152
φ178	CD01A178	CD01D178
φ203	CD01A203	CD01D203

CD03 抽带式卡箍(9.7mmThrobbing clamp)

加紧范围 Size		带宽 bandwidth	产品货号Item no.	
inch	mm	mm	W1	W4
13/16"	21	9.7	CD03A21	CD03D21
13/8"	35	9.7	CD03A35	CD03D35

CD05 抽带式卡箍(15.8mm Throbbingclamp)

加紧范围 Size		带宽 bandwidth	产品货号Item no.	
inch	mm	mm	W1	W4
1"	25	15.8	CD05A25	CD05B25
1 1/4"	32	15.8	CD05A32	CD05B32
1 1/2"	38	15.8	CD05A38	CD05B38
1 3/4"	44	15.8	CD05A44	CD05B44
2"	51	15.8	CD05A51	CD05B51
2 1/4"	57	15.8	CD05A57	CD05B57
2 1/2"	64	15.8	CD05A64	CD05B64
2 3/4"	70	15.8	CD05A70	CD05B70
3"	76	15.8	CD05A76	CD05B76
3 1/2"	89	15.8	CD05A89	CD05B89
4"	102	15.8	CD05A102	CD05B102
4 1/2"	114	15.8	CD05A140	CD05B140
5"	127	15.8	CD05A127	CD05B127
6"	152	15.8	CD05A152	CD05B152
7"	178	15.8	CD05A178	CD05B178
8"	203	15.8	CD05A203	CD05B203

材质 Material	钢带 Band	卡扣 Buckle
W1	Zinc plated steel/galvanized steel	Zinc plated steel/galvanized steel
W4	AlSI 201ss/301SS/304ss	AlSI 201ss/301SS/304ss

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范:
All the information is just for your reference, can't be used as specification




排水用柔性接口铸铁管卡箍（简称“管束”）

The fitting of cast iron pipes with flexible joint sewerage for drainage (“Couplings” for short)


根据客人要求, 其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考, 不作为技术规范
All the information is just for your reference, can't be used as specification

安装方法 Installation

- ① 将卡箍套入橡胶圈。
- ② 将卡箍内橡胶圈取下, 先将卡箍套入下部管道。
- ③ 将橡胶圈套入下部管道一端。
- ④ 将卡箍套入橡胶圈。
- ⑤ 使用平口螺丝刀拧紧即可。

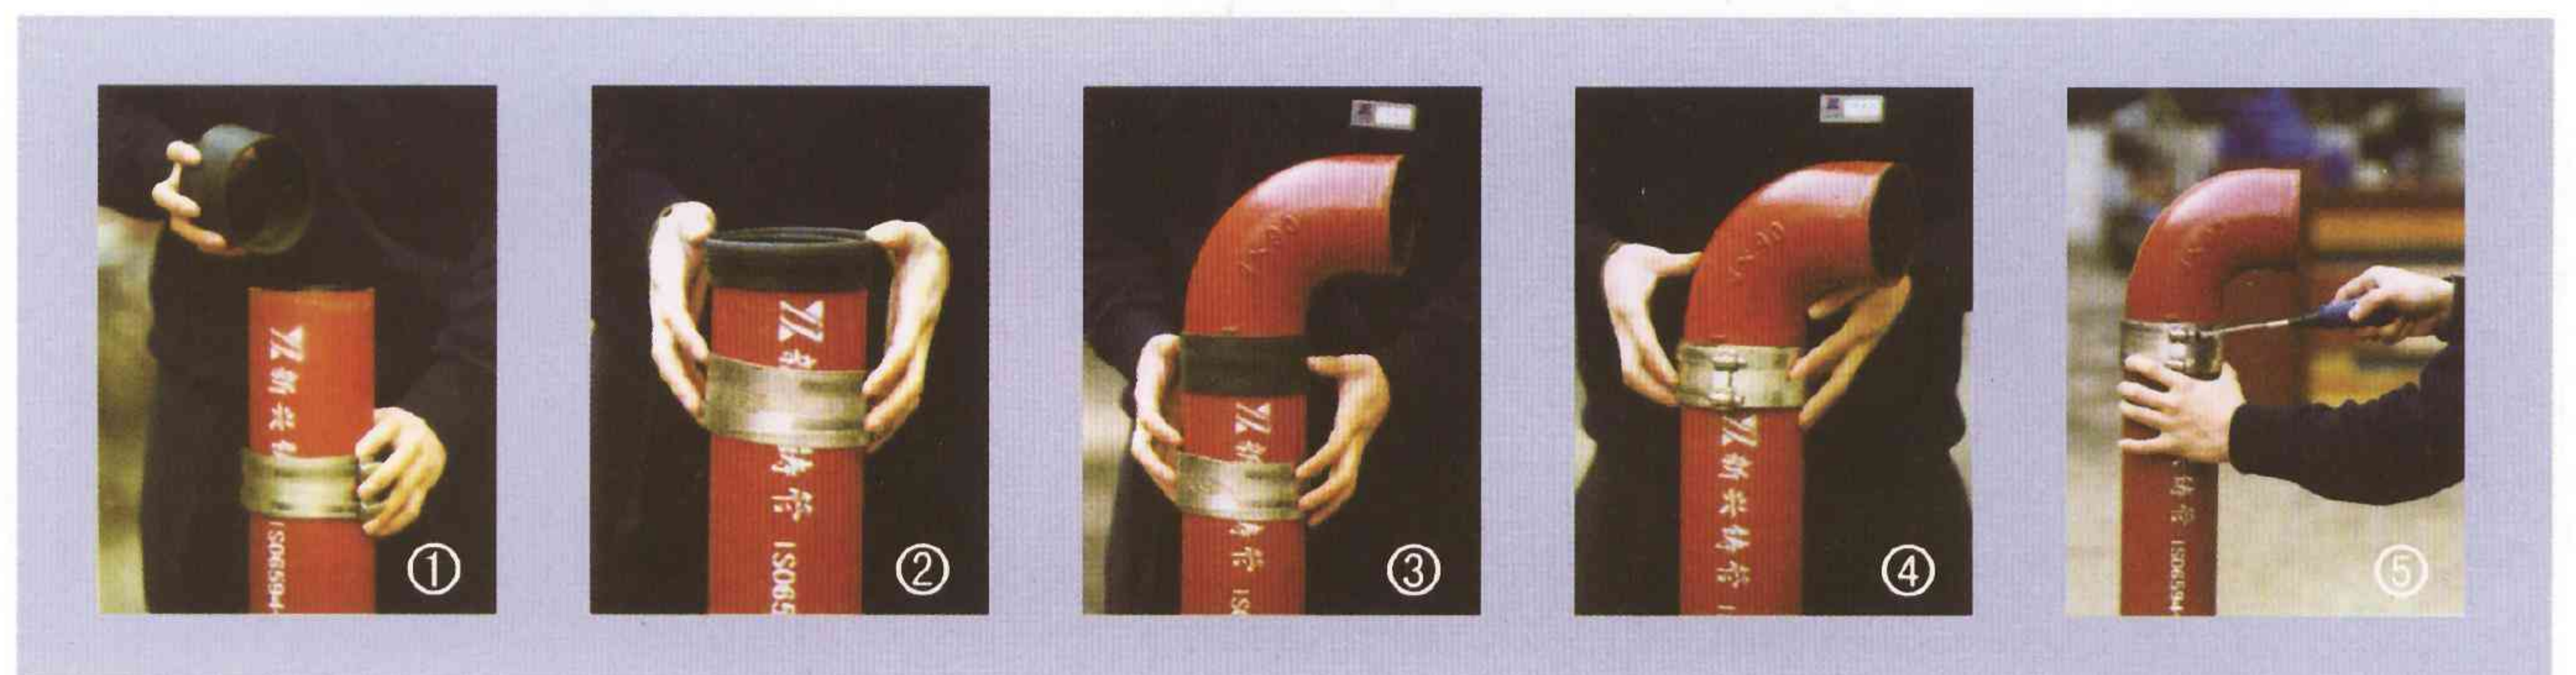

安装中支吊架一般设置参考尺寸

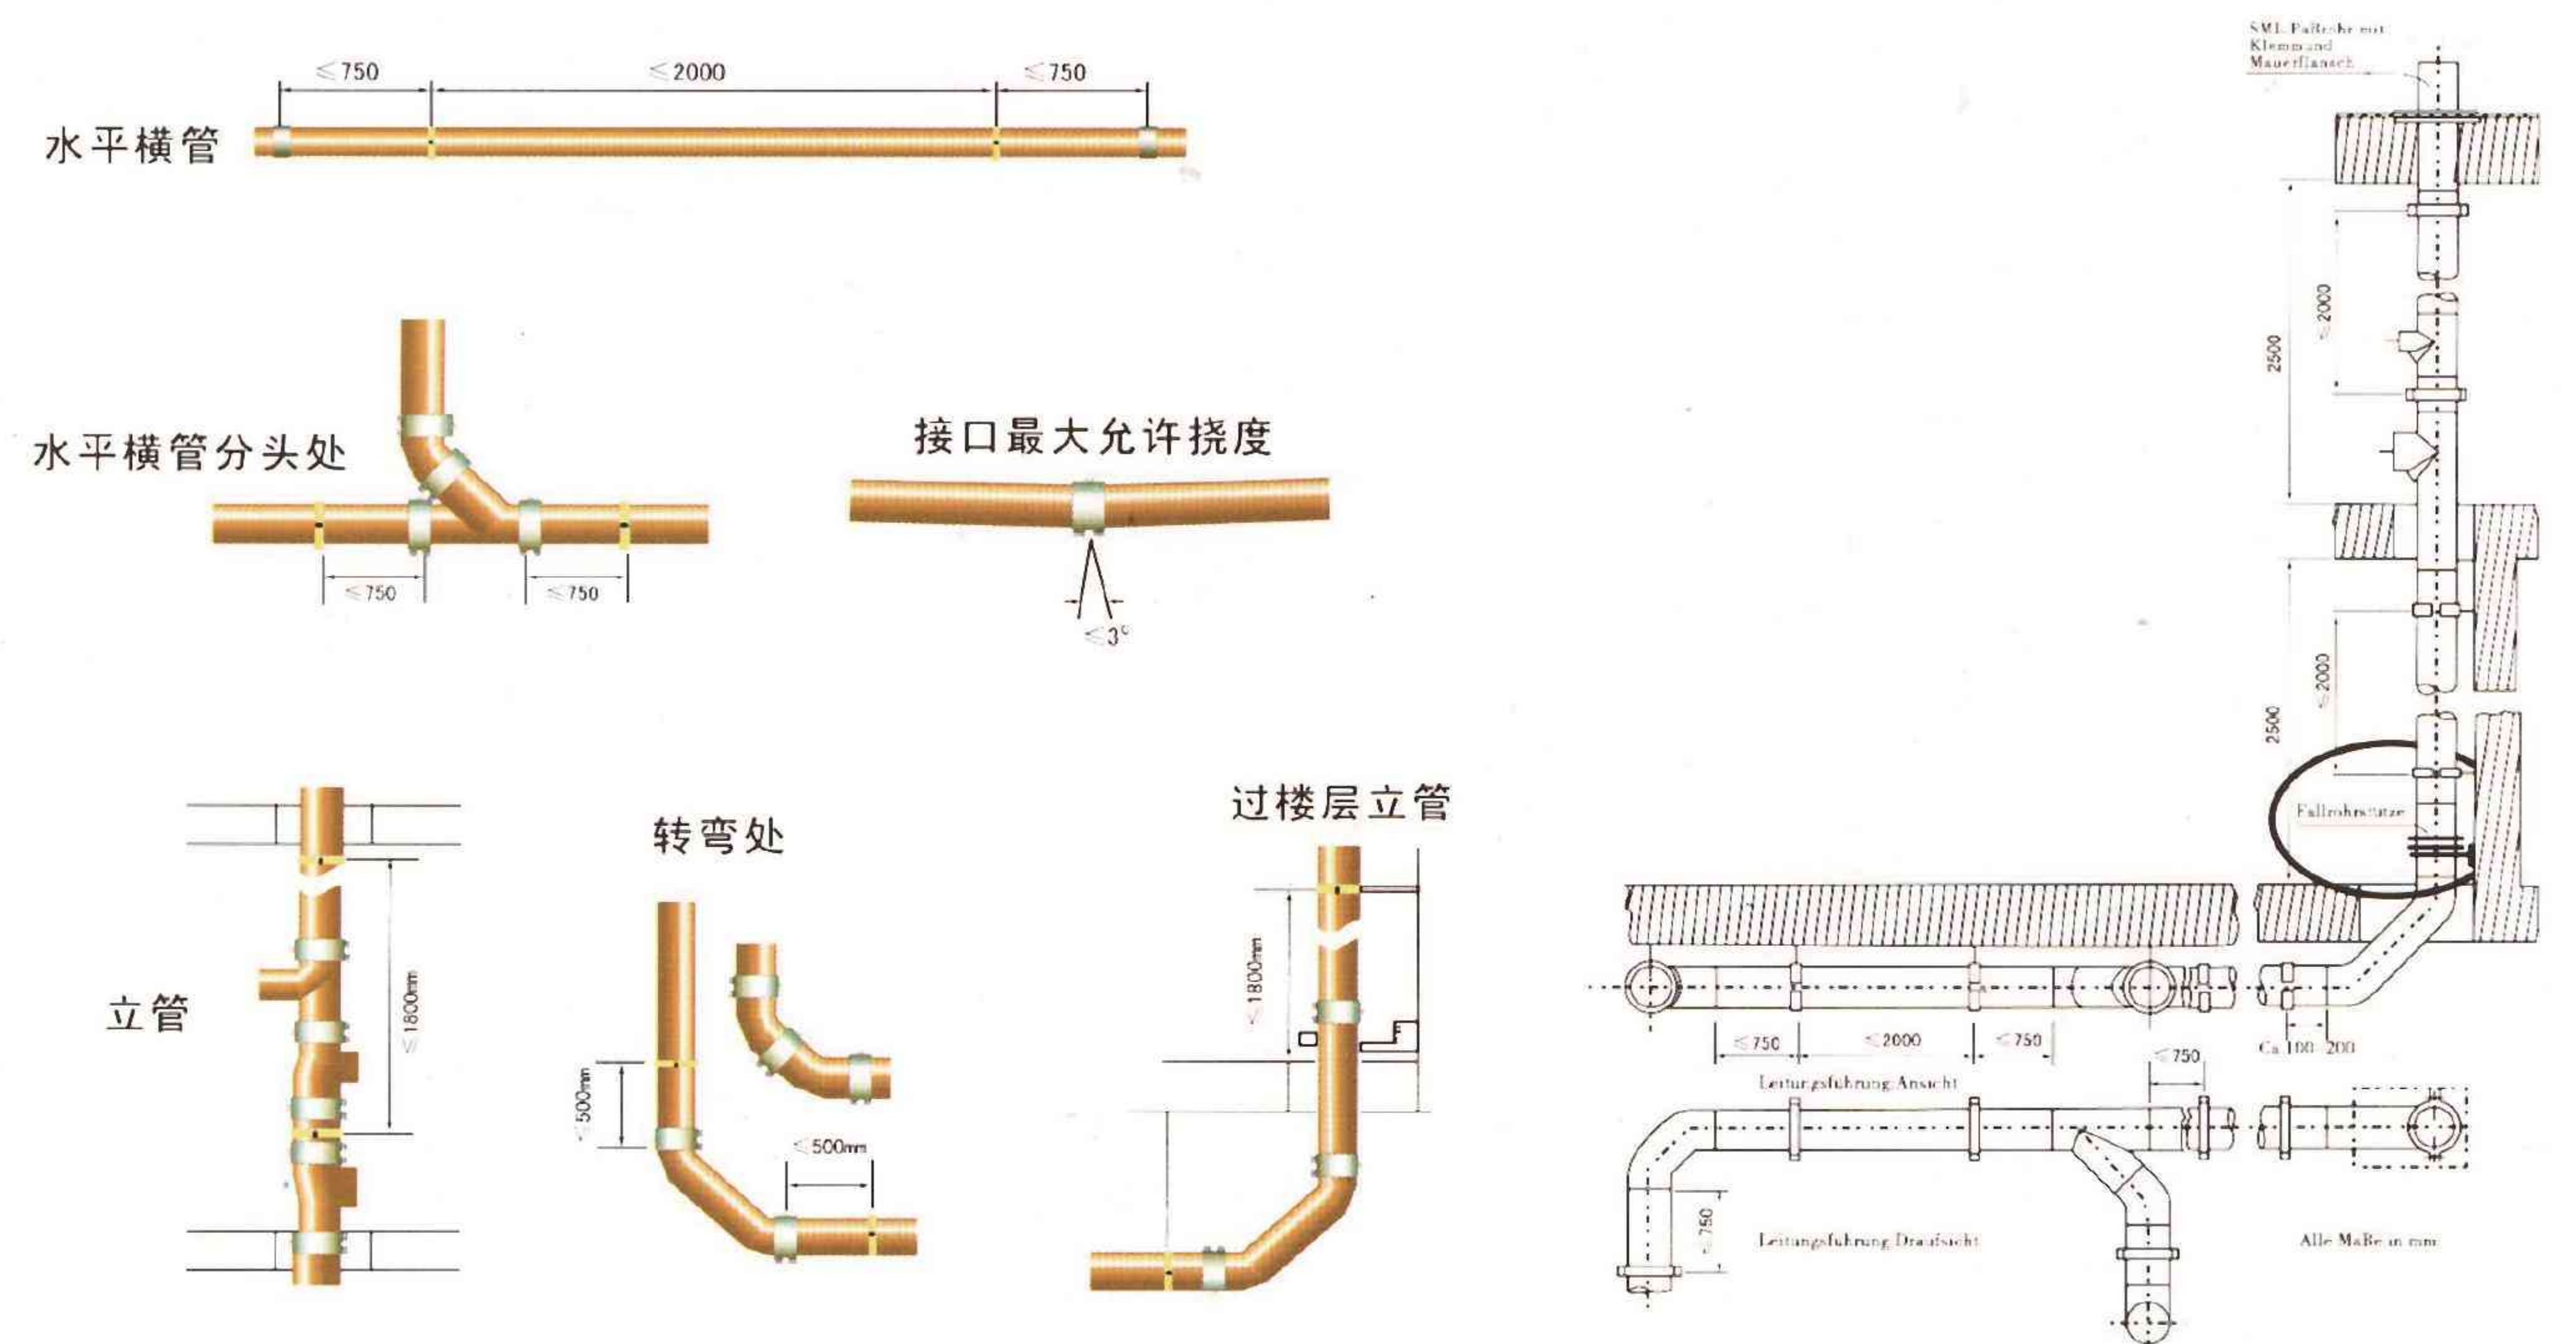

根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification

■ A型管束（箍带式卡箍）
Type A coupling

货号 W4	尺寸	每箱装量		外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
GS01D40	DN40	1.5"	100	36*27.5*32
GS01D50	DN50	2"	100	41*32.5*31
GS01D75	DN75	3"	100	50*41*32
GS01D100	DN100	4"	100	63*51*33
GS01D125	DN125	5"	50	61*42*43
GS01D150	DN150	6"	50	73*53*44
GS01D200	DN200	8"	30	68*47*56
GS01D250	DN250	10"	25	60*60*53
GS01D300	DN300	12"	16	66*66*45

■ 重型A型管束
Heavy duty A type coupling

货号 W4	尺寸		每箱装量	外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
GS02D40	DN40	1.5"	100	39*31*34
GS02D50	DN50	2"	100	39*31*34
GS02D75	DN75	3"	100	50*41*34
GS02D100	DN100	4"	100	63*51*34
GS02D125	DN125	5"	50	60*42*54
GS02D150	DN150	6"	60	72*51*43
GS02D200	DN200	8"	30	68*48*55
GS02D250	DN250	10"	16	58*58*46
GS02D300	DN300	12"	16	67*67*59


■ B型管束（耳板式管束） Type B coupling

货号 W5	货号 W4	货号 W2	尺寸		每箱装量	外箱尺寸
item number	item number	item number	mm	inch	pcs/carton	carton size mm
GS03E40	GS03D40	GS03B40	DN40	1.5"	250	57*42*26
GS03E50	GS03D50	GS03B50	DN50	2"	100	42*32*24
GS03E75	GS03D75	GS03B75	DN75	3"	100	57*42*26
GS03E100	GS03D100	GS03B100	DN100	4"	100	70*52*28
GS03E125	GS03D125	GS03B125	DN125	5"	50	54*38*62
GS03E150	GS03D150	GS03B150	DN150	6"	50	54*38*62
GS03E200	GS03D200	GS03B200	DN200	8"	20	63*51*33




■ W管型不锈钢卡箍

公称直径DN	卡箍宽度 L	箍带厚度 t	波纹板厚度 t1	卡箍口径调节D		安装扭矩
				最小	最大	
50	54	0.65	0.18	50	76	7.5N.m
75				75	101	
100				101	127	
125	76			134	157	
150				160	182	
200				198	233	
250	100			248	298	
300				298	352	

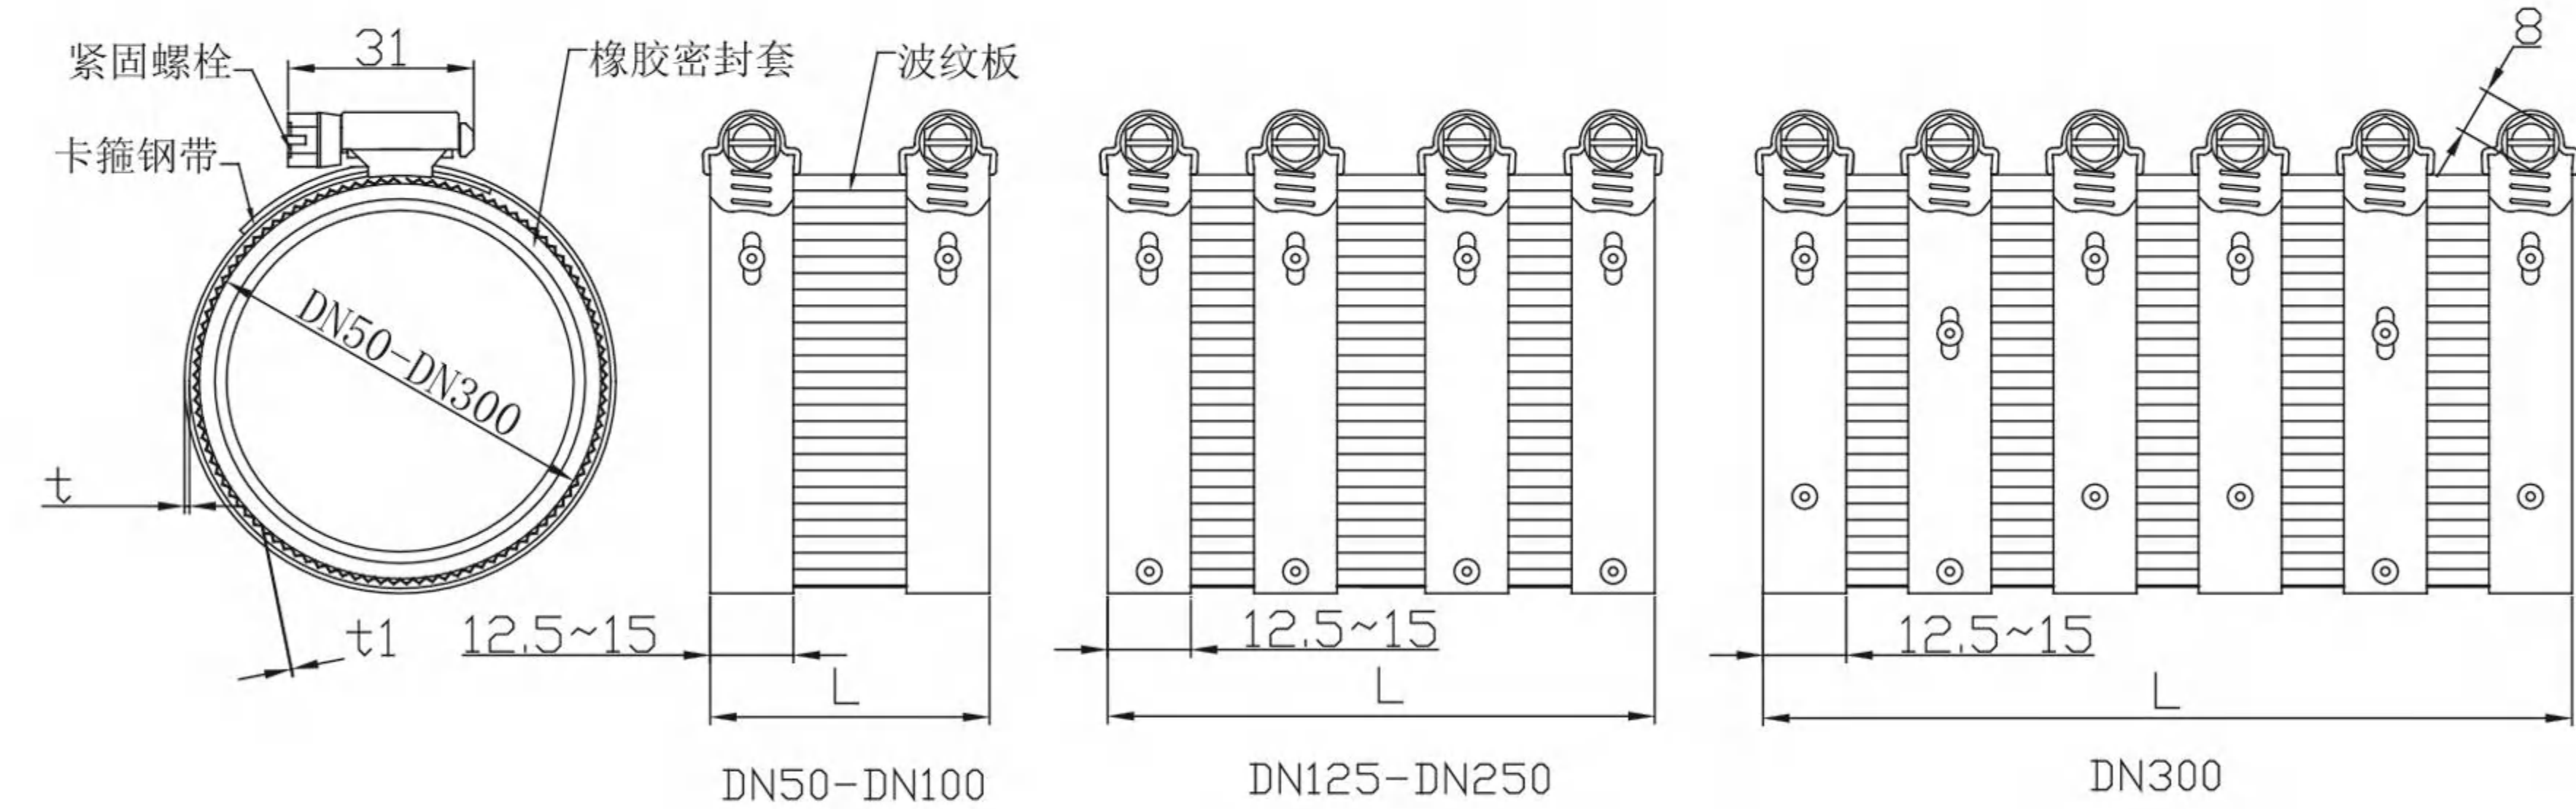

■ W1管型不锈钢卡箍

公称直径DN	D	卡箍钢带厚度t		螺母厚度 t1	耳板厚度 t2	卡箍宽度 L	螺栓	安装扭矩
		材质06Cr19Ni10	材质06Cr17Ni12Mo2					
50	70	0.4	0.5	4.8	1.8	41	M8-45	18N.m
75	94					45	M8-60	
100	124					54	M8-70	22N.m
125	154							
150	178					66	M10-80	30N.m
200	230	0.55	0.55	7.8	2.3			

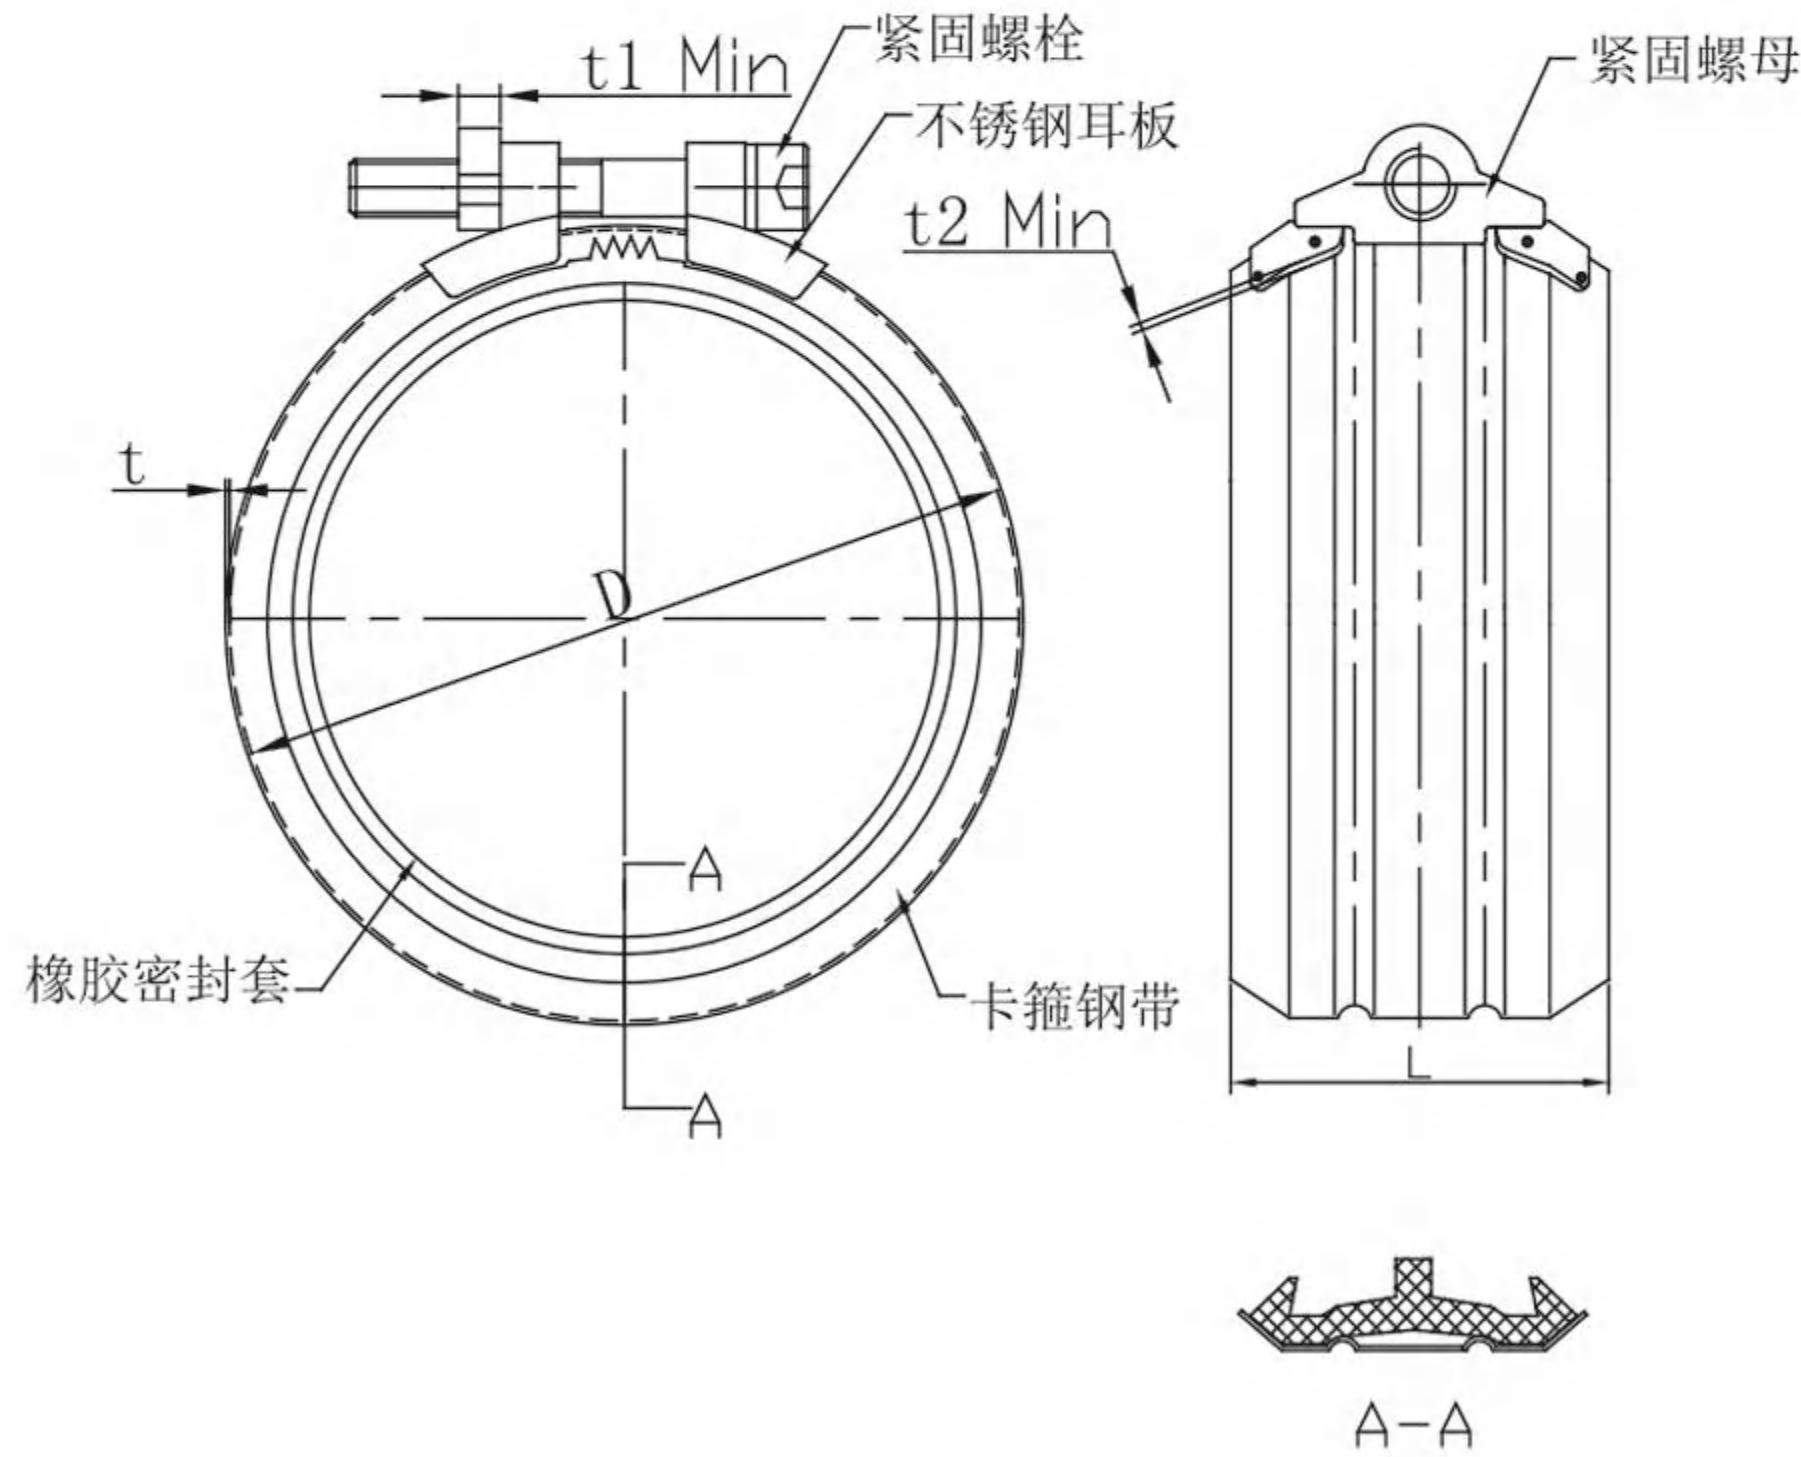

■ CHA型管束(夹板式管束) Type CHA coupling

货号 W4	货号 W2	尺寸		每箱装量	外箱尺寸
item number	item number	mm	inch	pcs/carton	carton size mm
GS04D50	GS04B50	DN50	2"	100	46*33*33
GS04D75	GS04B75	DN75	3"	100	60*44*33
GS04D100	GS04B100	DN100	4"	50	55*40*33
GS04D125	GS04B125	DN125	5"	50	68*44*40
GS04D150	GS04B150	DN150	6"	50	73*53*39
GS04D200	GS04B200	DN200	8"	12	72*39*32
GS04D250	GS04B250	DN250	10"		
GS04D300	GS04B300	DN300	12"	4	72*39*32



■ E型管束(快装式管束) Type E coupling

货号 W4	货号 W2	尺寸		每箱装量	外箱尺寸
item number	item number	mm	inch	pcs/carton	carton size mm
GS07D50	GS07B50	DN50	2"	100	45*32*30
GS07D75	GS07B75	DN75	3"	100	60*42*33
GS07D100	GS07B100	DN100	4"	100	72*51*32
GS07D125	GS07B125	DN125	5"	50	41*43.5*42



■ G型封堵 Type G close cover

货号	尺寸		每箱装量	外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
GS10D40	DN40	1.5"	100	37*26*25
GS10D50	DN50	2"	100	43*31*25
GS10D70	DN70	3"	100	56*31*25
GS10D100	DN100	4"	50	53*38*30
GS10D125	DN125	5"	---	---
GS10D150	DN150	6"	---	---



■ D型管束(变径式管束) Type D coupling

货号	尺寸		每箱装量	外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
GS06D5040	DN50*40	2"*1.5"	50	41*31*31
GS06D7550	DN75*50	3"*2"	50	41*31*31
GS06D10050	DN100*50	4"*2"	50	51*37*32
GS06D10075	DN100*75	4"*3"	50	41*37*32



■ F型管束(高层管束) Type F coupling

货号 W4	货号 W2	尺寸		每箱装量	外箱尺寸
item number	item number	mm	inch	pcs/carton	carton size mm
GS08D100	GS08B100	DN100	4"	50	55*40*33
GS08D125	GS08B125	DN125	5"	50	68*44*40
GS08D150	GS08B150	DN150	6"	50	73*53*39
GS08D200	GS08B200	DN200	8"	12	72*39*32



■ 爪箍 Support clip with heavy duty

货号	尺寸		每箱装量	外箱尺寸
item number	mm	inch	pcs/carton	carton size mm
YX14050	DN50	2"	20	32*27*14
YX14070	DN70	3"	10	32*27*14
YX14075	DN75	3"	10	32*27*14
YX14100	DN100	4"	10	32*27*14
YX14125	DN125	5"	10	38*27*14
YX14150	DN150	6"	10	38*27*17
YX14200	DN200	8"	5	38*27*17
YX14250	DN250	10"	5	38*27*17
YX14305	DN305	12"	5	72*39*33



根据客人要求, 其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考, 不作为技术规范
All the information is just for your reference, can't be used as specification

■ 柔性接口铸铁排水管道关键节点防脱加固所用的附件


不锈钢卡箍接口防脱加强箍选用:

不锈钢卡箍接口防脱加强箍采用碳钢板材冲压加工成型, 表面采用镀锌防腐处理。
由于W型和W1型不锈钢卡箍宽度不同, 防脱加强箍分为W型和W1型两个系列产品。
适用口径: DN50、DN75、DN100、DN150、DN200、DN250

不锈钢卡箍接口防脱加强箍根据适用管材口径由2~4片配件组合而成。选用时应至少配有有一片带有弧形缺口的配件, 以便与带有弯曲接口的管件配套使用。


■ W型不锈钢卡箍加强箍

公称直径 DN	D	t	t1	L	L1	K	片数	安装扭矩
50	58	2.5	1.5	95	63	11	2	M8-45
75	83					15	3	
100	110			20	4			
125	135							
150	160							
200	210							
250	274	3	2	190	146	20	4	
300	326							

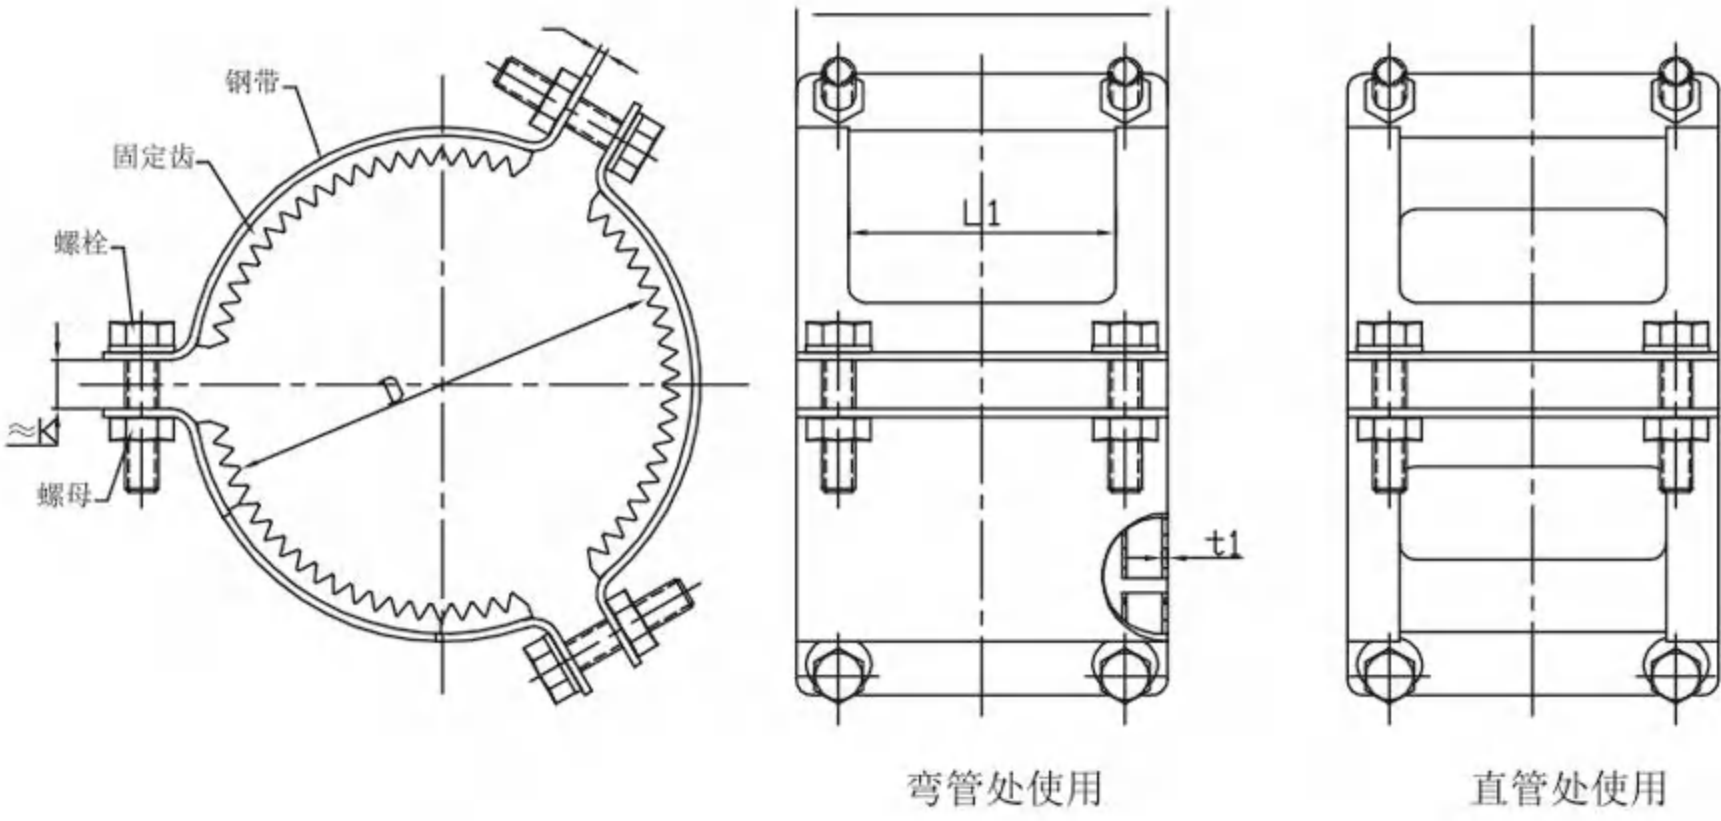

■ W1型不锈钢卡箍加强箍

公称直径 DN	D	t	t1	L	L1	K	片数	安装扭矩
50	58	2.5	1.5	82	50	11	2	M8-45
75	83					15	3	
100	110							
125	135			95	63			
150	160							
200	210			106	74	20	4	

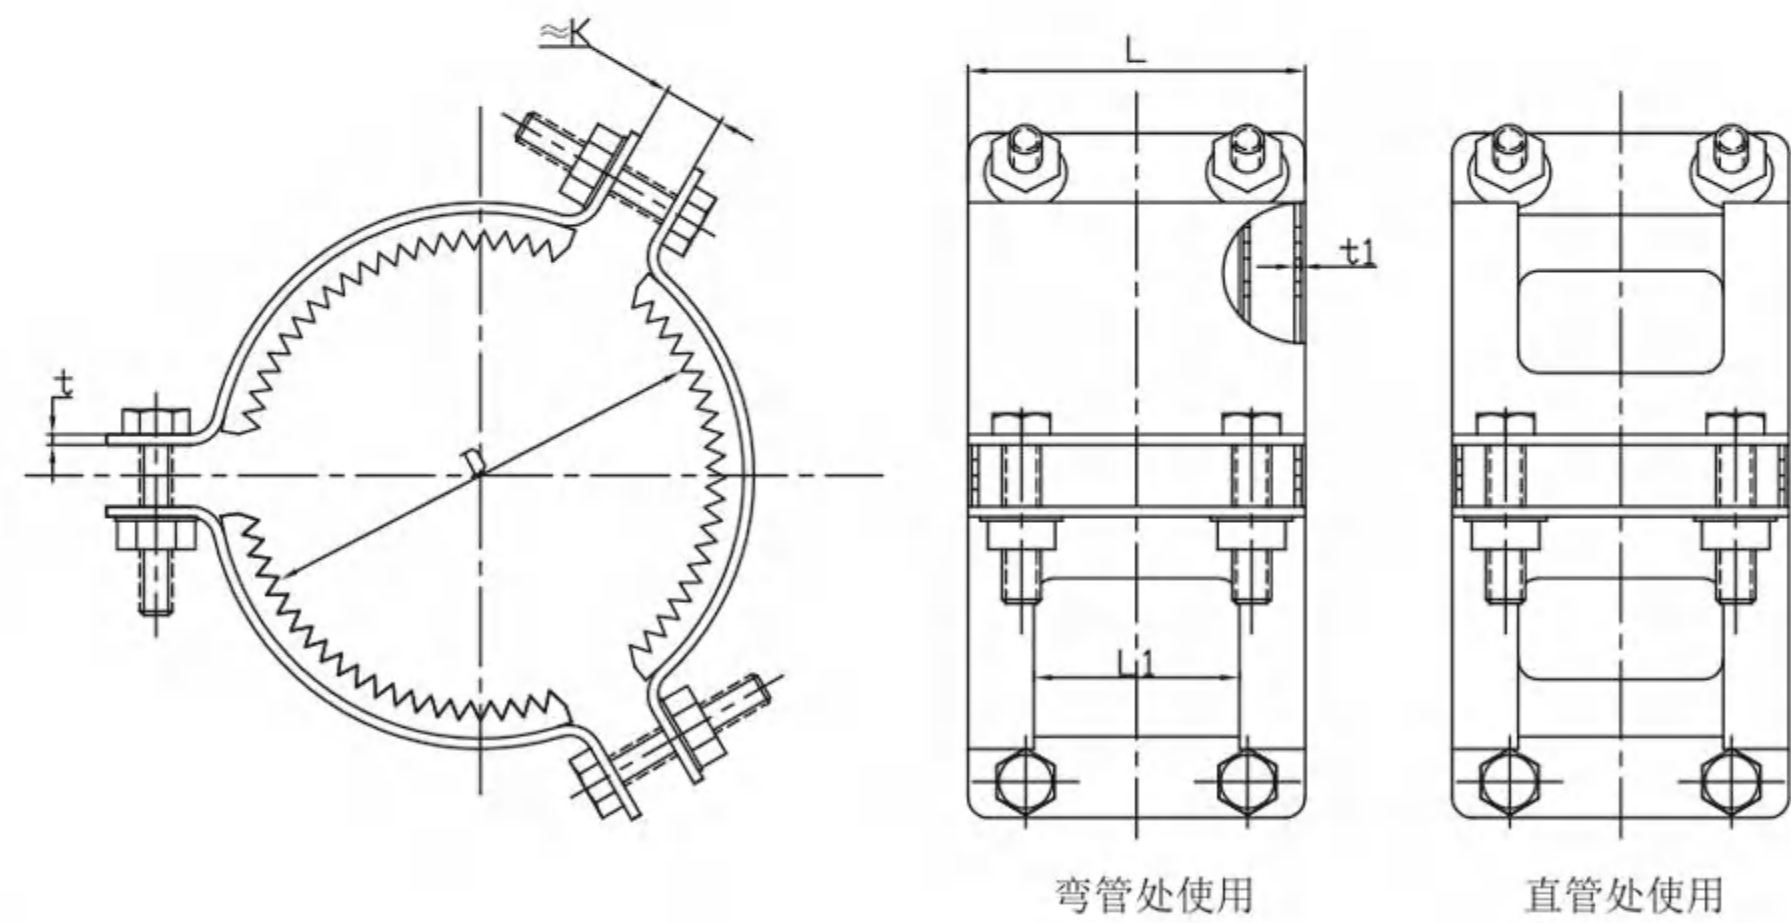

根据客人要求, 其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考, 不作为技术规范:
All the information is just for your reference, can't be used as specification

橡胶制品 Rubber Products

我公司的橡胶制品配方包括三元乙丙橡胶、天然胶、氯丁胶、硅胶、合成胶等；根据客户的需求，我们会为您调制不同的配方。

We have EPDM rubber, natural rubber, Neoprene rubber, Silicone rubber, Synthetic rubber, and so on. According to the customers’ different requirements, we can make the compound for you.

橡胶制品车间拥有一个独立的实验室，可以测试的项目如下：

The lab of rubber can make the following testing:

Original Properties（一般试验）	Unit	Test Methods
	单位	测试方法
Shore A hardness（硬度）	—	ISO 48
Tensile strength(拉伸强度)	Mpa	ISO 37
Elongation(扯断伸长率)	%	ISO 37
Compression set(压缩永久变形)23 ℃@ 72 hrs		ISO 815
Compression set(压缩永久变形)70 ℃@ 24 hrs		ISO 815
Ageing(热老化试验)70 ℃@168 hrs (Test Method ISO 188)		
Shore A Hardness change(硬度变化)	—	ISO 48
Tensile strength change（拉伸强度变化）	%	ISO 37
Elongation change（扯断伸长率变化）	%	ISO 37
Water(耐水试验) 70℃@ 168 hrs		
Volume change（体积变化）	%	ISO 1817
Ozone resistance (臭氧试验)		
Surface appearance(表面状况)	—	ISO 1413-1



橡胶制品实验室



硬度计



橡胶拉力试验机



老化试验箱

根据客人要求，其他规格和材质也能够提供
According to the requirement of customers, other sizes and material are also available
以上信息仅供参考，不作为技术规范
All the information is just for your reference, can't be used as specification



根据客人要求，其他规格和材质也能够提供。
According to the requirement of customers, other sizes and material are also available.
以上信息仅供参考，不作为技术规范：
All the information is just for your reference, can't be used as specification