



产品手册 Product Manual

◆ 滑移装载机

◆ 小型挖掘机



★ 济宁森林猫重工科技有限公司

济宁森林猫重工科技有限公司

地址:山东省济宁市任城区同济路北头均和云谷8-1

电话:13181321988

济宁森林猫重工科技有限公司

Jining Forest Cat Heavy Industry Technology Co., Ltd.

滑移装载机 V1000


SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA

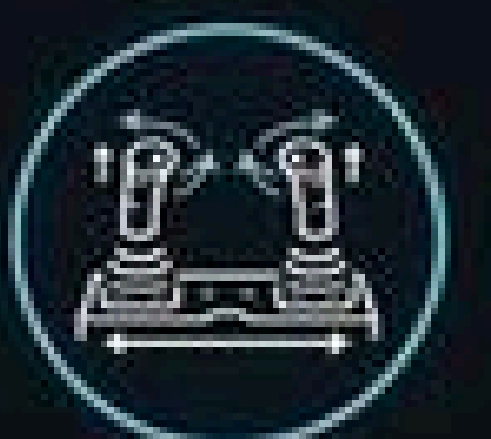

操作灵活
Easy Operation



强劲动力
Powerful Engine



高效举升
Powerful Lifting



快速换装
Quick Attachment



复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	V1000
基本性能参数	
操作质量	1892kg
铲斗容量	0.19m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	500kg
最大载荷	650kg
行驶速度	0-6km/h
车体宽度	960mm
额定压力	17Mpa-20Mpa
铲斗宽度	1240mm
最大装载高度	2102mm
最大卸载高度	1522mm
最大操作高度	2794mm
至铲斗销高度	2140mm
铲斗在最高时翻转角度	63°
最小高度	1548mm
离去角	29°
离地间隙	200mm
卸载距离	498mm
履带接地长	1080mm
尺寸	
外形尺寸	2691*1240*1548mm
含铲斗长度	2691mm
不含铲斗长度	1981mm
履带型号	230*72*45
发动机	
品牌	洋马/久保田
型号	3TNV80/D1105
额定功率	15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	40L

Model	V1000
Basic performance parameters	
Operating weight	1892kg
Bucket capacity	0.19m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	500kg
Maximum load	650kg
Travel speed	0-6km/h
Vehicle width	960mm
Rated pressure	17Mpa-20Mpa
Bucket width	1240mm
Max loading height	2102mm
Max dumping height	1522mm
Max operating height	2794mm
Height to bucket pin	2140mm
Max height bucket dump angle	63°
Min height	1548mm
Departure angle	29°
Ground clearance	200mm
Dumping distance	498mm
Track contact length	1080mm
Dimensions	
Overall dimensions	2691*1240*1548mm
Length including bucket	2691mm
Length excluding bucket	1981mm
Track contact length	230*72*45
Engine	
Brand	Yanmar/Kubota
Model	3TNV80/D1105
Rated power	15.2(17.8)/17.1kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	40L

滑移装载机 V800


SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA

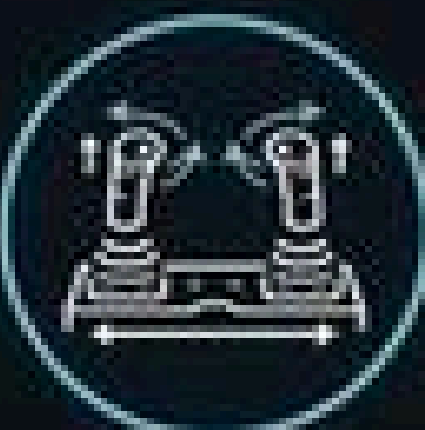

操作灵活
Easy Operation



强劲动力
Powerful Engine



高效举升
Powerful Lifting



快速换装
Quick Attachment



复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	V800
基本性能参数	
操作质量	1729kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	420kg
最大载荷	500kg
行驶速度	0-4km/h
车体宽度	911mm
额定压力	16Mpa
铲斗宽度	1020mm
最大装载高度	2000mm
最大卸载高度	1704mm
最大操作高度	2873mm
至铲斗销高度	2195mm
铲斗在最高时翻转角度	32°
最小高度	1573mm
离去角	39°
离地间隙	225mm
卸载距离	371mm
履带接地长	1200mm
尺寸	
外形尺寸	2651*1020*1573mm
含铲斗长度	2651mm
不含铲斗长度	2084mm
履带型号	180*72*45
发动机	
品牌	久保田
型号	D1105
额定功率	17.1(18.2)kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	33L

Model	V800
Basic performance parameters	
Operating weight	1729kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	420kg
Maximum load	500kg
Travel speed	0-4km/h
Vehicle width	911mm
Rated pressure	16Mpa
Bucket width	1020mm
Max loading height	2000mm
Max dumping height	1704mm
Max operating height	2873mm
Height to bucket pin	2195mm
Max height bucket dump angle	32°
Min height	1573mm
Departure angle	39°
Ground clearance	225mm
Dumping distance	371mm
Track contact length	1200mm
Dimensions	
Overall dimensions	2651*1020*1573mm
Length including bucket	2651mm
Length excluding bucket	2084mm
Track contact length	180*72*45
Engine	
Brand	Kubota
Model	D1105
Rated power	17.1(18.2)kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	33L

滑移装载机 V800

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA




产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	V800
基本性能参数	
操作质量	1729kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	420kg
最大载荷	500kg
行驶速度	0-4km/h
车体宽度	911mm
额定压力	16Mpa
铲斗宽度	1020mm
最大装载高度	2000mm
最大卸载高度	1704mm
最大操作高度	2873mm
至铲斗销高度	2195mm
铲斗在最高时翻转角度	32°
最小高度	1573mm
离去角	39°
离地间隙	225mm
卸载距离	371mm
履带接地长	1200mm
尺寸	
外形尺寸	2651*1020*1573mm
含铲斗长度	2651mm
不含铲斗长度	2084mm
轮胎型号	21*8-9
发动机	
品牌	久保田
型号	D1105
额定功率	17.1(18.2)kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	33L

Model	V800
Basic performance parameters	
Operating weight	1729kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	420kg
Maximum load	500kg
Travel speed	0-4km/h
Vehicle width	911mm
Rated pressure	16Mpa
Bucket width	1020mm
Max loading height	2000mm
Max dumping height	1704mm
Max operating height	2873mm
Height to bucket pin	2195mm
Max height bucket dump angle	32°
Min height	1573mm
Departure angle	39°
Ground clearance	225mm
Dumping distance	371mm
Track contact length	1200mm
Dimensions	
Overall dimensions	2651*1020*1573mm
Length including bucket	2651mm
Length excluding bucket	2084mm
Tire model	21*8-9
Engine	
Brand	Kubota
Model	D1105
Rated power	17.1(18.2)kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	33L

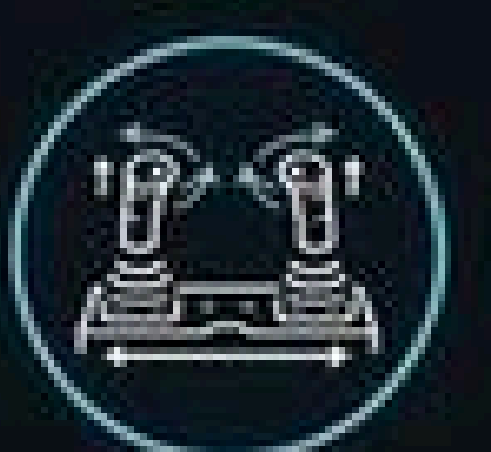

操作灵活
Easy Operation



强劲动力
Powerful Engine



高效举升
Powerful Lifting



快速换装
Quick Attachment



复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

滑移装载机 V800

SKID STEER LOADER (DUAL-PILOT CONTROL)

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	V800
基本性能参数	
操作质量	1729kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	420kg
最大载荷	500kg
行驶速度	0-4km/h
车体宽度	911mm
额定压力	16Mpa
铲斗宽度	1020mm
最大装载高度	2000mm
最大卸载高度	1704mm
最大操作高度	2873mm
至铲斗销高度	2195mm
铲斗在最高时翻转角度	32°
最小高度	1573mm
离去角	39°
离地间隙	225mm
卸载距离	371mm
履带接地长	1200mm
尺寸	
外形尺寸	2651*1020*1573mm
含铲斗长度	2651mm
不含铲斗长度	2084mm
履带型号	180*72*45
发动机	
品牌	久保田
型号	D1105
额定功率	17.1(18.2)kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	33L

Model	V800
Basic performance parameters	
Operating weight	1729kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	420kg
Maximum load	500kg
Travel speed	0-4km/h
Vehicle width	911mm
Rated pressure	16Mpa
Bucket width	1020mm
Max loading height	2000mm
Max dumping height	1704mm
Max operating height	2873mm
Height to bucket pin	2195mm
Max height bucket dump angle	32°
Min height	1573mm
Departure angle	39°
Ground clearance	225mm
Dumping distance	371mm
Track contact length	1200mm
Dimensions	
Overall dimensions	2651*1020*1573mm
Length including bucket	2651mm
Length excluding bucket	2084mm
Track contact length	180*72*45
Engine	
Brand	Kubota
Model	D1105
Rated power	17.1(18.2)kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	33L

滑移装载机 S750

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA




产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S750
基本性能参数	
操作质量	1400kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	400kg
最大载荷	450kg
行驶速度	0-6km/h
工作三项和	9s
工作系统压力	25bar
铲斗宽度	1050mm
最大装载高度	2140mm
最大卸载高度	1700mm
最大操作高度	2920mm
至铲斗销高度	2300mm
铲斗在最高时翻转角度	63°
最小高度	1550mm
尾部长度	500mm
离地间隙	240mm
卸载距离	150mm
轴距	860mm
尺寸	
外形尺寸	2700*1270*1550mm
含铲斗长度	2700mm
不含铲斗长度	2070mm
轮胎型号	21*8-9
发动机	
品牌	电动/莱动/洋马/久保田
型号	磷酸铁锂/385/3TNV80/D1105
额定功率	14kw、72V、200ah/18.6/18.4/18.5kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	30L


Model	S750
Basic performance parameters	
Operating weight	1400kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	400kg
Maximum load	450kg
Travel speed	0-6km/h
Three-item sum of work	9s
Working system pressure	25bar
Bucket width	1050mm
Max loading height	2140mm
Max dumping height	1700mm
Max operating height	2920mm
Height to bucket pin	2300mm
Max height bucket dump angle	63°
Min height	1550mm
Tail length	500mm
Ground clearance	240mm
Dumping distance	150mm
Wheelbase	860mm
Dimensions	
Overall dimensions	2700*1270*1550mm
Length including bucket	2700mm
Length excluding bucket	2070mm
Tire model	21*8-9
Engine	
Brand	Electric/Laidong/Yanmar/Kubota
Model	Lithium iron phosphate/385/3TNV80/D1105
Rated power	14kw、72V、200ah/18.6/18.4/18.5kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	30L

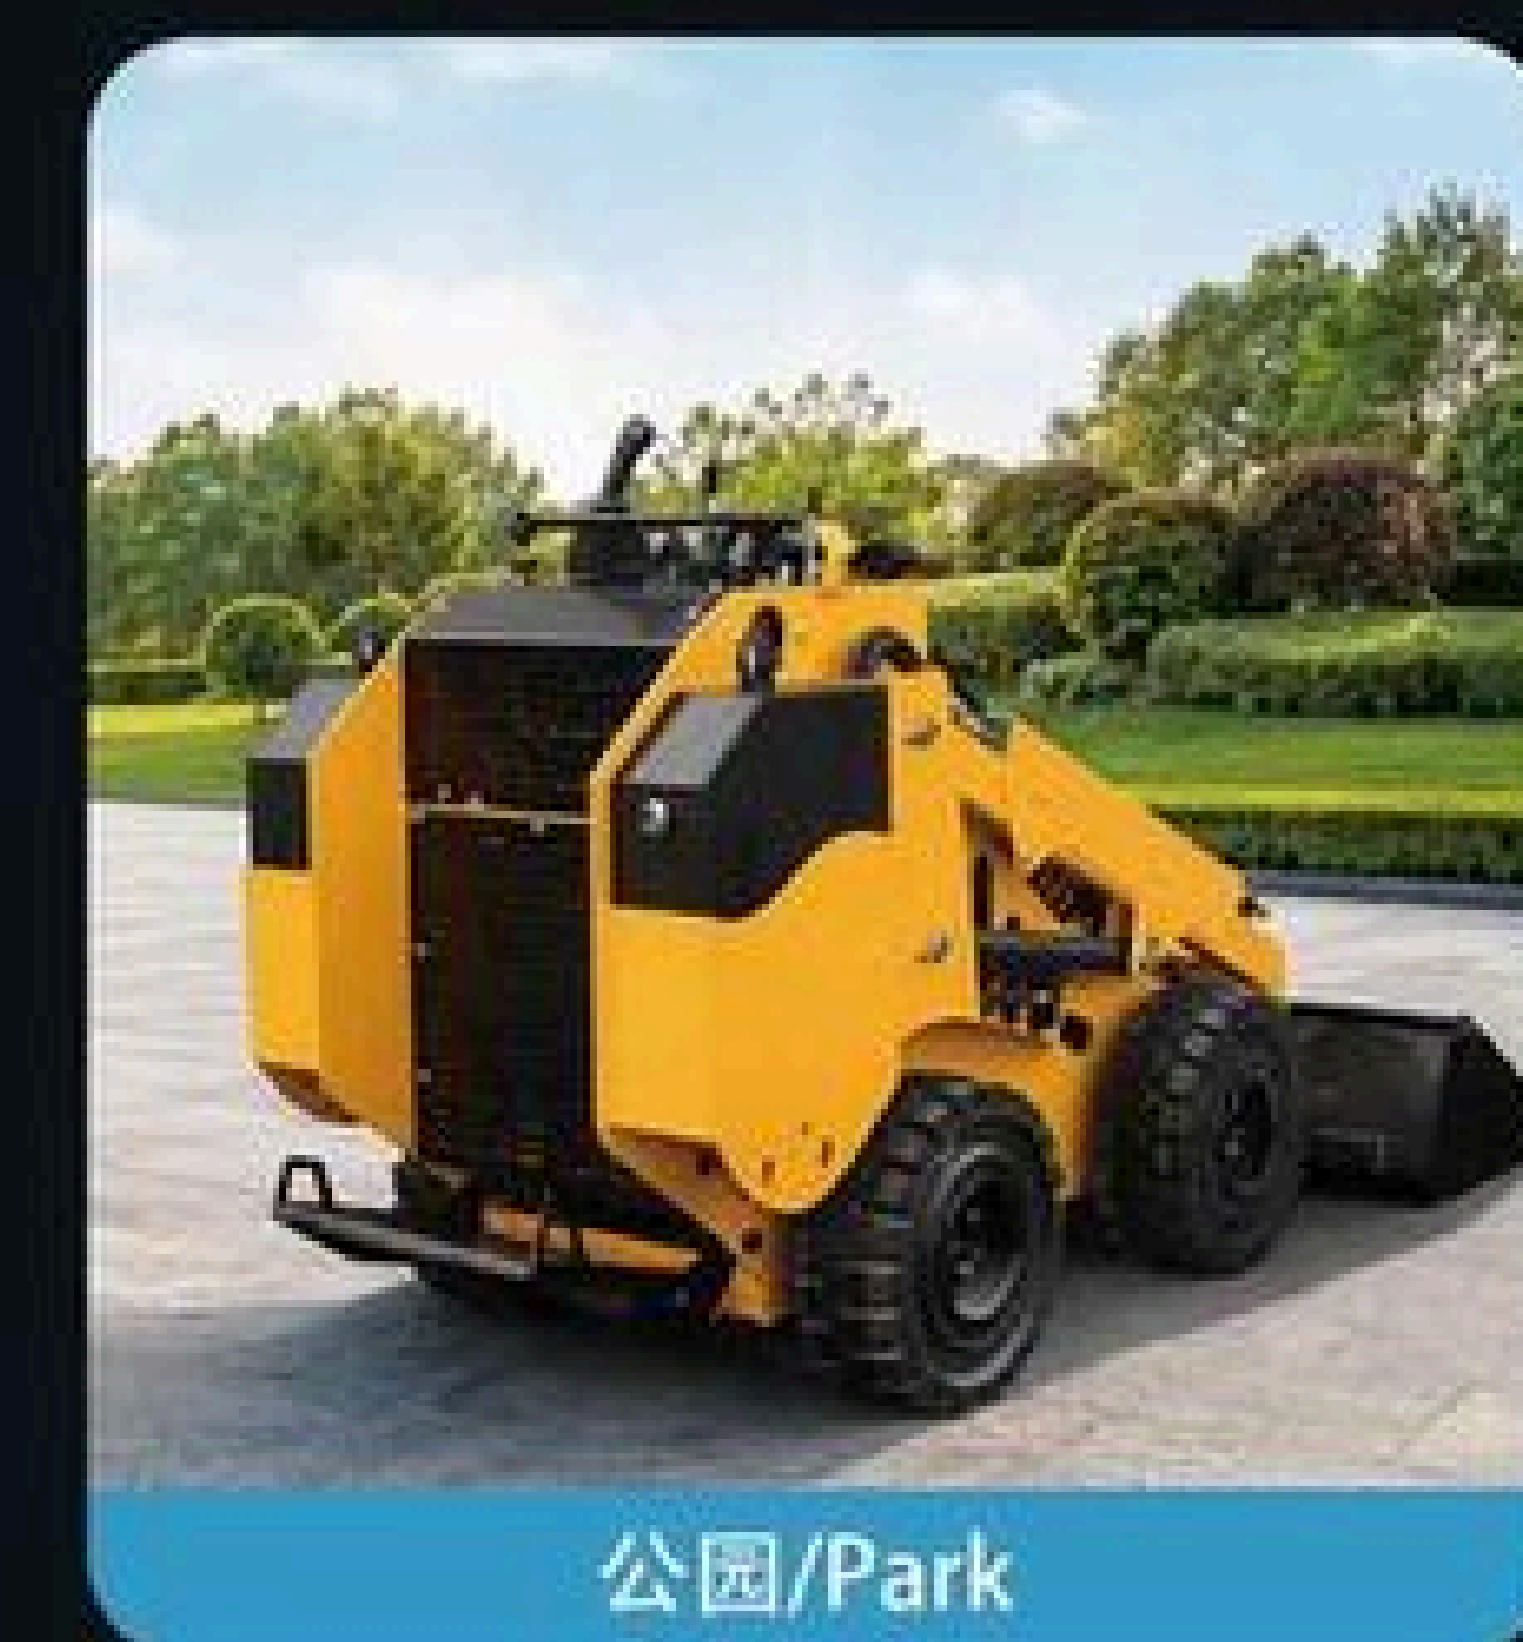

公园/Park



工地/Construction site

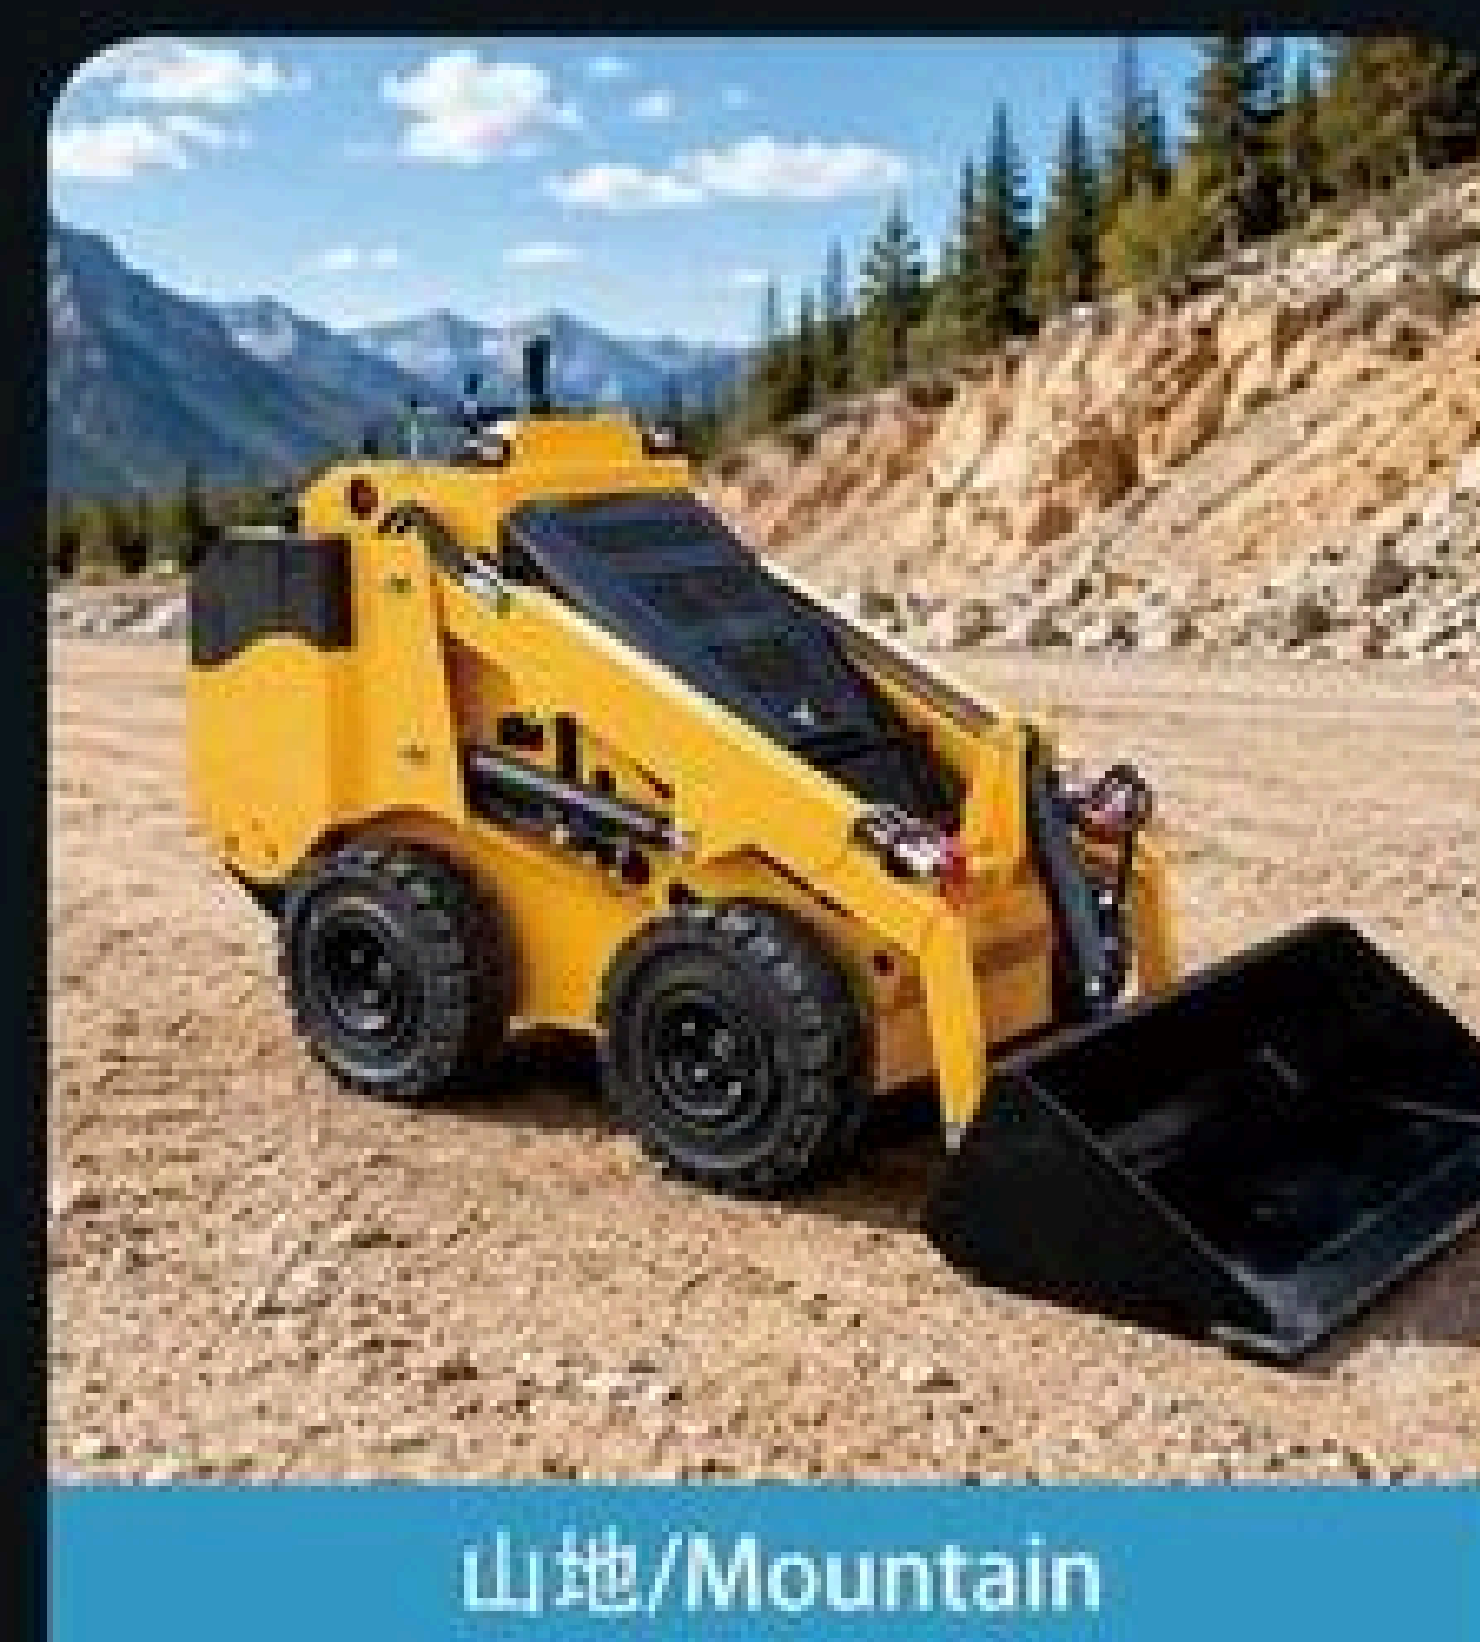

山地/Mountain



农场/Farm

滑移装载机 T750

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T750
基本性能参数	
操作质量	1635kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	5.5KN
额定载荷	410kg
最大载荷	525kg
行驶速度	0-5km/h
车体宽度	985
额定压力	18Mpa
铲斗宽度	1050mm
最大装载高度	2230mm
最大卸载高度	1826mm
最大操作高度	2880mm
至铲斗销高度	2340mm
铲斗在最高时翻转角度	63°
最小高度	1550mm
离去角	18°
离地间隙	230mm
卸载距离	373mm
履带接地长	1300mm
尺寸	
外形尺寸	2836*1270*1550mm
含铲斗长度	2836mm
不含铲斗长度	2100mm
履带型号	180*72*45
发动机	
品牌	电动/莱动/洋马/久保田
型号	磷酸铁锂/385/3TNV80/D1105
额定功率	6+8kw,72V,200ah/18.8/15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	30L

Model	T750
Basic performance parameters	
Operating weight	1635kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	5.5KN
Rated load	410kg
Maximum load	525kg
Travel speed	0-5km/h
Vehicle width	985
Rated pressure	18Mpa
Bucket width	1050mm
Max loading height	2230mm
Max dumping height	1826mm
Max operating height	2880mm
Height to bucket pin	2340mm
Max height bucket dump angle	63°
Min height	1550mm
Departure angle	18°
Ground clearance	230mm
Dumping distance	373mm
Track contact length	1300mm
Dimensions	
Overall dimensions	2836*1270*1550mm
Length including bucket	2836mm
Length excluding bucket	2100mm
Track model	180*72*45
Engine	
Brand	Electric/Laidong/Yanmar/Kubota
Model	Lithium iron phosphate/385/3TNV80/D1105
Rated power	6+8kw,72V,200ah/18.8/15.2(17.8)/17.1kw
Cylinder	3
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	30L

滑移装载机 V730

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA




产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	V730
基本性能参数	
操作质量	1540kg
铲斗容量	0.15m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	400kg
最大载荷	450kg
行驶速度	0-4km/h
车体宽度	911mm
额定压力	16Mpa
铲斗宽度	1020mm
最大装载高度	2000mm
最大卸载高度	1704mm
最大操作高度	2873mm
至铲斗销高度	2195mm
铲斗在最高时翻转角度	32°
最小高度	1573mm
离去角	39°
离地间隙	225mm
卸载距离	371mm
履带接地长	1200mm
尺寸	
外形尺寸	2651*1020*1573mm
含铲斗长度	2651mm
不含铲斗长度	2084mm
履带型号	180*72*45
发动机	
品牌	润通/宗申
型号	R740/GB680II
额定功率	16.8kw/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	33L

Model	V730
Basic performance parameters	
Operating weight	1540kg
Bucket capacity	0.15m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	400kg
Maximum load	450kg
Travel speed	0-4km/h
Vehicle width	911mm
Rated pressure	16Mpa
Bucket width	1020mm
Max loading height	2000mm
Max dumping height	1704mm
Max operating height	2873mm
Height to bucket pin	2195mm
Max height bucket dump angle	32°
Min height	1573mm
Departure angle	39°
Ground clearance	225mm
Dumping distance	371mm
Track contact length	1200mm
Dimensions	
Overall dimensions	2651*1020*1573mm
Length including bucket	2651mm
Length excluding bucket	2084mm
Track contact length	180*72*45
Engine	
Brand	Rato/Zonsen
Model	R740/GB680II
Rated power	16.8kw/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	33L

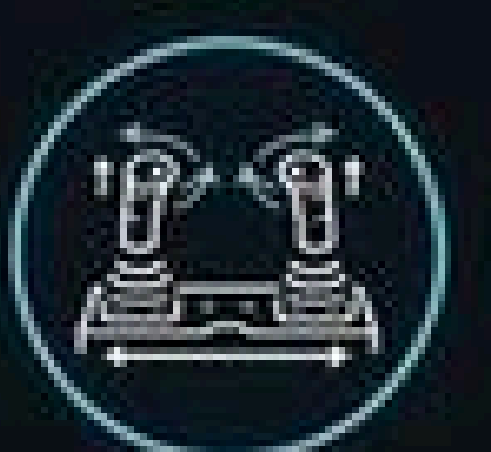

操作灵活
Easy Operation



强劲动力
Powerful Engine



高效举升
Powerful Lifting




快速换装
Quick Attachment



复杂地形适应
All-Terrain Capability



公园/Park

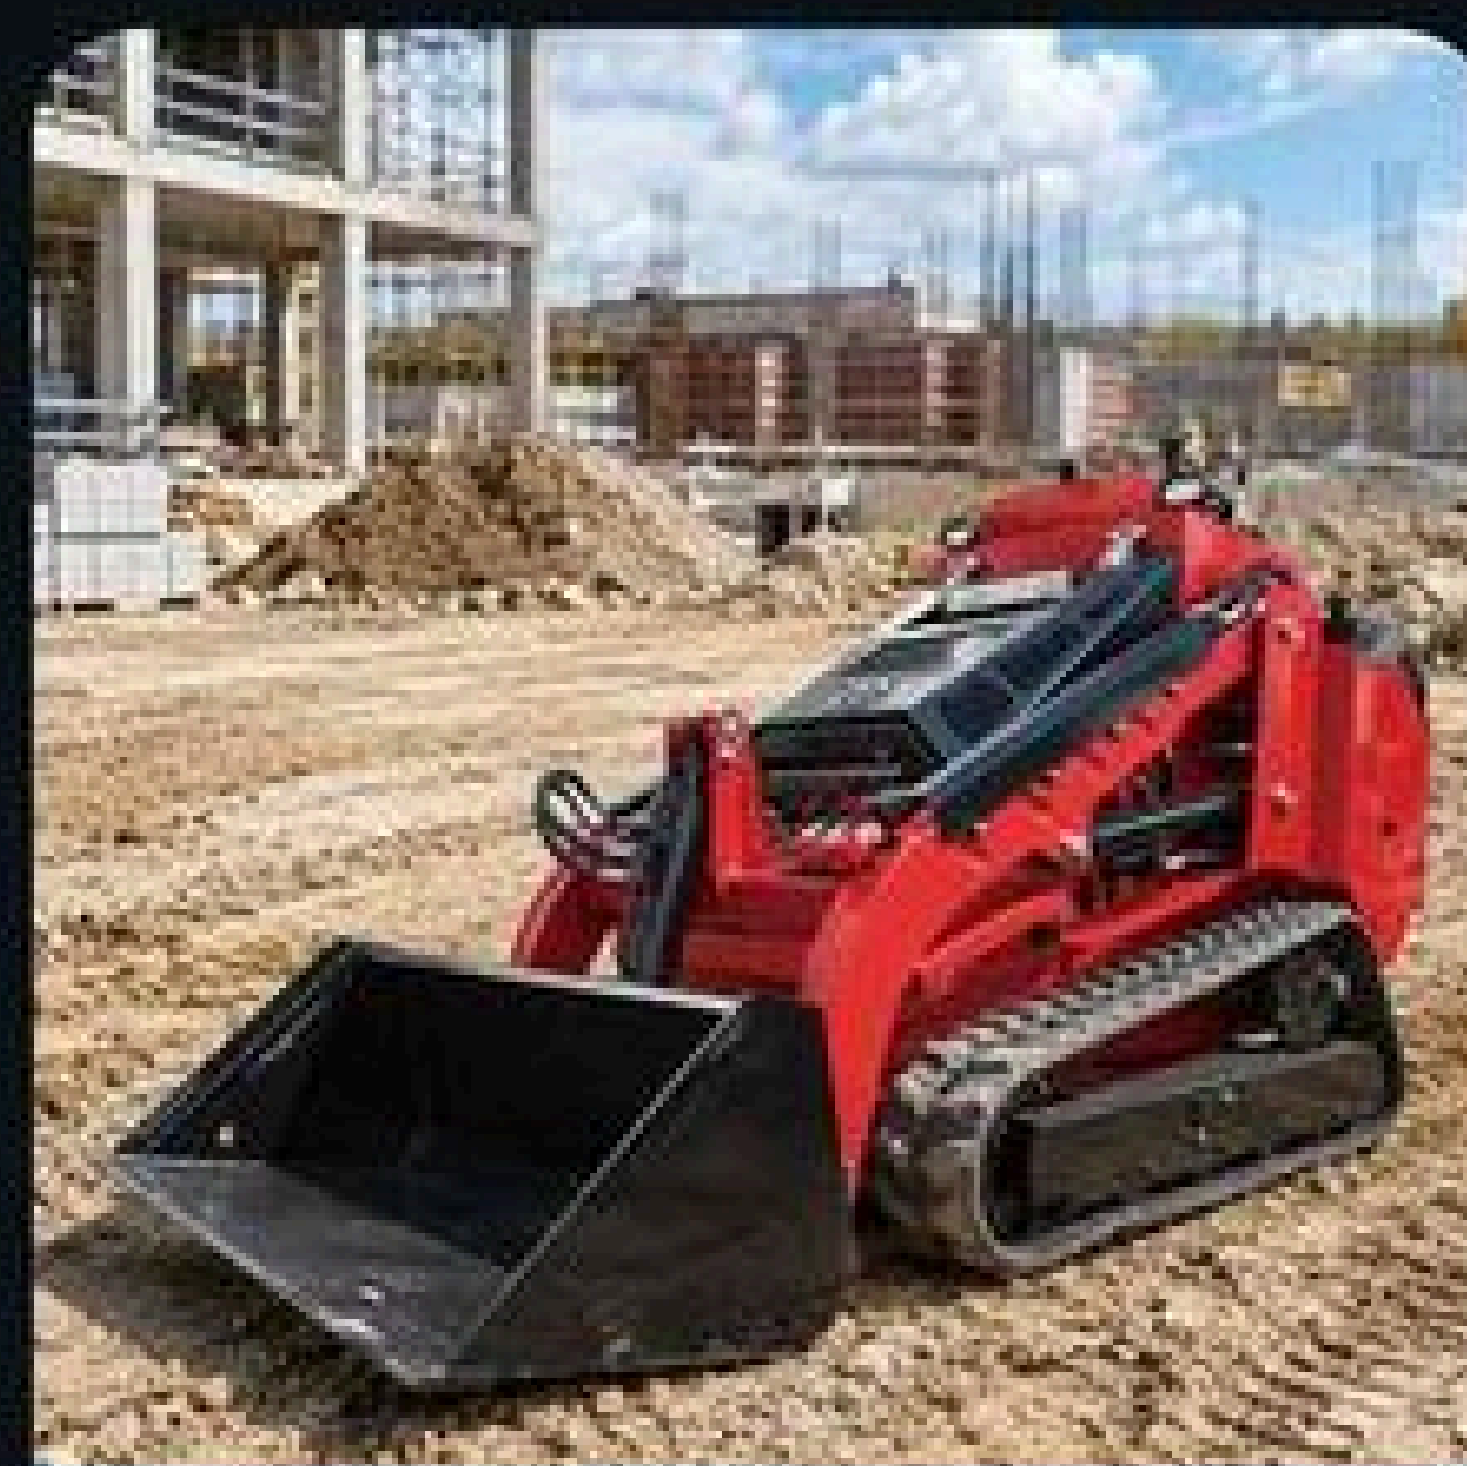

工地/Construction site



山地/Mountain



农场/Farm

滑移装载机 V2000


SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA

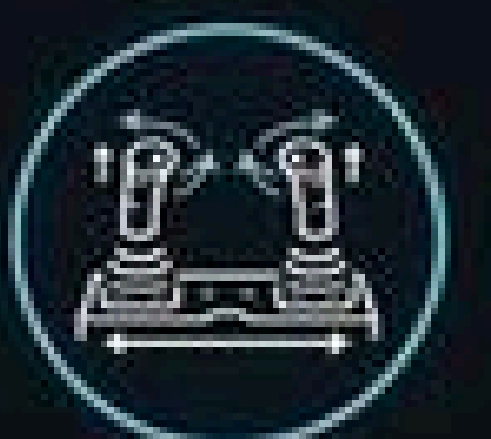

操作灵活
Easy Operation



强劲动力
Powerful Engine



高效举升
Powerful Lifting



快速换装
Quick Attachment



复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	V2000
基本性能参数	
操作质量	2822kg
铲斗容量	0.34m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	800kg
最大载荷	1000kg
行驶速度	2.8-5.5km/h
车体宽度	1300mm
额定压力	20Mpa
铲斗宽度	1420mm
最大装载高度	2325mm
最大卸载高度	2000mm
最大操作高度	3318mm
至铲斗销高度	2525mm
铲斗在最高时翻转角度	63°
最小高度	1687mm
离去角	32°
离地间隙	225mm
卸载距离	596mm
履带接地长	1400mm
尺寸	
外形尺寸	3220*1420*1687mm
含铲斗长度	3220mm
不含铲斗长度	2555mm
履带型号	300*52.5N*82
发动机	
品牌	康明斯
型号	QSF2.8T
额定功率	55KW/2500r
气缸	4
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	42L

Model	V2000
Basic performance parameters	
Operating weight	2822kg
Bucket capacity	0.34m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	800kg
Maximum load	1000kg
Travel speed	2.8-5.5km/h
Vehicle width	1300mm
Rated pressure	20Mpa
Bucket width	1420mm
Max loading height	2325mm
Max dumping height	2000mm
Max operating height	3318mm
Height to bucket pin	2525mm
Max height bucket dump angle	63°
Min height	1687mm
Departure angle	32°
Ground clearance	225mm
Dumping distance	596mm
Track contact length	1400mm
Dimensions	
Overall dimensions	3220*1420*1687mm
Length including bucket	3220mm
Length excluding bucket	2555mm
Track contact length	300*52.5N*82
Engine	
Brand	Cummins
Model	QSF2.8T
Rated power	55KW/2500r
Cylinder	4
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	42L

滑移装载机 S480

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S480
基本性能参数	
操作质量	1240kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	350kg
最大载荷	450kg
行驶速度	0-6km/h
车体宽度	1110mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1680mm
最大卸载高度	1370mm
最大操作高度	2290mm
至铲斗销高度	1835mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	18°
离地间隙	125mm
卸载距离	261mm
轴距	760mm
尺寸	
外形尺寸	2194*1050*1300mm
含铲斗长度	2194mm
不含铲斗长度	1770mm
轮胎型号	18*8.5-8
发动机	
品牌	洋马/久保田
型号	3TNV80/D1105
额定功率	15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	13L

Model	S480
Basic performance parameters	
Operating weight	1240kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	350kg
Maximum load	450kg
Travel speed	0-6km/h
Vehicle width	1110mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1680mm
Max dumping height	1370mm
Max operating height	2290mm
Height to bucket pin	1835mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	18°
Ground clearance	125mm
Dumping distance	261mm
Wheelbase	760mm
Dimensions	
Overall dimensions	2194*1050*1300mm
Length including bucket	2194mm
Length excluding bucket	1770mm
Tire model	18*8.5-8
Engine	
Brand	Yanmar/Kubota
Model	3TNV80/D1105
Rated power	15.2(17.8)/17.1kw
Cylinder	3
Intake method	Naturally aspirated
Emission standard	EPA/ERU05
Fuel tank capacity	13L

滑移装载机 T480

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN




产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T480
基本性能参数	
操作质量	1321kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	350kg
最大载荷	450kg
行驶速度	0-5km/h
车体宽度	1040mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1720mm
最大卸载高度	1401mm
最大操作高度	2110mm
至铲斗销高度	1870mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	157mm
卸载距离	295mm
履带接地长	900mm
尺寸	
外形尺寸	2169*1120*1300mm
含铲斗长度	2169mm
不含铲斗长度	1850mm
履带型号	180*72*35
发动机	
品牌	洋马/久保田
型号	3TNV80/D1105
额定功率	15.2(17.8)/17.1kw
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	13L


Model	T480
Basic performance parameters	
Operating weight	1321kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	350kg
Maximum load	450kg
Travel speed	0-5km/h
Vehicle width	1040mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1720mm
Max dumping height	1401mm
Max operating height	2110mm
Height to bucket pin	1870mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	157mm
Dumping distance	295mm
Track contact length	900mm
Dimensions	
Overall dimensions	2169*1120*1300mm
Length including bucket	2169mm
Length excluding bucket	1850mm
Track contact length	180*72*35
Engine	
Brand	Yanmar/Kubato
Model	3TNV80/D1105
Rated power	15.2(17.8)/17.1kw
Cylinder	3
Intake method	Naturally aspirated
Emission standard	EPA/ERU05
Fuel tank capacity	13L

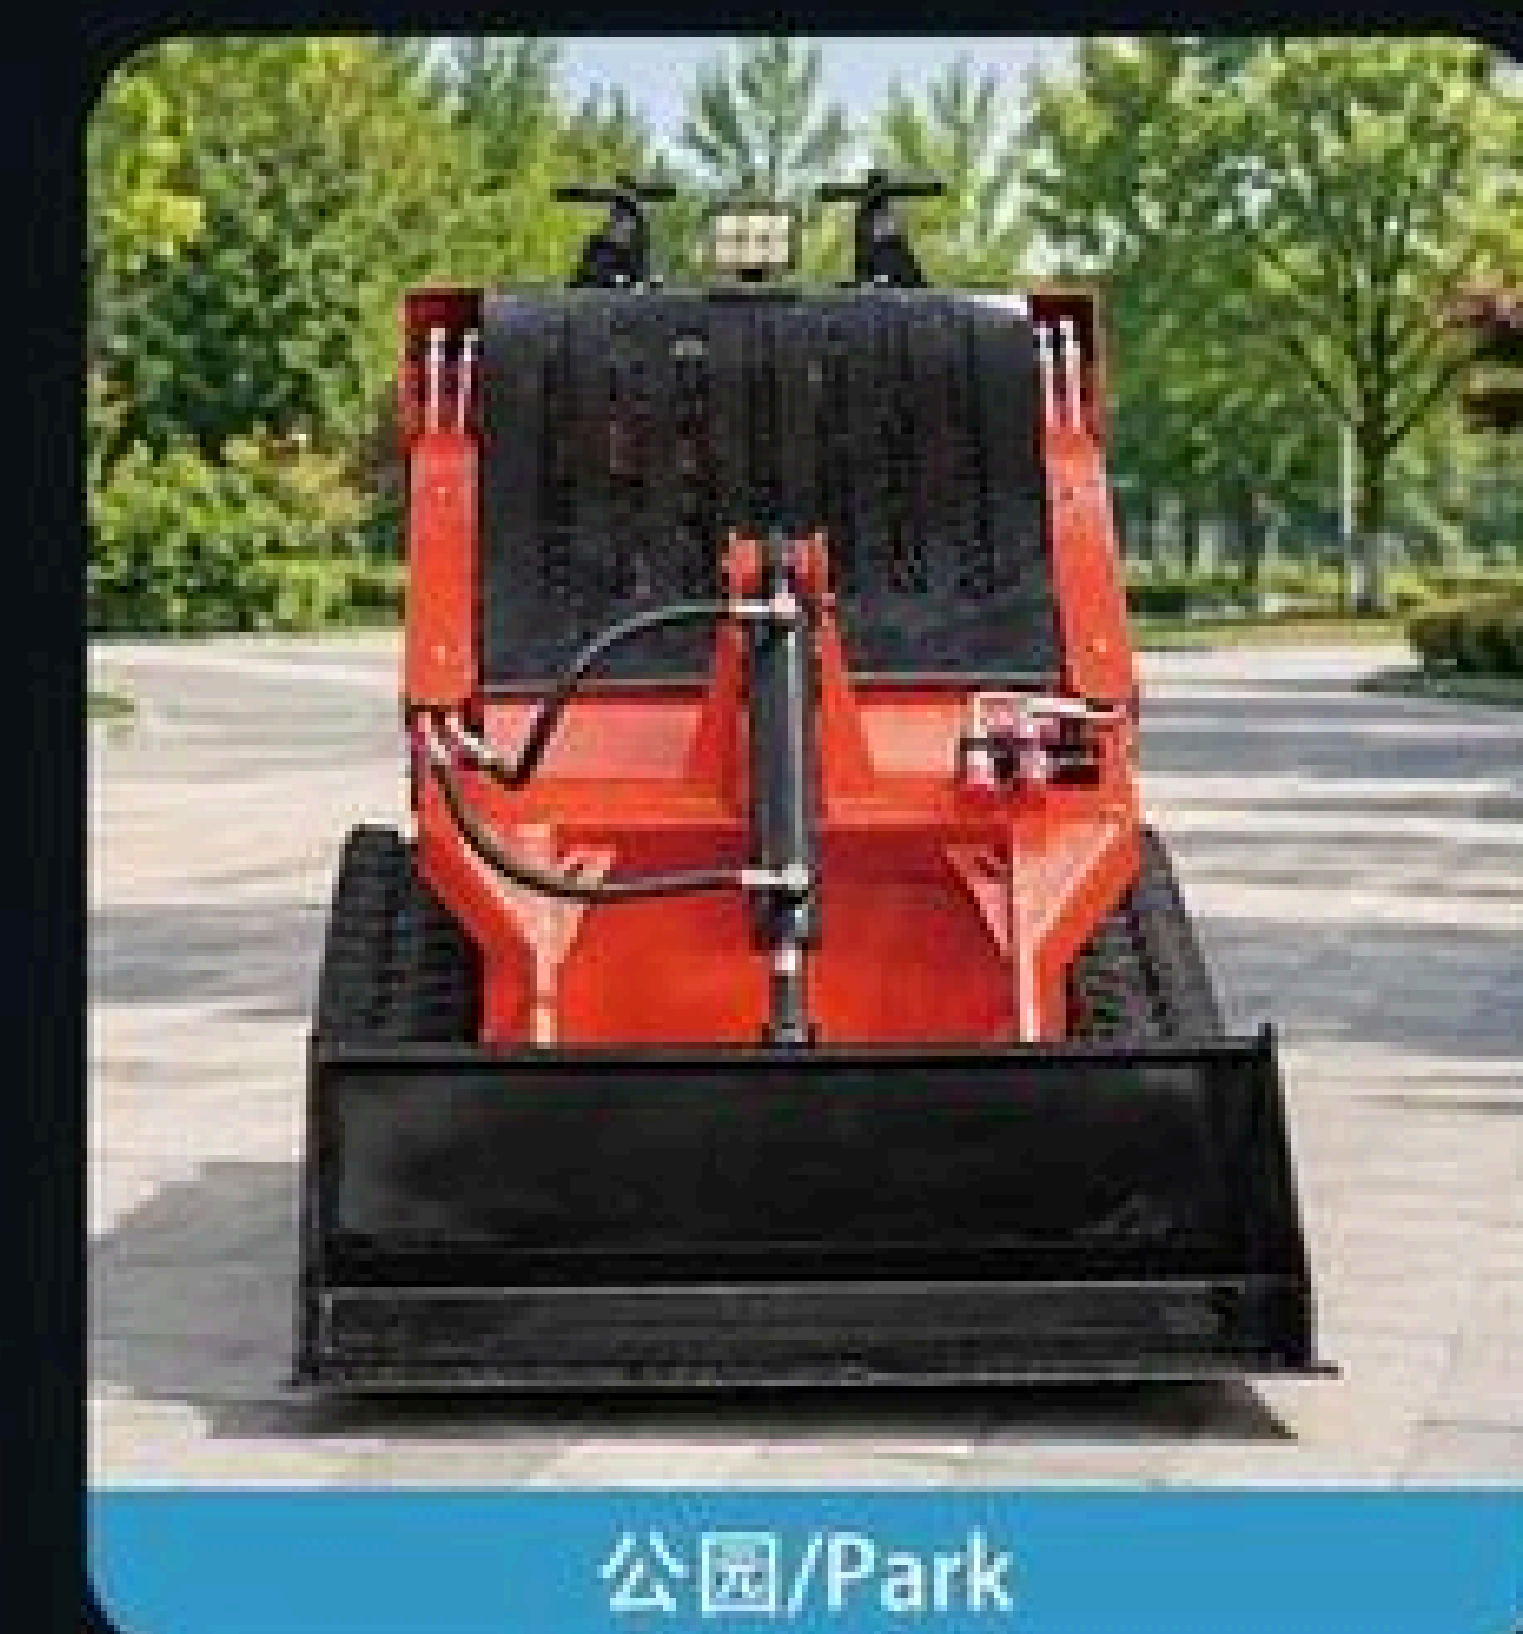


公园/Park



工地/Construction site

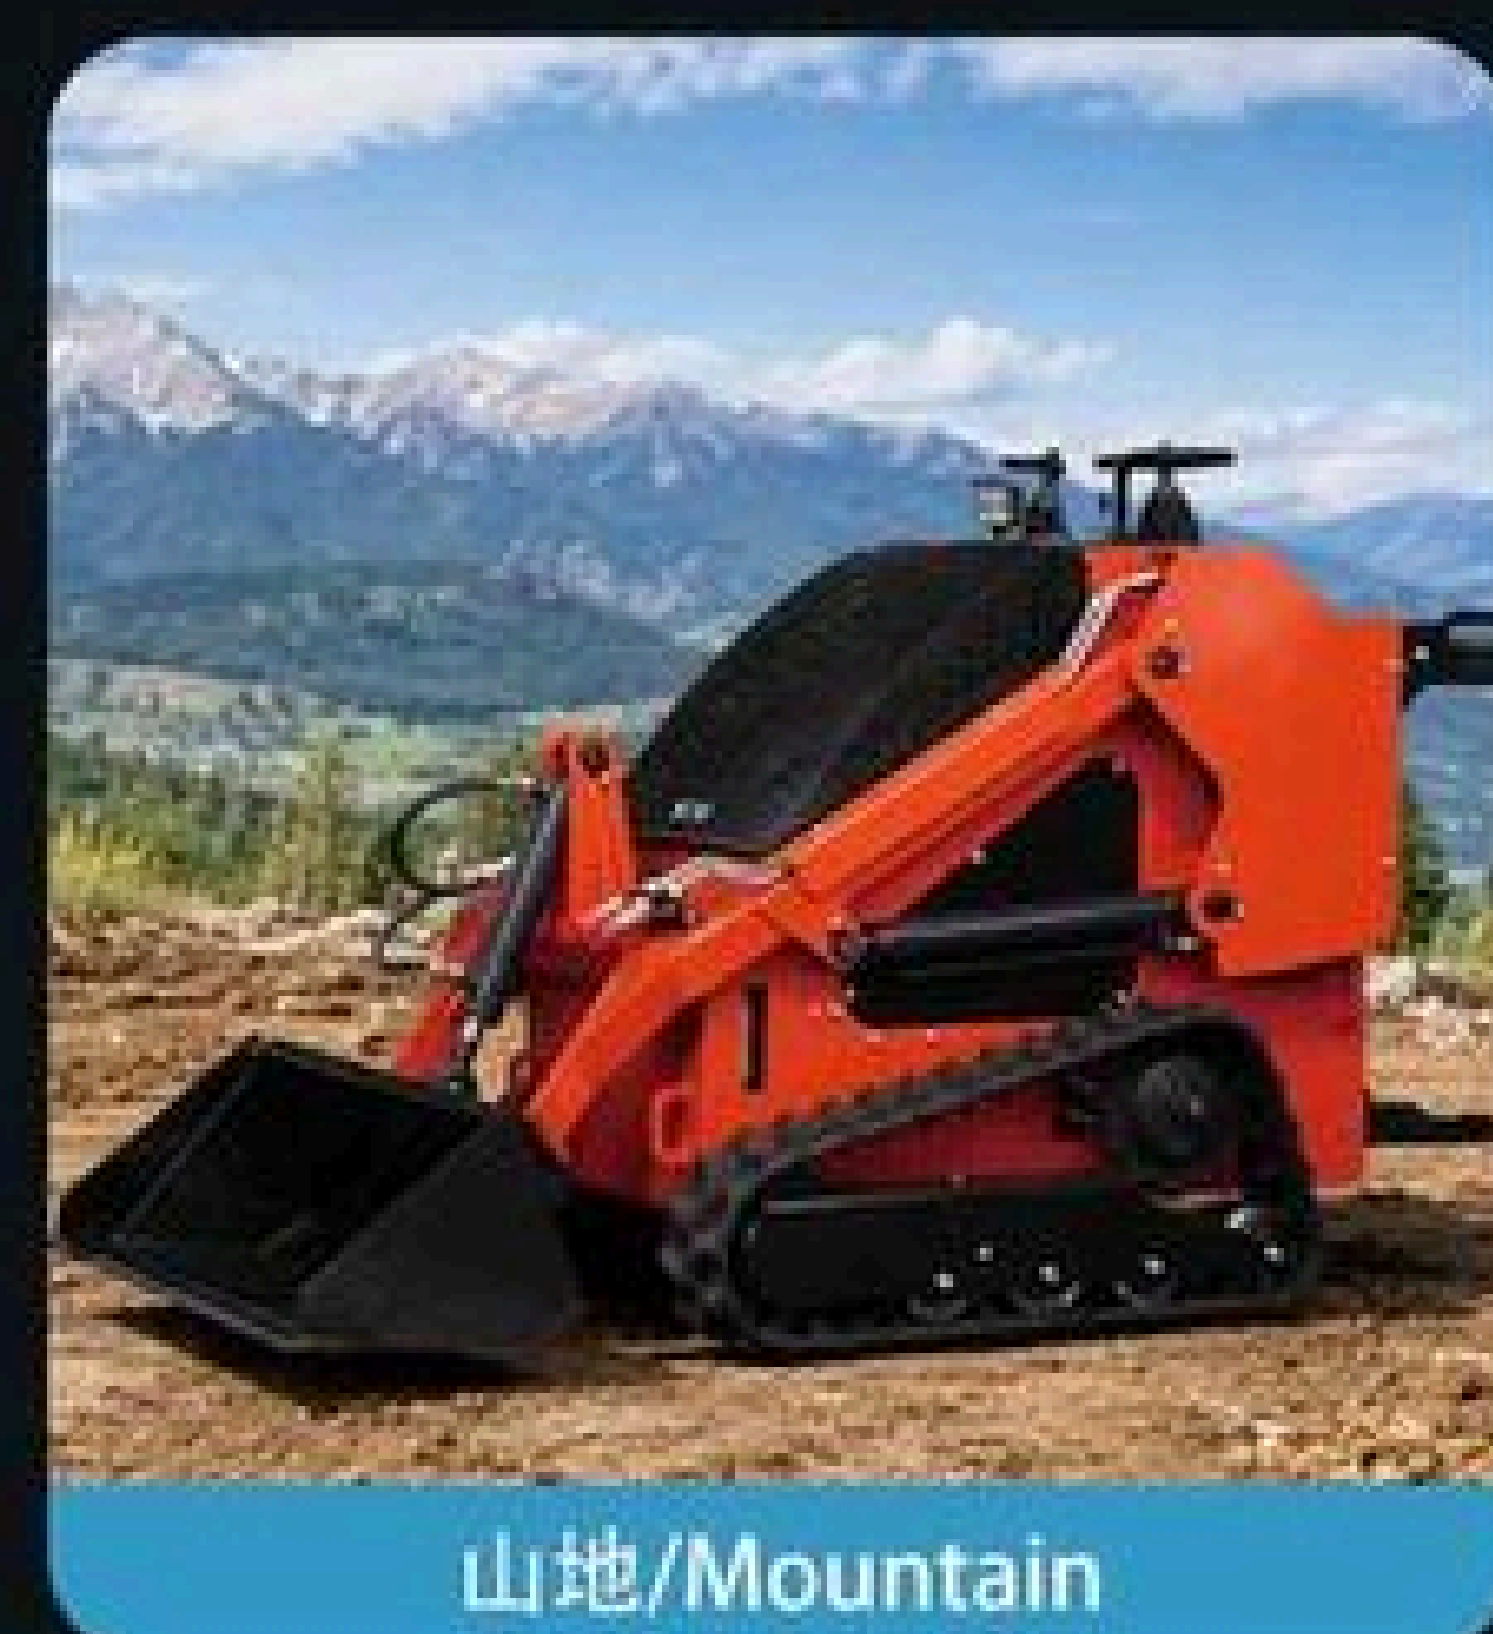

山地/Mountain

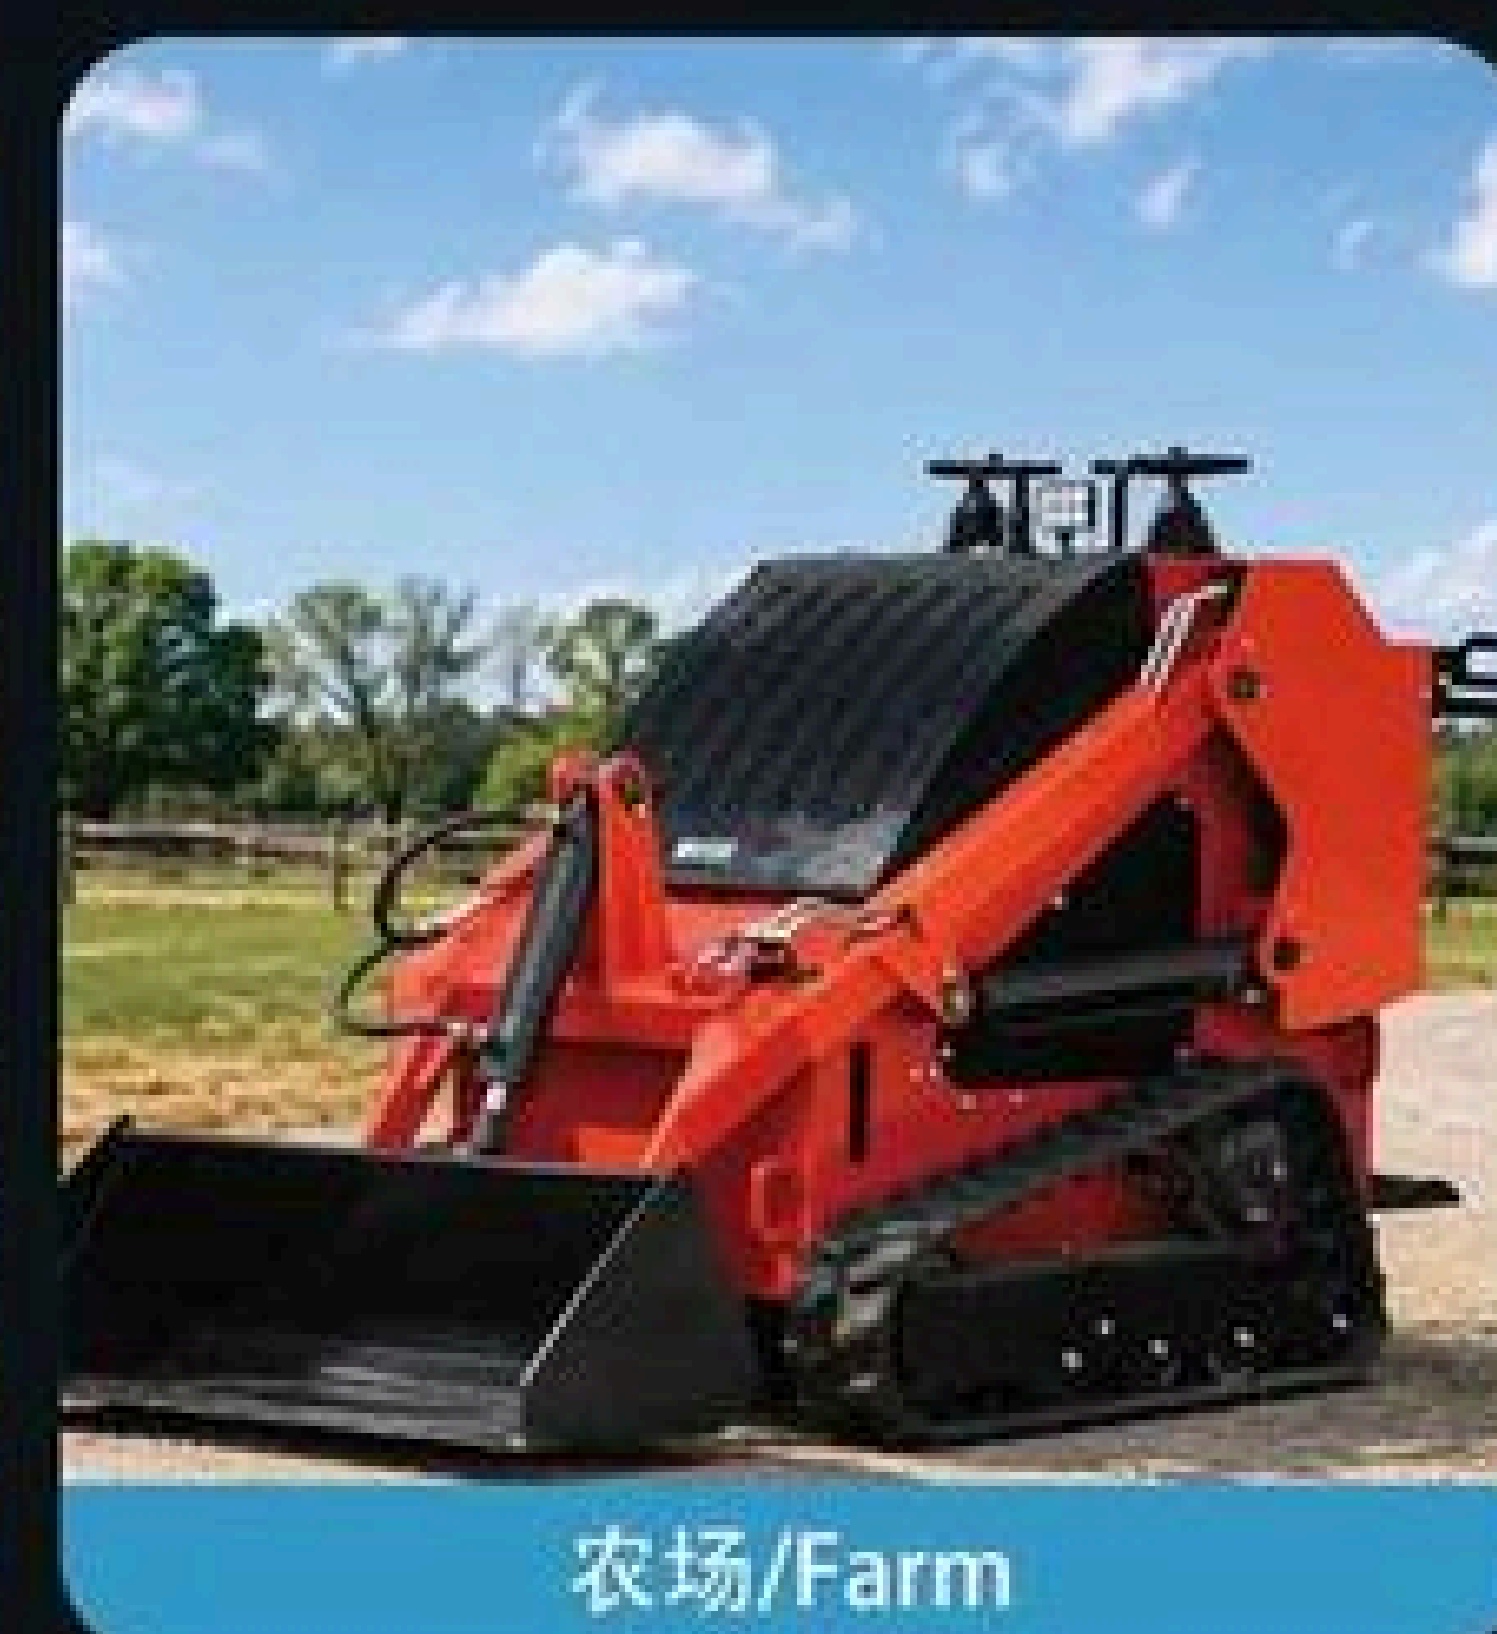

农场/Farm


滑移装载机 S25
SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA

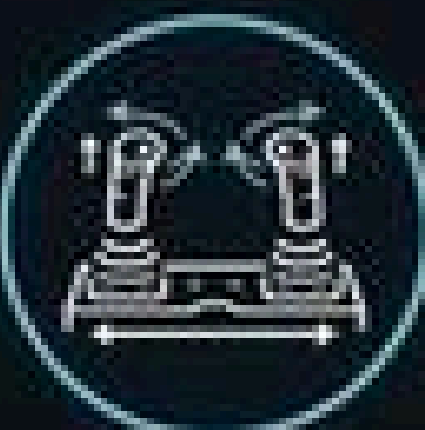

操作灵活
Easy Operation



强劲动力
Powerful Engine



高效举升
Powerful Lifting



快速换装
Quick Attachment



复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S25
基本性能参数	
操作质量	1665kg
铲斗容量	0.22m³
爬坡能力	25°
最大崛起力	14.5KN
额定载荷	450kg
最大载荷	850kg
行驶速度	0-12km/h
车体宽度	900mm
额定压力	18Mpa
铲斗宽度	1000mm
最大装载高度	2284mm
最大卸载高度	1890mm
最大操作高度	3155mm
至铲斗销高度	2398mm
铲斗在最高时翻转角度	22°
最小高度	1836mm
离去角	20°
离地间隙	245mm
卸载距离	550mm
轴距	722mm
尺寸	
外形尺寸	2607*1000*1836mm
含铲斗长度	2607mm
不含铲斗长度	1887mm
轮胎型号	570*155
发动机	
品牌	久保田/常柴
型号	D1105-E4B/M403
额定功率	18.2kw/18.5KW
气缸	3
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	24L

Model	S25
Basic performance parameters	
Operating weight	1665kg
Bucket capacity	0.22m³
Climbing ability	25°
Maximum breakout force	14.5KN
Rated load	450kg
Maximum load	850kg
Travel speed	0-12km/h
Vehicle width	900mm
Rated pressure	18Mpa
Bucket width	1000mm
Max loading height	2284mm
Max dumping height	1890mm
Max operating height	3155mm
Height to bucket pin	2398mm
Max height bucket dump angle	22°
Min height	1836mm
Departure angle	20°
Ground clearance	245mm
Dumping distance	550mm
Wheelbase	722mm
Dimensions	
Overall dimensions	2607*1000*1836mm
Length including bucket	2607mm
Length excluding bucket	1887mm
Tire model	570*155
Engine	
Brand	KUBATA/CHANGCAI
Model	D1105-E4B/M403
Rated power	18.2kw/18.5kw
Cylinder	3
Intake method	自然吸气
Emission standard	EPA/ERU05
Fuel tank capacity	24L

滑移装载机 S460

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S460
基本性能参数	
操作质量	1060kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	300kg
最大载荷	400kg
行驶速度	0-6km/h
车体宽度	1110mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1680mm
最大卸载高度	1370mm
最大操作高度	2290mm
至铲斗销高度	1835mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	18°
离地间隙	125mm
卸载距离	261mm
轴距	760mm
尺寸	
外形尺寸	2194*1050*1300mm
含铲斗长度	2194mm
不含铲斗长度	1770mm
轮胎型号	18*8.5-8
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292f/R740/Vanguard23
额定功率	8kw,72V,200ah/15/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	10L

Model	S460
Basic performance parameters	
Operating weight	1060kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	300kg
Maximum load	400kg
Travel speed	0-6km/h
Vehicle width	1110mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1680mm
Max dumping height	1370mm
Max operating height	2290mm
Height to bucket pin	1835mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	18°
Ground clearance	125mm
Dumping distance	261mm
Wheelbase	760mm
Dimensions	
Overall dimensions	2194*1050*1300mm
Length including bucket	2194mm
Length excluding bucket	1770mm
Tire model	18*8.5-8
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292f/R740/Vanguard23
Rated power	8kw,72V,200ah/15/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	10L

滑移装载机 T460


SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



公园/Park

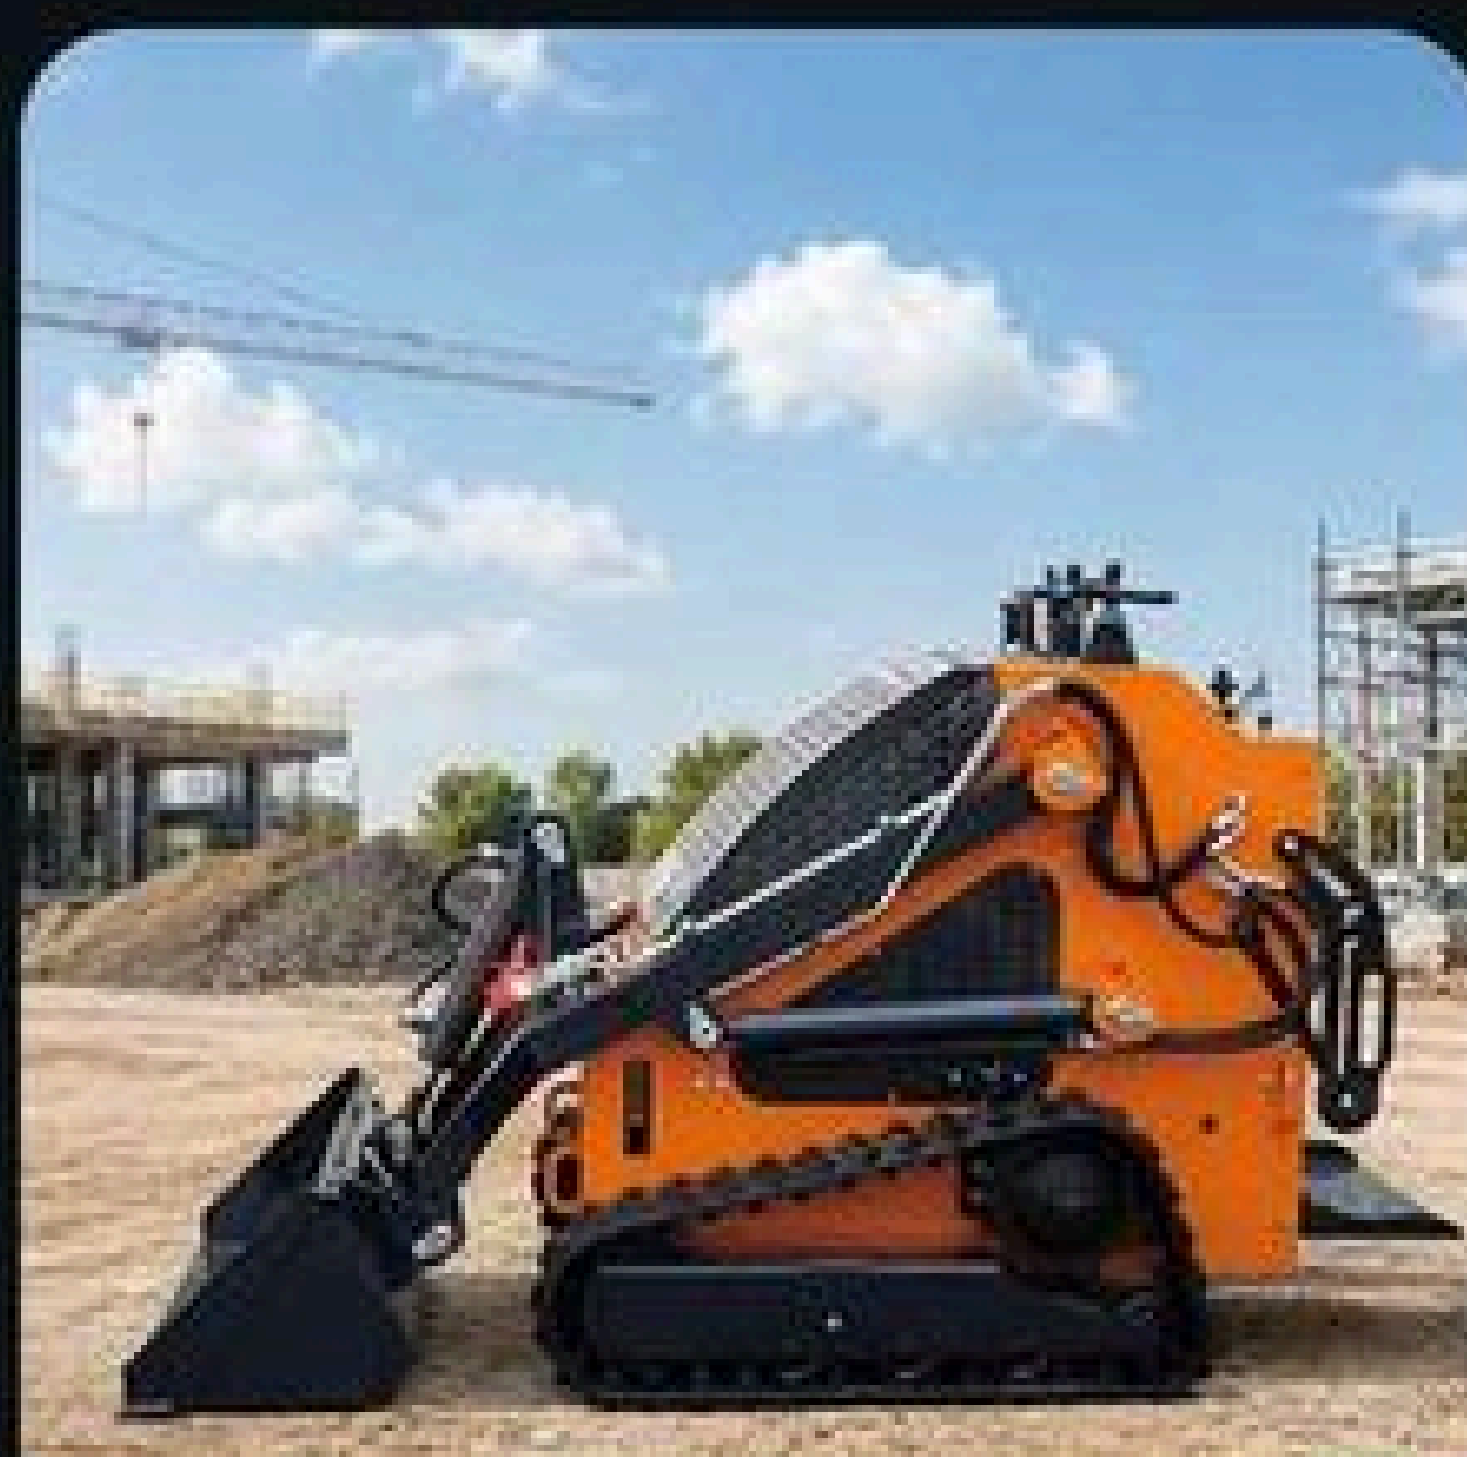

工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T460
基本性能参数	
操作质量	1120kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	300kg
最大载荷	400kg
行驶速度	0-5km/h
车体宽度	1040mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1720mm
最大卸载高度	1401mm
最大操作高度	2110mm
至铲斗销高度	1870mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	157mm
卸载距离	295mm
履带接地长	900mm
尺寸	
外形尺寸	2169*1050*1300mm
含铲斗长度	2169mm
不含铲斗长度	1850mm
履带型号	180*72*35
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292f/R740/先锋23
额定功率	8kw, 72V, 200ah/14/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	10L

Model	T460
Basic performance parameters	
Operating weight	1120kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	300kg
Maximum load	400kg
Travel speed	0-5km/h
Vehicle width	1040mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1720mm
Max dumping height	1401mm
Max operating height	2110mm
Height to bucket pin	1870mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	157mm
Dumping distance	295mm
Track contact length	900mm
Dimensions	
Overall dimensions	2169*1120*1300mm
Length including bucket	2169mm
Length excluding bucket	1850mm
Track contact length	180*72*35
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292f/R740/Vanguard23
Rated power	8kw, 72V, 200ah/14/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	10L

滑移装载机 T470

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T470
基本性能参数	
操作质量	1291kg
铲斗容量	0.12m³
爬坡能力	25°
最大崛起力	5.1kN
额定载荷	240kg
最大载荷	400kg
行驶速度	0-5km/h
车体宽度	1024mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	2024mm
最大卸载高度	1376mm
最大操作高度	2561mm
至铲斗销高度	2071mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	25°
离地间隙	195mm
卸载距离	231mm
履带接地长	1300mm
尺寸	
外形尺寸	2337*1050*1300mm
含铲斗长度	2337mm
不含铲斗长度	1750mm
履带型号	180*72*38
发动机	
品牌	润通/科普/百利通
型号	R740/292F/先锋23
额定功率	16.8/15/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	21L

Model	T470
Basic performance parameters	
Operating weight	1291kg
Bucket capacity	0.12m³
Climbing ability	25°
Maximum breakout force	5.1kN
Rated load	240kg
Maximum load	400kg
Travel speed	0-5km/h
Vehicle width	1024mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	2024mm
Max dumping height	1376mm
Max operating height	2561mm
Height to bucket pin	2071mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	25°
Ground clearance	195mm
Dumping distance	231mm
Track contact length	1300mm
Dimensions	
Overall dimensions	2337*1050*1300mm
Length including bucket	2337mm
Length excluding bucket	1750mm
Track model	180*72*35
Engine	
Brand	Rato/KOOP/B&S
Model	R740/292F/Vanguard23
Rated power	16.8/15/17kw
Cylinder	2
Intake method	Naturally aspirated
Emission standard	EPA/ERU05
Fuel tank capacity	21L

滑移装载机 S490

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S490
基本性能参数	
操作质量	1200kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	250kg
最大载荷	350kg
行驶速度	0-6km/h
车体宽度	1089mm
额定压力	16Mpa
铲斗宽度	1150mm
最大装载高度	1650mm
最大卸载高度	1382mm
最大操作高度	2466mm
至铲斗销高度	1877mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	15°
离地间隙	200mm
卸载距离	550mm
轴距	940mm
尺寸	
外形尺寸	2573*1150*1300mm
含铲斗长度	2573mm
不含铲斗长度	2100mm
轮胎型号	23*8.5-12
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292F/R740/Vanguard23
额定功率	8kw,72V,200ah/14/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	10L

Model	S490
Basic performance parameters	
Operating weight	1200kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	250kg
Maximum load	350kg
Travel speed	0-6km/h
Vehicle width	1089mm
Rated pressure	16Mpa
Bucket width	1150mm
Max loading height	1650mm
Max dumping height	1382mm
Max operating height	2466mm
Height to bucket pin	1877mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	15°
Ground clearance	200mm
Dumping distance	550mm
Wheelbase	940mm
Dimensions	
Overall dimensions	2573*1150*1300mm
Length including bucket	2573mm
Length excluding bucket	2100mm
Track contact length	23*8.5-12
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292F/R740/Vanguard23
Rated power	8kw,72V,200ah/14/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	10L

滑移装载机 T490

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T490
基本性能参数	
操作质量	1305kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	4.5KN
额定载荷	250kg
最大载荷	350kg
行驶速度	0-5km/h
车体宽度	1089mm
额定压力	16Mpa
铲斗宽度	1150mm
最大装载高度	1700mm
最大卸载高度	1402mm
最大操作高度	2489mm
至铲斗销高度	1900mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	15°
离地间隙	220mm
卸载距离	580mm
履带接地长	1330mm
尺寸	
外形尺寸	2535*1150*1300mm
含铲斗长度	2535mm
不含铲斗长度	2100mm
履带型号	180*72*45
发动机	
品牌	电动/科普/润通/百利通
型号	磷酸铁锂/292f/R740/Vanguard23
额定功率	8kw, 72V, 200ah/15/16.8/17kw
气缸	2
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	10L

Model	T490
Basic performance parameters	
Operating weight	1305kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	4.5KN
Rated load	250kg
Maximum load	350kg
Travel speed	0-5km/h
Vehicle width	1089
Rated pressure	16Mpa
Bucket width	1150mm
Max loading height	1700mm
Max dumping height	1402mm
Max operating height	2489mm
Height to bucket pin	1900mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	15°
Ground clearance	220mm
Dumping distance	580mm
Track contact length	1330mm
Dimensions	
Overall dimensions	2535*1150*1300mm
Length including bucket	2535mm
Length excluding bucket	2100mm
Track contact length	180*72*45
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lithium iron phosphate/292f/R740/Vanguard23
Rated power	8kw, 72V, 200ah/15/16.8/17kw
Cylinder	2
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	10L

滑移装载机 S360

SKID STEER LOADER


强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN




- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park

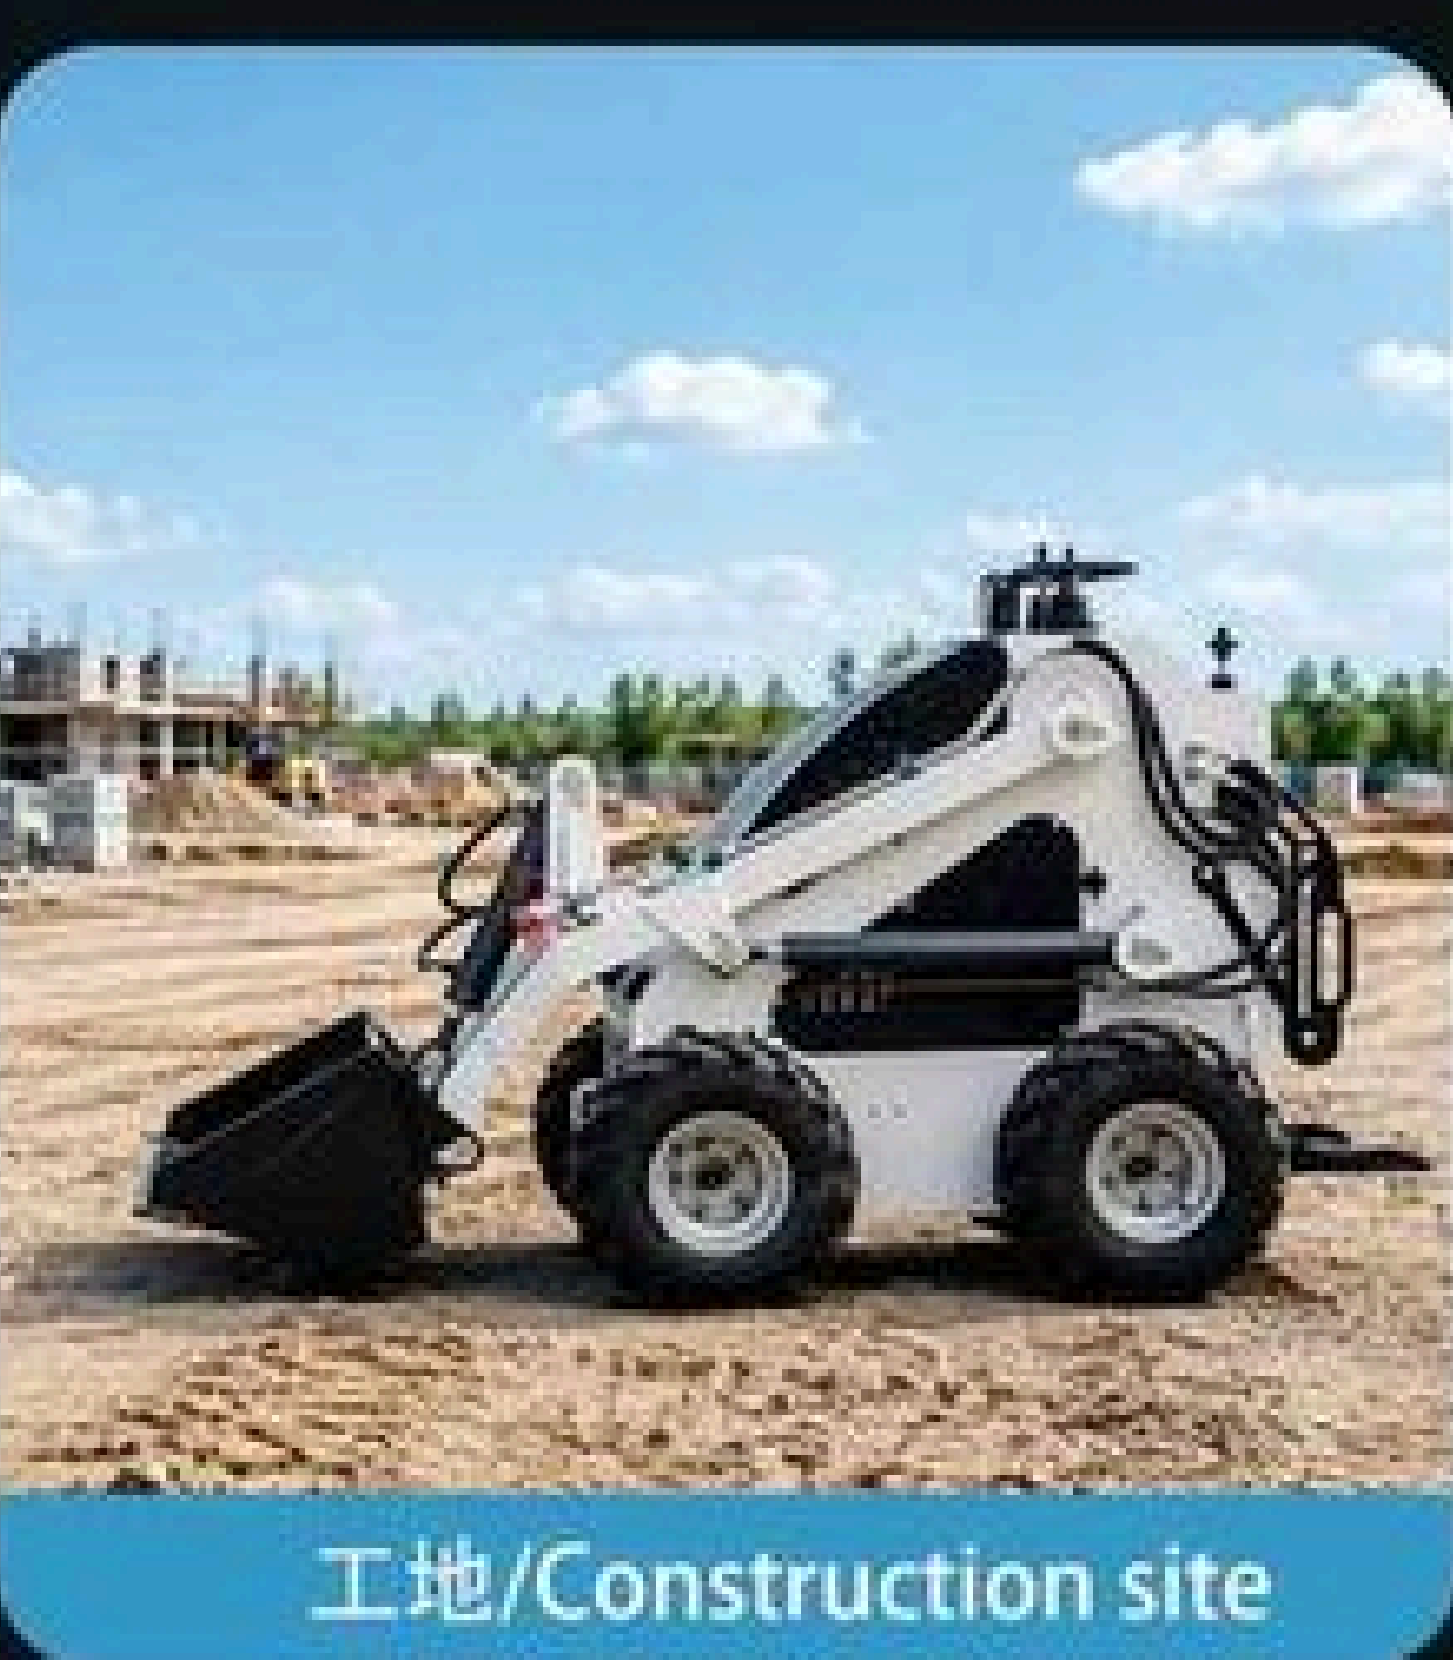

工地/Construction site

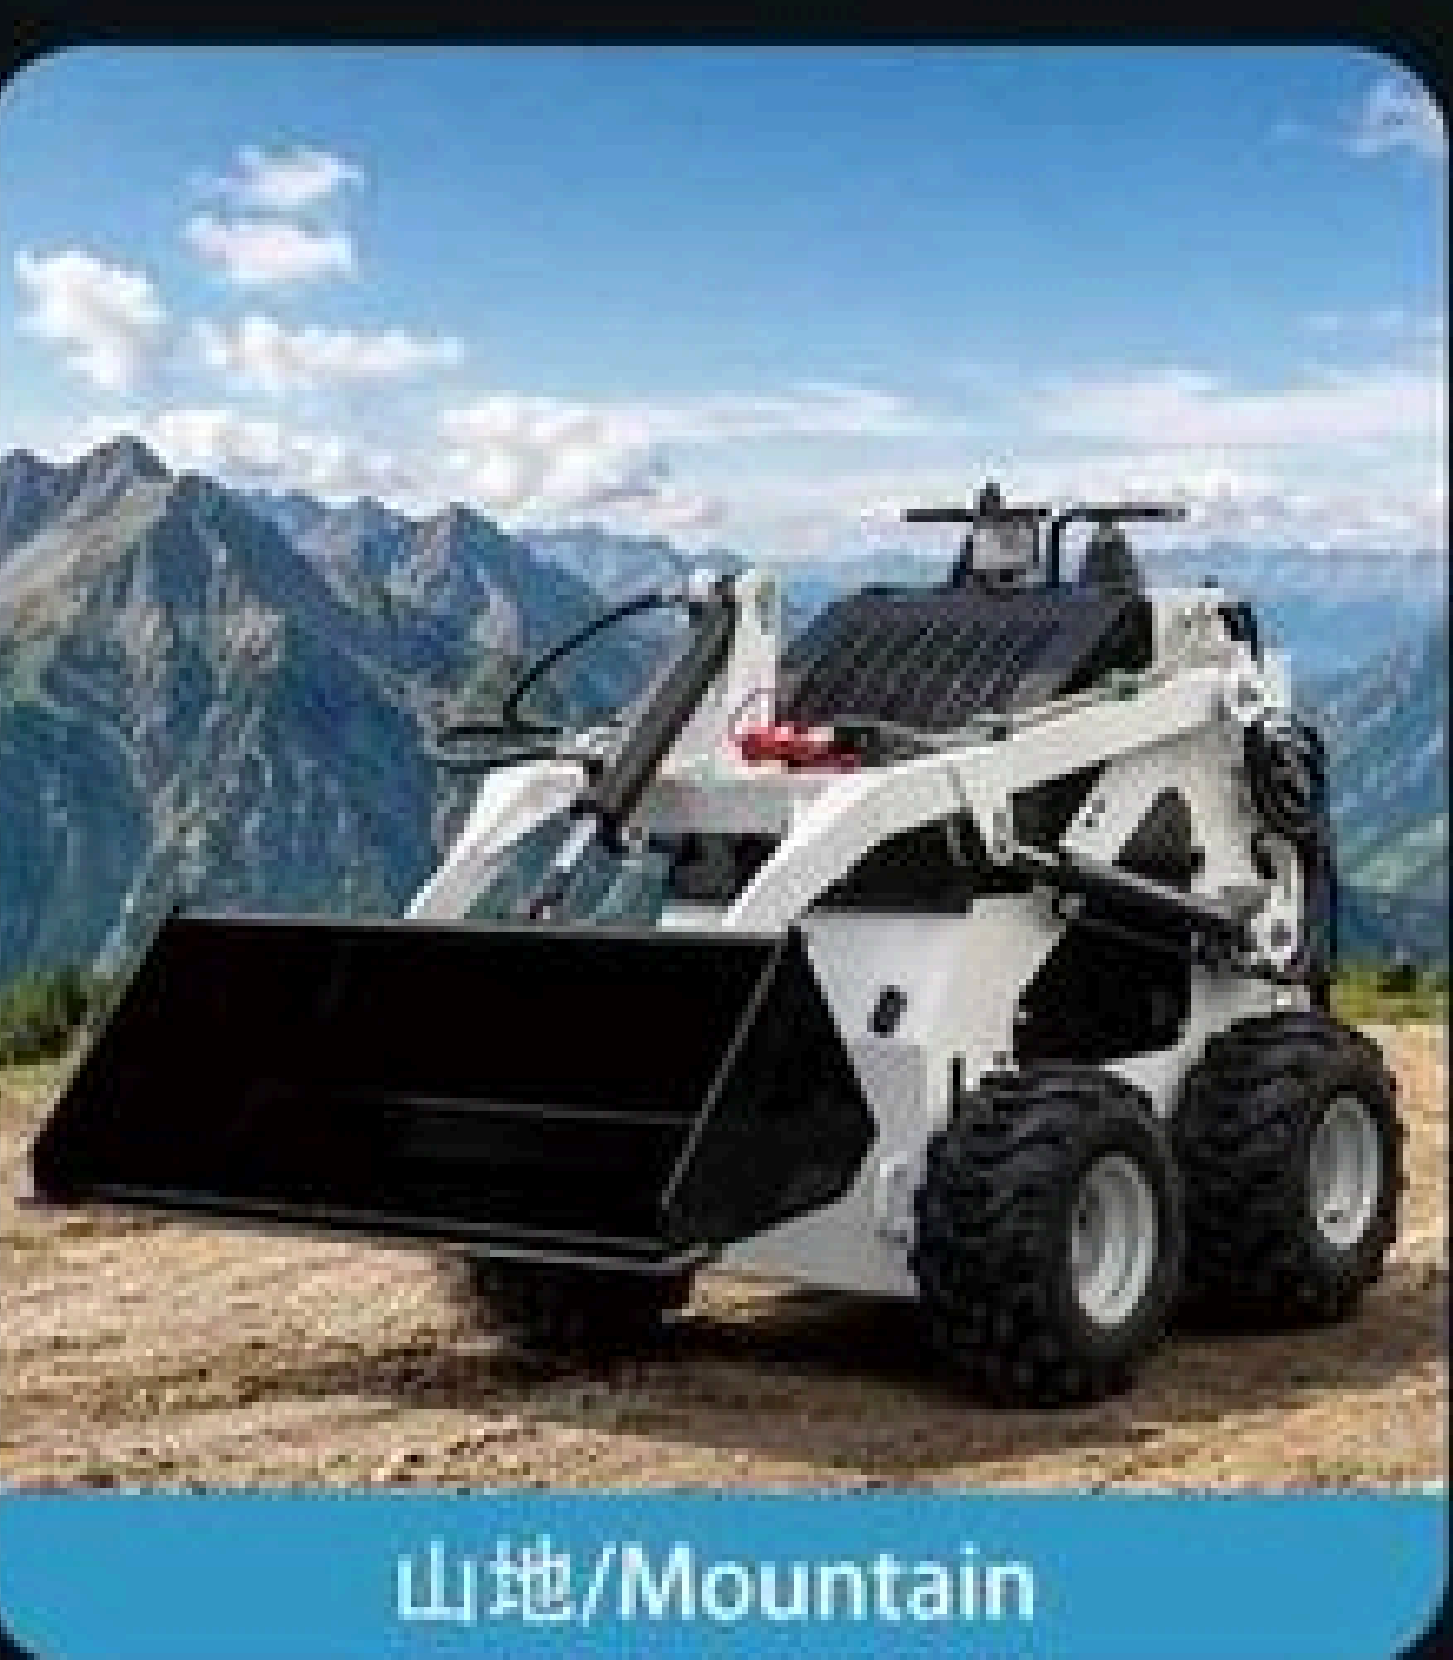

山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S360
基本性能参数	
操作质量	880kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	200kg
最大载荷	300kg
行驶速度	0-6km/h
车体宽度	1000mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1680mm
最大卸载高度	1367mm
最大操作高度	2400mm
至铲斗销高度	1840mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	21°
离地间隙	130mm
卸载距离	258mm
轴距	710mm
尺寸	
外形尺寸	2130*1050*1300mm
含铲斗长度	2130mm
不含铲斗长度	1726mm
轮胎型号	18*8.5-8
发动机	
品牌	电动/科普/润通/百利通
型号	铅酸电池/192FH/R420D/XR13.5
额定功率	6kw, 72V, 125ah/7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	5L

Model	S360
Basic performance parameters	
Operating weight	880kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	200kg
Maximum load	300kg
Travel speed	0-6km/h
Vehicle width	1000mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1680mm
Max dumping height	1367mm
Max operating height	2400mm
Height to bucket pin	1840mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	21°
Ground clearance	130mm
Dumping distance	258mm
Wheelbase	710mm
Dimensions	
Overall dimensions	2130*1050*1300mm
Length including bucket	2130mm
Length excluding bucket	1726mm
Tire model	18*8.5-8
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lead-acid battery/192FH/R420D/XR13.5
Rated power	6kw, 72V, 125ah/7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	5L

滑移装载机 T360

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T360
基本性能参数	
操作质量	941kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	200kg
最大载荷	300kg
行驶速度	0-6km/h
车体宽度	910mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1720mm
最大卸载高度	1386mm
最大操作高度	2400mm
至铲斗销高度	1857mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	173mm
卸载距离	250mm
履带接地长	900mm
尺寸	
外形尺寸	2092*1050*1300mm
含铲斗长度	2092mm
不含铲斗长度	1726mm
履带型号	180*72*35
发动机	
品牌	电动/科普/润通/百利通
型号	铅酸电池/192FH/R420D/XR13.5
额定功率	6kw, 72V, 125ah/7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	5L

Model	T360
Basic performance parameters	
Operating weight	941kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	200kg
Maximum load	300kg
Travel speed	0-6km/h
Vehicle width	910mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1720mm
Max dumping height	1386mm
Max operating height	2400mm
Height to bucket pin	1857mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	173mm
Dumping distance	250mm
Track contact length	900mm
Dimensions	
Overall dimensions	2092*1050*1300mm
Length including bucket	2092mm
Length excluding bucket	1726mm
Track model	180*72*35
Engine	
Brand	Lithium electricity/KOOP/Rato/B&S
Model	Lead-acid battery/192FH/R420D/XR13.5
Rated power	6kw, 72V, 125ah/7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	5L

滑移装载机 S370

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S370
基本性能参数	
操作质量	1000kg
铲斗容量	0.07m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	180kg
最大载荷	210kg
行驶速度	0-6km/h
车体宽度	982mm
额定压力	16Mpa
铲斗宽度	1050mm
最大装载高度	1840mm
最大卸载高度	1373mm
最大操作高度	2030mm
至铲斗销高度	1925mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	22°
离地间隙	122mm
卸载距离	83mm
轴距	650mm
尺寸	
外形尺寸	2138*1050*1300mm
含铲斗长度	2138mm
不含铲斗长度	1528mm
轮胎型号	18*8.5-8
发动机	
品牌	百利通/科普/润通
型号	XR13.5/192FH/R420D
额定功率	9.92/7.6(7)/7.9kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	19L+6.6L

Model	S370
Basic performance parameters	
Operating weight	1000kg
Bucket capacity	0.07m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	180kg
Maximum load	210kg
Travel speed	0-6km/h
Vehicle width	982mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1840mm
Max dumping height	1373mm
Max operating height	2030mm
Height to bucket pin	1925mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	22°
Ground clearance	122mm
Dumping distance	83mm
Wheelbase	650mm
Dimensions	
Overall dimensions	2138*1050*1300mm
Length including bucket	2138mm
Length excluding bucket	1528mm
Tire model	18*8.5-8
Engine	
Brand	B&S/KOOP/Rato
Model	XR13.5/192FH/R420D
Rated power	9.92/7.6(7)/7.9kw
Cylinder	1
Intake method	Naturally Aspirated
Emission standard	EPA/ERU05
Fuel tank capacity	19L+6.6L

滑移装载机 S390

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	S390
基本性能参数	
操作质量	989kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5kN
额定载荷	260kg
最大载荷	290kg
行驶速度	0-6km/h
车体宽度	959mm
额定压力	16Mpa
铲斗宽度	1150mm
最大装载高度	1600mm
最大卸载高度	1376mm
最大操作高度	2460mm
至铲斗销高度	1872mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	18°
离地间隙	193mm
卸载距离	600mm
轴距	800mm
尺寸	
外形尺寸	2281*1050*1300mm
含铲斗长度	2281mm
不含铲斗长度	1880mm
轮胎型号	23*8.5-12
发动机	
品牌	科普/润通/百利通
型号	192FH/R420D/XR13.5
额定功率	7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	5L

Model	S390
Basic performance parameters	
Operating weight	989kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5kN
Rated load	260kg
Maximum load	290kg
Travel speed	0-6km/h
Vehicle width	959mm
Rated pressure	16Mpa
Bucket width	1050mm
Max loading height	1600mm
Max dumping height	1376mm
Max operating height	2460mm
Height to bucket pin	1872mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	18°
Ground clearance	193mm
Dumping distance	600mm
Wheelbase	800mm
Dimensions	
Overall dimensions	2281*1050*1300mm
Length including bucket	2281mm
Length excluding bucket	1880mm
Tire model	23*8.5-12
Engine	
Brand	KOOP/Rato/B&S
Model	192FH/R420D/XR13.5
Rated power	7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	5L

滑移装载机 T390

SKID STEER LOADER

强劲动力 · 灵活高效 · 轻松征服复杂地形


POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



公园/Park

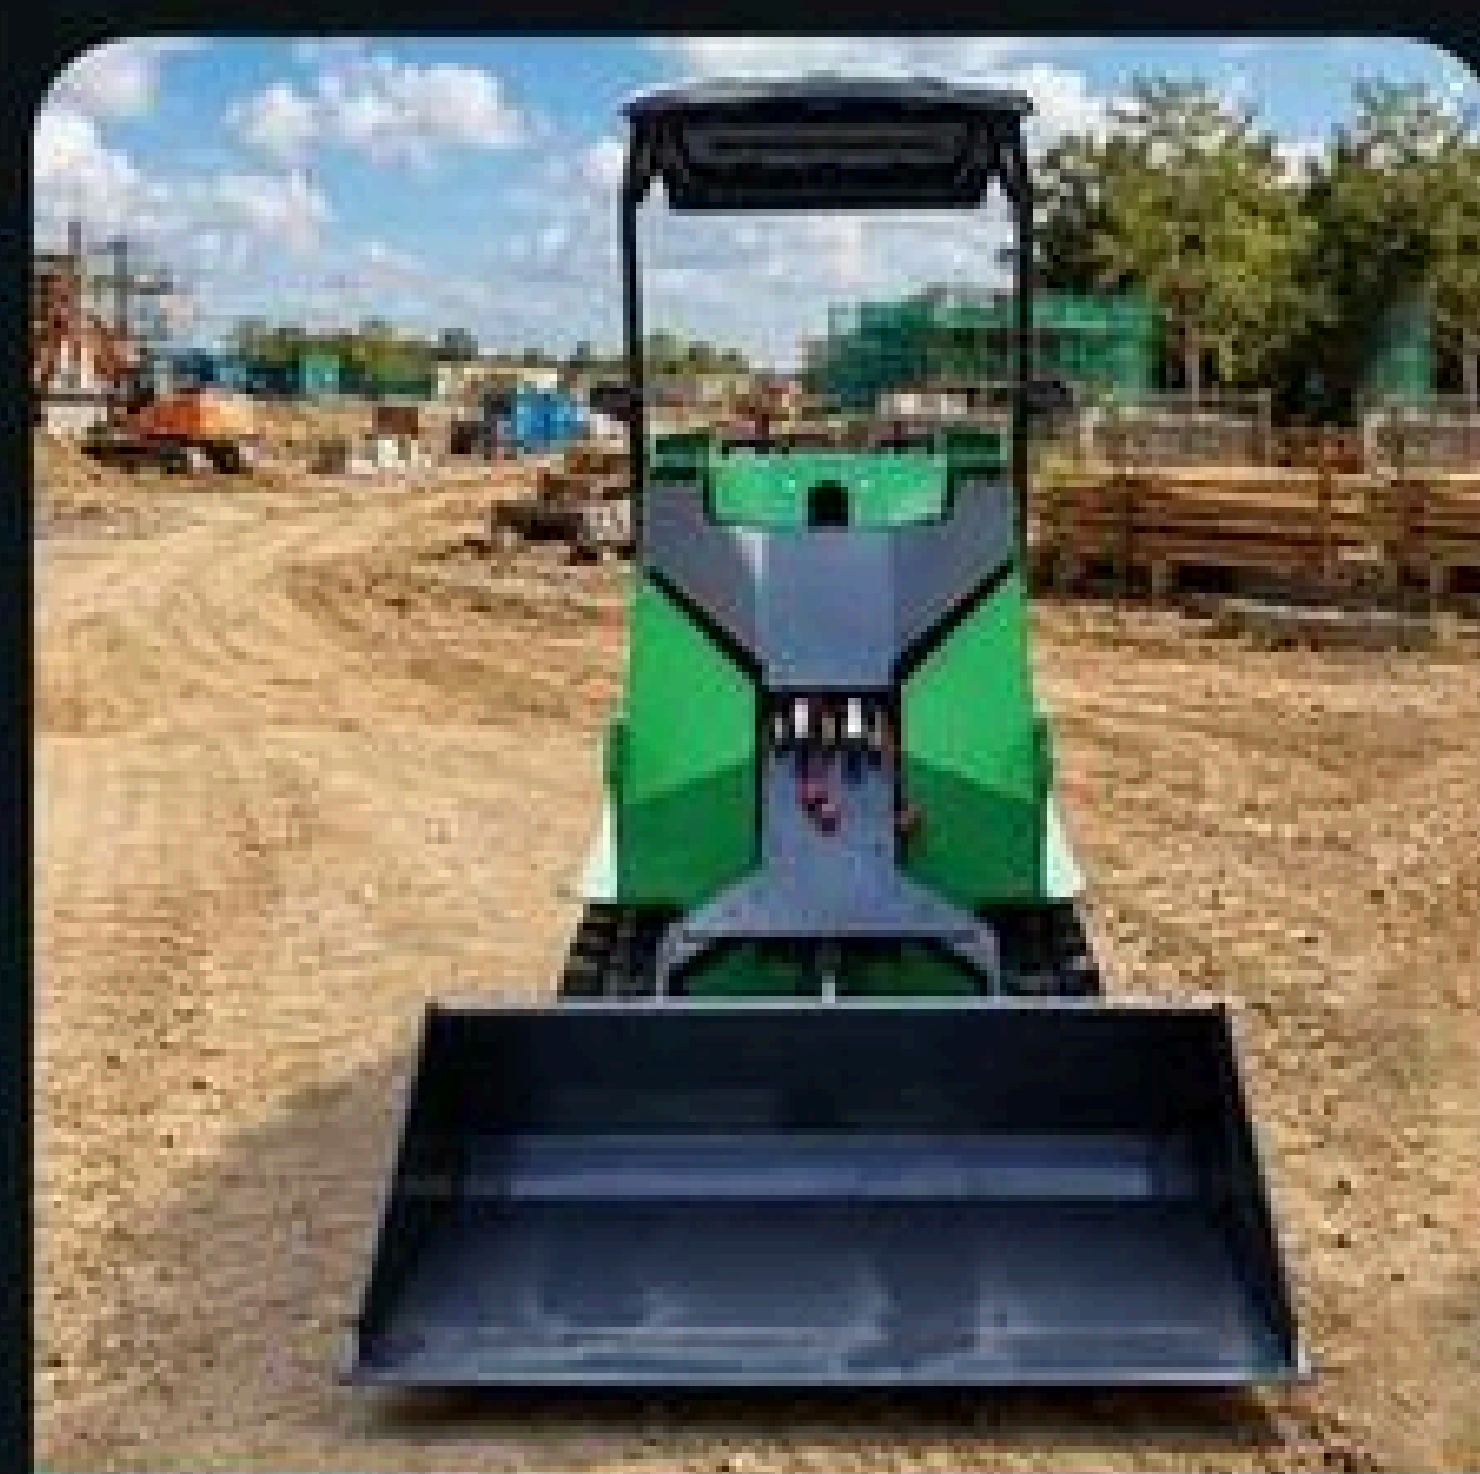

工地/Construction site



山地/Mountain



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T390
基本性能参数	
操作质量	1070kg
铲斗容量	0.1m³
爬坡能力	25°
最大崛起力	3.5KN
额定载荷	250kg
最大载荷	300kg
行驶速度	0-5km/h
车体宽度	955mm
额定压力	16Mpa
铲斗宽度	1150mm
最大装载高度	1830mm
最大卸载高度	1404mm
最大操作高度	2488mm
至铲斗销高度	1899mm
铲斗在最高时翻转角度	63°
最小高度	1300mm
离去角	40°
离地间隙	219mm
卸载距离	526mm
履带接地长	1300mm
尺寸	
外形尺寸	2282*1050*1300mm
含铲斗长度	2282mm
不含铲斗长度	1880mm
履带型号	180*72*45
发动机	
品牌	科普/润通/百利通
型号	192FH/R420D/XR13.5
额定功率	7.6(7)/7.9/9.92kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	5L

Model	T390
Basic performance parameters	
Operating weight	1070kg
Bucket capacity	0.1m³
Climbing ability	25°
Maximum breakout force	3.5KN
Rated load	250kg
Maximum load	300kg
Travel speed	0-5km/h
Vehicle width	955mm
Rated pressure	16Mpa
Bucket width	1150mm
Max loading height	1830mm
Max dumping height	1404mm
Max operating height	2488mm
Height to bucket pin	1899mm
Max height bucket dump angle	63°
Min height	1300mm
Departure angle	40°
Ground clearance	219mm
Dumping distance	526mm
Track contact length	1300mm
Dimensions	
Overall dimensions	2282*1050*1300mm
Length including bucket	2282mm
Length excluding bucket	1880mm
Track model	180*72*45
Engine	
Brand	KOOP/Rato/B&S
Model	192FH/R420D/XR13.5
Rated power	7.6(7)/7.9/9.92kw
Cylinder	1
Intake method	Natural inhalation
Emission standard	EPA/ERU05
Fuel tank capacity	5L

翻斗车 T500

MINI DUMPER

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T500
基本性能参数	
操作质量	500kg
货箱容量	0.22m³
爬坡能力	20°
最大载荷	500kg
行驶速度	1.7-3.5km/h
最小回转半径	95mm
履带中心距	509mm
最小离地间隙	85mm
履带接地长	811mm
货箱翻转角度	86°
铲斗翻转角度	109°
行走马达	
品牌	北方液压
排量	200cc
最大工作压力	20Mpa
最大扭矩	805Nm
尺寸	
外形尺寸	1735*844*1255mm
整车高度	1255mm
整车宽度	844mm
整车长度	1735mm
发动机	
品牌	科普/润通/百利通
型号	178F/R210/RX6.5
额定功率	4.2/4.8/4.78kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	3.1L

Model	T500
Basic performance parameters	
Operating weight	500kg
Cargo box capacity	0.22m³
Climbing ability	20°
Maximum load	500kg
Travel speed	1.7-3.5km/h
Minimum turning radius	95mm
Track center distance	509mm
Minimum ground clearance	85mm
Track contact length	811mm
Cargo box tilting angle	86°
Bucket tilting angle	109°
Travel motor	
Brand	Northern Hydraulics
Displacement	200cc
Maximum working pressure	20Mpa
Maximum torque	805Nm
Dimensions	
Overall dimensions	1735*844*1255mm
Overall height	1255mm
Overall width	844mm
Overall length	1735mm
Engine	
Brand	Koop/Rato/B&S
Model	178F/R210/RX6.5
Rated power	4.2/4.8/4.78kw
Cylinder	1
Intake method	Naturally aspirated
Emission standard	EPA/ERU05
Fuel tank capacity	3.1L

- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



果园/Orchard



农场/Farm



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	FD50X
基本性能参数	
操作质量	500kg
外形尺寸	1740*690*1255mm
斗容积	0.21m ³
斗旋转角度	0-180°
行走速度	0-2km/h
离地间隙	70mm
最小转弯半径	1000mm
履带中心距	810mm
履带宽度	180mm
作业高度	1425mm
翻斗卸载角度	35°
翻斗卸载高度	380mm
发动机	
品牌	润通
型号	R210
类型	汽油机，单缸，风冷
排量	212cc
总功率	6.5hp
油耗	≤395g/kw/3600
启动方式	电启动/手启动
液压系统	
行走马达	200ml/r
液压双泵	2.7+2.7ml/r
容量	
燃油容量	3.6L
机油容量	0.6L
液压容量	7

Model	FD50X
Basic performance parameters	
Operating weight	500kg
Overall dimensions	1740*1176*690mm
Bucket capacity	0.21m ³
Bucket rotation angle	0-180°
Travel speed	0-2km/h
Ground clearance	70mm
Minimum turning radius	1000mm
Track center distance	810mm
Track width	180mm
Working height	1425mm
Dump unloading angle	35°
Dump unloading height	380mm
Engine	
Brand	Rato
Model	R210
Type	Gasoline engine, single cylinder
Displacement	212cc
Gross power	6.5hp
Fuel consumption	≤395g/kw/3600
Starting method	Electric start / Hand start
Hydraulic system	
Travel motor	200ml/r
Dual hydraulic pump	2.7+2.7ml/r
Capacity	
Fuel tank capacity	3.6L
Engine oil capacity	0.6L
Hydraulic oil capacity	7

搅拌罐 T550

MIXING DRUM

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作灵活
Easy Operation
- 强劲动力
Powerful Engine
- 高效举升
Powerful Lifting
- 快速换装
Quick Attachment
- 复杂地形适应
All-Terrain Capability



公园/Park



工地/Construction site



果园/Orchard



农场/Farm

产品用途 / PRODUCT APPLICATION

主要用于作业场地狭小、地面起伏不平、作业内容变换频繁的场所。适用于基础设施建设、工业应用、码头装卸、市区街道、住宅、谷仓、畜舍、机场跑道等，同时还可作为大型工程施工机械辅助设备使用。

It is mainly used in scenarios with narrow working sites, uneven ground and frequent changes of operation tasks. Suitable for infrastructure construction, industrial applications, dock handling, urban streets, residential areas, granaries, livestock barns, airport runways, etc. It can also be used as auxiliary equipment for large-scale construction machinery.

型号	T550
基本性能参数	
操作质量	642kg
货箱容量	0.145m³
爬坡能力	20°
最大载荷	200kg
行驶速度	0.8-1.7km/h
最小回转半径	1420mm
履带中心距	825mm
最小离地间隙	85mm
履带接地长	825mm
货箱翻转角度	90°
搅拌桶直径	600mm
进料口直径	423mm
搅拌通深度	612mm
铲斗举升高度	1622mm
铲斗举升长度	1767mm
卸载离地高度	232mm
液压系统	
行走马达	200ml/r
回转马达	200ml/r
液压双泵	2.7+2.7ml/r
尺寸	
外形尺寸	2155*800*1228mm
整车高度	1228mm
整车宽度	800mm
整车长度	2155mm
发动机	
品牌	科普/润通/百利通
型号	178F/R210/RX6.5
额定功率	4.2/4.8/4.78kw
气缸	1
摄入方式	自然吸气
排放标准	EPA/ERU05
燃油箱容积	3.1L

Model	T550
Basic performance parameters	
Operating weight	642kg
Cargo box capacity	0.145m³
Climbing ability	20°
Maximum load	200kg
Travel speed	0.8-1.7km/h
Minimum turning radius	1420mm
Track center distance	825mm
Minimum ground clearance	85mm
Track contact length	825mm
Cargo box tilting angle	90°
Mixing drum diameter	600mm
Feed inlet diameter	423mm
Mixing drum depth	612mm
Bucket lifting height	1622mm
Bucket lifting length	1767mm
Unloading height from ground	232mm
Hydraulic system	
Travel motor	200ml/r
Slewing motor	200ml/r
Hydraulic dual pump	2.7+2.7ml/r
Dimensions	
Overall dimensions	2155*800*1228mm
Overall height	1228mm
Overall width	800mm
Overall length	2155mm
Engine	
Brand	Koop/Rato/B&S
Model	178F/R210/RX6.5
Rated power	4.2/4.8/4.78kw
Cylinder	1
Intake method	Naturally aspirated
Emission standard	EPA/ERU05
Fuel tank capacity	3.1L

滑移装载机辅具 ACCESSORIES

- 一机多用
- 快速更换多种辅具
- One Machine, Multiple Applications
- Quick and Easy Attachment Changes



松土器 Ripper



货叉 Pallet Fork



破碎锤 Breaker



抓叉 Hydraulic grapple



清扫器 Sweeper



螺旋钻 Auger



抓铲 Grapple Bucket



直挖 Digger



四合一铲斗 4-in-1 Bucket



除雪机 Snow blower



平土器 Leveler



旋耕机 Rotary tiller

13



搅拌罐 Mixer

14



搅拌斗 Mixing Bucket

19



草坪松土器 Lawn Aerator

20



土壤调节器 Soil Conditioner

15



提升装置 Lifting Device

16




牵引装置 Trailer Hitch

21



割灌机 Brush Cutter

22

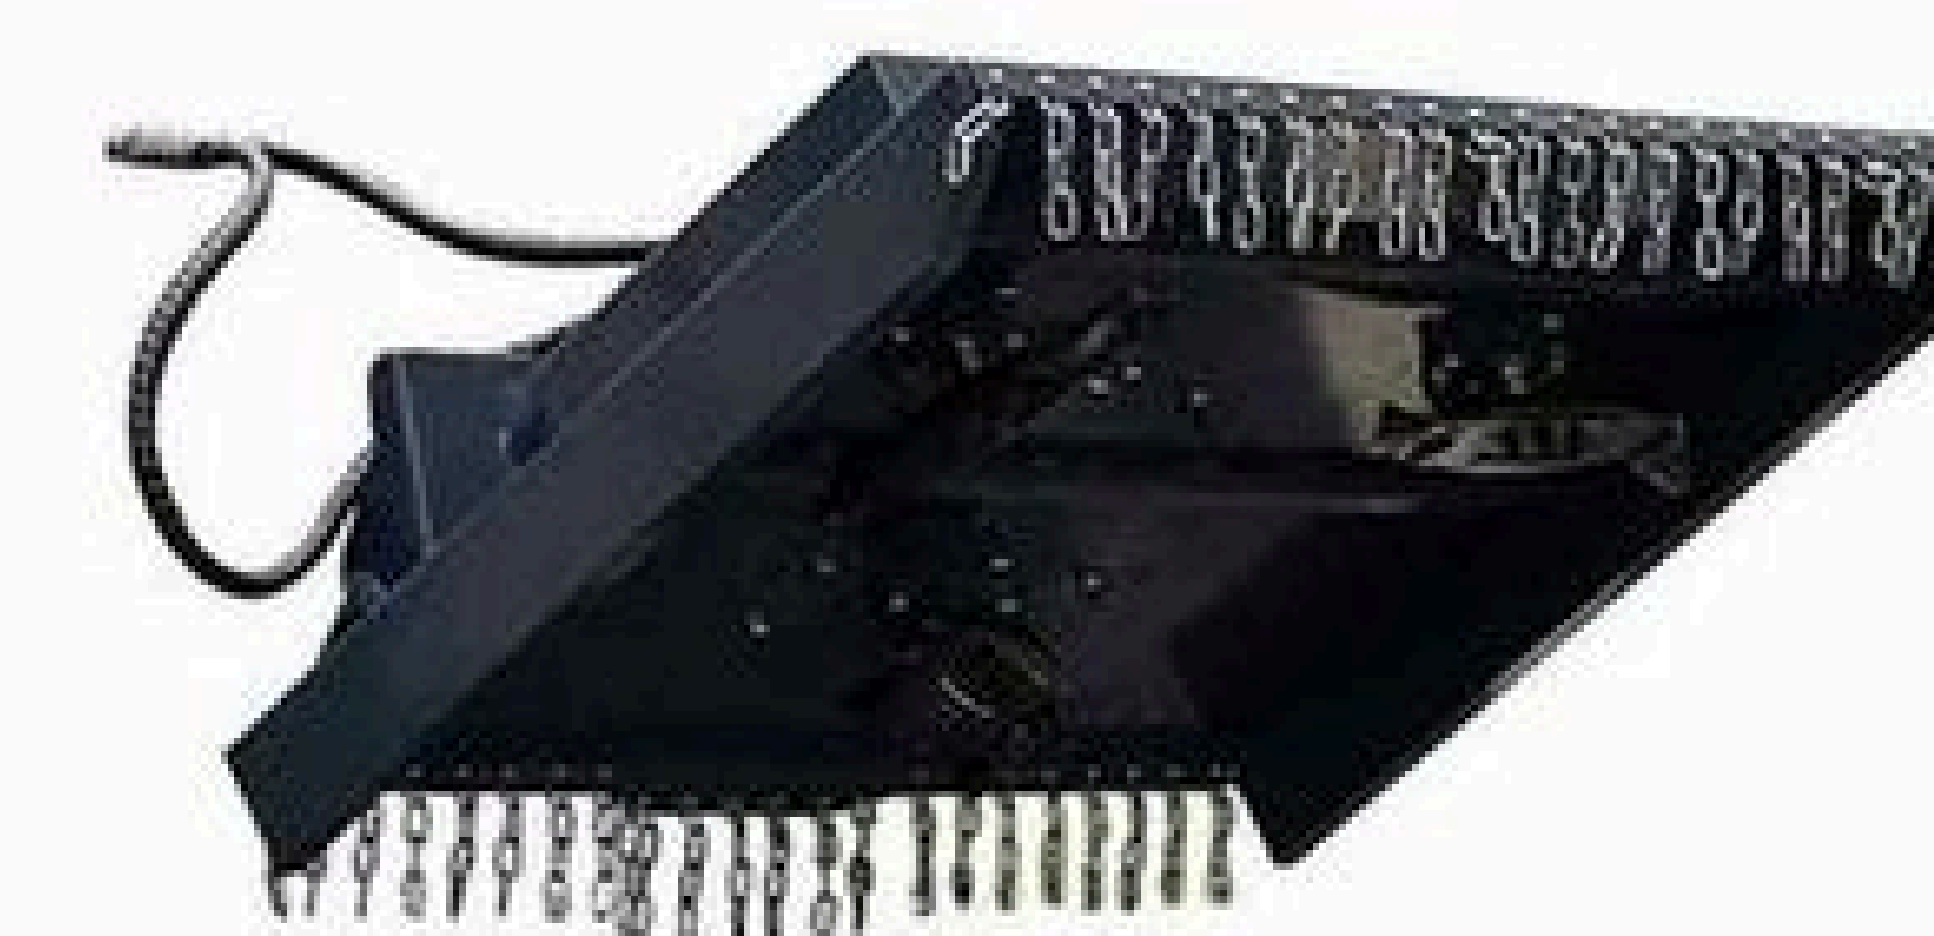

割草机 Lawn Mower

17




开沟器 Trencher

18



劈柴机 Log Splitter

23

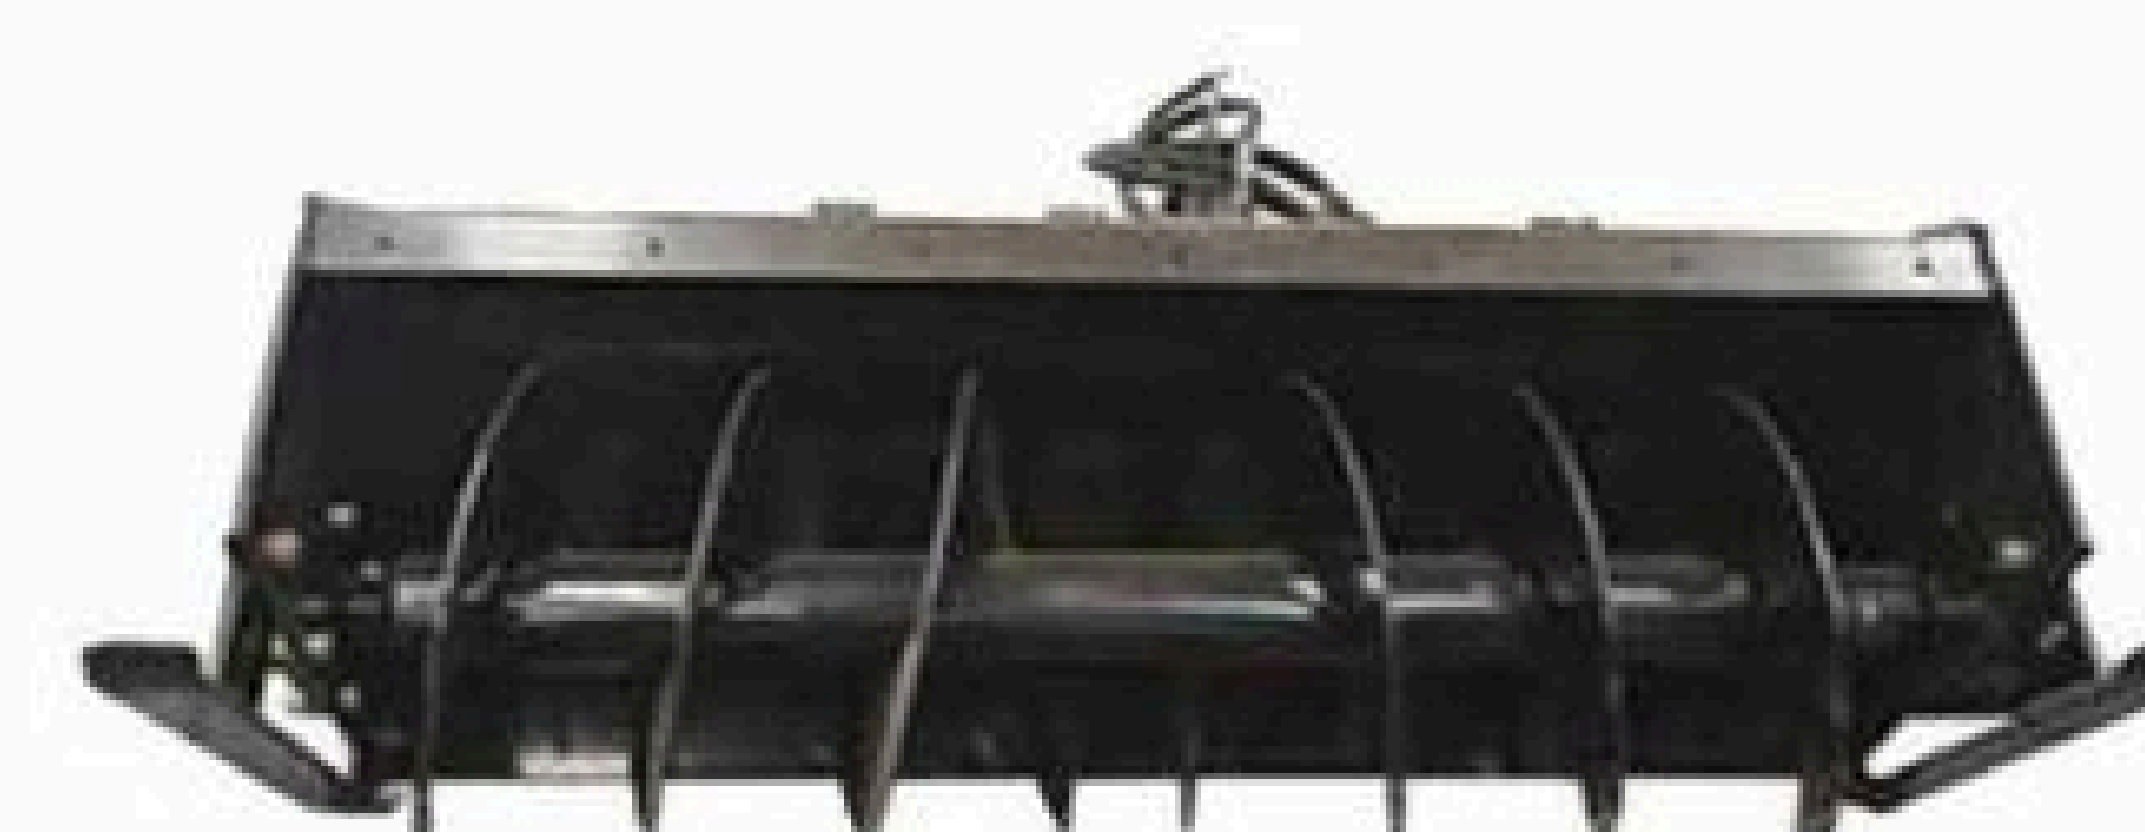

回填机 Trench Filler

24



拓荒机 Mulcher

小型挖掘机 TC-06

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN




EPA



公园/Park



工地/Construction site

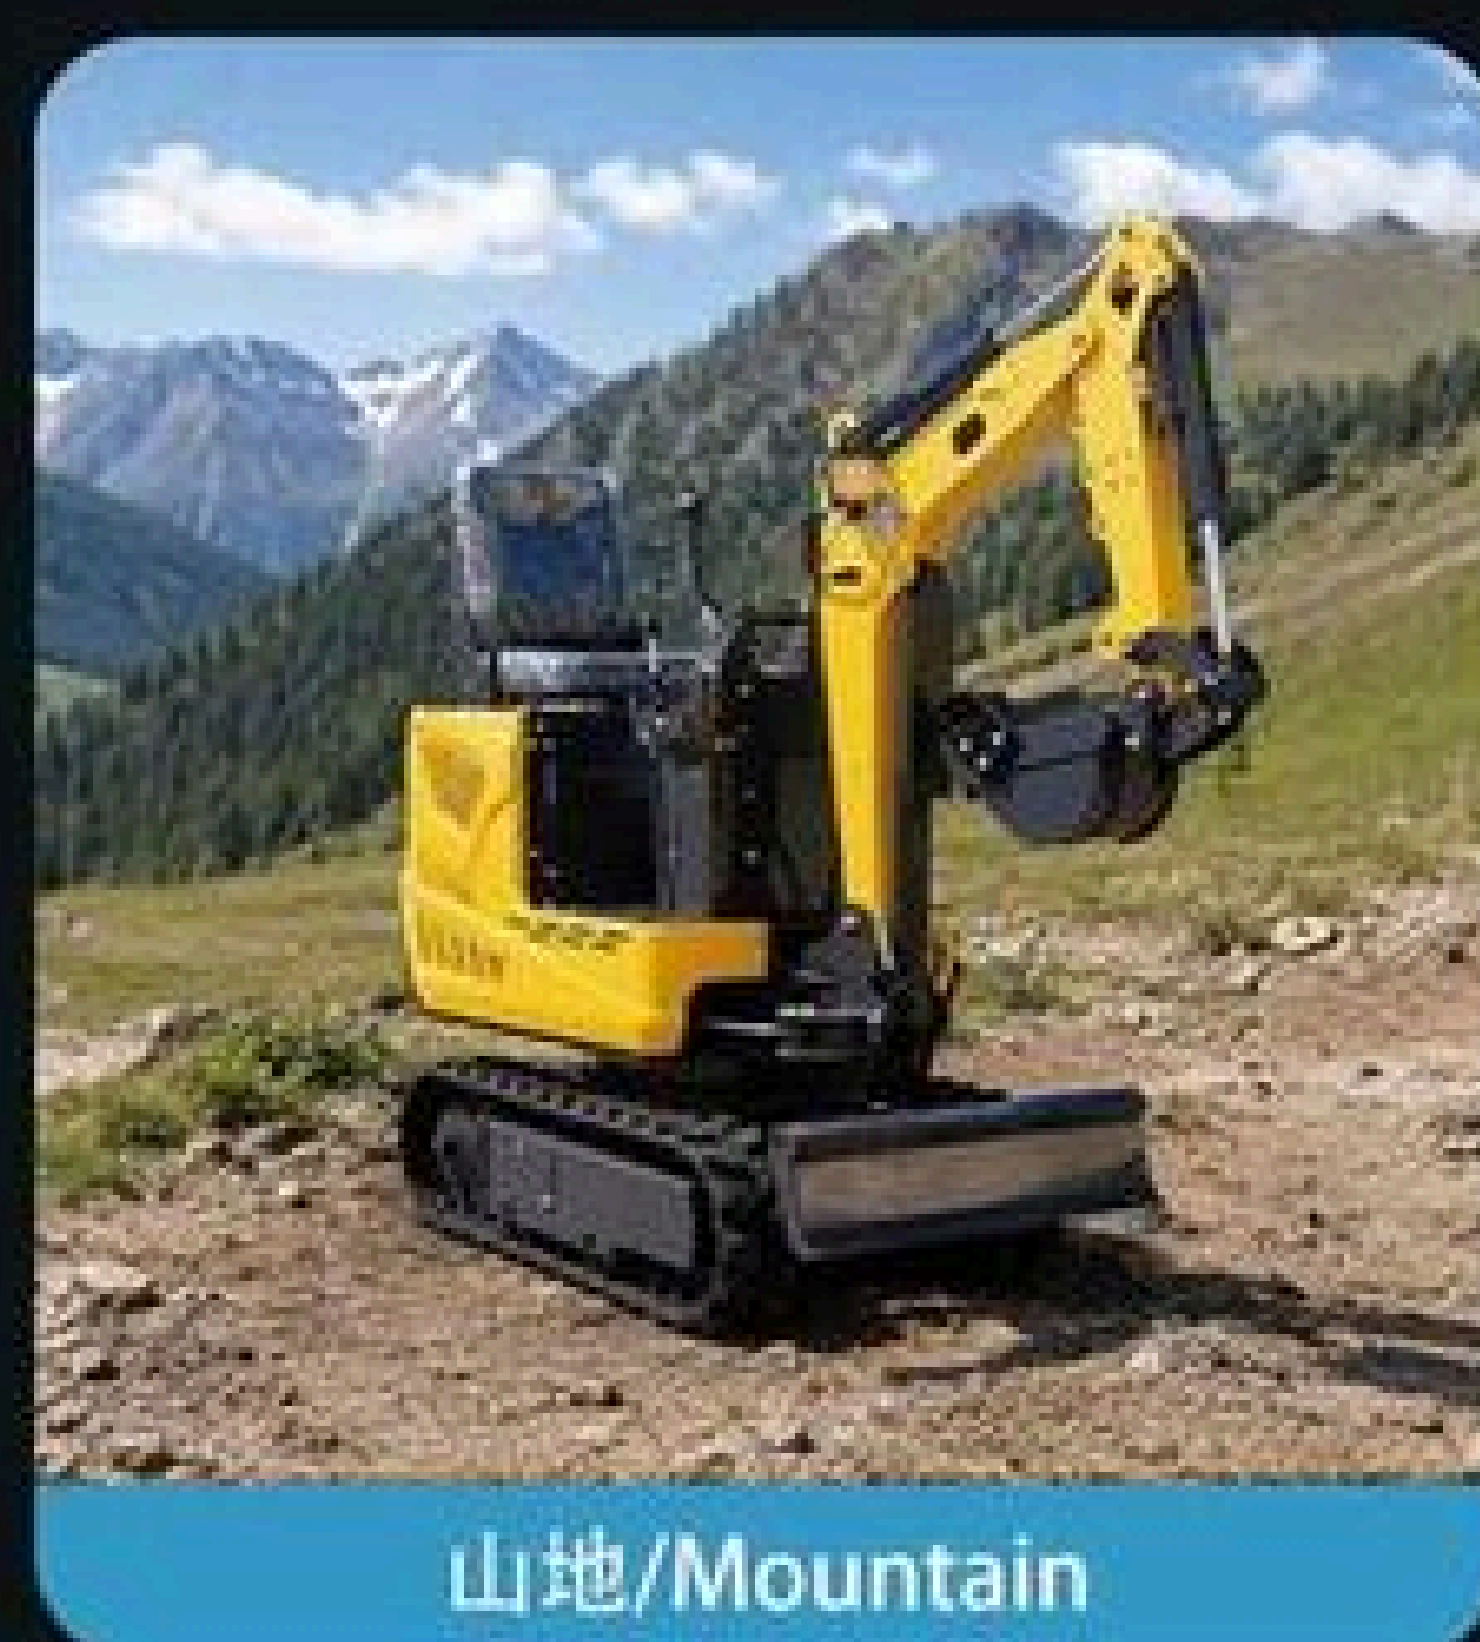

山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

众诚发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗

ZHONGCHENG engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/Adjustable driving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	06Q
重量	
操作质量	800kg
尺寸	
运输长度	2287mm
运输宽度	700mm
运输高度	2130mm
最大挖掘半径	2254mm
最大挖掘深度	1091mm
最大挖掘高度	2114mm
最大卸载高度	1386mm
最大挖掘力	3.5KN
驱动	
发动机品牌	众城/隆鑫
发动机型号	TR306/G300FDA
最大功率	6.3kw(8.5HP)/6.8kw(9.2HP)
行走特性	
行走速度	0-1.5km/h
爬坡能力	30°

MODEL	06Q
WEIGHT	
Operating weight	800kg
SIZE	
Total length	2287mm
Total width	700mm
Total height	2130mm
Max. digging radius	2254mm
Max. digging depth	1091mm
Max. digging height	2114mm
Counterweight ground clearance	1386mm
Max. digging force	3.5KN
DRIVE	
Engine brand	ZONGCHENG/LONCIN
Engine model	TR306/G300FDA
Maximum power	6.3kw(8.5HP)/6.8kw(9.2HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.5km/h
Climbing angle	30°

小型挖掘机 TC-10

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



- 操作简单
Easy to operate
- 360° 回转
360° Full Rotation
- 紧凑灵活
Compact & Flexible
- 强劲挖掘
Powerful Digging
- 适用复杂地形
Adaptable to Rough Terrain



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

科普发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗

Koop engine, imported hydraulic cylinder, hydraulic hoses with built-in NOK seals, dual gear pump, adjustable dozer blade, wear-resistant industrial rubber tracks, adjustable operator seat, standard bucket.

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	10
重量	
操作质量	1000kg
尺寸	
运输长度	2784mm
运输宽度	940mm
运输高度	2209mm
最大挖掘半径	2830mm
最大挖掘深度	1722mm
最大挖掘高度	2452mm
最大卸载高度	1821mm
最大挖掘力	7.2KN
驱动	
发动机品牌	华普瑞/科普/百利通
发动机型号	192F/XR13.5
最大功率	7.6kW (10HP)/9.92kw(13.5HP)
行走特性	
行走速度	0-1.5km/h
爬坡能力	30°

MODEL	10
WEIGHT	
Operating weight	1000kg
SIZE	
Total length	2784mm
Total width	940mm
Total height	2209mm
Max. digging radius	2830mm
Max. digging depth	1722mm
Max. digging height	2452mm
Counterweight ground clearance	1821mm
Max. digging force	7.2KN
DRIVE	
Engine brand	HUAPURUI/Koop/B&S
Engine model	192F/XR13.5
Maximum power	7.6kW (10HP)/9.92kw(13.5HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.5km/h
Climbing angle	30°

小型挖掘机 TC-10

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形
POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作简单
Easy to operate
- 360° 回转
360° Full Rotation
- 紧凑灵活
Compact & Flexible
- 强劲挖掘
Powerful Digging
- 适用复杂地形
Adaptable to Rough Terrain



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

百利通/科普发动机/进口油缸、油管内置NOK密封圈/柱塞泵/后掀式座椅/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚
Briggs & Stratton/KOOP engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/plunger pump/Rear-tilting seat/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustable driving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗
Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	10Q
重量	
操作质量	1000kg
尺寸	
运输长度	2889mm
运输宽度	930mm
运输高度	2190mm
最大挖掘半径	3063mm
最大挖掘深度	1736mm
最大挖掘高度	2701mm
最大卸载高度	1848mm
最大挖掘力	6KN
驱动	
发动机品牌	百利通/科普
发动机型号	XR13.5/192F
最大功率	9.92kw(13.5HP)/7.6kw(10HP)
行走特性	
行走速度	0-1.8km/h
爬坡能力	30°

MODEL	10Q
WEIGHT	
Operating weight	1000kg
SIZE	
Total length	2889mm
Total width	930mm
Total height	2190mm
Max. digging radius	3063mm
Max. digging depth	1736mm
Max. digging height	2701mm
Counterweight ground clearance	1848mm
Max. digging force	6KN
DRIVE	
Engine brand	R&S/KOOP
Engine model	XR13.5/192F
Maximum power	9.92kw(13.5HP)/7.6kw(10HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.8km/h
Climbing angle	30°

小型挖掘机 TC-12

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

科普192发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

KOOP192F engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/Adjustable driving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	12Q
重量	
操作质量	1250kg
尺寸	
运输长度	2981mm
运输宽度	930-1105mm
运输高度	2287mm
最大挖掘半径	3057mm
最大挖掘深度	1717mm
最大挖掘高度	2717mm
最大卸载高度	1866mm
最大挖掘力	9KN
驱动	
发动机品牌	科普/百利通
发动机型号	192F/XR13.5
最大功率	7.6kw(10HP)/9.92kw(13.5HP)
行走特性	
行走速度	0-1.5km/h
爬坡能力	30°

MODEL	12Q
WEIGHT	
Operating weight	1250kg
SIZE	
Total length	2981mm
Total width	930-1105mm
Total height	2287mm
Max. digging radius	3057mm
Max. digging depth	1717mm
Max. digging height	2717mm
Counterweight ground clearance	1866mm
Max. digging force	9KN
DRIVE	
Engine brand	KOOP/B&S
Engine model	192F/XR13.5
Maximum power	7.6kw(10HP)/9.92kw(13.5HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.5km/h
Climbing angle	30°

小型挖掘机 TC-13

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 操作简单
Easy to operate
- 360° 回转
360° Full Rotation
- 紧凑灵活
Compact & Flexible
- 强劲挖掘
Powerful Digging
- 适用复杂地形
Adaptable to Rough Terrain



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

科普发动机/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗

Koop engine, imported hydraulic cylinder, hydraulic hoses with built-in NOK seals, dual gear pump, adjustable dozer blade, wear-resistant engineering rubber tracks, adjustable operator seat, standard bucket.

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	13
重量	
操作质量	1100kg
尺寸	
运输长度	2784mm
运输宽度	940mm
运输高度	2209mm
最大挖掘半径	2830mm
最大挖掘深度	1722mm
最大挖掘高度	2452mm
最大卸载高度	1821mm
最大挖掘力	7.2KN
驱动	
发动机品牌	华普瑞/科普/百利通
发动机型号	192F/XR13.5
最大功率	7.6kW (10HP)/9.92kw(13.5HP)
行走特性	
行走速度	0-1.5km/h
爬坡能力	30°

MODEL	13
WEIGHT	
Operating weight	1100kg
SIZE	
Total length	2784mm
Total width	940mm
Total height	2209mm
Max. digging radius	2830mm
Max. digging depth	1722mm
Max. digging height	2452mm
Counterweight ground clearance	1821mm
Max. digging force	7.2KN
DRIVE	
Engine brand	HUAPURUI/KOOP/B&S
Engine model	192F/XR13.5
Maximum power	7.6kW (10HP)/9.92kw(13.5HP)
WALKING CHARACTERISTICS	
Walking speed	0-1.5km/h
Climbing angle	30°

小型挖掘机 TC-13Pro

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

科普发动机/进口油缸、油管内置NOK密封圈/柱塞泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/
标准挖斗

KOOP 192F engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/piston pump/Ad-justable bulldozer/wear-resistant engineering rubber track/ Adjustable driving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适合于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, -municipal projects, break concrete, dredging river and other working environment.

型号	13Pro
重量	
操作质量	1200kg
尺寸	
运输长度	2967mm
运输宽度	940mm
运输高度	2199mm
最大挖掘半径	3063mm
最大挖掘深度	1729mm
最大挖掘高度	2708mm
最大卸载高度	1855mm
最大挖掘力	7.2KN
驱动	
发动机品牌	科普
发动机型号	195F
最大功率	8.6KW
行走特性	
行走速度	0-1.8km/h
爬坡能力	30°

MODEL	13Pro
WEIGHT	
Operating weight	1200kg
SIZE	
Total length	2967mm
Total width	940mm
Total height	2199mm
Max. digging radius	3063mm
Max. digging depth	1729mm
Max. digging height	2708mm
Counterweight ground clearance	1855mm
Max. digging force	7.2KN
DRIVE	
Engine brand	KOOP
Engine model	195F
Maximum power	8.6KW
WALKING CHARACTERISTICS	
Walking speed	0-1.8km/h
Climbing angle	30°

小型挖掘机 TC-15


MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形


POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



公园/Park

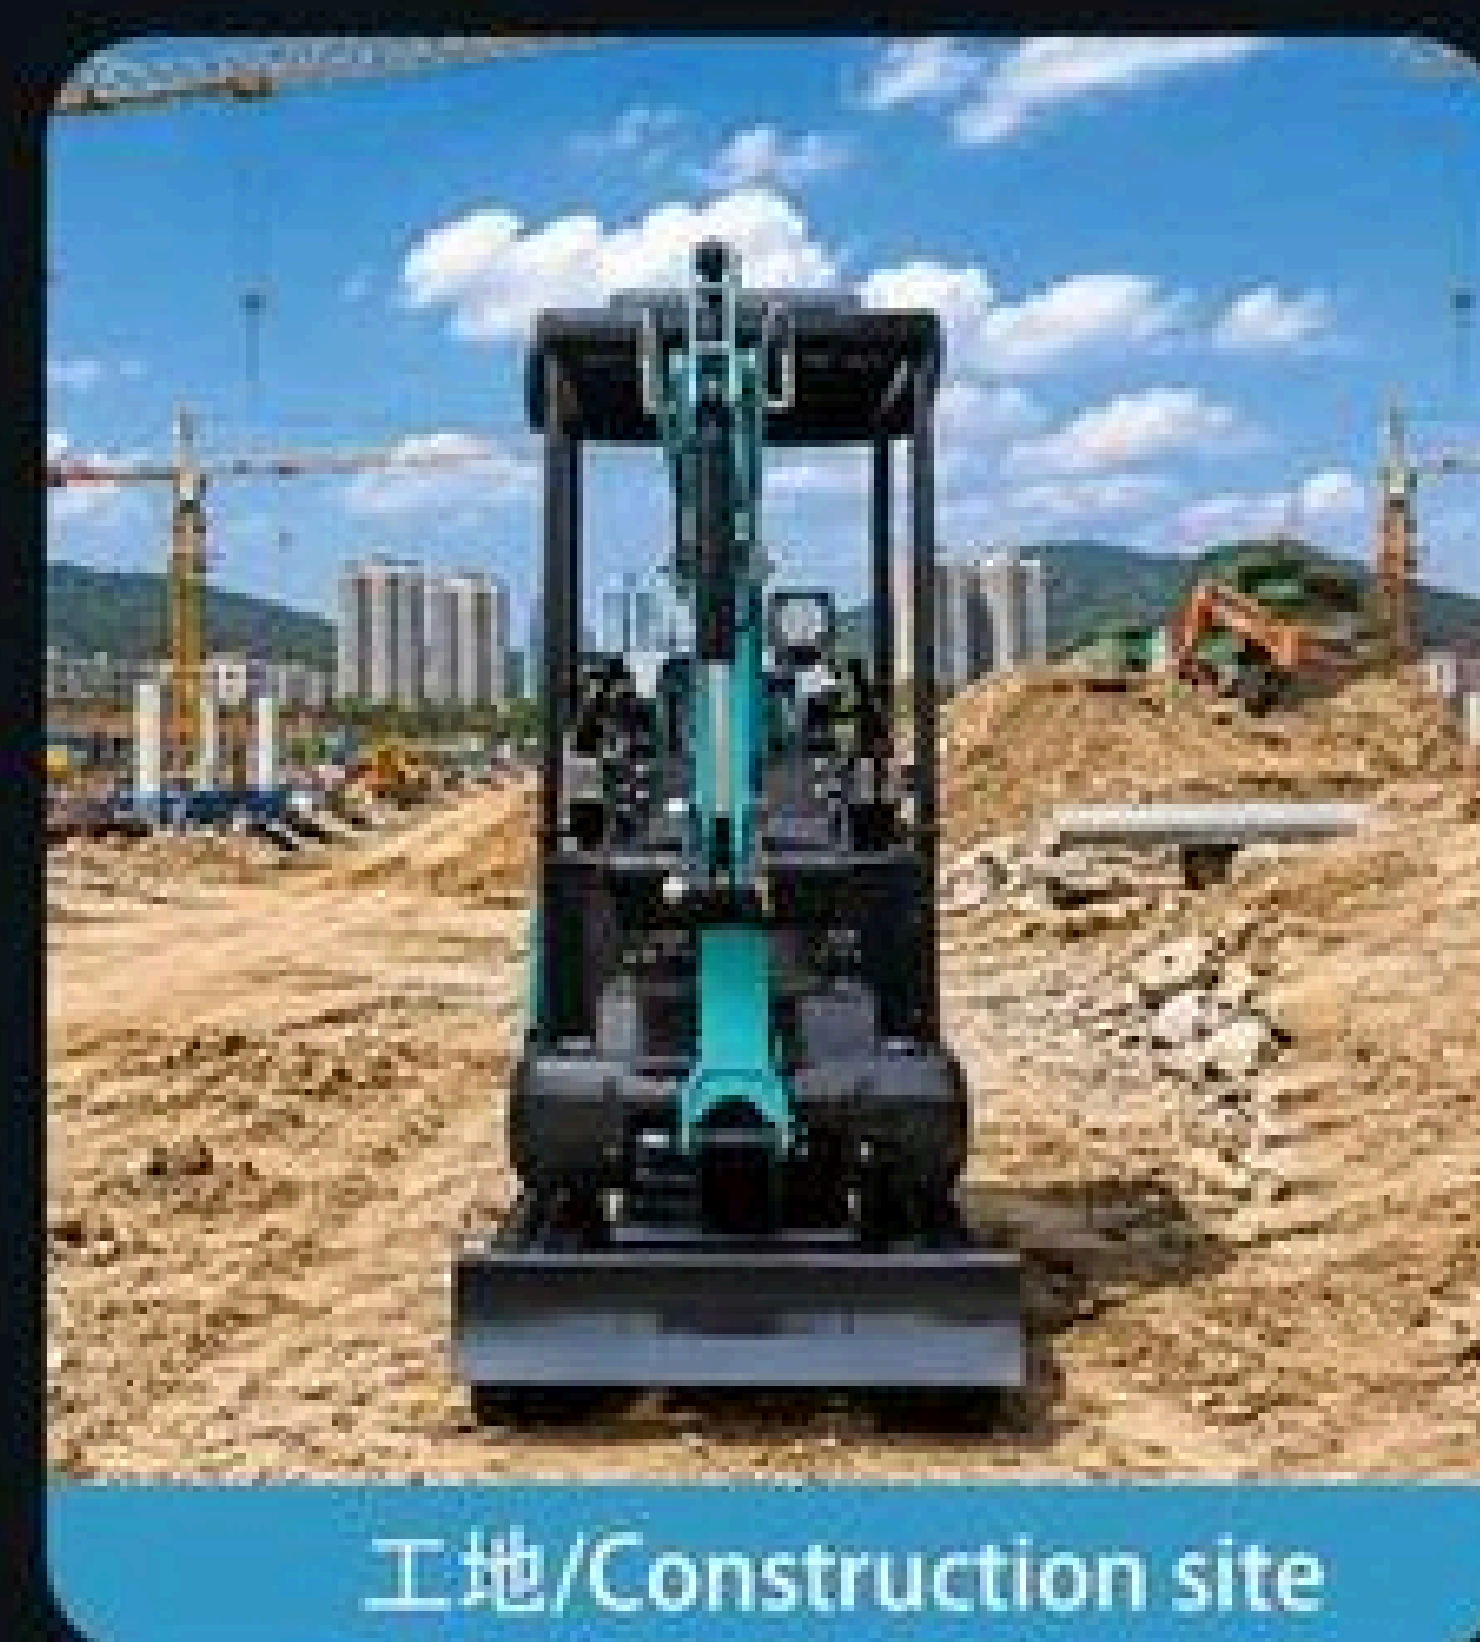

工地/Construction site

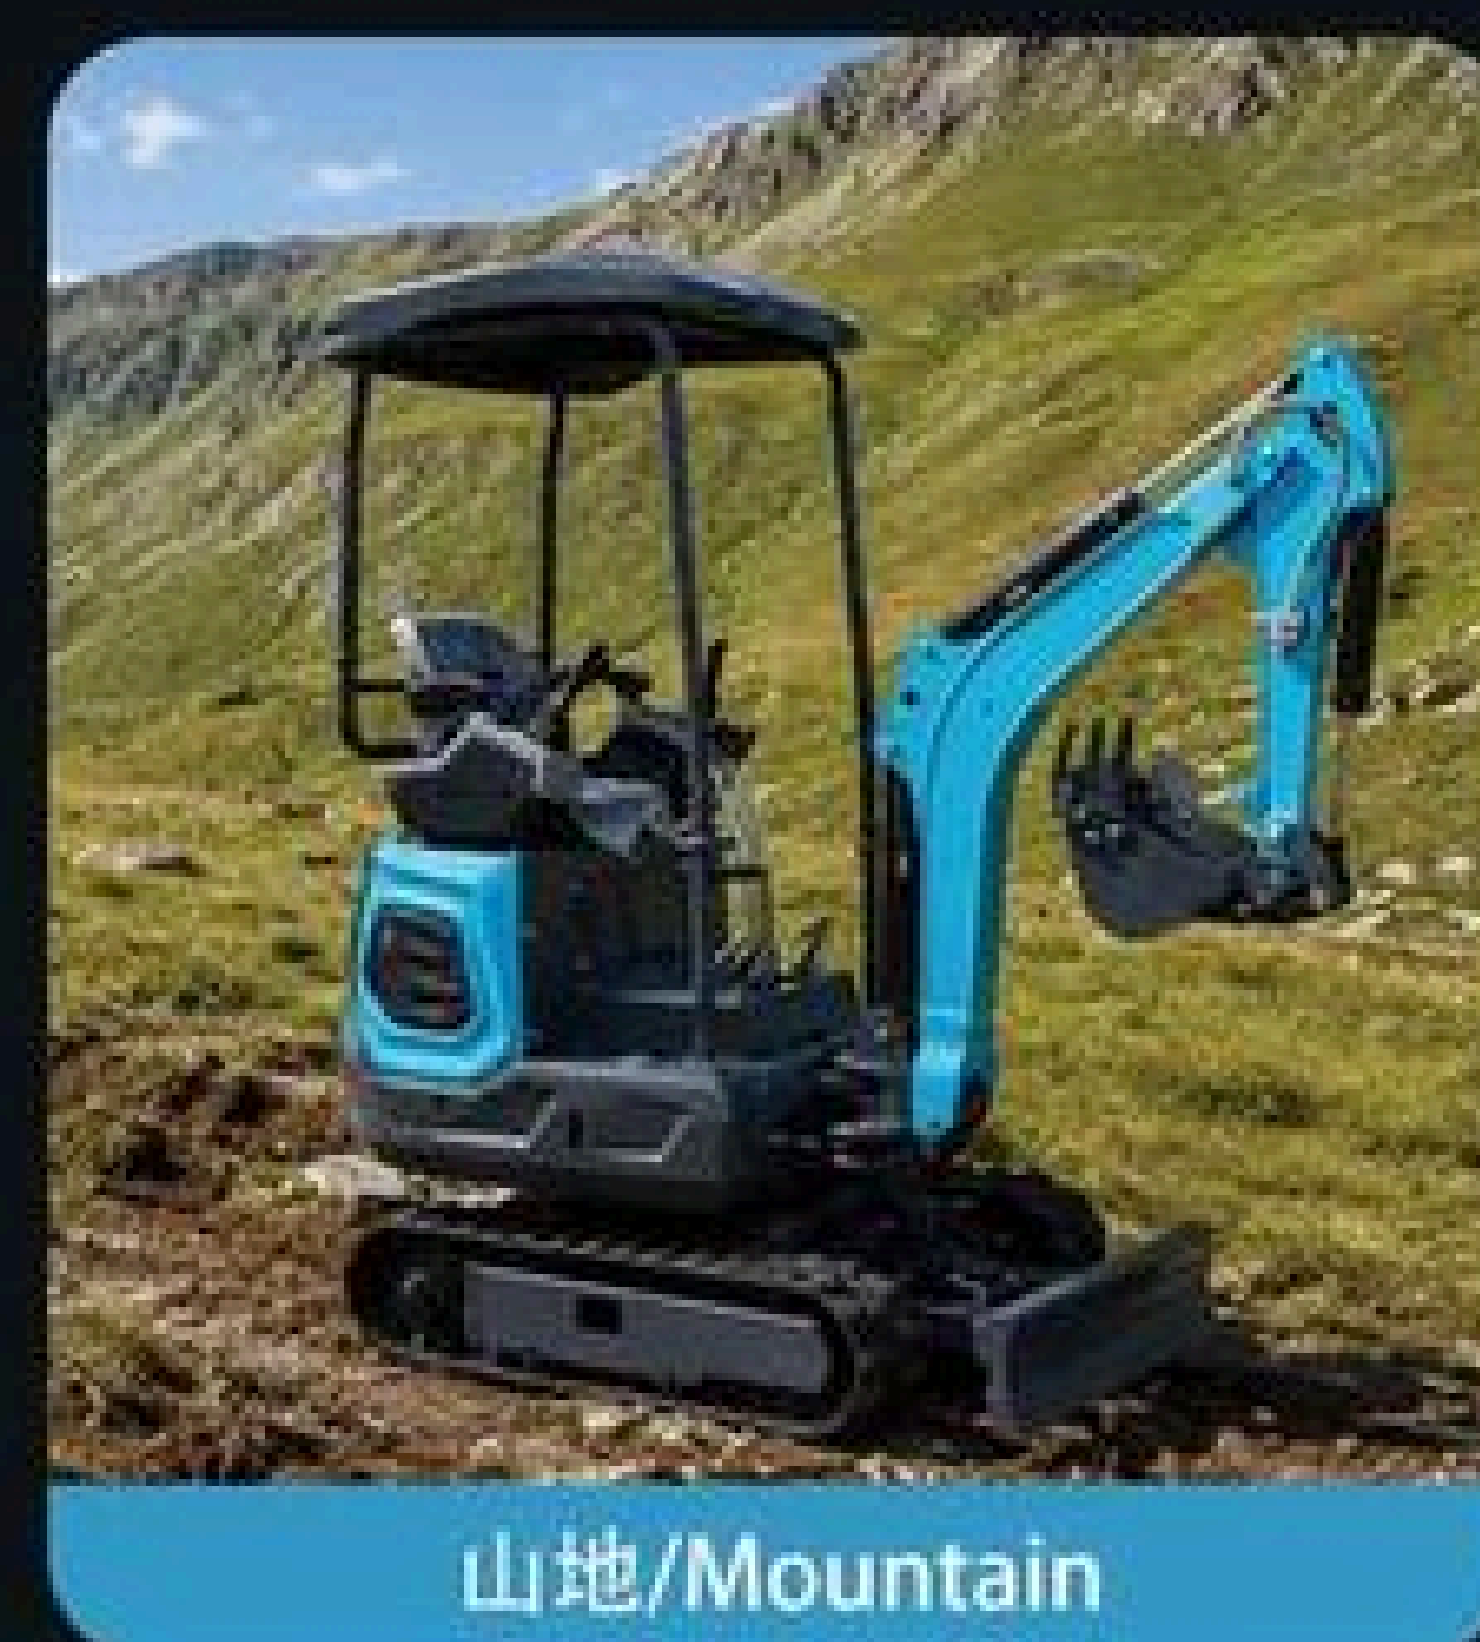

山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

久保田D722/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/标准挖斗/标准顶棚

Kubota D722 engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/Twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustable driving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	15Q
重量	
操作质量	1350kg
尺寸	
运输长度	2981mm
运输宽度	930-1105mm
运输高度	2287mm
最大挖掘半径	3057mm
最大挖掘深度	1717mm
最大挖掘高度	2717mm
最大卸载高度	1866mm
最大挖掘力	9KN
驱动	
发动机品牌	久保田
发动机型号	D722
最大功率	10.2kw(13.9HP)
行走特性	
行走速度	0-6km/h
爬坡能力	30°


MODEL	15Q
WEIGHT	
Operating weight	1350kg
SIZE	
Total length	2981mm
Total width	930-1105mm
Total height	2287mm
Max. digging radius	3057mm
Max. digging depth	1717mm
Max. digging height	2717mm
Counterweight ground clearance	1966mm
Max. digging force	9KN
DRIVE	
Engine brand	Kubota
Engine model	D722
Maximum power	10.2kw(13.9HP)
WALKING CHARACTERISTICS	
Walking speed	0-6km/h
Climbing angle	30°

小型挖掘机 TC-18

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN

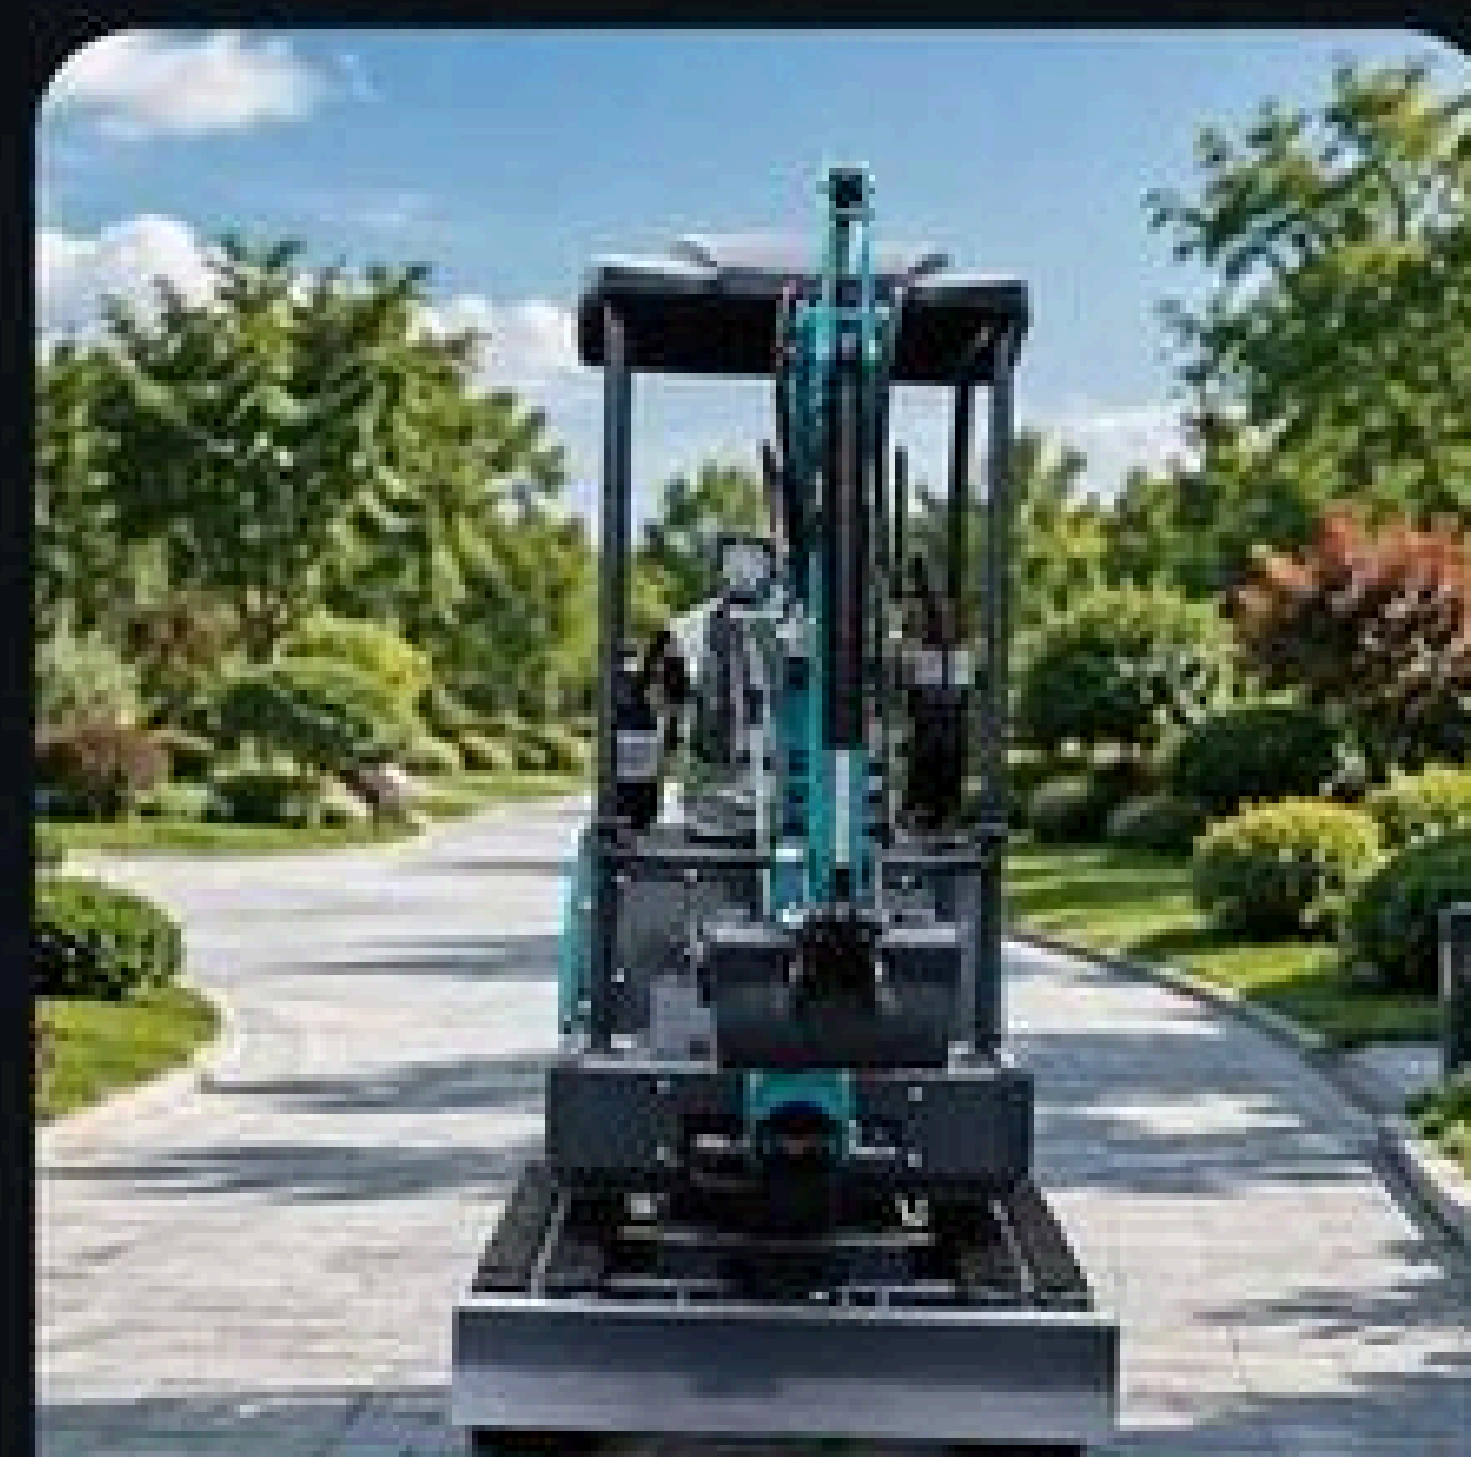

公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

莱动385B/进口油缸、油管内置NOK密封圈/双齿轮泵/可调节推土铲/耐磨工程橡胶履带/可调式驾驶座椅/

标准挖斗/标准顶棚

LAIDONG KM385B engine/Imported oil cylinders and oil pipes with built-in NOK sealing ring/twin gear pump/adjustable bulldozer/wear-resistant engineering rubber track/ Adjustable driving seat/standard bucket

选装配置/OPTIONAL CONFIGURATION

破碎锤/松土器/抓木器/耙子/旋挖钻/大挖斗/泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, - municipal projects, break concrete, dredging river and other working environment.

型号	18Q
重量	
操作质量	1800kg
尺寸	
运输长度	3249mm
运输宽度	1120mm
运输高度	2314mm
最大挖掘半径	3396mm
最大挖掘深度	1991mm
最大挖掘高度	2928mm
最大卸载高度	2090mm
最大挖掘力	9KN
驱动	
发动机品牌	莱动/久保田
发动机型号	KM385B/D722
最大功率	18.1kw(24HP)/10.2kw(13.9HP)
行走特性	
行走速度	0-6km/h
爬坡能力	30°

MODEL	18Q
WEIGHT	
Operating weight	1800kg
SIZE	
Total length	3249mm
Total width	1120mm
Total height	2314mm
Max. digging radius	3396mm
Max. digging depth	1991mm
Max. digging height	2928mm
Counterweight ground clearance	2090mm
Max. digging force	9KN
DRIVE	
Engine brand	LAIDONG/KUBOTA
Engine model	KM385B/D722
Maximum power	18.1kw(24HP)/10.2kw(13.9HP)
WALKING CHARACTERISTICS	
Walking speed	0-6km/h
Climbing angle	30°

小型挖掘机 TC-25

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



标准配置/STANDARD CONFIGURATION

洋马3TNV80 / 柱塞泵 / 负载敏感系统 / 钢履带 / 可调试驾驶座椅 / 底盘伸缩 / 动臂侧移 / 标准挖斗 / 破碎管路 / 标准

顶棚

Yanmar 3TNV80 engine / Piston pump / Load-sensing hydraulic system / Steel tracks / Adjustable operator seat / Expandable undercarriage / Boom swing / Standard bucket / Hydraulic breaker pipe-line / Standard canopy

选装配置/OPTIONAL CONFIGURATION

破碎锤 / 松土器 / 抓木器 / 耙子 / 旋挖钻 / 大挖斗 / 泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, -municipal projects, break concrete, dredging river and other working environment.

型号	25Q
重量	
操作质量	2500kg
尺寸	
运输长度	4100mm
运输宽度	1300/1500mm
运输高度	2440mm
最大挖掘半径	4520mm
最大挖掘深度	2410mm
最大挖掘高度	4190mm
最大卸载高度	2880mm
最大挖掘力	20KN
驱动	
发动机品牌	洋马
发动机型号	3TNV80
最大功率	15.2kw
行走特性	
行走速度	2.0-3.8km/h
爬坡能力	30°

MODEL	25Q
WEIGHT	
Operating weight	2500kg
SIZE	
Total length	4100mm
Total width	1300/1500mm
Total height	2440mm
Max. digging radius	4520mm
Max. digging depth	2410mm
Max. digging height	4190mm
Counterweight ground clearance	2880mm
Max. digging force	20KN
DRIVE	
Engine brand	Yanmar
Engine model	3TNV80
Maximum power	15.2kw
WALKING CHARACTERISTICS	
Walking speed	2.0-3.8km/h
Climbing angle	30°



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

小型挖掘机 TC-27

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

洋马3TNV80 / 柱塞泵 / 负载敏感系统 / 钢履带 / 可调试驾驶座椅 / 底盘伸缩 / 动臂侧移 / 标准挖斗 / 破碎管路 / 标准顶棚

Yanmar 3TNV80 engine / Piston pump / Load-sensing hydraulic system / Steel tracks / Adjustable operator seat / Expandable undercarriage / Boom swing / Standard bucket / Hydraulic breaker pipe-line / Standard canopy

选装配置/OPTIONAL CONFIGURATION

破碎锤 / 松土器 / 抓木器 / 耙子 / 旋挖钻 / 大挖斗 / 泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, -municipal projects, break concrete, dredging river and other working environment.

型号	27Q
重量	
操作质量	2700kg
尺寸	
运输长度	4100mm
运输宽度	1370/1570mm
运输高度	2440mm
最大挖掘半径	4640mm
最大挖掘深度	2590mm
最大挖掘高度	4370mm
最大卸载高度	3060mm
最大挖掘力	20KN
驱动	
发动机品牌	洋马
发动机型号	3TNV80
最大功率	15.2kw
行走特性	
行走速度	2.0-3.5km/h
爬坡能力	30°

MODEL	27Q
WEIGHT	
Operating weight	2700kg
SIZE	
Total length	4100mm
Total width	1500mm
Total height	2440mm
Max. digging radius	4520mm
Max. digging depth	2590mm
Max. digging height	4370mm
Counterweight ground clearance	3060mm
Max. digging force	20KN
DRIVE	
Engine brand	YANMAR
Engine model	3TNV80
Maximum power	15.2kw
WALKING CHARACTERISTICS	
Walking speed	2.0-3.5km/h
Climbing angle	57°

小型挖掘机 TC-30

MINI EXCAVATOR

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



公园/Park



工地/Construction site



山地/Mountain



农场/Farm

标准配置/STANDARD CONFIGURATION

洋马3TNV80 / 柱塞泵 / 负载敏感系统 / 钢履带 / 可调试驾驶座椅 / 底盘伸缩 / 动臂侧移 / 标准挖斗 / 破碎管路 / 标准顶棚

Yanmar 3TNV80 engine / Piston pump / Load-sensing hydraulic system / Steel tracks / Adjustable operator seat / Expandable undercarriage / Boom swing / Standard bucket / Hydraulic breaker pipe-line / Standard canopy

选装配置/OPTIONAL CONFIGURATION

破碎锤 / 松土器 / 抓木器 / 耙子 / 旋挖钻 / 大挖斗 / 泥浆斗

Hammer / Ripper / Log grapple / Rake / Auger drill / Large bucket / Mud bucket

适用范围 APPLICATION

适用于室内拆除、旱厕改造、工程破拆、开荒山、小型土石方工程、市政工程、混凝土破碎、河道清淤等作业环境。
Applicable to indoor demolition, toilet upgrading, engineering forcible entry, excavate barren hills, small earthwork, municipal projects, break concrete, dredging river and other working environment.

型号	30Q
重量	
操作质量	3000kg
尺寸	
运输长度	4100mm
运输宽度	1370/1570mm
运输高度	2440mm
最大挖掘半径	4640mm
最大挖掘深度	2590mm
最大挖掘高度	4370mm
最大卸载高度	3060mm
最大挖掘力	20KN
驱动	
发动机品牌	洋马
发动机型号	3TNV80
最大功率	15.2kw
行走特性	
行走速度	2.0-3.5km/h
爬坡能力	30°


MODEL	30Q
WEIGHT	
Operating weight	3000kg
SIZE	
Total length	4100mm
Total width	1370/1570mm
Total height	2440mm
Max. digging radius	4640mm
Max. digging depth	2590mm
Max. digging height	4370mm
Counterweight ground clearance	3060mm
Max. digging force	20KN
DRIVE	
Engine brand	洋马
Engine model	3TNV80
Maximum power	15.2kw
WALKING CHARACTERISTICS	
Walking speed	2.0-3.5km/h
Climbing angle	30°

属具

·一机多用 ·快速替换



200 挖斗
200 Digging bucket

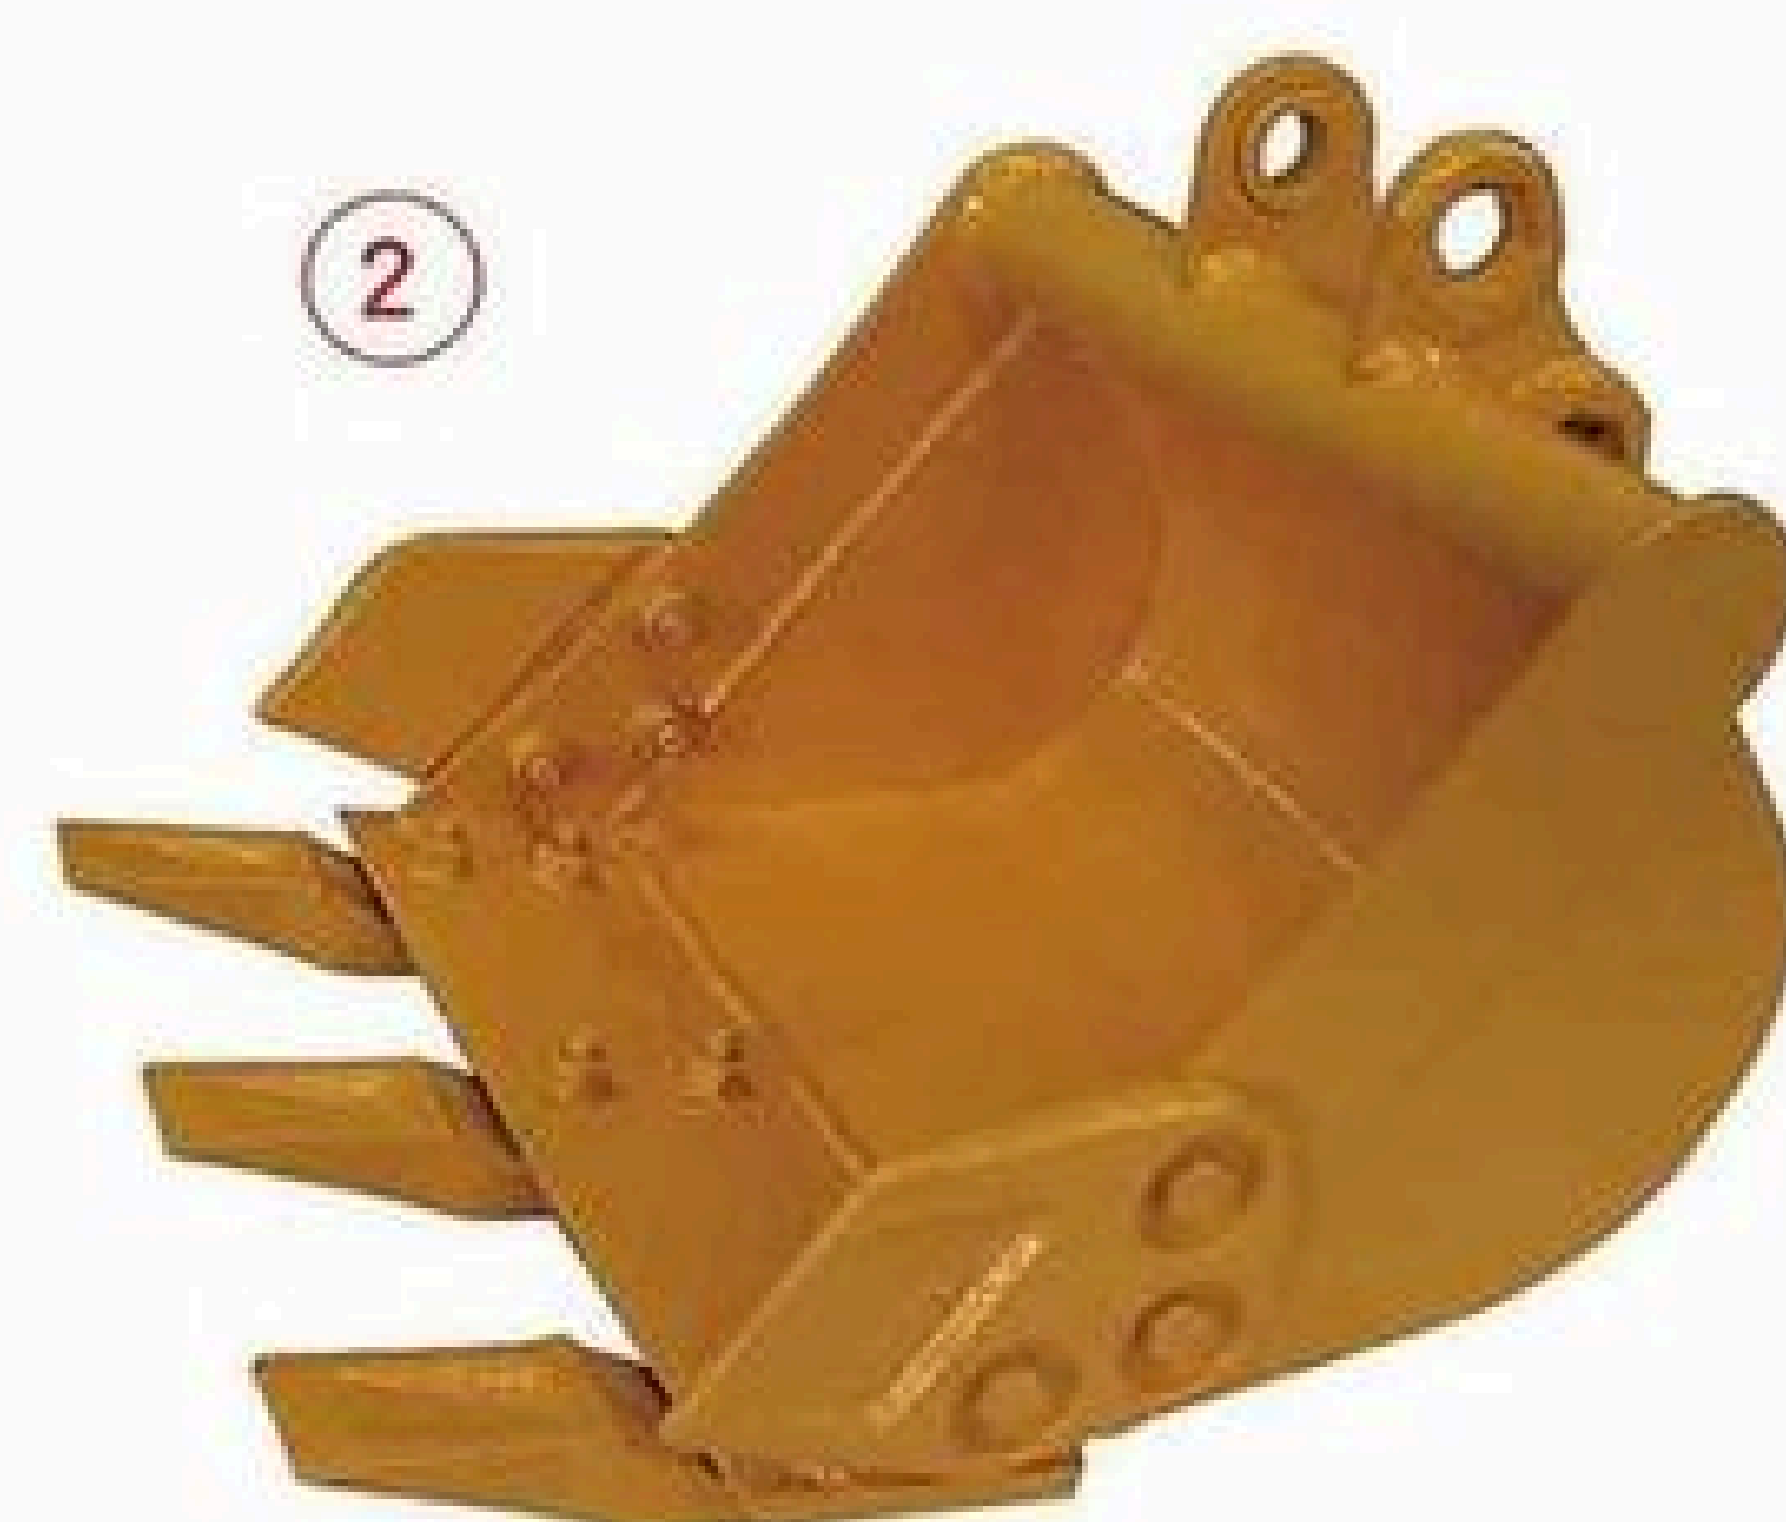


400 挖斗
400 Digging bucket



500/600/800/1000mm
平面斗
Flat bucket



600/800mm
倾斜斗
Tilting bucket

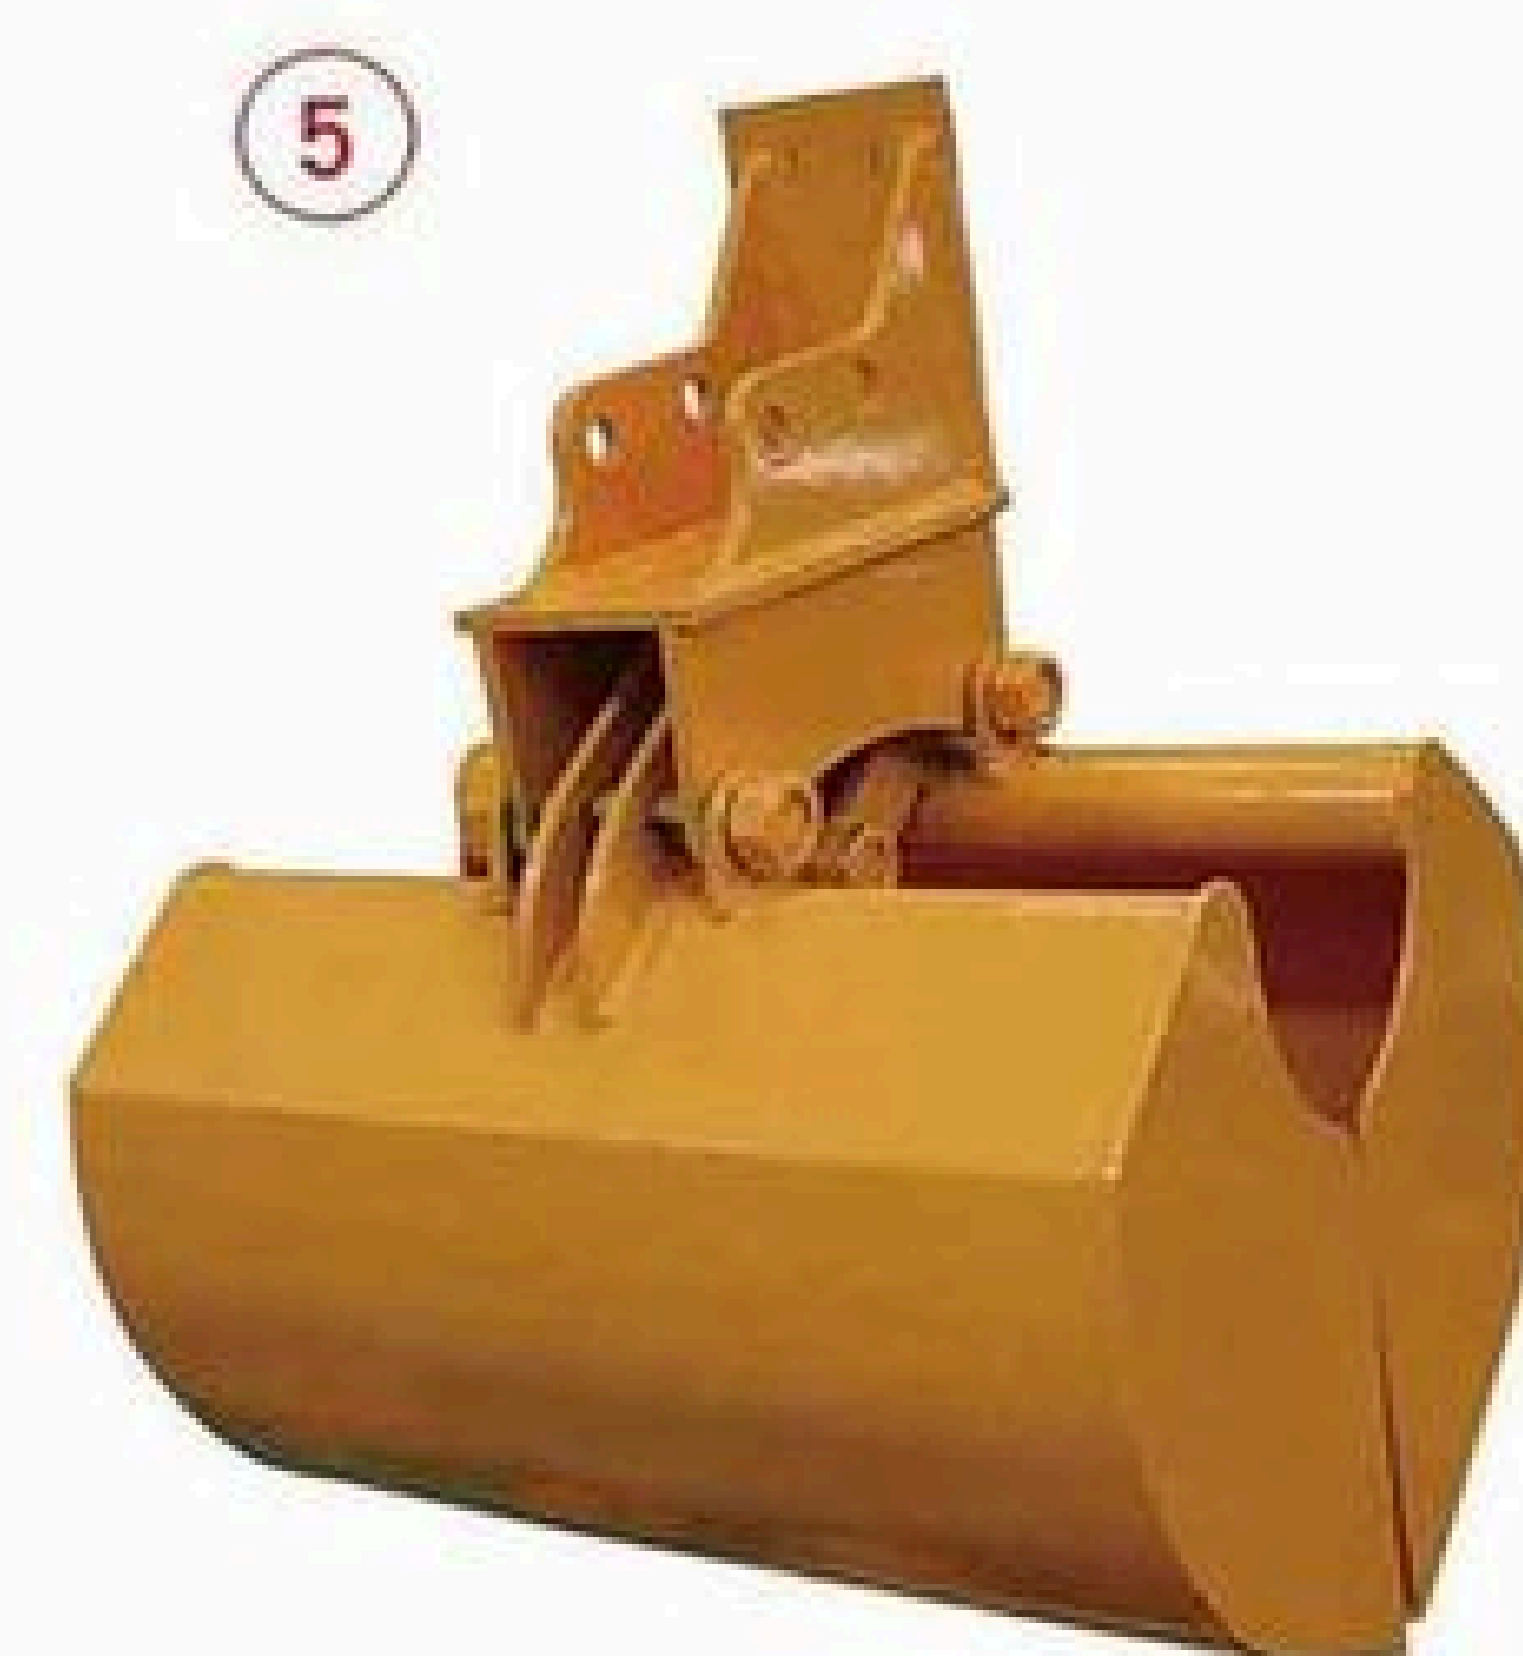

贝壳斗
Shell bucket



筛斗
Sieve bucket



推雪铲
Pushing snow shovel



旋转挖斗
Rotating Excavator bucket



快换
Quick coupler



挖渠斗
V Ditch bucket



倾斜快换
Tilt quick coupler



半自动快换
Semi automatic quick coupler



⑬ 360° 旋转抓木器
360° rotating wooden gripper



⑭ 抓木器
Grab wooden objects



⑰ 一体式液压拇指夹
Integrated hydraulic thumb clamp



⑱ 液压拇指夹
Hydraulic thumb clamp



⑮ 拖车
Trailer



⑯ 拖车2
Trailer2



⑰ 双钩松土器
Double hooksoil loosening device



⑱ 松土器
Soil loosening tool



⑰ 拖车3
Trailer3




⑱ 拇指夹
Hydraulic thumb clamp



⑰ 螺旋钻
Spiral drill



⑱ 破碎锤
Breaking hammer

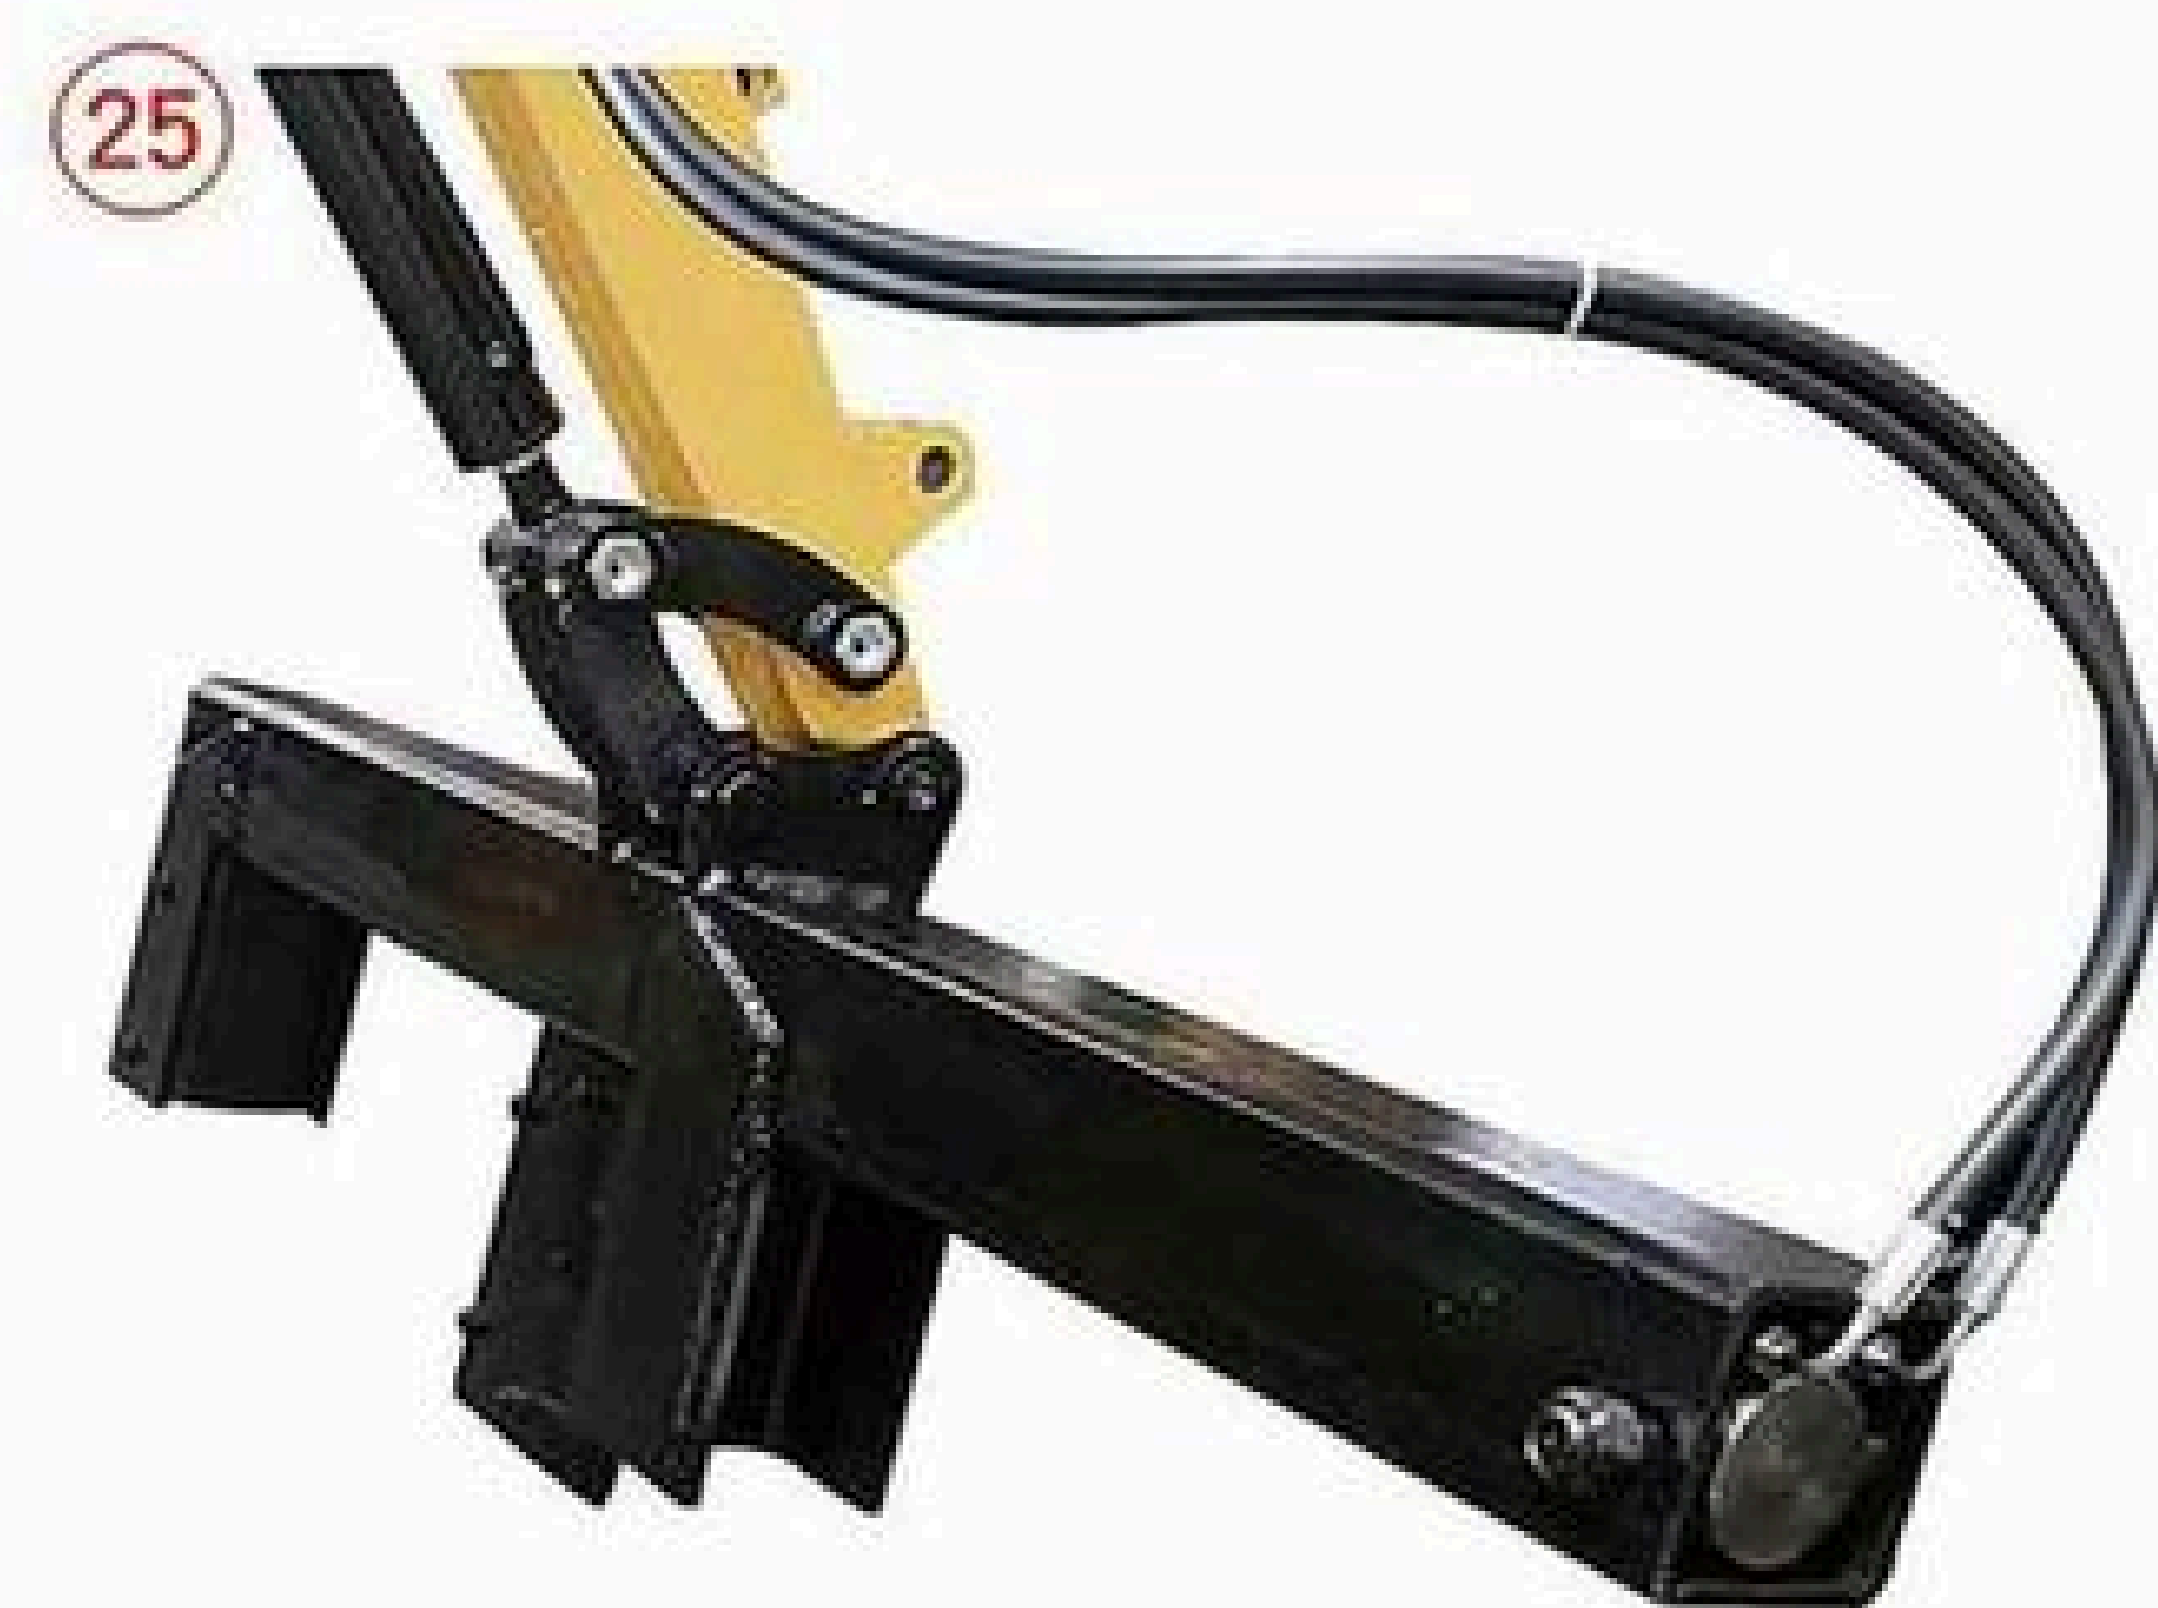

劈柴机
Log Splitter



钻木器
Diamond wood



平板夯
Flat rammer



货叉
Forks for goods




开沟器
Trencher



铣刨机
Milling machine



爬梯
Climbing stairs

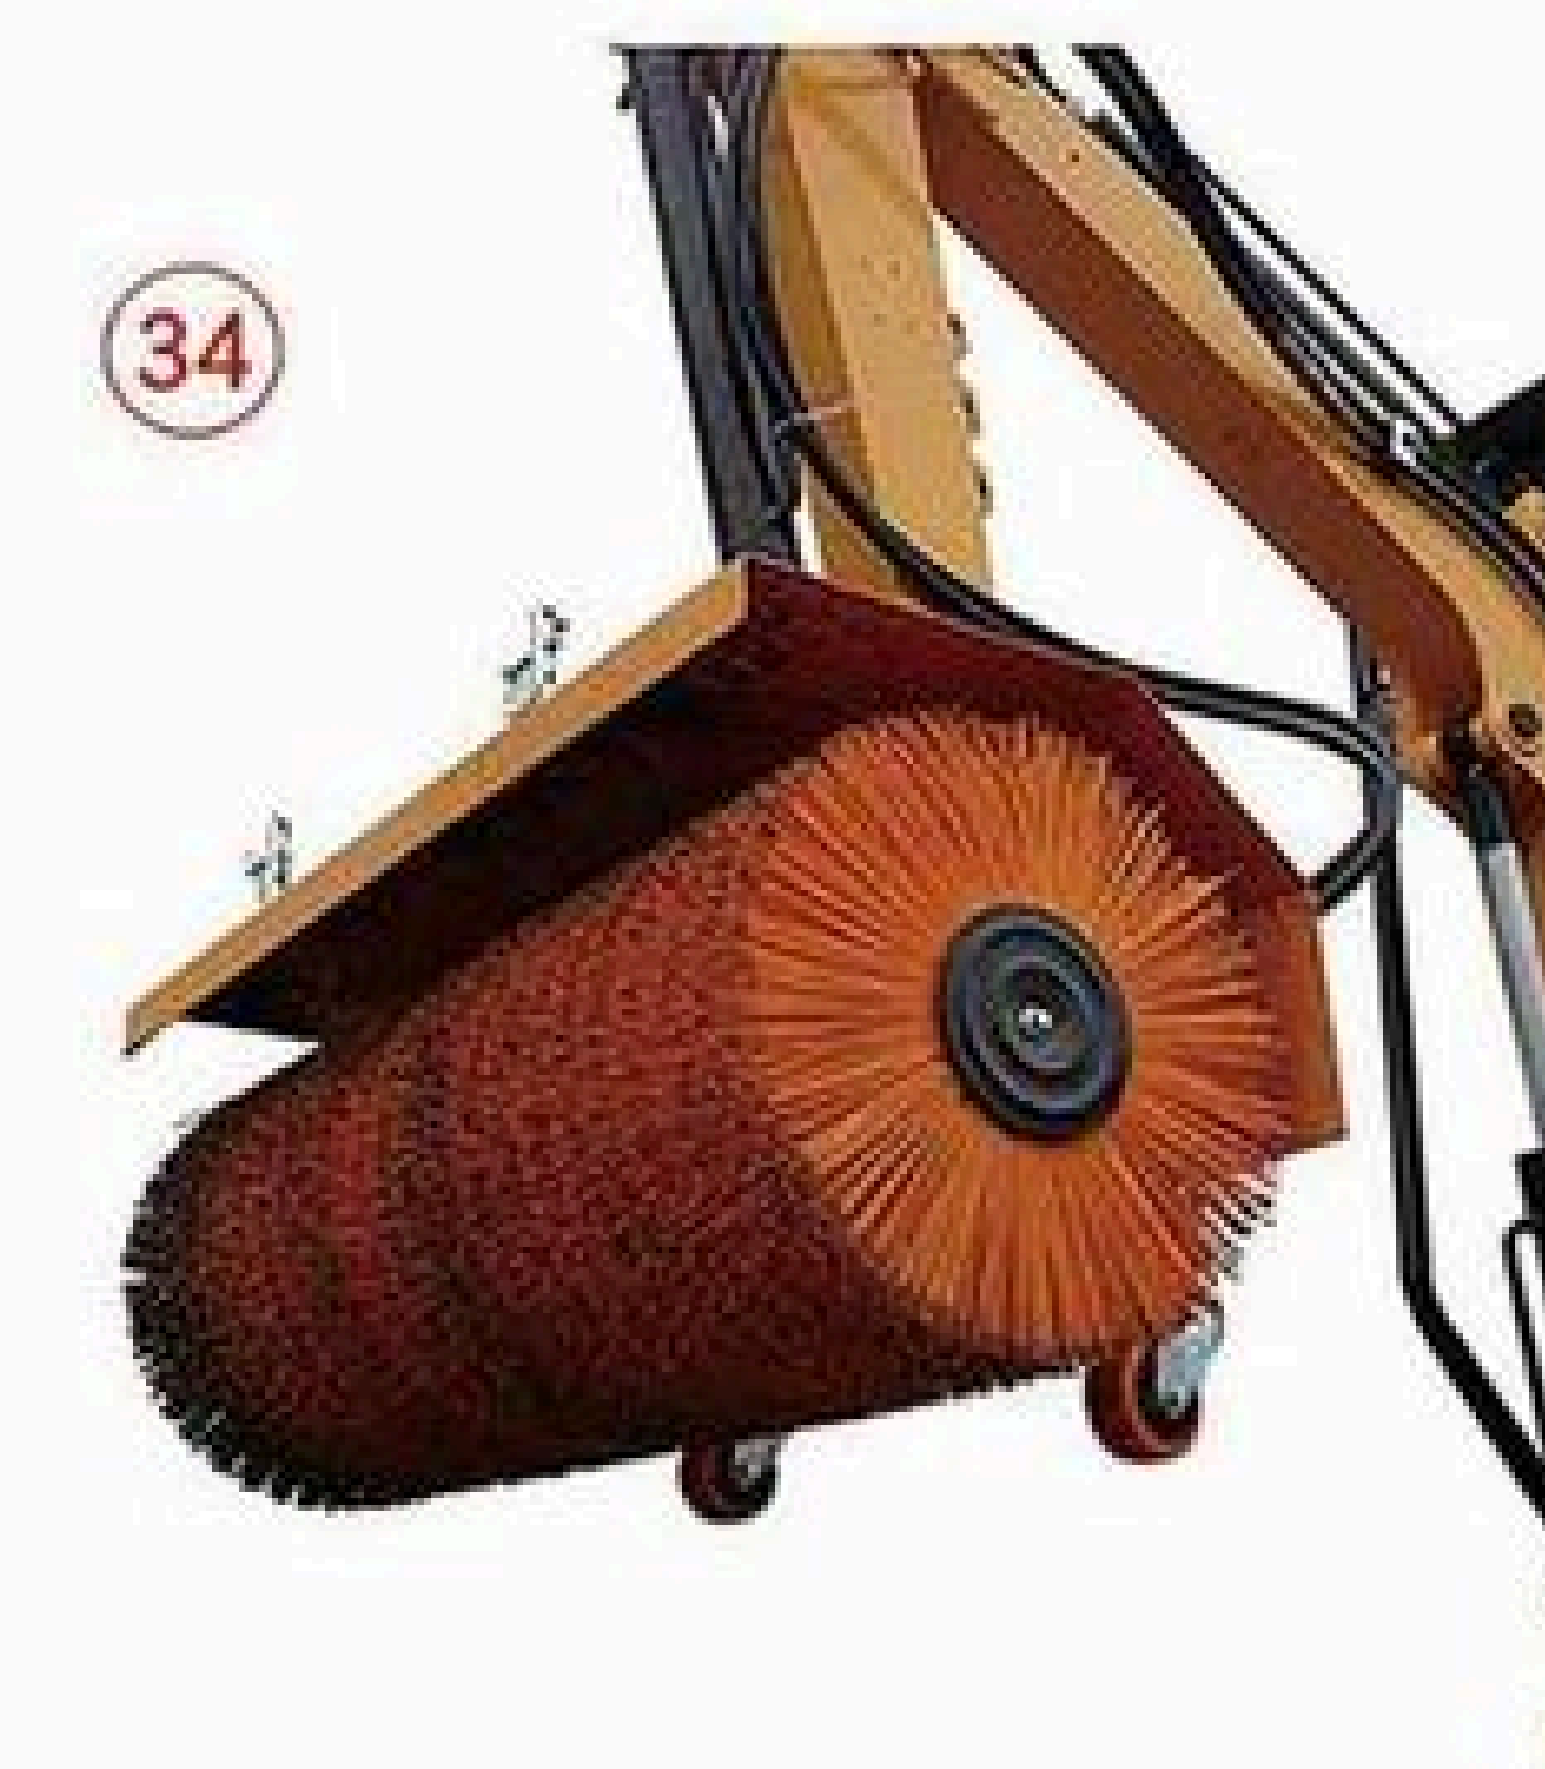

扫雪机
Snow sweeper



切割器
Cutter



耙子
Rake



扫地机
Sweeping machine



割草机
Lawn mower

锂电割草机 YM-550

ELECTRIC LAWN MOWER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



- 遥控操作
Remote Control
- 强劲动力
Powerful Engine
- 履带行走
Track Drive
- 高效切割
Efficient Cutting
- 适用复杂地形
Adaptable to Rough Terrain



农场/Farm



果园/Orchard



山地/Mountain




绿化工程/landscaping projects



标准配置 / STANDARD CONFIGURATION

标配遥控器/工具箱/割刀一副/充电器一个

Standard accessories Remote controller/toolbox/one set of cutting blades/one charger

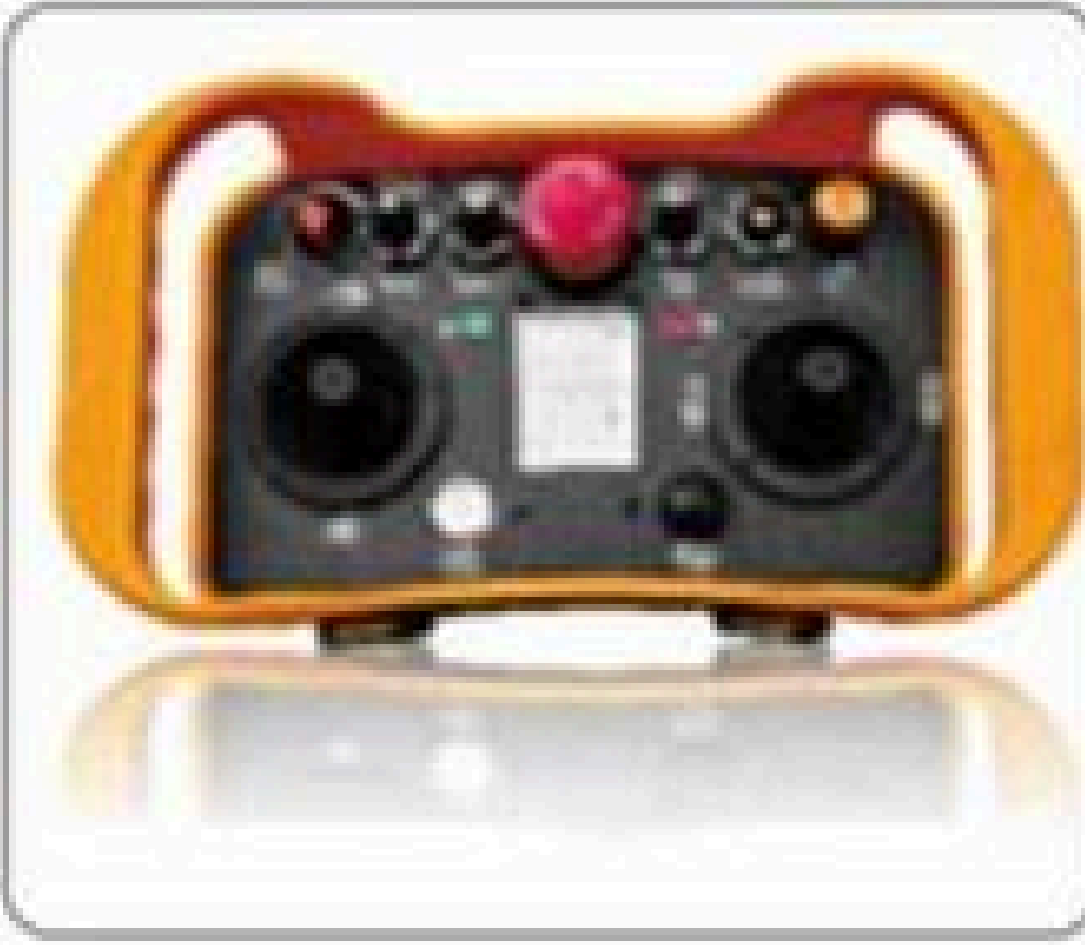

选装配置 / OPTIONAL CONFIGURATION

有刷电机款:推铲/无刷电机款:推铲、置物架、48V-67AH加大电池

Brushed motor version: Dozer blade/Brushless motor version: Dozer blade、storage rack、Upgraded Large Battery

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	YM-550有刷
整机尺寸	980*870*450mm
包装尺寸	1100*910*610mm
整机重量	110kg
包装重量	140kg
切割宽度	530mm
切割高度	20-70mm
升降方式	遥控
行走速度	0-4km
电压电量	48V 40Ah
启动方式	远程遥控启动、停止
爬坡角度	45°
电机功率	48V 350W*2
电池重量	15 kg
行走电机转速	75r/min
割草电机转速	1500W 2800r/min
工作效率	20000m ² /h
遥控距离	≤200m
工作时长	2-3h (根据使用场景)

Model	YM-550
Overall Dimension	980*870*450mm
Packing Dimension	1100*910*610mm
Net Weight	110kg
Gross Weight	140kg
Cutting Width	530mm
Cutting Height	20-70mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	48V 67AH
Starting Method	Remote start & stop
Climbing Angle	45°
Motor Power	48V 350W*2
Battery Weight	30 kg
Travel Motor Speed	75r/min
Cutting Motor Speed	1500W 2800r/min
Working Efficiency	20000m ² /h
Remote Control Range	≤200m
Working Duration	2-3 hours (varies with working conditions)

锂电割草机 YM-550

ELECTRIC LAWN MOWER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



农场/Farm




果园/Orchard



山地/Mountain




绿化工程/landscaping projects

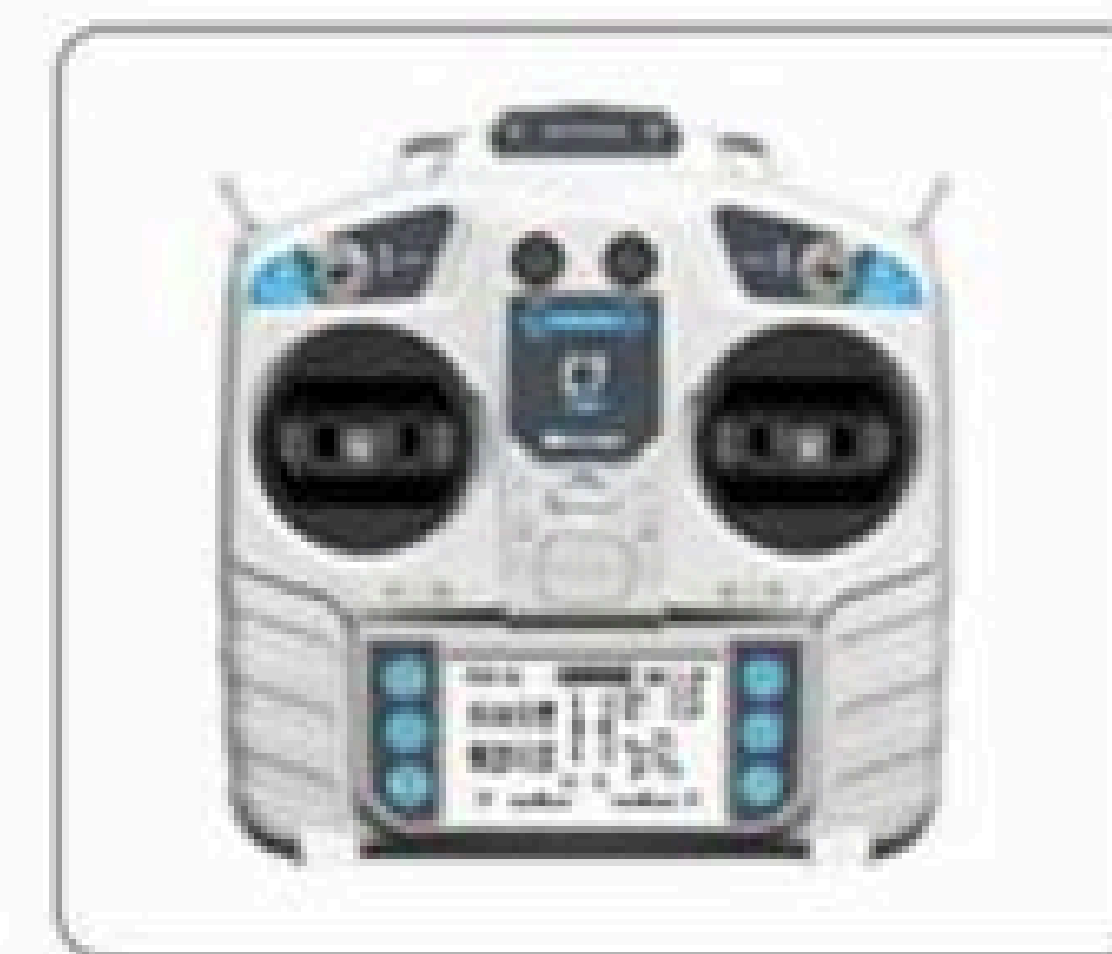

标准配置 / STANDARD CONFIGURATION

标配遥控器/工具箱/割刀一副/充电器一个

Standard accessories Remote controller/toolbox/one set of cutting blades/one charger

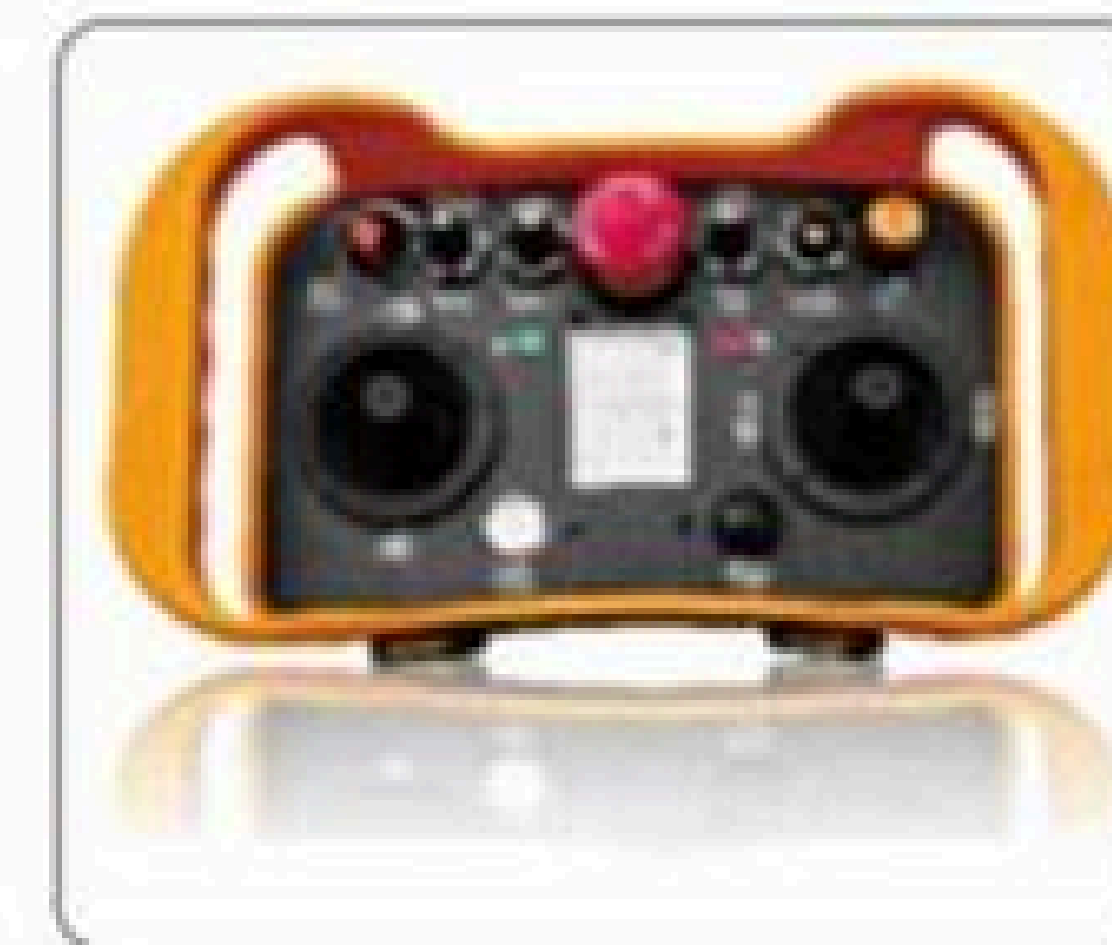

选装配置 / OPTIONAL CONFIGURATION

有刷电机款:推铲/无刷电机款:推铲、置物架、48V-67AH加大电池

Brushed motor version: Dozer blade/Brushless motor version: Dozer blade、storage rack、Upgraded Large Battery

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	YM-550无刷
整机尺寸	900*960*460mm
包装尺寸	1000*1000*610mm
整机重量	160kg
包装重量	190kg (木箱加机器)
切割宽度	530mm
切割高度	20-70mm
升降方式	遥控
行走速度	0-4km
电压电量	48V 40Ah
启动方式	远程遥控启动、停止
爬坡角度	45°
电机功率	48V 500W*2
电池重量	15kg
行走电机转速	75r/min
割草电机转速	1500W 2800r/min
工作效率	20000m ² /h
遥控距离	≤200m
工作时长	2-3h (根据使用场景)

Model	YM-550
Overall Dimension	900*960*460mm
Packing Dimension	1000*1000*610mm
Net Weight	160kg
Gross Weight	190kg (Machine packed in wooden case)
Cutting Width	530mm
Cutting Height	20-70mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	48V 63AH
Starting Method	Remote start & stop
Climbing Angle	45°
Motor Power	48V 500W*2
Battery Weight	30kg
Travel Motor Speed	75r/min
Cutting Motor Speed	1500W 2800r/min
Working Efficiency	20000m ² /h
Remote Control Range	≤200m
Working Duration	2-3 hours (varies with working conditions)

燃油割草机 YM-550

GASOLINE LAWN MOWER (BRUSHED)

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN





EPA



产品手册

PRODUCT MANUAL

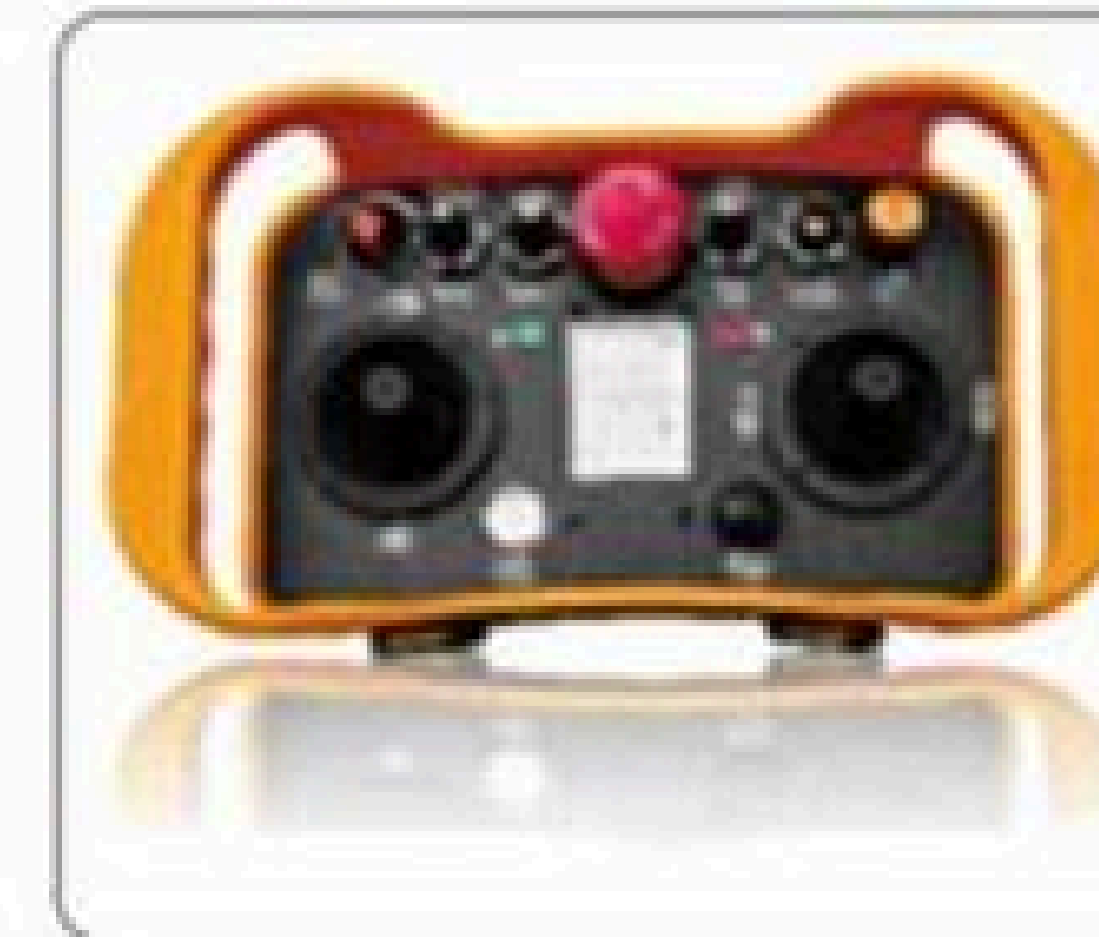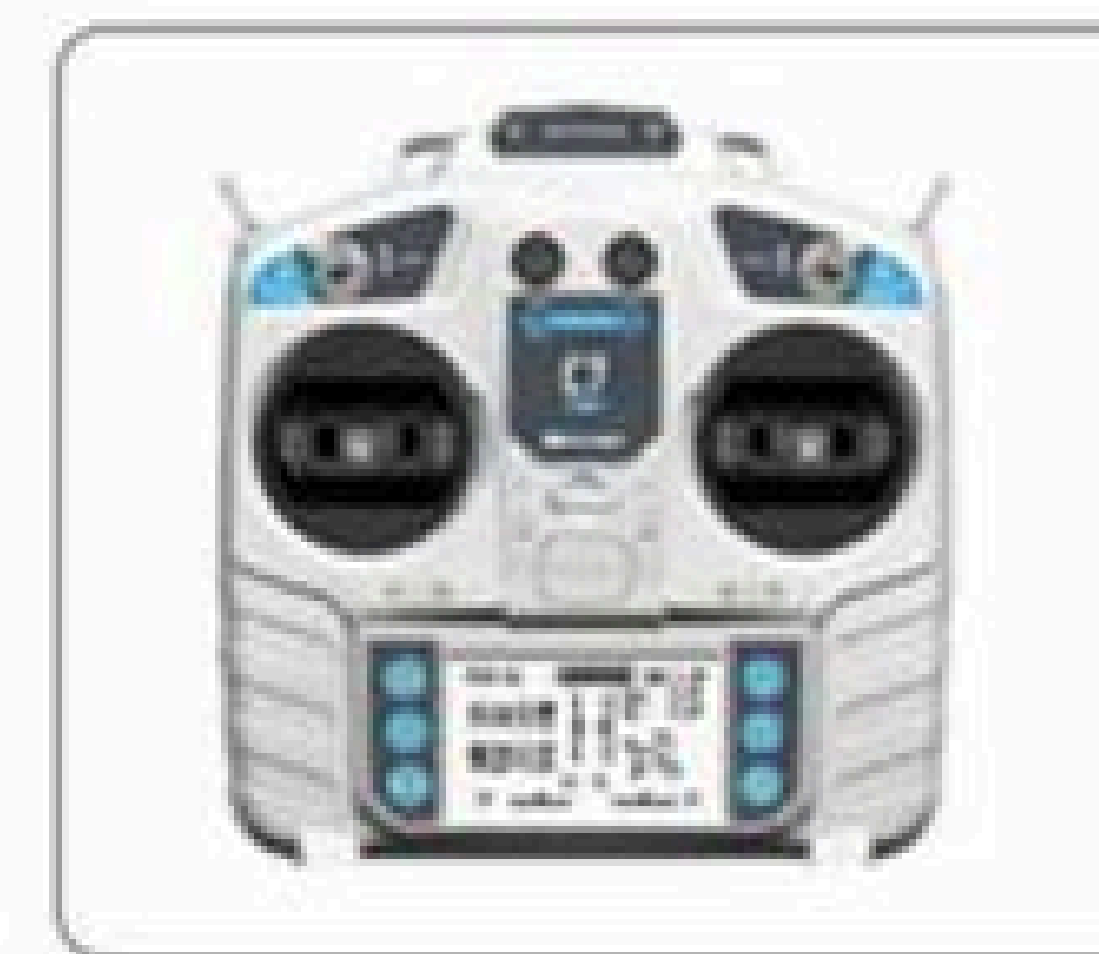

标准配置 / STANDARD CONFIGURATION

电启动发动机/遥控器启动/遥控器熄火/远程紧急停止(遥控器可升级为工业遥控器或C7-plus遥控器)

Electric start engine/Remote start/Remote shutoff/Remote emergency stop(The remote controller can be upgraded to industrial remote controller or C7-plus remote controller)

选装配置 / OPTIONAL CONFIGURATION

有刷电机款: 推铲/无刷电机款: 推铲、置物架

Brushed motor version: Dozer blade

Brushless motor version: Dozer blade + storage rack

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。


Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	YM-550有刷
整机尺寸	900*930*520
包装尺寸	950*990*670
整机重量	140kg
包装重量	170kg
切割宽度	500mm
切割高度	10-125mm
升降方式	遥控
行走速度	0-4km
电压电量	24V 12AH
启动方式	远程遥控启动、停止
爬坡角度	45°
发动机型号/品牌	润通225D/隆鑫224
最大功率	4.5kw
燃油箱容量	2L
油耗	1.2h/L
工作效率	20000m ² /h
遥控距离	≤1000m
可选属具	推铲


Model	YM-550 Brushed
Overall Dimension	900*930*520
Packing Dimension	950*990*670
Net Weight	140kg
Gross Weight	170kg
Cutting Width	500mm
Cutting Height	10-125mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	24V 12AH
Starting Method	Remote start & stop
Climbing Angle	45°
Standard Engine	RATO225D/Loncin225
Maximum Power	4kw
Fuel Tank Capacity	2L
Fuel Consumption	1.2h/L
Working Efficiency	20000m ² /h
Remote Control Range	≤1000m
Optional Attachments	Dozer blade



农场/Farm

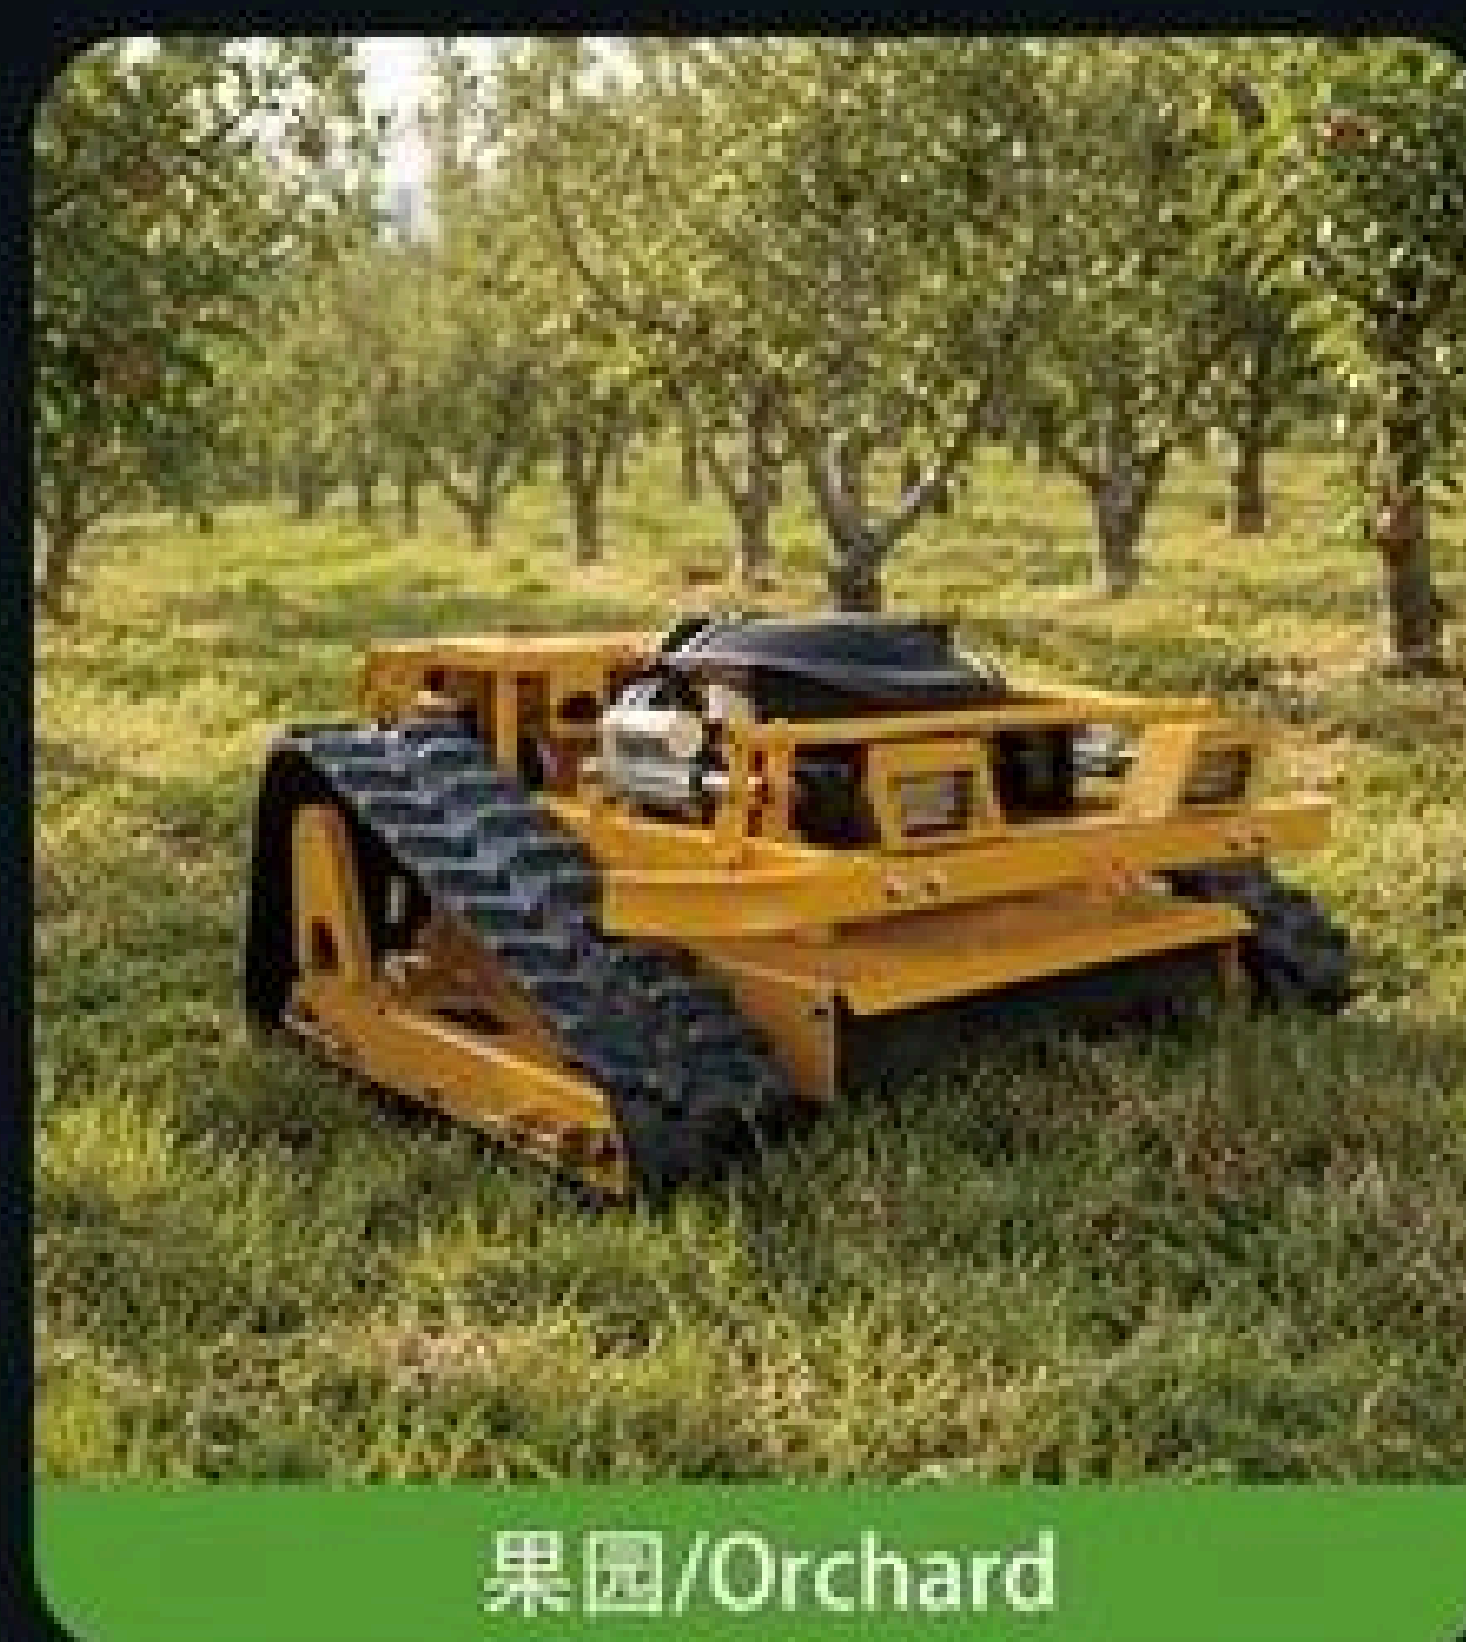

果园/Orchard

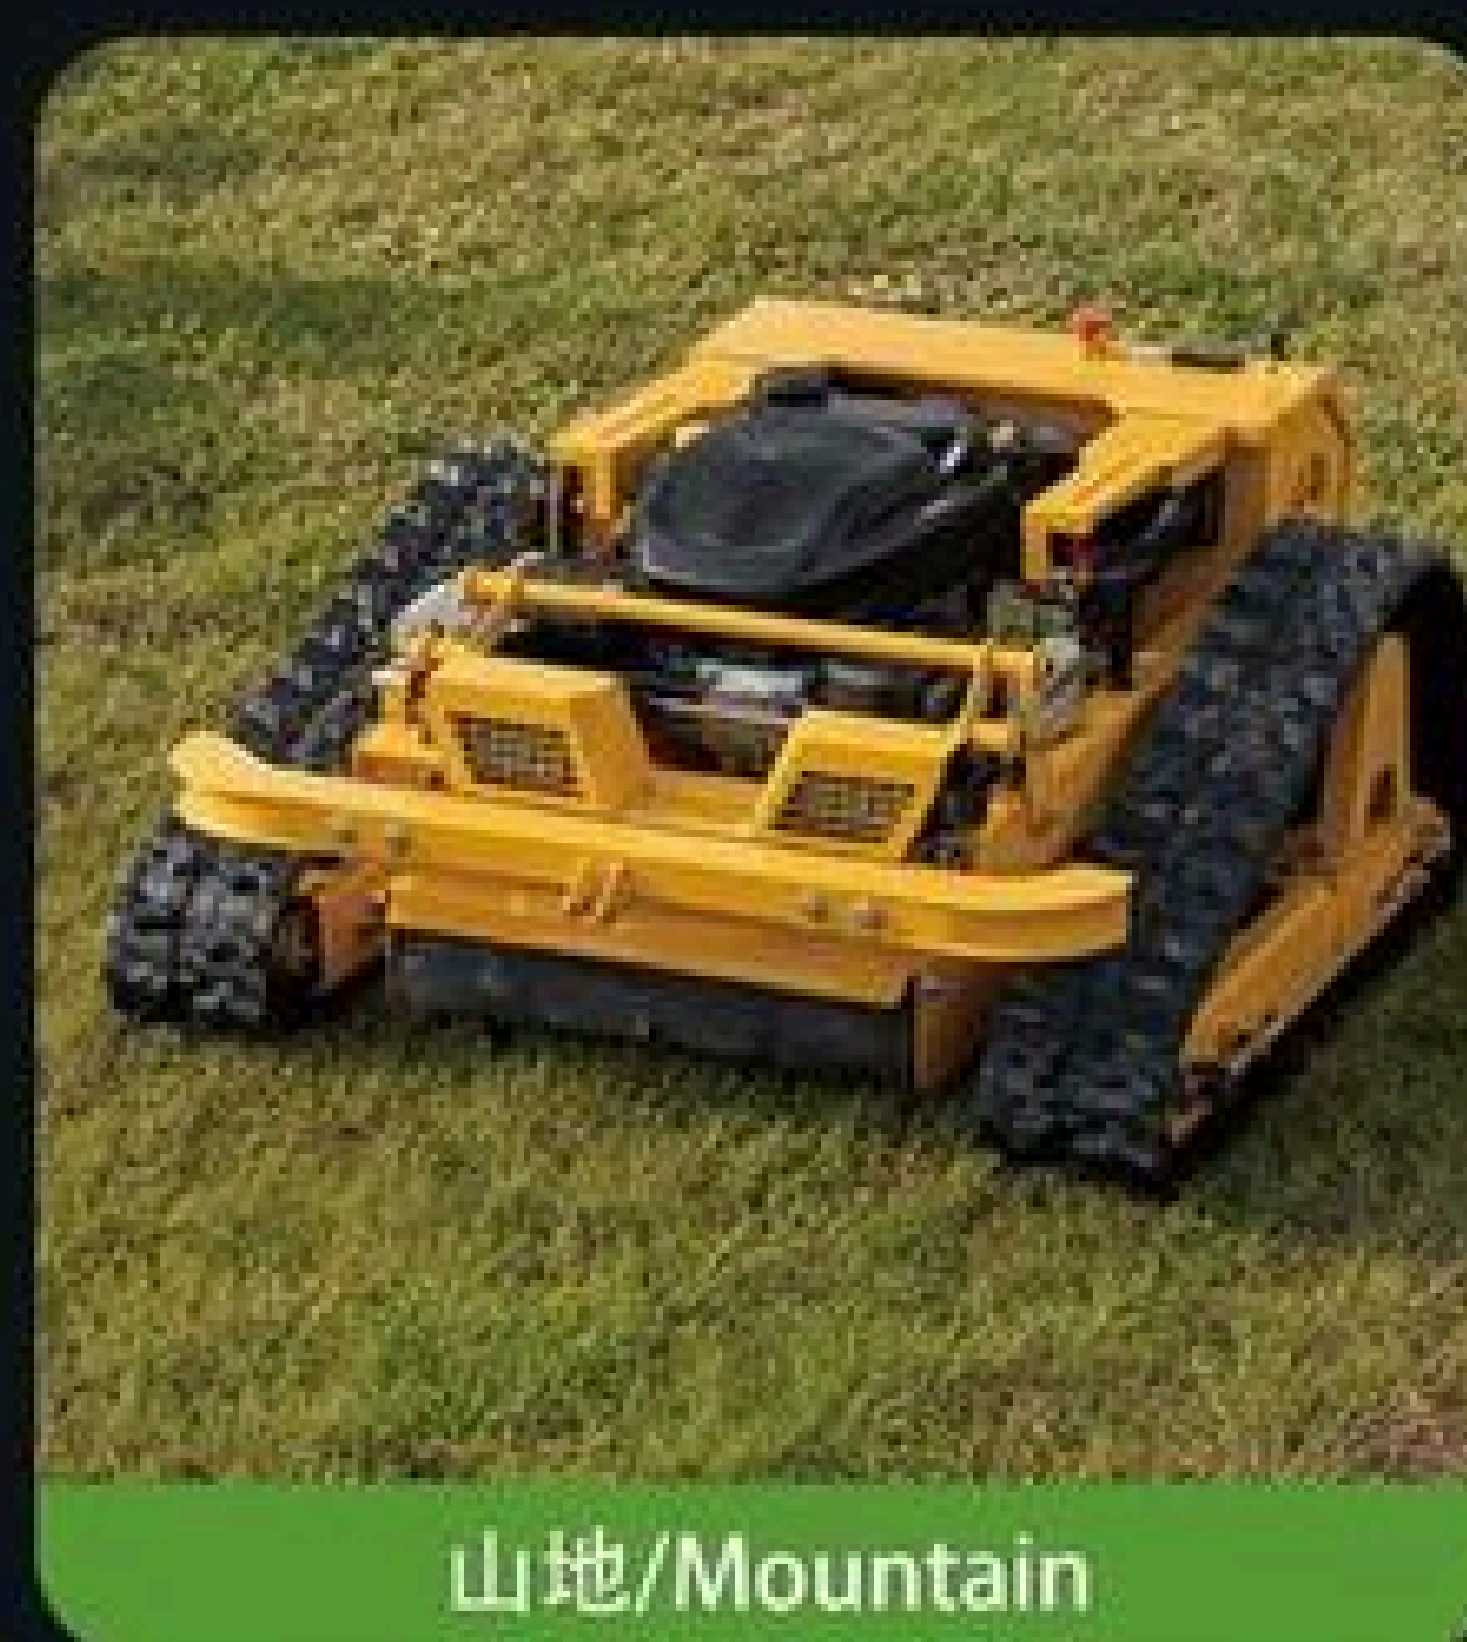

山地/Mountain



绿化工程/landscaping projects

燃油割草机 YM-550

GASOLINE LAWN MOWER (BRUSHLESS)

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



农场/Farm





果园/Orchard



山地/Mountain



绿化工程/landscaping projects

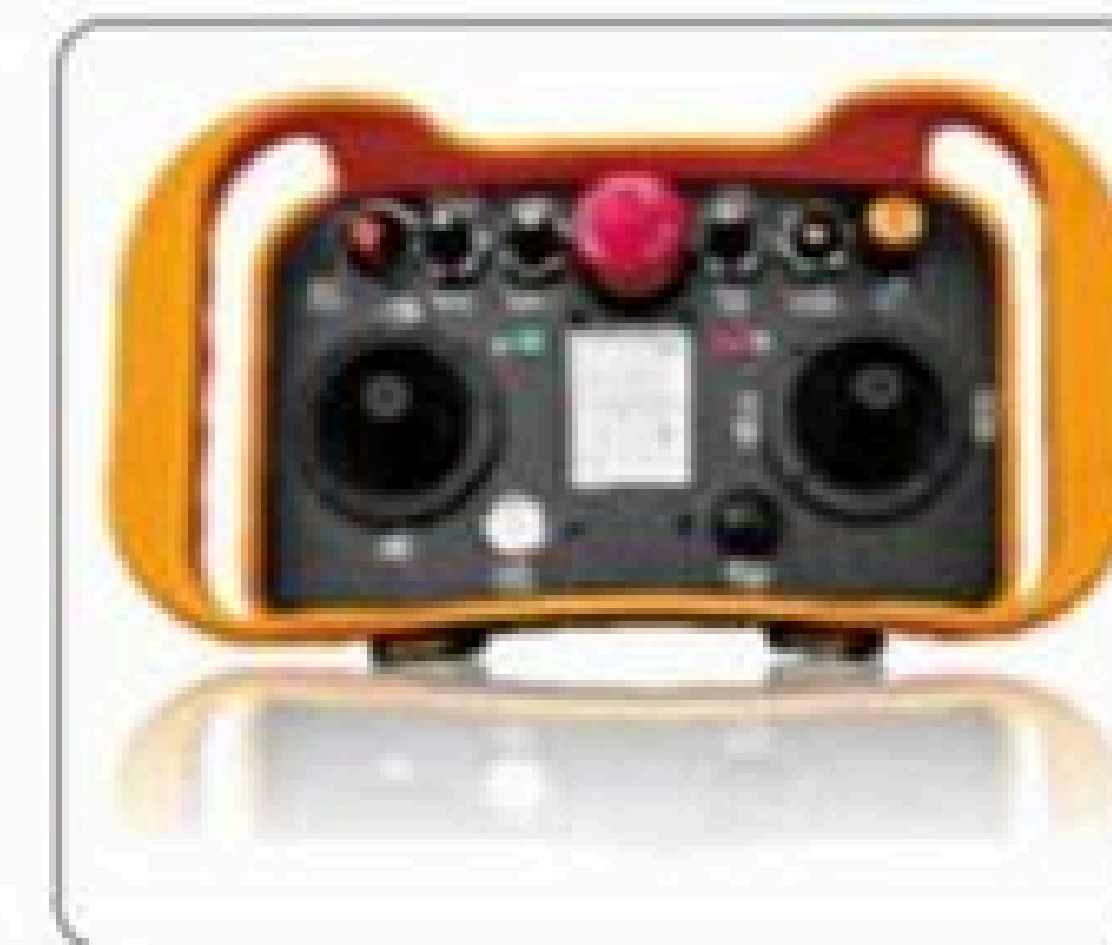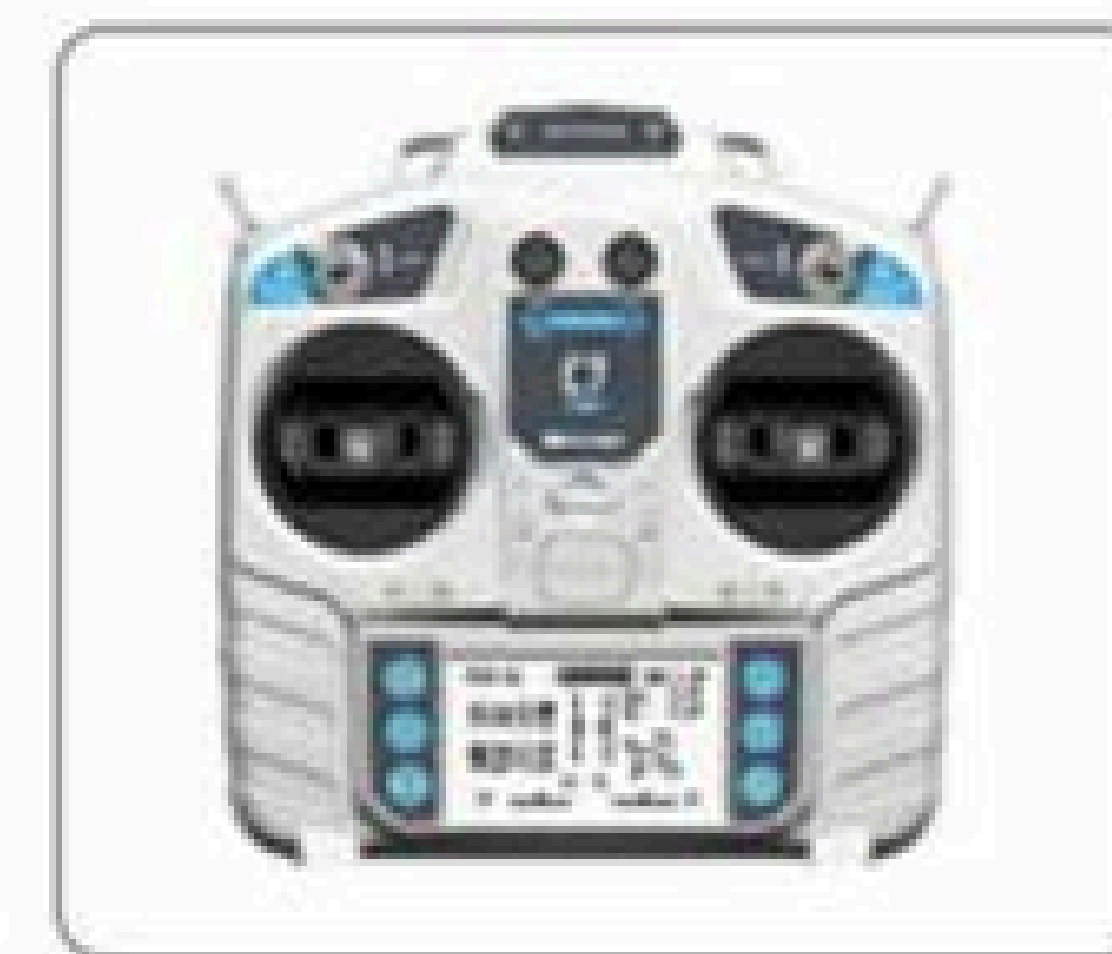

标准配置 / STANDARD CONFIGURATION

电启动发动机/遥控器启动/遥控器熄火/远程紧急停止(遥控器可升级为工业遥控器或C7-plus遥控器)

Electric start engine/Remote start/Remote shutoff/Remote emergency stop(The remote controller can be upgraded to industrial remote controller or C7-plus remote controller)

选装配置 / OPTIONAL CONFIGURATION

有刷电机款: 推铲/无刷电机款: 推铲、置物架

Brushed motor version: Dozer blade

Brushless motor version: Dozer blade + storage rack

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	YM-550 无刷
整机尺寸	900*950*535mm
包装尺寸	950*1010*685mm
整机重量	170kg
包装重量	210kg
切割宽度	500mm
切割高度	10-100mm
升降方式	遥控升降
行走速度	0-4km
电压电量	24V 12AH
启动方式	远程遥控启动、停止
爬坡角度	45°
发动机型号/品牌	润通225D/隆鑫224
最大功率	4.5kw
燃油箱容量	2L
油耗	1.2h/L
工作效率	20000m ² /h
遥控距离	≤1000m
可选属具	推铲、置物架

Model	YM-550 Brushless
Overall Dimension	900*950*535
Packing Dimension	950*1010*685
Net Weight	170kg
Gross Weight	210kg
Cutting Width	500mm
Cutting Height	10-100mm
Height Adjustment Mode	Remote Control
Travel Speed	0-4km
Battery Spec.	24V 12AH
Starting Method	Remote start & stop
Climbing Angle	45°
Standard Engine	RATO225D/Loncin225
Maximum Power	4kw
Fuel Tank Capacity	2L
Fuel Consumption	1.2h/L
Working Efficiency	20000m ² /h
Remote Control Range	≤1000m
Optional Attachments	Dozer blade/storage rack

燃油割草机 YM-550

GASOLINE LAWN MOWER (WHEELED)

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



农场/Farm




果园/Orchard



山地/Mountain



绿化工程/landscaping projects

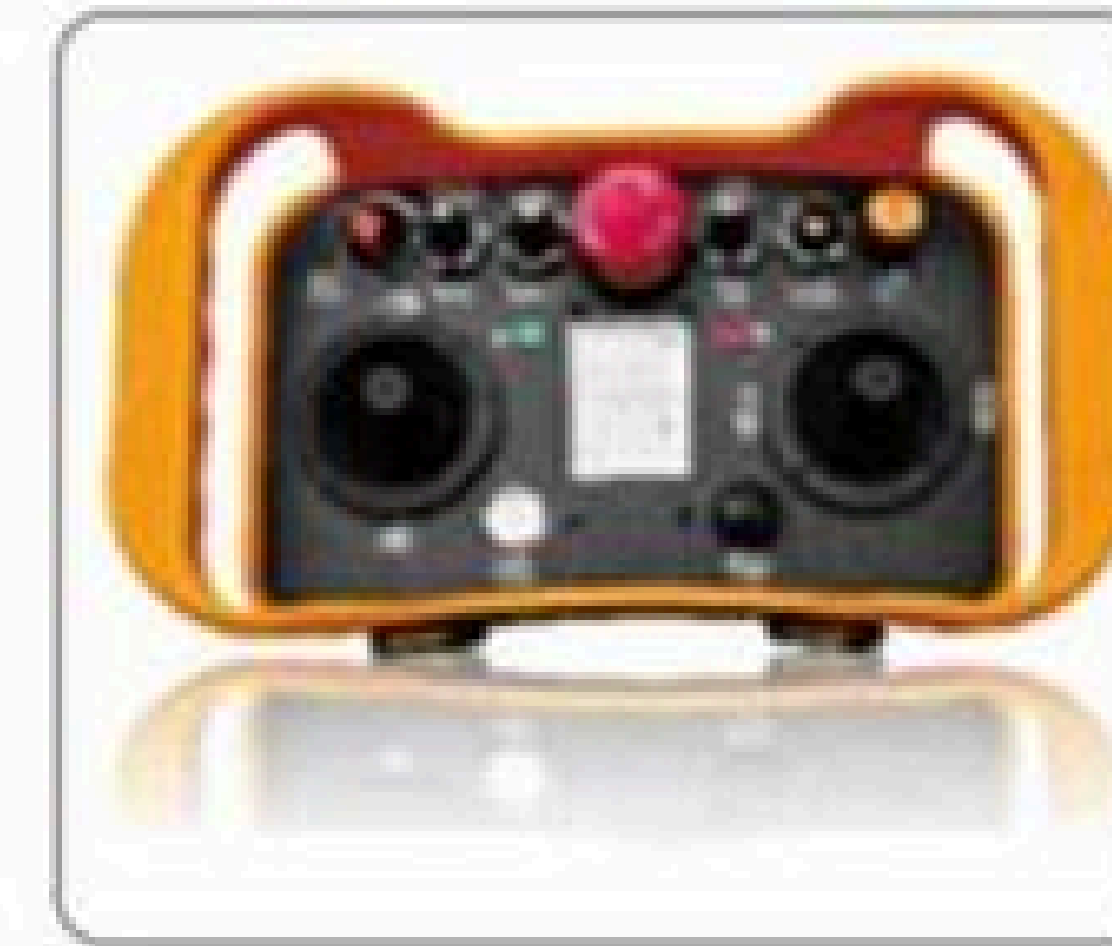

标准配置 / STANDARD CONFIGURATION

电启动发动机/遥控器启动/遥控器熄火/远程紧急停止(遥控器可升级为工业遥控器或C7-plus遥控器)

Electric start engine/Remote start/Remote shutoff/Remote emergency stop(The remote controller can be upgraded to industrial remote controller or C7-plus remote controller)

选装配置 / OPTIONAL CONFIGURATION

有刷电机款: 推铲/无刷电机款: 推铲、置物架

Brushed motor version: Dozer blade

Brushless motor version: Dozer blade + storage rack

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	轮式简易四驱
整机尺寸	890*770*470mm
包装尺寸	940*820*620mm
整机重量	98kg
包装重量	120kg
切割宽度	500mm
切割高度	4cm、6cm
升降方式	手动
行走速度	0-4km/h
电压电量	24V 12AH
启动方式	手拉/电启动
爬坡角度	30°
行走方式	四驱
行走电机	有刷
割刀	一字平刀
刀头数量	2
燃油	92以上汽油
遥控距离	≤200m
割草效率	2000m ² /h

Model	Wheel Mower
Overall Dimension	890*770*470mm
Packing Dimension	940*820*620mm
Net Weight	98kg
Gross Weight	120kg
Cutting Width	530mm
Cutting Height	4cm、6cm
Height Adjustment Mode	Manual
Travel Speed	0-4km/h
Battery Spec.	24V 12AH
Starting Method	Manual / Electric
Climbing Angle	30°
Travel Mode	4WD
Travel Motor	Brushed Motor
Mowing Blade	Straight Flat Blade
Blade Quantity	2
Fuel	≥92# Gasoline
Remote Control Range	≤200m
Mowing Capacity	2000m ² /h

燃油割草机 坦克-800/1000

GASOLINE LAWN MOWER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



农场/Farm




果园/Orchard



山地/Mountain



绿化工程/Landscaping projects

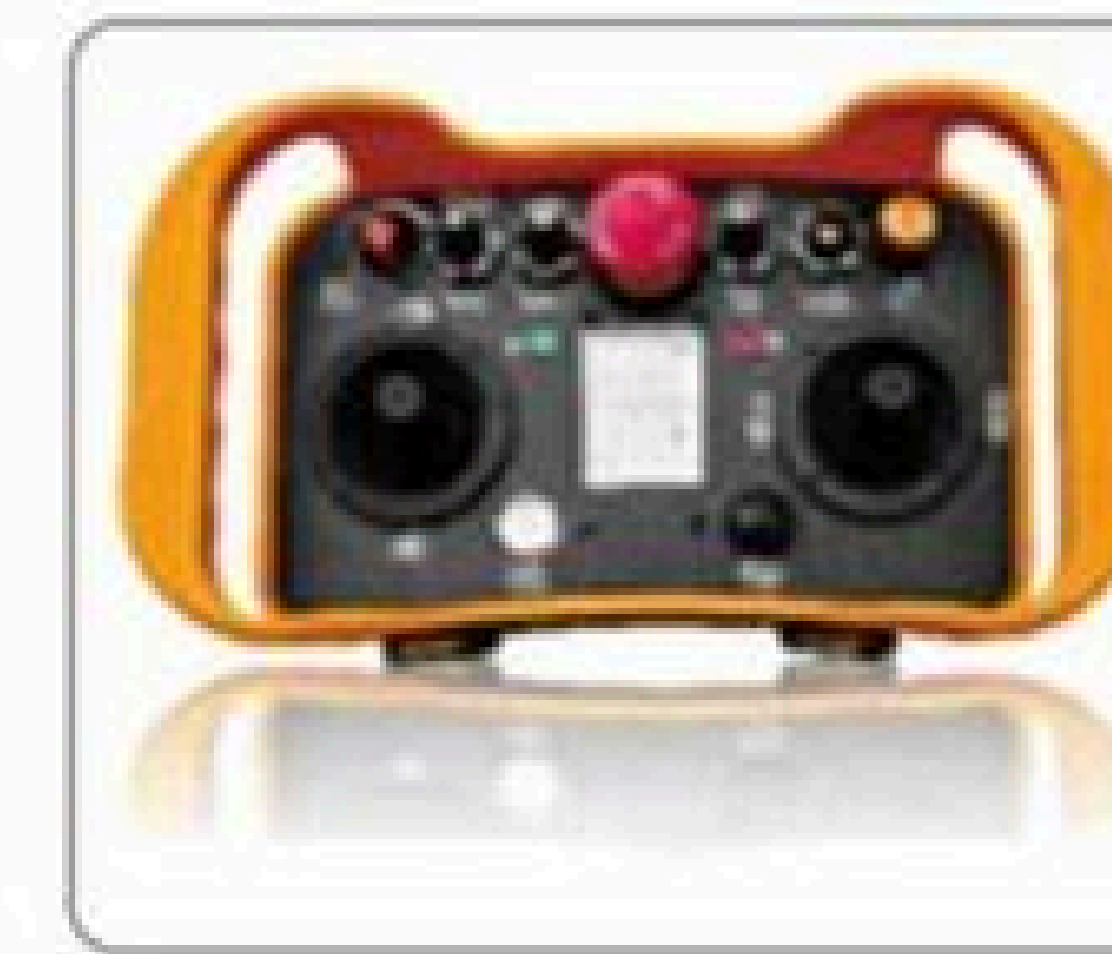

标准配置 / STANDARD CONFIGURATION

电启动发动机/遥控器启动/遥控器熄火/远程紧急停止(遥控器可升级为工业遥控器或C7-plus遥控器)

Electric start engine/Remote start/Remote shutoff/Remote emergency stop(The remote controller can be upgraded to industrial remote controller or C7-plus remote controller)

选装配置 / OPTIONAL CONFIGURATION

推雪铲/打药机/机罩/运输平台/侧割台/48V定制

Snow Plow / Sprayer / Engine Cover / Transport Platform / Side Cutting Deck / Custom 48V

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	坦克800/1000
整机尺寸(800/1000)	1450*1330*700/ /1550*1530*700
包装尺寸(800/1000)	1500*1420*880/ /1600*1620*880
整机重量(800/1000)	390kg/400kg
包装重量(800/1000)	460kg/470kg
切割宽度	800mm/1000mm
切割高度(有刷/无刷)	10-200mm
升降方式	遥控
行走速度	0-6km/h
电压电量	48V-20Ah
启动方式	远程遥控启动、停止
爬坡角度	50°
标配动力	隆鑫 608cc
系统/控制器	自发电系统 分控电路控制器
燃油箱容量	9L
额定功率	11.5kW/3600rpm
燃油消耗	≤370g/kW·h
遥控距离	≤1000m
工作时长	3-5h (根据使用场景)

Model	TK800/1000
Overall Dimension (Brushed / Brushless)	1450*1330*700/ /1550*1530*700
Packing Dimension (Brushed / Brushless)	1500*1420*880/ /1600*1620*880
Net Weight (Brushed / Brushless)	390kg/400kg
Gross Weight (Brushed / Brushless)	460kg/470kg
Cutting Width	800mm/1000mm
Cutting Height (Brushed / Brushless)	10-200mm
Height Adjustment Mode	Remote Control
Travel Speed	0-6km/h
Battery Spec.	48V-20Ah
Starting Method	Remote start & stop
Climbing Angle	50°
Standard Power	Loncin 608cc
System / Controller	Self-generating System Split Circuit Controller
Fuel Tank Cap.	9L
rated power	11.5kW/3600rpm
fuel consumption	≤370g/kW·h
Remote Control Range	≤1000m
Working Duration	3-5 hours (varies with working conditions)

遥控开荒机

REMOTE CONTROLLED BRUSH CUTTER

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



农场/Farm



果园/Orchard



山地/Mountain




绿化工程/landscaping projects



标准配置 / STANDARD CONFIGURATION

标配-科普柴油195发动机/遥控升级/电启动/工具箱/阀门一副

STANDARD CONFIGURATION:Koop 195 diesel engine/upgraded remote control system/
electric start/toolbox/one set of valves

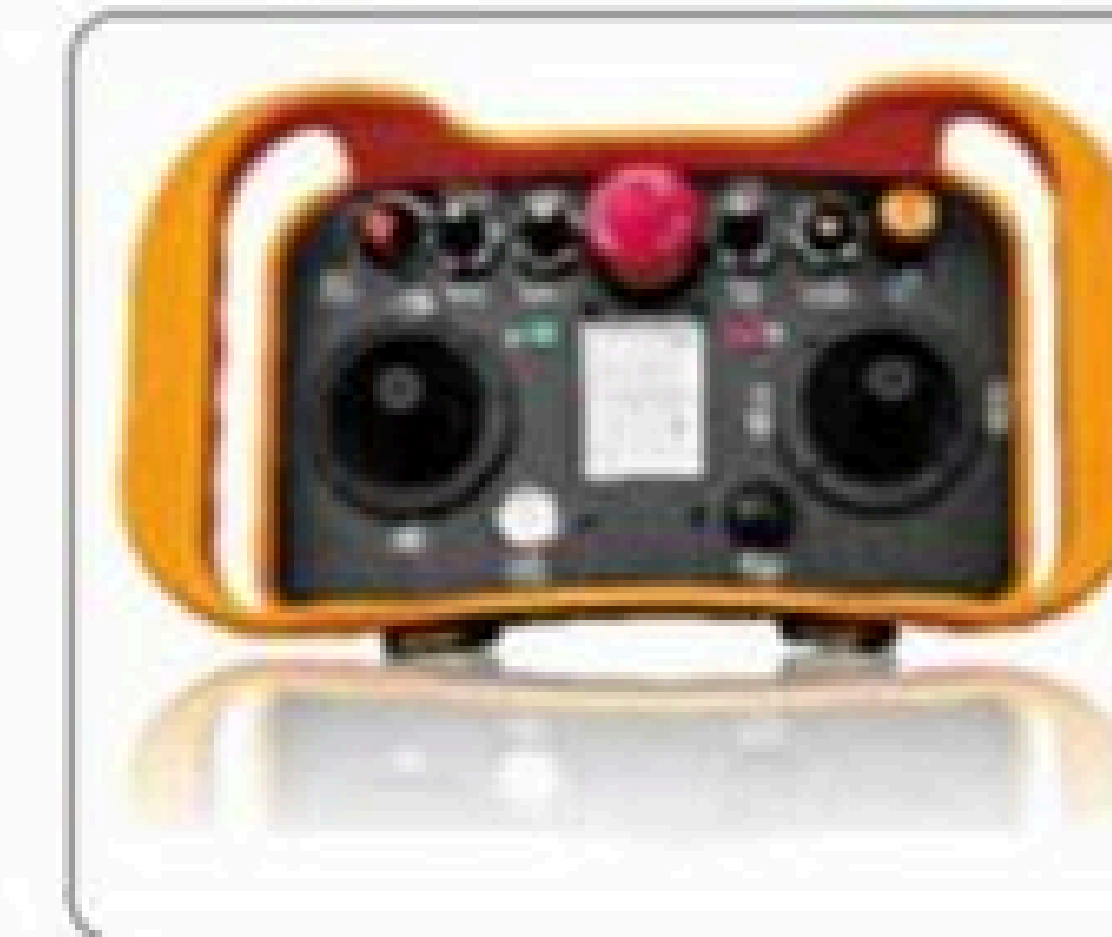

选装配置 / OPTIONAL CONFIGURATION

选配C7-PLUS遥控器/加购抛雪机属具

Optional C7-PLUS remote controller/Snow Thrower Attachment (Extra Cost)

适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	开荒机
整机尺寸	1580×870×700 mm
包装尺寸	1630×920×850 mm
整机重量	360 kg
包装重量	410 kg
切割宽度	800 mm
切割高度	0-350 mm
升降方式	遥控升降
行走速度	0-4 km/h
最大碎枝直径	80 mm
刀片数量	48个
爬坡角度	≤40°
发动机型号/品牌	科普195F
最大功率	8 KW
燃油油量	5.5 L
蓄电池容量	48 V / 20 Ah
液压泵类型	齿轮泵
液压系统流量	30 L / min
液压系统压力	16 Mpa

Model	Brush Cutter
Overall Dimensions	1580×870×700 mm
Packing Dimensions	1630×920×850 mm
Net Weight	360 kg
Gross Weight	410 kg
Cutting Width	800 mm
Cutting Height	0-350 mm
Lifting Method	Remote-Controlled Lifting
Travel Speed	0-4 km/h
Maximum Branch Diameter	80 mm
Number of Blades	48个
Maximum Climbing Angle	≤40°
Engine Model / Brand	KOOP 195F
Maximum Power	8 KW
Fuel Tank Capacity	5.5 L
Battery Capacity	48 V / 20 Ah
Hydraulic Pump Type	Gear Pump
Hydraulic Flow Rate	30 L / min
Hydraulic System Pressure	16 Mpa

遥控割灌机

Remote-Controlled Diesel Brush Cutter

强劲动力 · 灵活高效 · 轻松征服复杂地形

POWERFUL · AGILE · ADAPTABLE TO ROUGH TERRAIN



EPA



产品手册


PRODUCT MANUAL



标准配置 / STANDARD CONFIGURATION

标配-科普195电启/遥控升降/标配遥控器/工具箱/割刀一副/充电器一个

STANDARD CONFIGURATION:Koop 195/Electric Start/Remote Controlled Lifting/Remote Controller Included as Standard/Tool kit/one set of blades/one charger

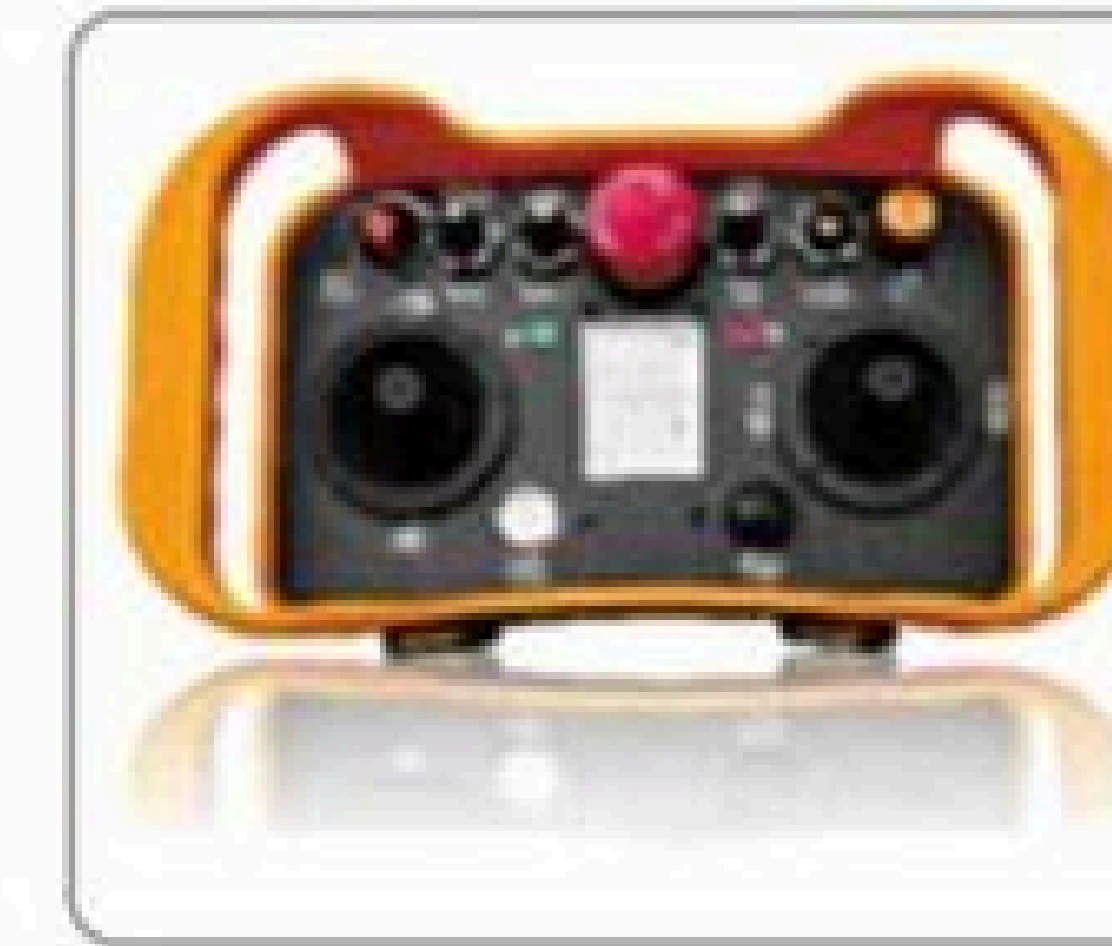

选装配置 / OPTIONAL CONFIGURATION

选配C7-PLUS遥控器

Optional C7-PLUS remote controller


适用范围 / APPLICATION

适合农场、果园、荒地、山地、绿化工程、开荒除草等多种作业环境。

Suitable for farms, orchards, sports fields, mountainous regions, landscaping projects, wasteland clearing and other working conditions.

型号	遥控柴油割灌机 (800/1000)
整机尺寸(800/1000)	1470*970*670/ /1470*1170*670
包装尺寸(800/1000)	1580*1170*800/ /1590*1270*800
整机重量(800/1000)	322kg/351kg
包装重量(800/1000)	362kg/398kg
切割宽度(800/1000)	850/1050mm
切割高度	10-220mm
升降方式	遥控
履带宽度	15cm*2条
主轴转速	3600rpm
启动方式	电启动
爬坡角度	≤55°
电机功率	650*2纯铜无刷电机
燃油箱容量	5L
油耗	1.1L/H
机油容量	1.2-1.5L
机油类型	四冲程柴油机油
遥控距离	≤1000m
刀片数量	60片 (20组*3=60)


Model	Remote-Controlled Diesel Brush Cutter 800 / 1000
Overall Dimension (800/1000)	1470*970*670/ /1470*1170*670
Packing Dimension (800/1000)	1580*1170*800/ /1590*1270*800
Net Weight (800/1000)	322kg/351kg
Gross Weight (800/1000)	362kg/398kg
Cutting Width (800/1000)	850/1050mm
Cutting Height	10-220mm
Height Adjustment Mode	Remote Control
Track Width	15cm × 2 pieces
spindle speed	3600rpm
Starting Method	Electric Start
Climbing Angle	≤55°
Motor Power	650*2 Pure Copper Brushless Motor
Fuel Tank Capacity	5L
Fuel Consumption	1.1L/H
Engine Oil Capacity	1.2-1.5L
Oil Type	Four-stroke diesel engine oil
Remote Control Range	≤1000m
Blades	60 pcs (20 sets × 3 = 60)

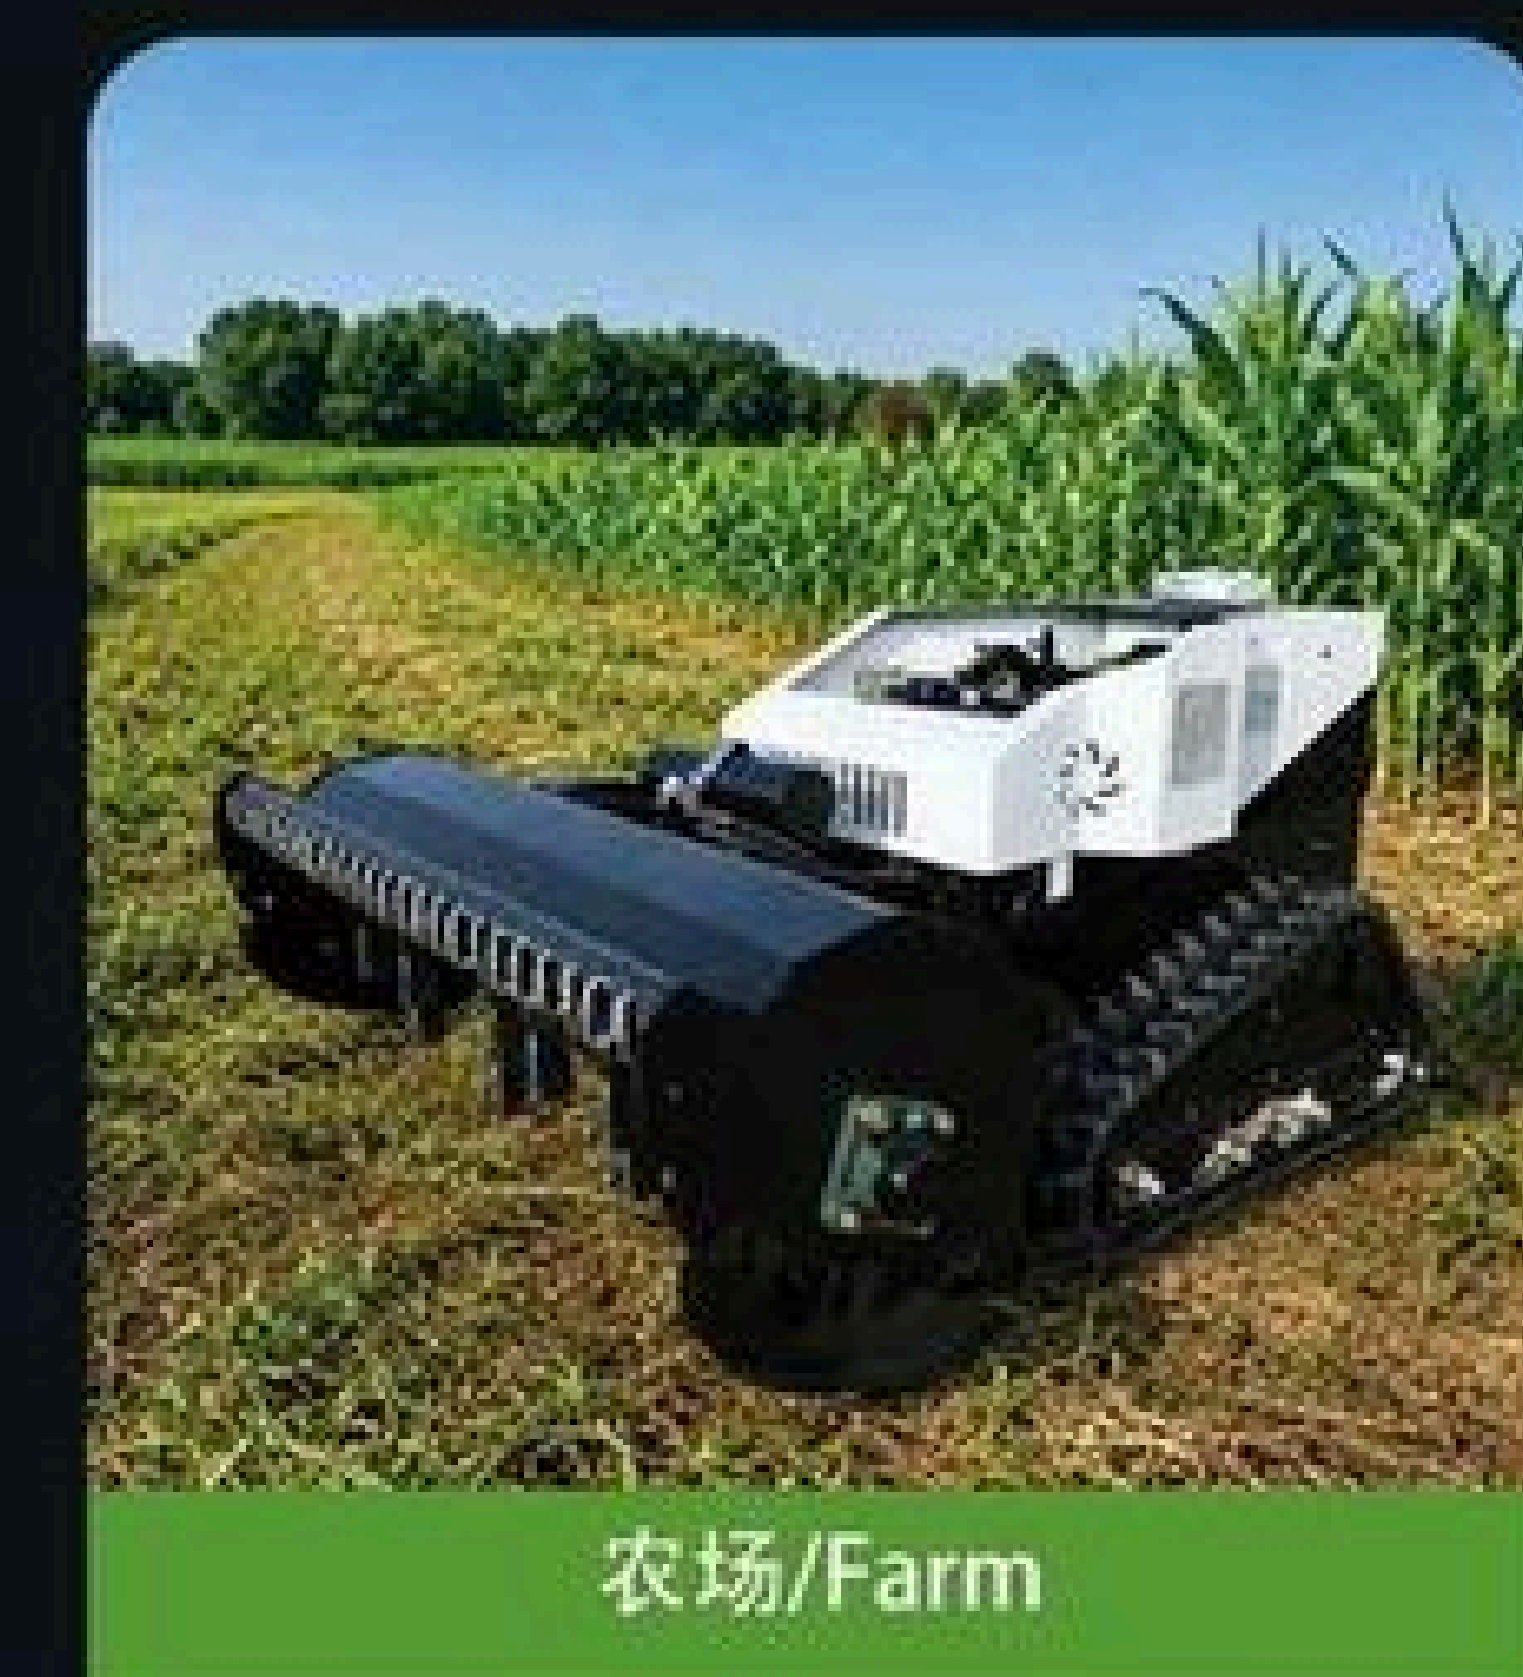

农场/Farm



果园/Orchard

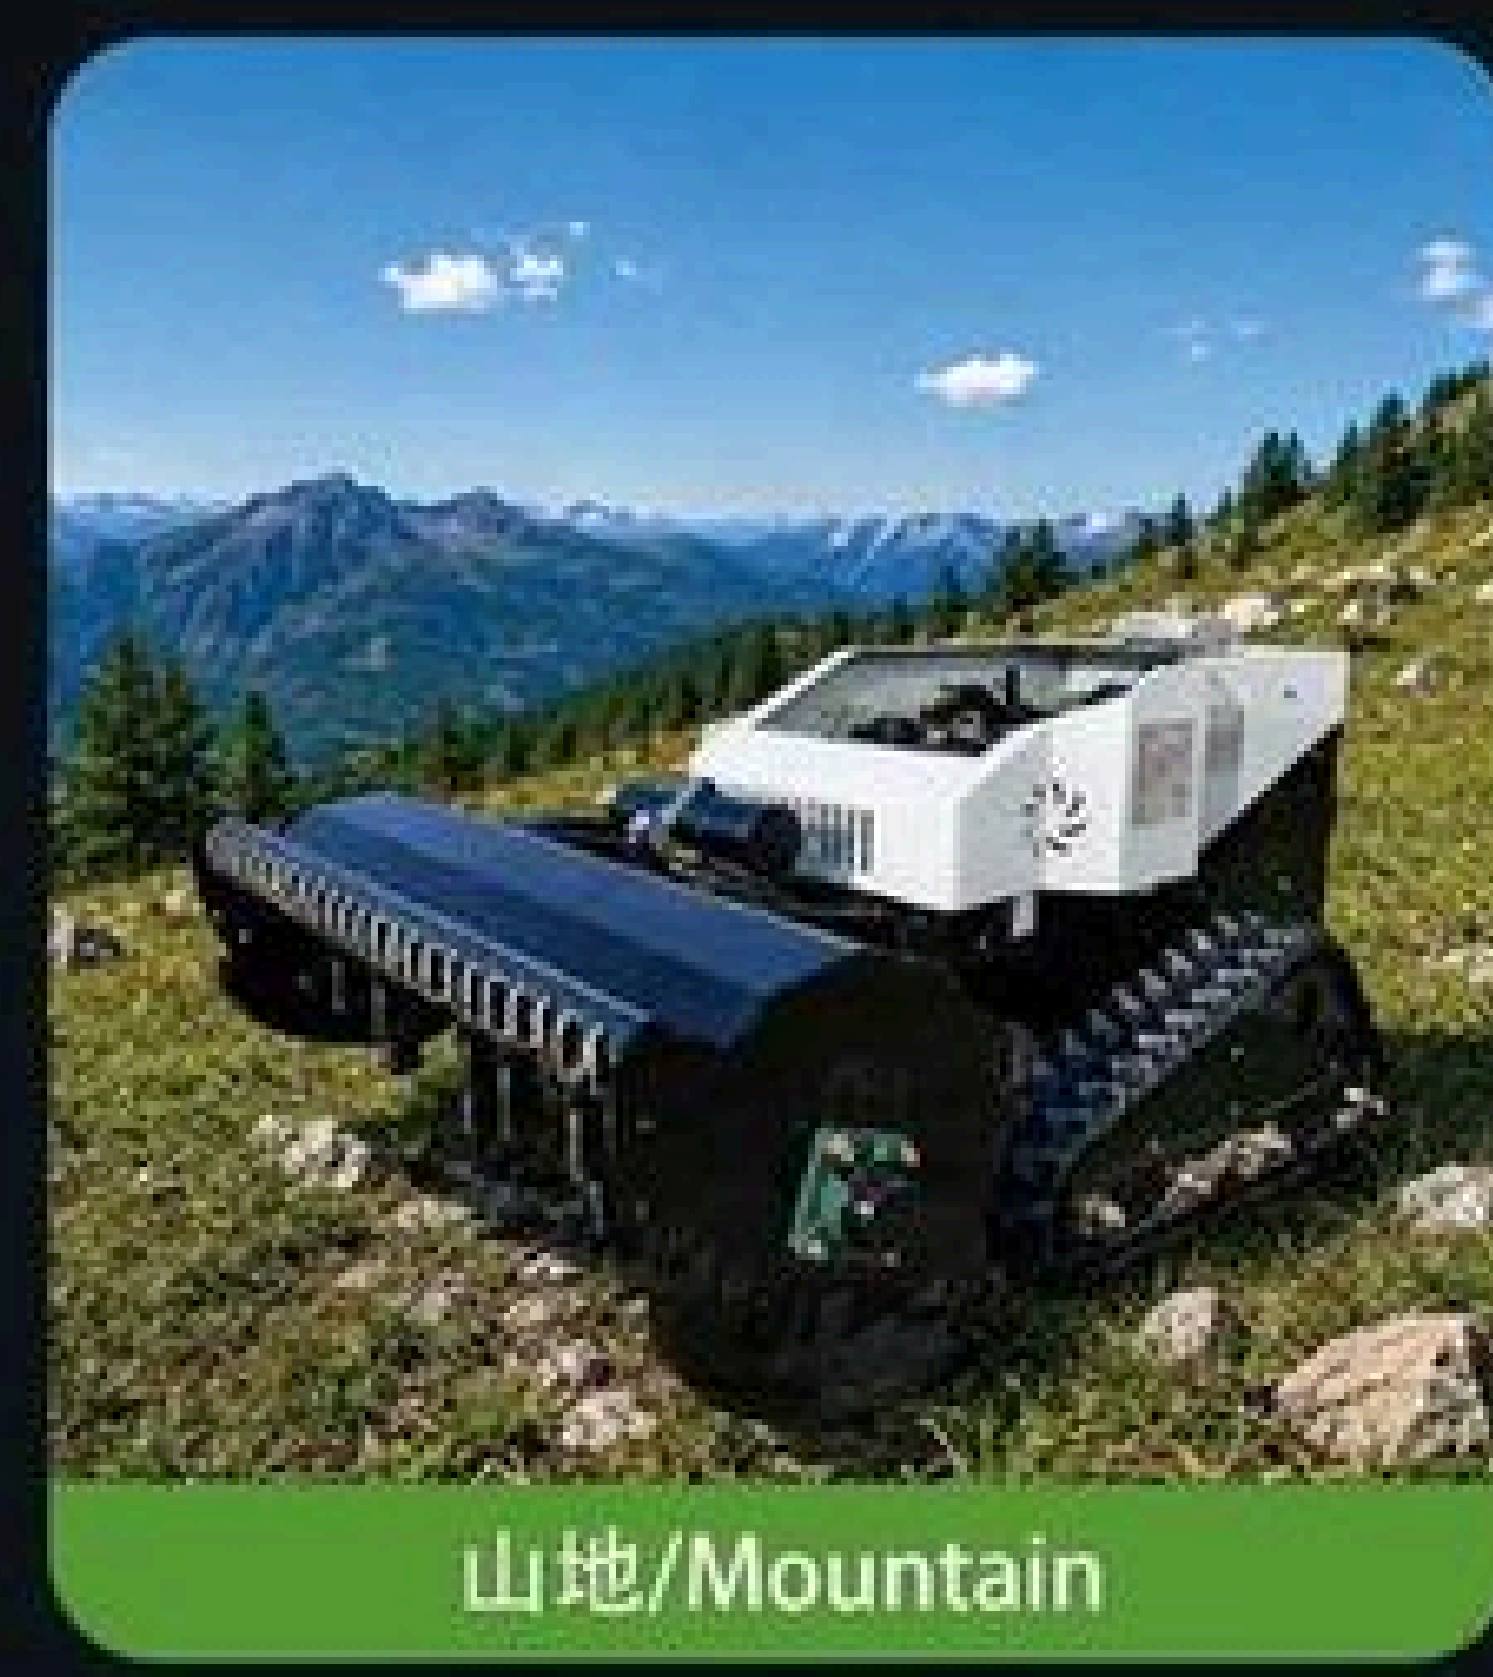

山地/Mountain



绿化工程/landscaping projects