



临沂潜龙液压机械有限公司
LINYI K-LONG MACHINERY CO., LTD



C 公司简介 COMPANY INTRODUCTION

临沂潜龙液压机械有限公司坐落于山东省临沂市沂南县经济开发区，是一家致力于工程机械履带底盘总成的生产、研发和销售为一体的专业企业。以客户为中心，以质量为本。公司一直坚持“潜龙出品，必属精品”的方针，重视每一件产品的质量。凭借丰富的液压、电动系统和机械设计经验，工程师们对底盘产品做了实用的设计方案，所有的焊接件以及其他的零部件都按照市场上的高标准质量，同时为客户提供及时的售后服务。

公司坚持创新推动发展，工程师们不断完善产品种类，除底盘系列，公司先后开发出滑移装载机、消防机器人、排涝机器人、搅拌车等整机产品，可满足客人多方面需求。

目前产品不仅畅销全国，而且还出口到欧美、澳洲、东南亚等地区，受到国内外客户的好评。欢迎更多海内外客户前来咨询！

Located in Linyi city of China, K-Long Machinery is a professional enterprise dedicated to the design, production and sales of Crawler Tracked Undercarriage series. Support customers with excellent quality. By the concept 'KLONG PRODUCTS, POWERFUL AND DURABLE', we always focused in quality of each product.

* Our engineers design the undercarriage with high-performance by their rich experiences in hydraulic&electric system and machinery design.

*Our welding parts, and all other spare parts used are with high quality level.

*We pay great attention on Quality Customer Service.

Also we developed more series like Loader, Fire Fighting Robot, Water-Logging Robot, Concrete Mixer, Drilling Rig, etc to enlarge market.

Our products have been widely used all over mainland China, and are also well received by clients from Europe, the USA, South America, Australia, Southeast Asia, etc. We sincerely hope to be your partner and develop together!



履带底盘总成 TRACKED UNDERCARRIAGE

我们的底盘系列包括:

1-120吨钢制履带底盘;

0.5-10吨橡胶履带底盘;

电动底盘及异形底盘。

不同吨位、尺寸和功能可根据客人要求匹配。

Our Tracked Undercarriage series include:

*Steel Tracked Undercarriage 1-120T

*Rubber Tracked Undercarriage 0.5-10T

*Electric Undercarriage and other types

Various capacity, dimension and functions are available.

部分构件特点:

*摆线马达, 单速或双速柱塞马达及不同功率的电机可供选择

*行走架可通过两侧履带梁与中间箱体刚性焊接或螺栓连接

*支重轮、托链轮、引导轮均为浮动油封密封, 可保证长期工作不需添加任何润滑油

*黄油张紧油缸并装有吸收冲击的弹簧, 履带调节变得更加容易

*护链架保障轨链不脱轨(选用)

*高强度合金钢制履带板或耐磨橡胶履带, 承受外部冲击更强、更耐用

Some Features:

*Different Final Drive: Hydraulic Motors or Electric Motors can be according to customers' needs.


*Intermediate beam can be connected to the two sides frame by all welding or bolt.

*The rollers and idlers are sealed with floating oil, no need to add extra lubricating oil during long-term work.

*Butter tensioning cylinders and shock-absorbing springs make tracks adjustment easier


*Track chain guard are optional.

*High-strength alloy steel track shoes/wear resistant rubber tracks can bear external impact better and are more durable.

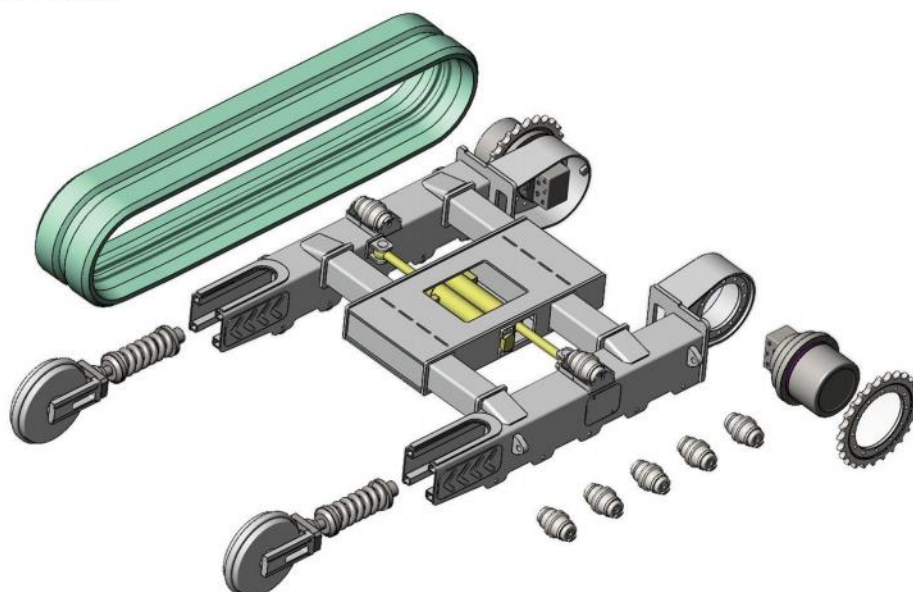

钢制履带底盘 STEEL TRACKED UNDERCARRIAGE


产品可承载1吨-120吨设备（以下为我们部分型号仅供参考，承载重量将根据不同机型有浮动）：
LOADING CAPACITY: 1TON-120TON. (BELOW ARE SOME OF OUR MODELS FOR REFERENCE ONLY. THE LOADING CAPACITY WILL VARY BY DIFFERENT MACHINE TYPES.):

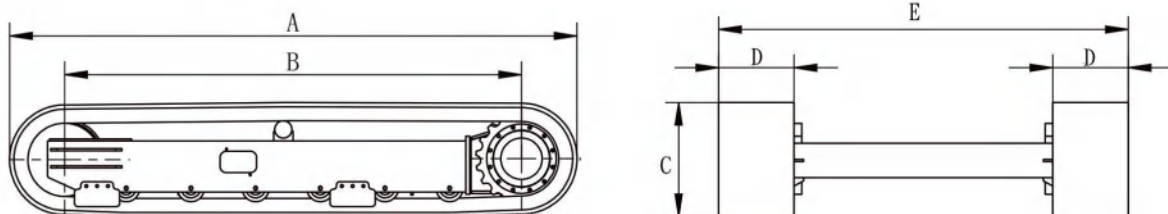

编号 (No)	型号 (Model)	A (mm)	B (mm)	C (mm)	D (mm)	E(mm)	可承载整机重量(含底盘) Loading Capacity (including Undercarriage)
1	QL2T	1815	1460	367	230	1350	1600-2000KG
2	QL3T	1450	1057	403	230	1400	2500-3000KG
3	QL4T	1565	1096	481	250/300	1250	4000-4800KG
4	QL5T	1820	1351	481	250/300	1450	4000-5500KG
5	QL6TA	2092	1579	527	300/350	1600	6000-7000KG
6	QL6TB	2159	1646	527	300/350	1700	6000-7000KG
7	QL6TC	2363	1852	527	300/350	1750	6000-7000KG
8	QL6TD	2630	2122	527	300/350	1800	6000-7000KG
9	QL7TA	2159	1647	531	300/350/400	1700	7000-8000KG
10	QL7TB	2497	1984	531	300/350/400	1850	7000-8000KG
11	QL7TC	2632	2119	531	300/350/400	1850	7000-8000KG
12	QL7TD	2767	2254	531	350/400	1850	7000-8000KG
13	QL7TE	3037	2524	531	350/400	1900	7000-8000KG
14	QL8TA	2352	1797	587	350/400/450	1850	8000-9000KG
15	QL8TB	2622	2067	587	350/400/450	1850	8000-9000KG
16	QL8TC	2892	2339	587	350/400/450	1900	8000-10000KG
17	QL8TD	3094	2537	587	400/450	1950	8000-10000KG
18	QL10TA	2606	1985	634	400/450	1980	10000-12000KG
19	QL10TB	2808	2187	674	400/450	2000	10000-12000KG
20	QL10TC	3146	2525	674	450	2000	10000-12000KG
21	QL10TD	3551	2930	674	450	2050	10000-13000KG
22	QL12T	2837	2203	674	400/450	2000	12000-13000KG
23	QL15TA	3144	2510	682	400/450/500	2100	15000-17000KG
24	QL15TB	3299	2665	682	450/500	2200	15000-17000KG
25	QL15TC	3761	3127	682	450/500	2250	17000-18000KG
26	QL15TD	3992	3358	682	450/500	2250	15000-17000KG
27	QL16TA	3034	2311	778	500	2150	16000-18000KG
28	QL16TB	3384	2661	778	500	2150	16000-18000KG
29	QL16TC	3734	3011	778	500	2200	16000-18000KG
30	QL20TA	3379	2614	786	500/600	2100	20000-25000KG
31	QL20TB	3804	3009	786	500/600	2150	20000-25000KG
32	QL20TC	4361	3636	778	500/600	2300	20000-25000KG
33	QL20TD	5001	4236	778	500/600	2400	20000-25000KG
34	QL25T	4256	3450	850	600	2500	25000-27000KG
35	QL35T	4810	3990	920	600	2750	35000-40000KG
36	QL50T	5597	4686	1064	650	-	50000-55000KG
37	QL70T	5541	4583	1095	650	-	70000-75000KG
38	QL100T	6386	5338	1120	650	-	90-100T

钢制履带底盘部分产品展示 STEEL TRACKED UNDERCARRIAGE SHOW



钢制履带底盘部分展示 SOME STEEL TRACKED UNDERCARRIAGE SHOW

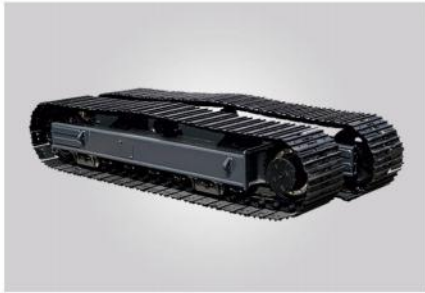


带横梁设计 (WITH INTERMEDIATE BEAM)



带车架/安装座 (WITH MOUNT FRAME)

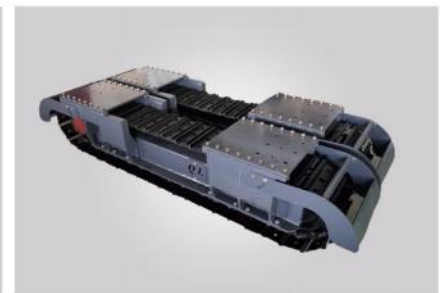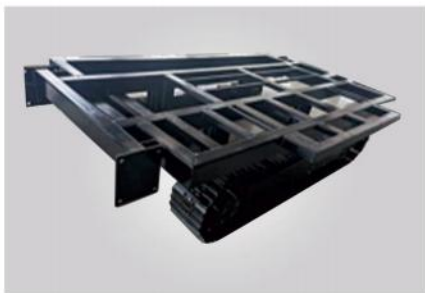


带伸缩/回转 (EXPANDABLE/SWING BEARING)

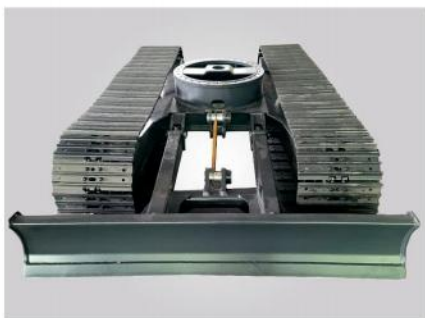

橡胶履带底盘 RUBBER TRACKED UNDERCARRIAGE


产品可承载最高10吨设备 (以下为我们部分型号仅供参考, 承载重量将根据不同机型有浮动):
LOADING CAPACITY 0.5TON-10TON. (BELOW ARE SOME OF OUR MODELS FOR REFERENCE ONLY. THE LOADING CAPACITY WILL VARY BY DIFFERENT MACHINE TYPES.):

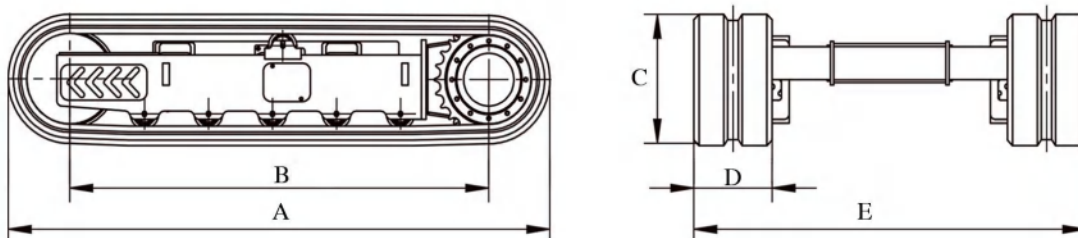

型号 (Model)	A (mm)	B (mm)	C (mm)	D (mm)	E(mm)	可承载整机重量(含底盘) Loading Capacity (including Undercarriage)
橡胶底盘(液压驱动) /With Hydraulic Drive						
QR-500	893	578	318	150	550	500-600KG
QR-700	1080	784	367	150	680	700-800KG
QR-701	976	667	309	180	700	700-800KG
QR-800	1220	911	309	180	920	800-1200KG
QR-1002	2040	1328	533	180	1728	1000-1200KG
QR-1500	1201	859	348	200	1100	1200-1800KG
QR-1601	1480	1127	363	230	1090	1600-2000KG
QR-1602	1815	1461	363	230	1200	1600-2000KG
QR-2000	1417	1075	348	230	1162	2000-2500KG
QR-2001	1554	1181	382	230	1300	2000-2200KG
QR-2500	1450	1057	403	250	1400	2500-3000KG
QR-3001	1958	1542	428	250/300	1400	3000-3500KG
QR-5000	1548	1079	479	300/350	1500	5000-6000KG
QR-5001	1706	1237	479	300/350	1500	5000-6000KG
QR-6001	2073	1604	479	300/350	1600	5500-6500KG
QR-6002	2388	1919	479	300/350	1650	5500-6500KG
QR-8001	2420	1876	591	400/450	-	7000-8000KG
QR-8002	2608	1993	591	400/450	-	7000-8000KG
QR-10001	2851	2236	626	450/500	-	9000-10000KG
QR-10002	3500	2884	626	450/500	-	9000-10000KG

橡胶履带底盘部分产品展示 RUBBER TRACKED UNDERCARRIAGE SHOW

带回转 WITH SWING BEARING

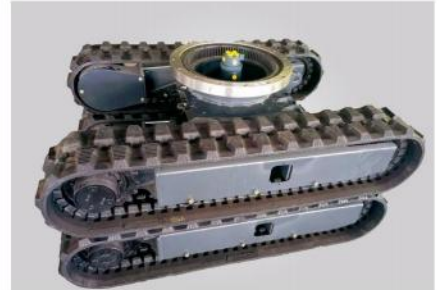

伸缩底盘 EXPANDABLE UNDERCARRIAGE



带横梁设计 WITH BEAM



不带横梁 WITHOUT INTERMEDIATE BEAM



电动履带底盘总成 ELECTRIC TRACKED UNDERCARRIAGE


■ 电动底盘总成: Electric Tracked Undercarriage:

特征 Features:

- * 结构紧凑，运行平稳。
 - * 采用电机直接驱动，具有高效能、低能耗等优点。
 - * 遥控设计，操作简便灵活。
 - * 电动系统相对简单，电机耐用，维护成本低。
 - * 可根据客户需求，选择匹配电机、遥控器和电池。
- * It is compact, easy moving.
 - * Directly driven by Electric Motor, with high efficiency and low energy consumption.
 - * More flexible operation by remote control.
 - * Low maintenance cost for electric system design and durable motor.
 - * Different Electric Motor, Remote Control and Battery are available by customers' needs.

型号: (以下为我们部分型号仅供参考，具体以图纸为准)

Models: (Below are some of our models only for reference. Please refer to specific drawings.)

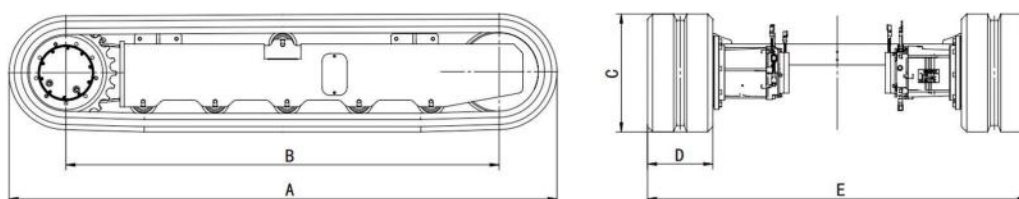

电动底盘总成/ Electric Tracked Undercarriage						
型号 (Model)	A (mm)	B (mm)	C (mm)	D (mm)	E(mm)	可承载整机重量(含底盘) Loading Capacity (including Undercarriage)
QRET1001	1287	933	361	230	900	500-1000KG
QRET1002	1574	1264	456	180	1200	1000-1200KG
QRET1501	1540	1230	405	230	1500	1500-1600KG
QRET1502	1740	1299	457	250	1140	1500-1600KG
QRET2001	1831	1381	458	250	1450	1600-2000KG
QRET3001	2093	1655	451	250	1450	2500-3000KG
QRET4001	2093	1655	453	300	1480	4500-5000KG
QRET5001	2093	1655	454	300	1480	5000-6000KG
QRET6001	3044	2453	646	300	1500	5500-6500KG




主要应用 MAIN APPLICATION:

电动履带底盘在复杂的地形环境中表现出色，能够适应灌溉地、山地、油田工作场所等复杂环境。例如：
Electric Undercarriage performs well in different terrain environment like field, mountain, etc.

They can be used for:

- *运输车 Transporter
- *高空作业车 Aerial Work Platform
- *各种机器人 Various Robot
- *农业机械 Agriculture Machinery

产品展示 PRODUCTS SHOW:

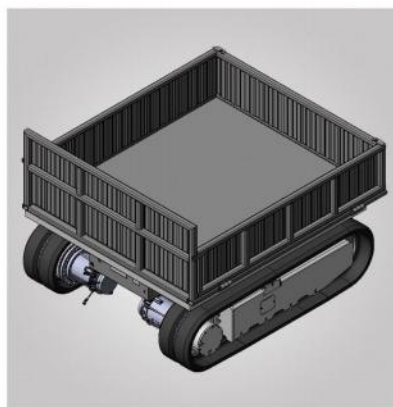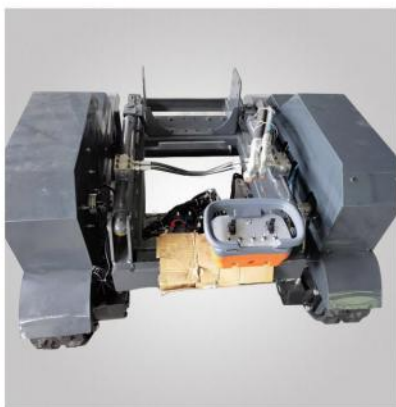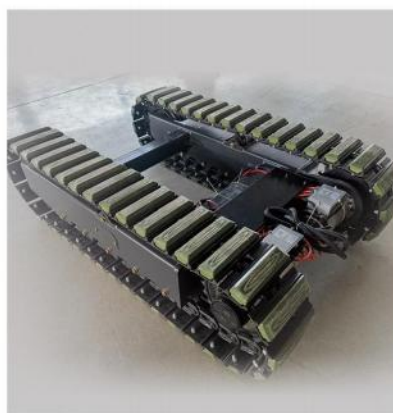

异形履带底盘总成 SPECIAL SHAPED TRACKED UNDERCARRIAGE


三角履带底盘总成 Triangle Tracked Undercarriage:

可承载最大6吨设备，大扭矩柱塞马达，行走速度最高可以达到15km/h，根据机型大小，底盘尺寸及安装座尺寸均可订制。

It can bear max 6T equipment. The motor is with high torque and plunger motor. Travel speed is up to 15km/h.

型号: (以下为我们部分型号仅供参考，具体以图纸为准)

Models: (Below are some of our models only for reference. Please refer to specific drawings.)

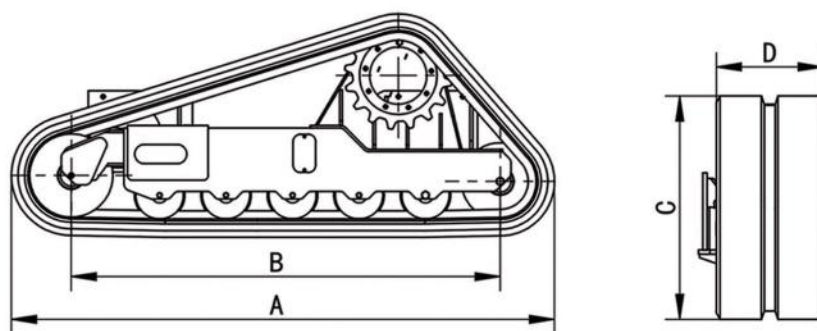

型号 (Model)	A (mm)	B (mm)	E (mm)	F (mm)	可承载整机重量(含底盘) Loading Capacity (including Undercarriage)
QTR4001	1976	1503	812	320/400	4000-5000KG
QTR5001	1993	1514	820	400	5000-6000KG
QTR5002	2090	1619	900	400/450	5000-6000KG
QTR5003	2285	1806	940	450	5000-6000KG

主要应用 Main Application:

*滑移装载机 Skid Steer Loader

*其他高底盘机型 Other High Chassis Machines

产品展示 PRODUCT SHOW:



其它异形履带底盘： Other Tracked Undercarriage Assembly:

主要应用 Main Application:

我们也可订制各种异形履带底盘供特殊机型，例如：

We also customize various special shaped undercarriage for different applications like:

*运输车Transporter

*林业机械Forest Machinery

*农业机械Agriculture Machinery

*高底盘机型High Chassis Machines

产品展示 PRODUCT SHOW:






部分配件 SOME SPARE PARTS



行走架部分图片展示 WELDED FRAME SHOW

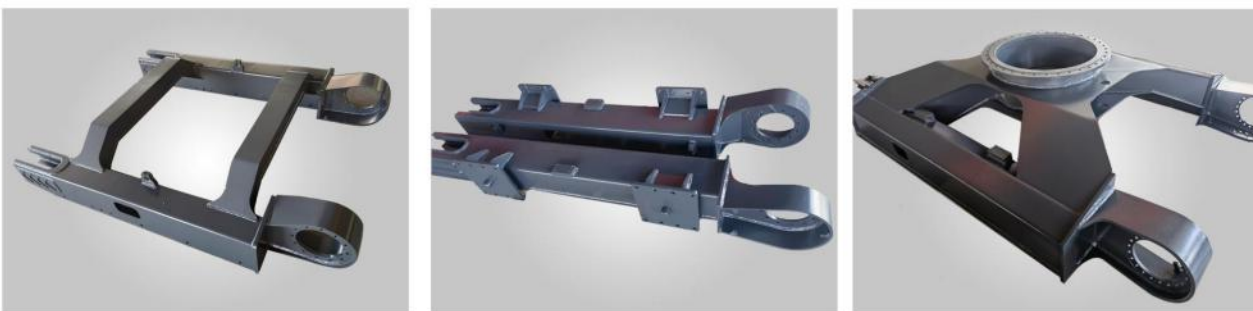

更多产品 WHAT'S MORE...

履带滑移装载机 SKID STEER LOADERS



轮式装载机 WHEELED LOADERS



收割机、机器人 HARVESTER, ROBOT



底盘产品应用 APPLICATION EXAMPLES

广泛应用于各类履带式工程机械、农业机械如挖掘机、钻机、履带吊、起重机、高空作业平台、吊管机、扒渣机、打桩机、掘进机、收割机、坑道钻机、全液压钻机、液压钻车、凿岩机、运输车等设备。

Our undercarriage can be widely applied for various drilling rigs, excavators, loaders, aerial work platform, wood chipper, transporter, harvester or any crawler types in different working conditions.



致力于工程机械履带底盘总成的 研发、制造和销售为一体的专业企业。

Dedicated to crawler tracked undercarriage assembly
A professional enterprise that integrates design, manufacturing and sales.



临沂潜龙液压机械有限公司

LINYI K-LONG MACHINERY CO., LTD

地址：山东省临沂市沂南县经济开发区樱花路东首

Add: Economic and Development Zone, Yinan County, Linyi City,
Shandong Province, China

邮编(P.C): 276300

电话(TEL)/传真(FAX): 0539-8858717

国内业务(Chinese Market): 18353998717

国际业务(International Market): 0086 13954412161

Email: sales@klongmachinery.com/klongmachinery@163.com

网址(Website): www.klongmachinery.com

