

HIFOUNE FORKLIFT

MATERIAL HANDLING
EASIER & EFFICIENCY

HIFOUNE

XIAMEN HIFOUNE MACHINERY CO.,LTD.

ADD : Torch High-Tech Zone (Xiang'an) Industrial Park,Xiamen

TEL:+86 0592 7820328

Email:kevin@hifoune.com

www.hifouneforklift.com

www.hifouneforklift.com



CONTENTS

01 COMPANY

Company Profile	01
Existing Dealer Network	03
Corporate Philosophy	05

02 PRODUCT

Diesel Forklift	07
LPG&Gasoline Forklift	09
Lithium Battery Forklift	11
Lithium Battery Rough Terrain Forklift	13
Rough Terrain Forklift	14
Warehouse Forklifts	15
Attachments Spectrum	17

ABOUT HIFOUNE FORKLIFT

HIFOUNE FORKLIFT is committed to providing customers with reliable and high efficient material handling equipments and solution. As a high-tech corportion that integrates R&D,manufacturing, sales and customer service.

At present, our products have been sold to more than 100 countries and regines worldwide . With global distributors,we offer a full range of high-end quality products and considerate servive.



LITHIUM BATTERY
FORKLIFT 1.5-2.0T (3 WHEELS)



NEW C SERIES LPG
FORKLIFT 1.5-8.0T



LITHIUM BATTERY
FORKLIFT 1.5-10.0T



NEW C SERIES Diesel
FORKLIFT 1.5-12.0T



Rough Terrain Forklift
FORKLIFT 2.5-3.5T

EXISTING DEALER NETWORK:



10⁺
years of experience

40⁺
dealers

90⁺
countries

20000⁺
sets

HIFOUNE forklift has established global network and high standard after-sale service team which could offer our customer with satisfying efficient one-stop service.



HIFOUNE GROUP

WITH GLOBAL DISTRIBUTORS,OFFER HIGH-END QUALITY PRODUCTS & SERVICE
FACTORY PROVIDE COMPETITIVE PRODUCTS + DEALERS PROVIDE LOCALIZED SERVICE

Three-layer service system :

- 1.Simple issues are handled by dealers themselves;
- 2.Our service engineers will provide remote video guidance if dealers don't know how to handle it;
- 3.Our service engineers will be dispatched onsite to handle;

PROFESSIONAL TEAM TO SOLVE PROBLEMS QUICKLY



Easier & Efficiency



DIESEL FORKLIFT

MATERIAL HANDLING EASIER & EFFICIENCY

Internal Combustion Counterbalanced Diesel Forklift 1.5-12.0T



FD15/18

Load: 1.5/1.8t
Weight: 2700/2830kg
Min.Turning Radius: 2030/2065mm
Power Unit: Diesel



FD20/25

Load: 2.0 / 2.5t
Weight: 3380/3960kg
Min.Turning Radius: 2170/2240mm
Power Unit: Diesel



FD30

Load: 3.0t
Weight: 4260kg
Min.Turning Radius: 2400mm
Power Unit: Diesel



FD35

Load: 3.5t
Weight: 4510kg
Min.Turning Radius: 2400mm
Power Unit: Diesel



FD40

Load: 4.0t
Weight: 4680kg
Min.Turning Radius: 2560mm
Power Unit: Diesel



FD45

Load: 4.5t
Weight: 6500kg
Min.Turning Radius: 2765mm
Power Unit: Diesel



FD50

Load: 5.0t
Weight: 6900kg
Min.Turning Radius: 2850mm
Power Unit: Diesel



FD60

Load: 6.0t
Weight: 8550kg
Min.Turning Radius: 3300mm
Power Unit: Diesel



FD70

Load: 7.0t
Weight: 9200kg
Min.Turning Radius: 3370mm
Power Unit: Diesel



FD80

Load: 8.0t
Weight: 10200kg
Min.Turning Radius: 3440mm
Power Unit: Diesel



FD100

Load: 10.0t
Weight: 12500kg
Min.Turning Radius: 3900mm
Power Unit: Diesel



FD120

Load: 12.0t
Weight: 13000kg
Min.Turning Radius: 4000mm
Power Unit: Diesel

LPG&GASOLINE FORKLIFT

MATERIAL HANDLING EASIER & EFFICIENCY

Internal Combustion Counterbalanced LPG&Gasoline Forklift 1.5-8.0T



FG15

Load: 1.5t
Weight: 2700kg
Min.Turning Radius: 2030mm
Power Unit: LPG/Gasoline



FG18

Load: 1.8t
Weight: 2830kg
Min.Turning Radius: 2065mm
Power Unit: LPG/Gasoline



FG20

Load: 2.0t
Weight: 3380kg
Min.Turning Radius: 2170mm
Power Unit: LPG/Gasoline



FG25

Load: 2.5t
Weight: 3960kg
Min.Turning Radius: 2240mm
Power Unit: LPG/Gasoline



FG30

Load: 3.0t
Weight: 4260kg
Min.Turning Radius: 2400mm
Power Unit: LPG/Gasoline



FG35

Load: 3.5t
Weight: 4510kg
Min.Turning Radius: 2400mm
Power Unit: LPG/Gasoline



FG40

Load: 4.0t
Weight: 4480kg
Min.Turning Radius: 2560mm
Power Unit: LPG/Gasoline



FG45

Load: 4.5t
Weight: 6500kg
Min.Turning Radius: 2765mm
Power Unit: LPG/Gasoline



FG50

Load: 5.0t
Weight: 6900kg
Min.Turning Radius: 2850mm
Power Unit: LPG/Gasoline



FG60

Load: 6.0t
Weight: 8550kg
Min.Turning Radius: 3300mm
Power Unit: LPG/Gasoline



FG70

Load: 7.0t
Weight: 9200kg
Min.Turning Radius: 3370mm
Power Unit: LPG/Gasoline



FG80

Load: 8.0t
Weight: 10200kg
Min.Turning Radius: 3440mm
Power Unit: LPG/Gasoline

LITHIUM BATTERY FORKLIFT

MATERIAL HANDLING EASIER & EFFICIENCY

Lithium Battery Counterbalanced Forklift 1.5-12.0T



FBL15/18/20(3wheels)

Load: 1.5t /1.8t /2.0t
Weight: 3100kg/3300kg/3500kg
Min.Turning Radius: 1640mm/1640mm/1740mm
Voltage/Capacity: Li-ion 48V/404Ah



FBL15/18

Load: 1.5t/1.8t
Weight: 2920kg/3050kg
Min.Turning Radius: 2000mm/2030mm
Voltage/Capacity: 80V/205Ah



FBL20/25

Load: 2.0t/2.5t
Weight: 3650kg/3810kg
Min.Turning Radius: 2250mm
Voltage/Capacity: 80v / 280ah



FBL30/35

Load: 3.0t/3.5t
Weight: 4110kg/4410kg
Min.Turning Radius: 2350mm/2395mm
Voltage/Capacity: 80v / 280ah



FBL40

Load: 4.0t
Weight: 4800kg
Min.Turning Radius: 2460mm
Voltage/Capacity: 80v / 410ah



FBL50

Load: 5.0t
Weight: 6900kg
Min.Turning Radius: 2850mm
Voltage/Capacity: 80v / 410ah



FBL70S/80S

Load: 7.0t/8.0t
Weight: 9300kg/9400kg
Min.Turning Radius: 3470mm/3480mm
Voltage/Capacity: 345v / 230ah



FBL100S/120S

Load: 10.0t/12.0t
Weight: 12500kg/13500kg
Min.Turning Radius: 3900mm/4200mm
Voltage/Capacity: 345v / 280ah

LITHIUM BATTERY ROUGH TERRAIN FORKLIFT

MATERIAL HANDLING EASIER & EFFICIENCY

Lithium battery Counterbalanced
Rough Terrain Forklift 2.5-3.5T



2WD: FBL25/35

Load: 2.5t/3.5t
Weight: 4680kg/5380kg
Min.Turning Radius: 2870mm
Mast Tilting Angle (Fwd/Bwd):10°/12°
Tire Type: Deep Tread Tyres
Large Steering Angle
Suspended Overhead Guard



4WD: FBL25/35

Load: 2.5t/3.5t
Weight: 4850kg/5460kg
Min.Turning Radius: 3080mm
Mast Tilting Angle (Fwd/Bwd):10°/12°
Tire Type: Deep Tread Tyres
Large Steering Angle
Suspended Overhead Guard

ROUGH TERRAIN FORKLIFT

MATERIAL HANDLING EASIER & EFFICIENCY

Internal Combustion Counterbalanced
Rough Terrain Forklift 2.5-3.5T



2WD: FDT25/35

Load: 2.5t/3.5t
Weight: 4680kg/5380kg
Min.Turning Radius: 2870mm
Mast Tilting Angle (Fwd/Bwd):10°/12°
Tire Type: Deep Tread Tyres
Large Steering Angle
Suspended Overhead Guard



4WD: FDT25/35

Load: 2.5t/3.5t
Weight: 4850kg/5460kg
Min.Turning Radius: 3080mm
Mast Tilting Angle (Fwd/Bwd):10°/12°
Tire Type: Deep Tread Tyres
Large Steering Angle
Suspended Overhead Guard

WAREHOUSE FORKLIFTS

MATERIAL HANDLING EASIER & EFFICIENCY

WAREHOUSE FORKLIFTS



SL20L3

Rated Traction Weight: 2000kg
Service Weight With Battery: 146kg
Lowered Height: 85mm
Min.Turning Radius: 1398mm



SL15GI

Rated Traction Weight: 1500kg
Service Weight With Battery: 193/200kg
Lowered Height: 85mm
Min.Turning Radius: 1425mm



CL1016J

Load Capacity: 1000kg
Weight : 425kg
Lowered Height: 86mm
Min.Turning Radius: 1336mm



CL1516JB

Rated Traction Weight: 1500kg
Service Weight With Battery: 507kg
Lowered Height: 86mm
Min.Turning Radius: 1342mm



CL1516E

Rated Traction Weight: 1.5t
Service Weight With Battery: 650kg
Lowered Height: 86mm
Min.Turning Radius: 1455mm



CL1556W

Rated Traction Weight: 1.5t
Service Weight With Battery: 1532kg
Lowered Height: 86mm
Min.Turning Radius: 1620mm



Q1530GC

Rated Traction Weight: 1.5t
Service Weight With Battery: 2360kg
Lowered Fork Height: 40mm
Min.Turning Radius: 1685mm




QGB20S

Rated Traction Weight: 2000kg
Service Weight With Battery: 2880kg
Min.Turning Radius: 1820mm
Battery Voltage/Rated Capacity: 48v/420ah

ATTACHMENTS SPECTRUM


MATERIAL HANDLING EASIER & EFFICIENCY

ATTACHMENTS SPECTRUM

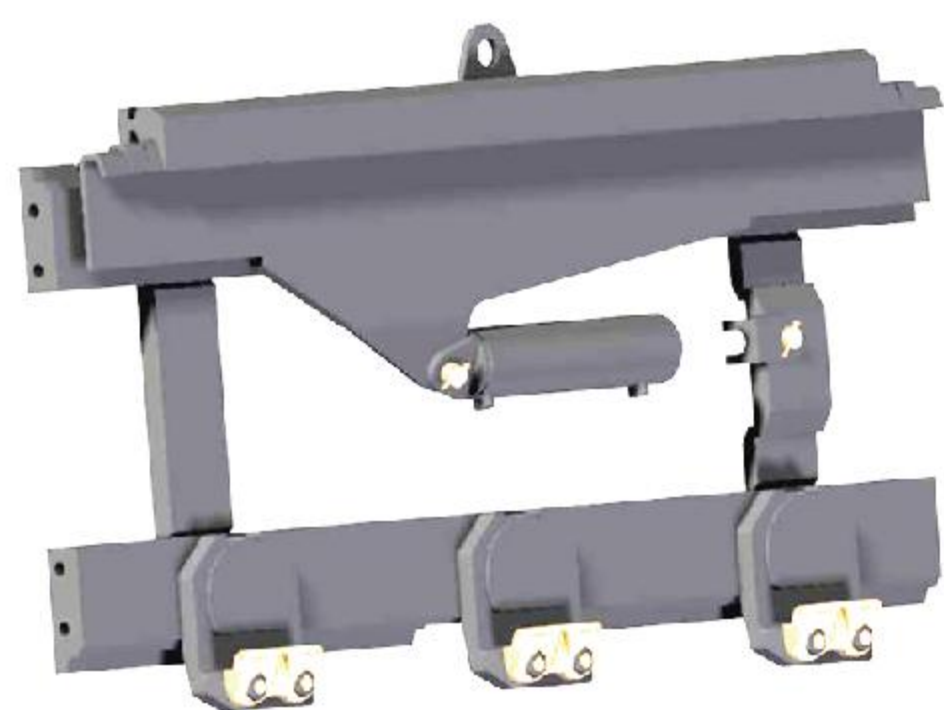


Sideshifters

Capacity /Load Center: 6800kg/600mm
Mounting Class :ISO IV
Effective Thickness:84mm
Sideshifter Range Total:300 (±150) mm

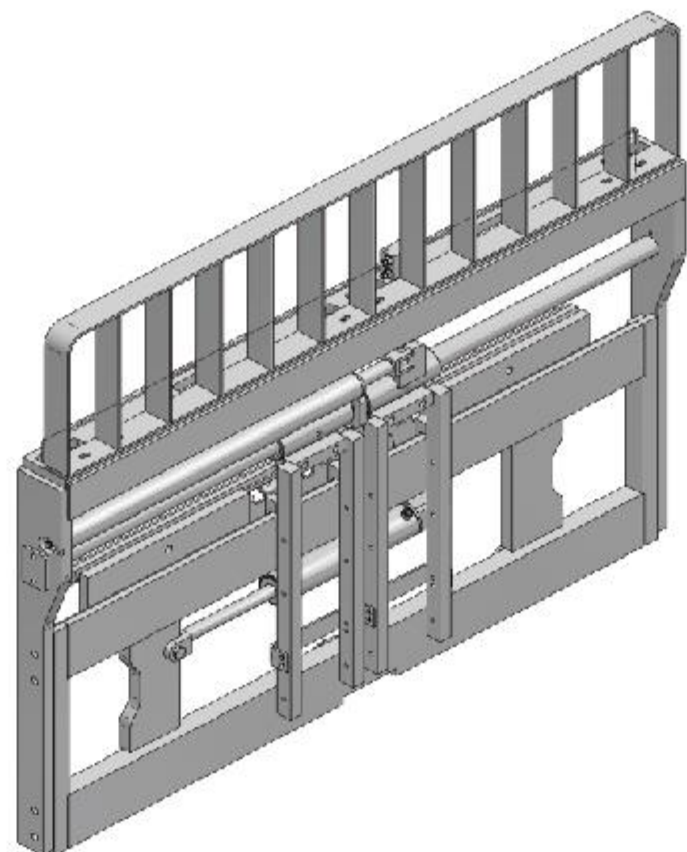

Fork Positioners

Capacity /Load Center: 6800kg/600mm
Mounting Class :ISO IV
Effective thickness:90mm
Sideshifter Range Total:300 (±150) mm

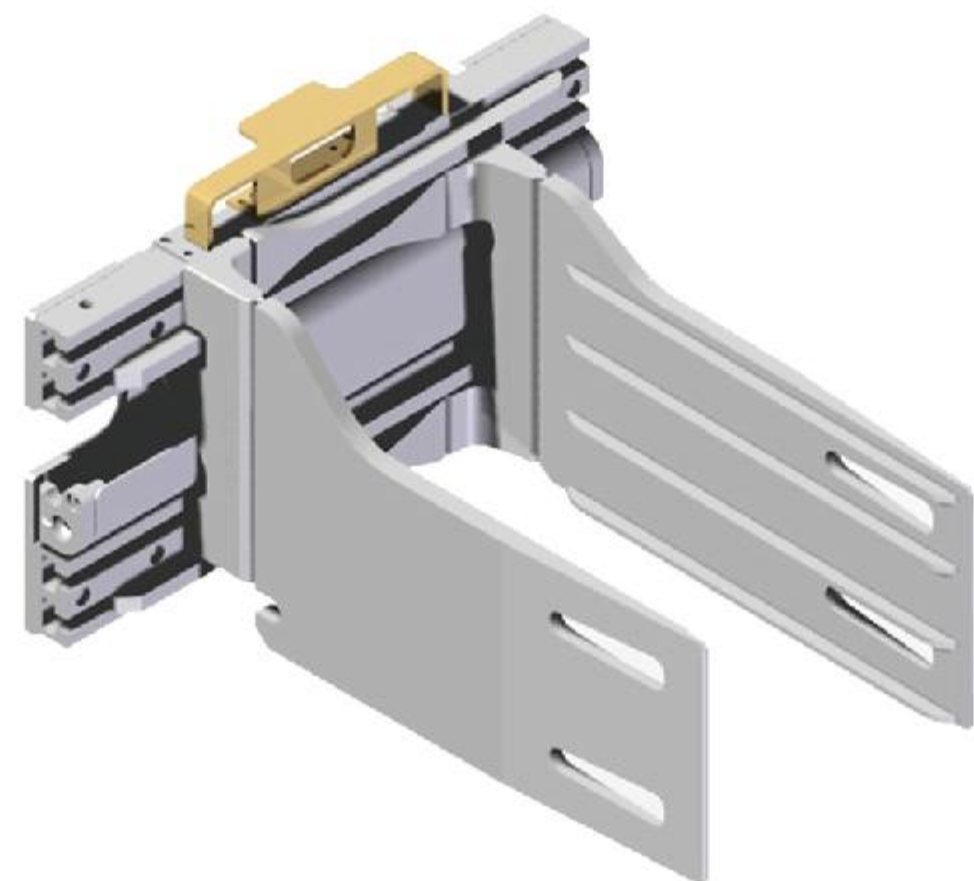


Bale Clamps

Capacity /Load Center: 3000kg/500mm
Mounting Class :ISO III
Effective Thickness:150mm
Sideshifter Range Total:200 (±100) mm




Paper Roll Clamps

Capacity /Load Center: 3000kg /200-900mm
Mounting Class :ISO III
Effective thickness:237mm
Roll Range :500-1600mm

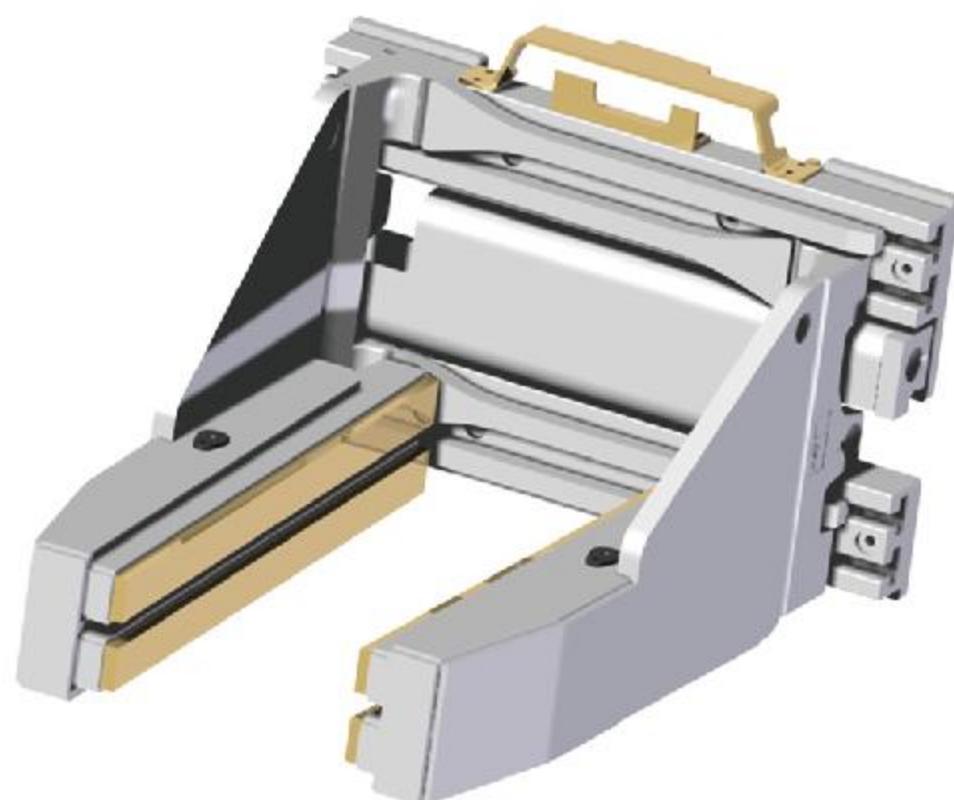


Block Clamps

Capacity /Load Center:2700kg/500mm
Mounting Class :ISO III
Effective Thickness:152mm
Sideshifter Range Total:200 (±100) mm

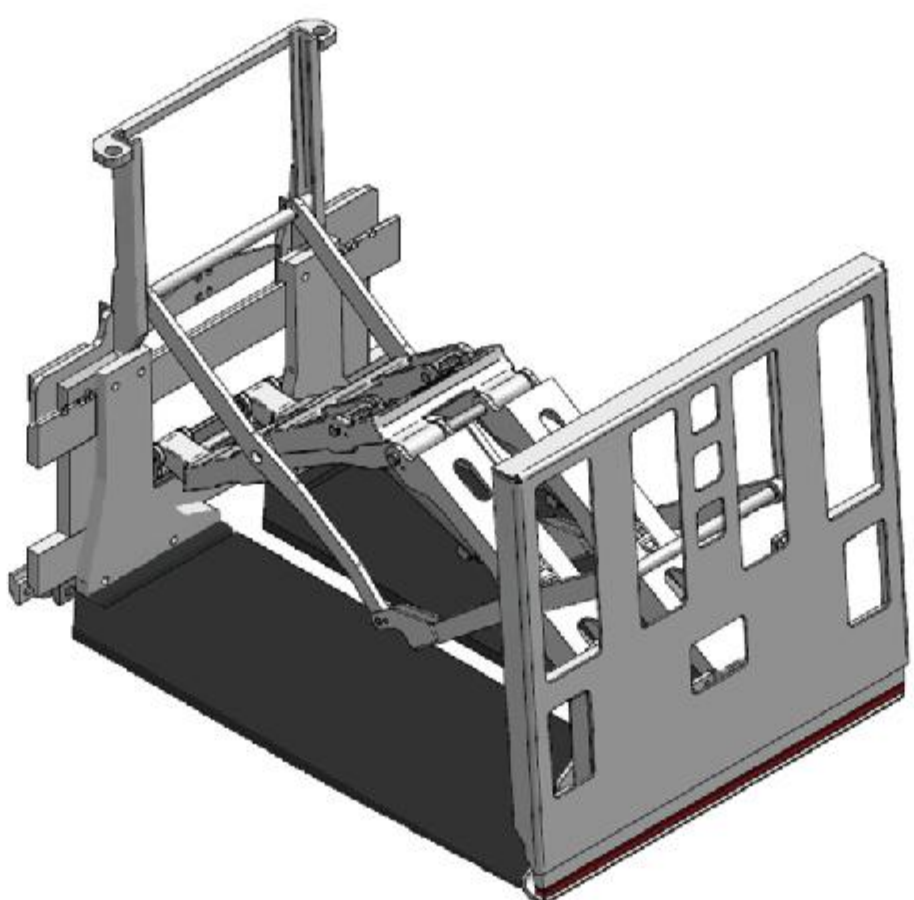


Push/Pulls

Capacity /Load Center:2500kg/600mm
Mounting Class :ISO III
Effective Thickness:241mm
Sideshifter Range Total:200 (±100) mm

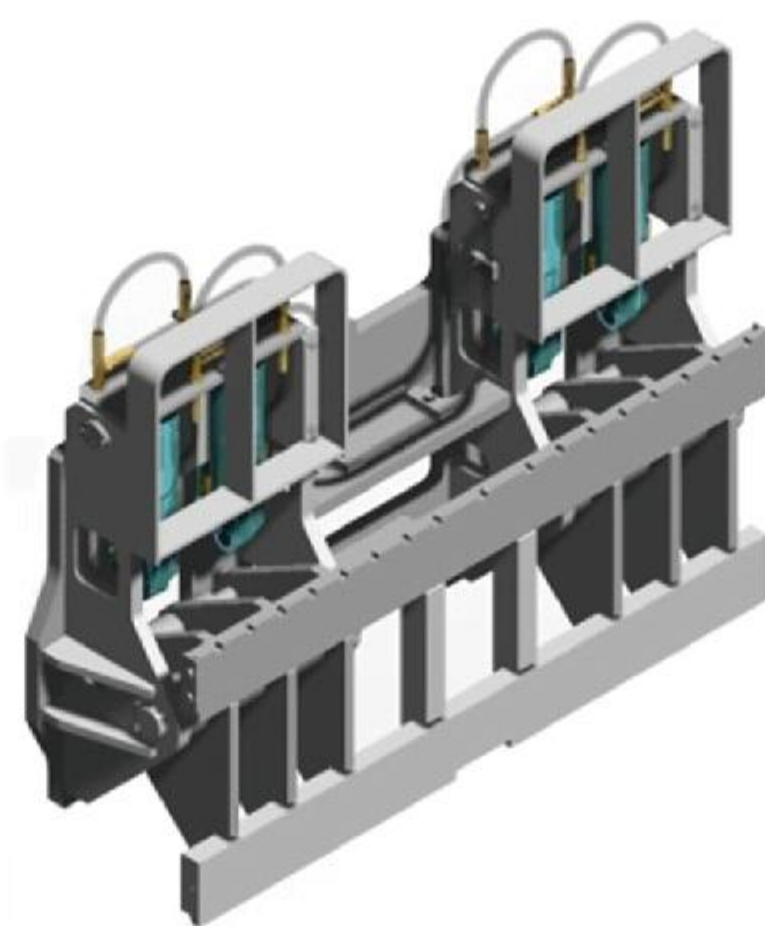

Hinged Carriage

Capacity /Load Center:3000KG/500mm
Mounting Class :ISO III
Effective Thickness:383 mm
Tilt Forward /Tilt Backward : 45°/25°

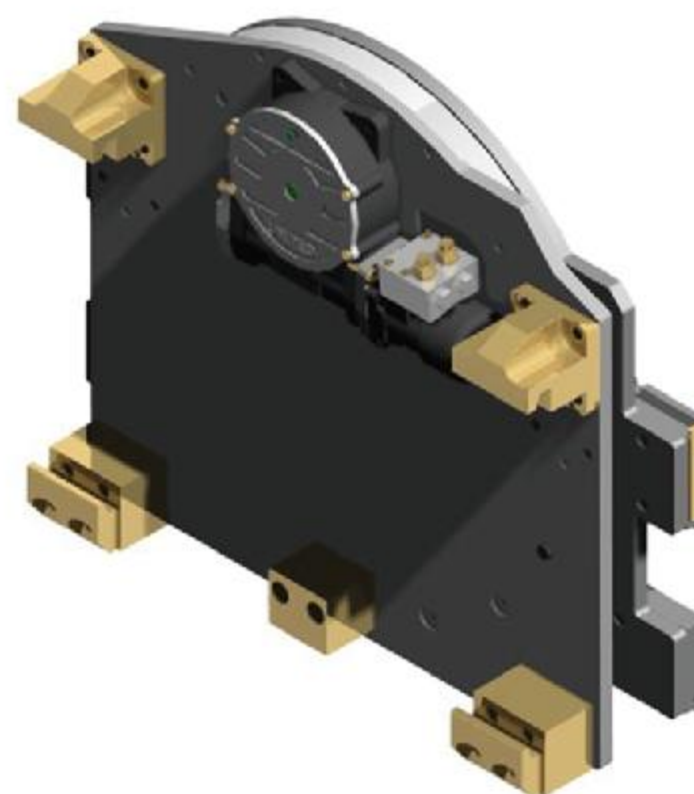

Rotators

Capacity /Load Center: 6800kg/600mm
Mounting Class :ISO IV
Effective Thickness:218mm
FORK Max Spacing : 1725mm

EASIER TO HANDLING

