



耐久之道 赣峰智造

GFM Parts - Peak Endurance

-  **Mobile:**
+86 13123101112 (国内 Domestic)
+86 17705953659 (海外 Overseas)
-  **Website:**
www.gfmparts.com
-  **Email:**
info@gfmparts.com
-  **Address:**
NO. 7, JINDONG 9TH ROAD, XIAMEI TOWN,
NAN'AN CITY, FUJIAN PROVINCE, CHINA



专业制造挖掘机与推土机底盘件及耐磨件



GFM PARTS

泉州市赣峰工程机械有限公司

QUANZHOU GFM PARTS CO., LTD

 底盘件 UNDERCARRIAGE  易损件 WEAR PARTS

目录 / CONTENT

公司简介 Company Profile	01/02
链条 Track Chains	03
链板 Track Shoes / 履带总成 Track Groups	04
支重轮 Bottom Rollers	05/06
托轮 Carrier Rollers	07
引导轮 Idlers	08
齿圈 齿块 Sprockets and Segments	09
斗轴 轴套 Pins and Bushings	10
斗齿销 Bucket Tooth Pins / 挖斗 Buckets	11
链销 链通 Track Pins and Bushings / 螺栓 螺母 Bolts and Nuts	12

WHY CHOOSE GFM PARTS? 为什么选择赣峰?

- Product Quality Guaranteed

精工品质 · 值得信赖

- Large Stock & Fast Delivery

现货充足 · 快速交付

- Factory Direct Supply at Competitive Prices

工厂直供 · 价格优势

- OEM & Customized Solutions

专业定制 · 按需服务

- Professional Manufacturer Since 2011

专注制造 · 始于2011年



COMPANY PROFILE

公司简介

泉州市赣峰工程机械有限公司 (GFM Parts) 成立于2011年, 位于中国工程机械配件产业核心区——福建泉州, 是一家专注于挖掘机与推土机底盘件及耐磨件的成熟制造商。

公司起步于国内市场, 逐步拓展至海外, 凭借丰富的行业经验、专业的技术团队、快速响应的客户服务与准时发货能力, 赢得了全球客户的广泛信赖与良好口碑。

公司主要产品包括: 支重轮、引导轮、驱动齿、托链轮、履带链条、履带总成、链通链销、斗齿销、斗轴轴套、螺栓螺母等, 广泛适配卡特彼勒、小松、日立、斗山、三一、沃尔沃、现代、徐工、柳工、中联重科等主流品牌设备。



Quanzhou Ganfeng Machinery Co., Ltd (GFM Parts) was established in 2011 in Quanzhou, Fujian — a core manufacturing hub for construction machinery parts in China. We are a mature and specialized manufacturer of undercarriage and wear parts for excavators and bulldozers.

Starting from the domestic market and gradually expanding overseas, GFM has earned the trust of customers worldwide with deep industry expertise, a professional technical team, responsive customer service, and reliable on-time delivery. Our main product range includes track rollers, carrier rollers, idlers, sprockets, track chains, track groups (track chains with shoes), track pins and bushings, bucket tooth pins and retainers, pins and bushings, bolts and nuts, widely compatible with well-known brands such as Caterpillar, Komatsu, Hitachi, Doosan, SANY, Volvo, Hyundai, XCMG, Liugong, and Zoomlion.

Manufacturing Strength

Our factory spans 10,000 square meters and is equipped with advanced forging, casting, heat treatment, and CNC machining lines, capable of handling high-volume orders and customized production.

We carefully select high-grade raw materials and combine them with proven processing techniques and strict quality control procedures to ensure each product delivers exceptional wear resistance, durability, and consistency even under the toughest conditions. Our parts meet or exceed industry standards.

Warehousing & Delivery

GFM operates a well-organized warehouse system with ready stock of popular models. Backed by an experienced logistics team, we ensure quick packing, timely container loading, and on-schedule delivery, helping customers improve procurement efficiency and reduce inventory pressure.

OEM Service

We offer flexible OEM solutions for global clients, including customization based on drawings, trademark/logo customization, packaging design, and laser marking, tailored to meet the unique requirements of various markets and help our partners enhance their competitiveness.

Our Brand Values — We are guided by

Customer Focus – Understanding your needs and responding fast

Quality First – Controlling every process to deliver reliable products

Service Driven – Providing efficient and thoughtful end-to-end support

工厂实力

公司配备标准化厂房, 占地面积10,000平方米, 配备先进的锻造、铸造、热处理及数控加工设备, 具备承接大批量订单及定制项目的生产能力。

我们精选优质原材料, 结合成熟工艺与严格质检流程, 确保产品在高强度作业环境中具备卓越的耐磨性、稳定性与一致性, 产品性能达到甚至优于行业标准。

仓储与发货

公司设有配套的标准化仓库, 常年备有热销产品库存。专业的物流团队可实现快速打包、及时装柜、准时发货, 为客户大幅提升采购效率, 降低库存压力。

OEM服务

我们为全球客户提供灵活的OEM定制服务, 支持按图纸定制、商标定制、包装设计与激光打标等, 满足不同市场的个性化需求, 助力客户提升品牌竞争力。

品牌理念 —— 我们始终秉持

以客户为中心

深入了解客户需求, 快速响应

以品质为根本

以品质为根本: 严控每一道工序, 专注产品质量

以服务为驱动

提供高效、贴心的全流程服务体验




链条Track Chains



FEATURES


- **High-Strength Steel**
–Engineered to handle heavy-duty workloads
- **Precision Fit**
–Ensures smooth and consistent track move
- **Heat-Treated Links**
–Enhanced durability and extended wear life

链板Track Shoes & 履带总成Track Groups

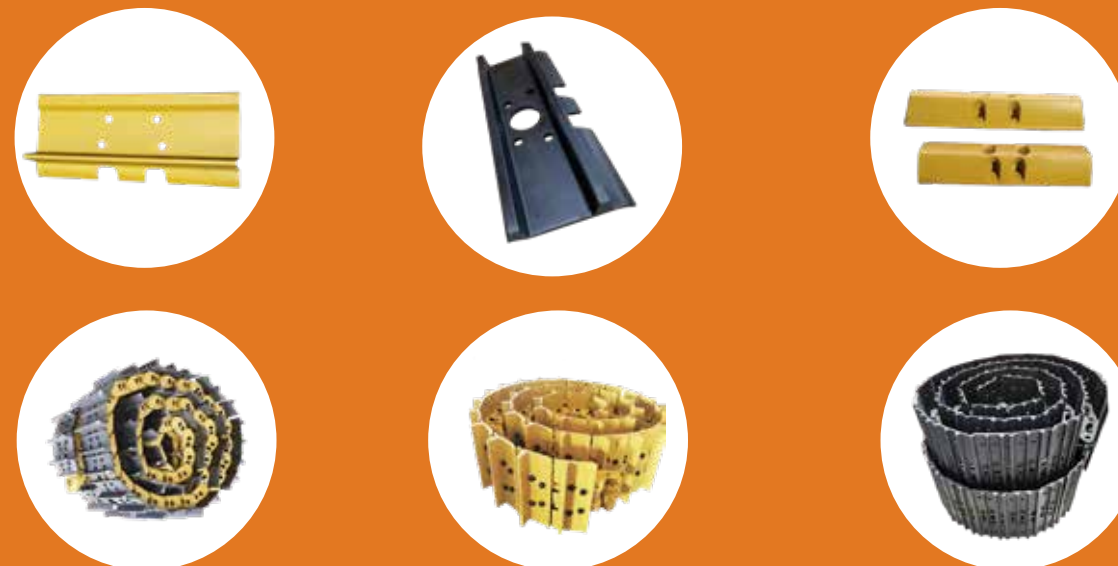


Compatible Models	Main Dimensions of Installation												
	T	A	B	C	D	M	E	F	G	H	J	K	L
CAT330	216	190	140	76.2	Φ68	Φ46	Φ22.5	103	248	211	69	124	68/,,
PC400-6	228.6	184	144	76.2	Φ71.3	Φ47	Φ24.5	109	254	210	71.4	129	70
EX700	260.3	234.9	184.1	76.2	Φ85.3	Φ57.2	Φ27.5	133	321	275	87.3	152	79
D6D	202.8	171.4	133.4	76.2	Φ69.7(66.7)	Φ44.5	Φ19.5	102.4	232	193.2	58	121.5	69
D7G	216	184	146	76.2	Φ71.3	Φ47.7	Φ19.5	108	252	208	64.3	125.5	70
D8K	228.6	201.6	169.8	76.2	Φ80.4(76.2)	Φ50.8	Φ23	124.4	292	246.8	71.4	138	78
D85	216	184	146	76.2	Φ74.3(71.3)	Φ47	Φ20.5	106	252	209.2	63	129	70
D155A	228.6	219.8	169	76.2	Φ79(77.4)	Φ48.8	Φ24.5	121.6	292	244	71.4	138	78
D355/D9H	260.3	234.9	184.1	76.2	Φ92(88.7)	Φ57.3	Φ27.5	133	321	275	87.3	160	85


Track Link Structure

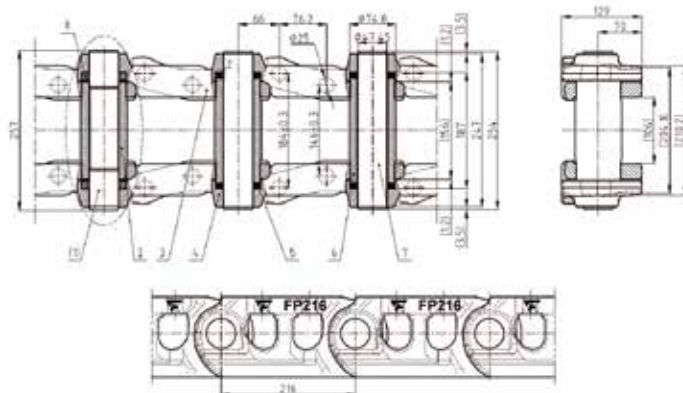

推土机链板Bulldozer Track Grousers

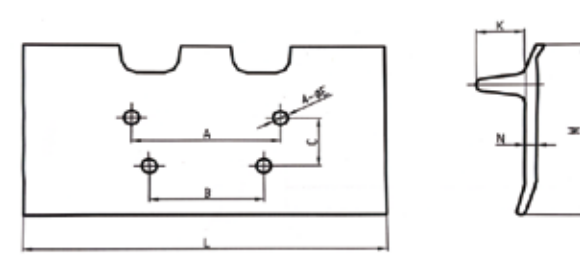

挖机链板Excavator Track Grousers

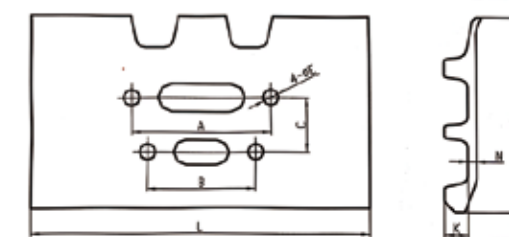






- **Excellent Traction**–Designed for superior grip on challenging terrain
- **Wear-Resistant Build**–Made to endure harsh working environments
- **OEM-Compatible Design**–Ensures easy installation and reliable performance

Compatible Models	Main Dimensions of Installation							
	A	B	C	E	K	L	M	N
D4D	107.9	72	60.3	Φ16.5	50	450	199.6	12
D6D	171.3	124.4	76.2	Φ19.5	60	510	238	14
D7H	205.5	129	70	Φ20.5	72	610	250	14
D8K	201.6	146	76.2	Φ23.8	80	560	268	17
D60/D65	178.3	146	72.2	Φ19.5	60	510	238	14
D155	219.8	146	76.2	Φ24.5	80	560	268	17

Compatible Models	Main Dimensions of Installation							
	A	B	C	E	K	L	M	N
PC60-3	99	72	43.4	Φ13.2	14	400	154	6
EX220	160.4	124.4	62	Φ18.5	26	600	219	10
SK300	179	129	72	Φ21	28	600	236	13
PC400-6	184	146	30	Φ24.6	30	600	247	14
R450	184	146	76.2	Φ20.5	28	600	236	13
EC460	184	146	76.2	Φ22.8	30	600	250	14

支重轮 Bottom Rollers

- **Stable Load Support**—Effectively carries machine weight during operation
- **Heavy-Duty Casting**—Withstands impact, wear, and debris
- **Sealed & Lubricated**—For low maintenance and extended service life

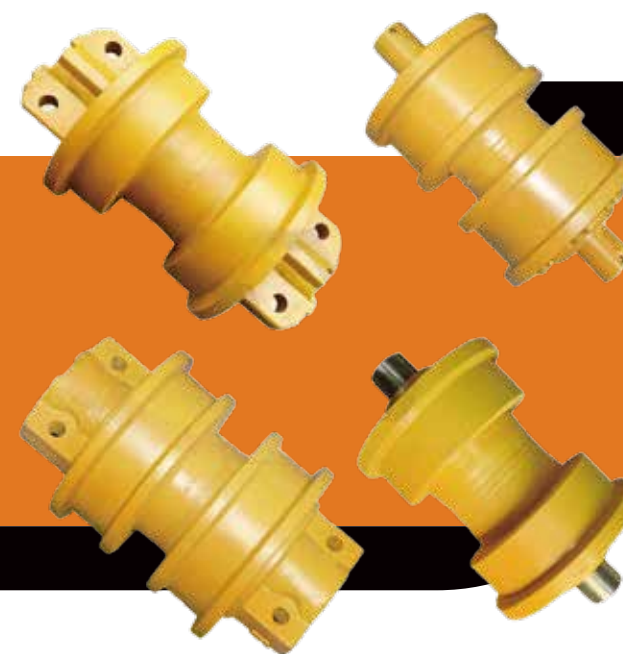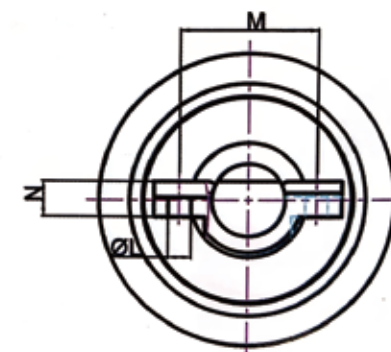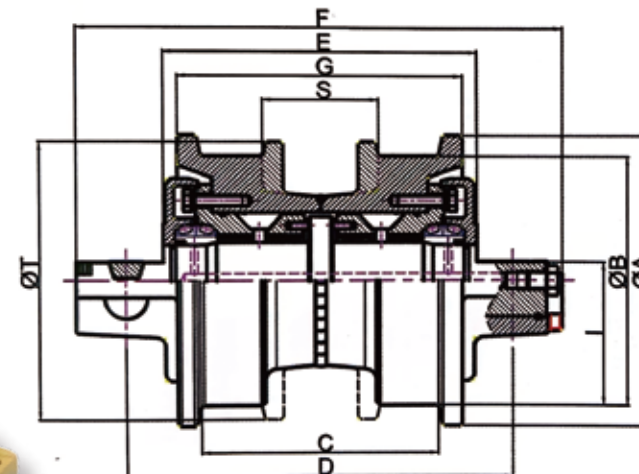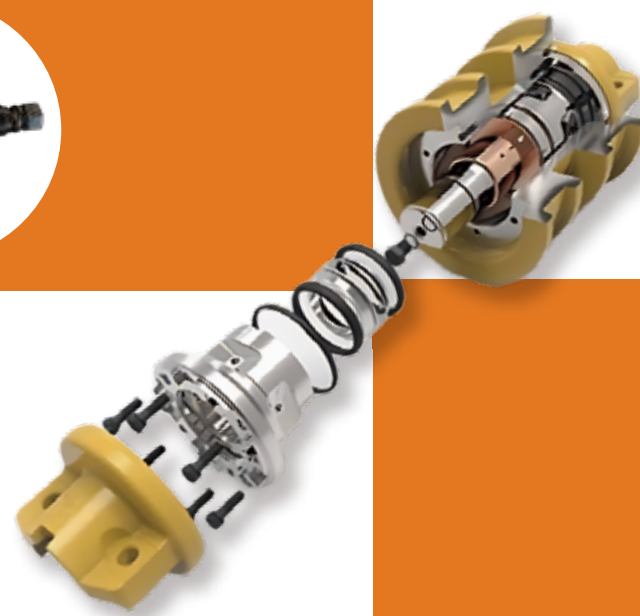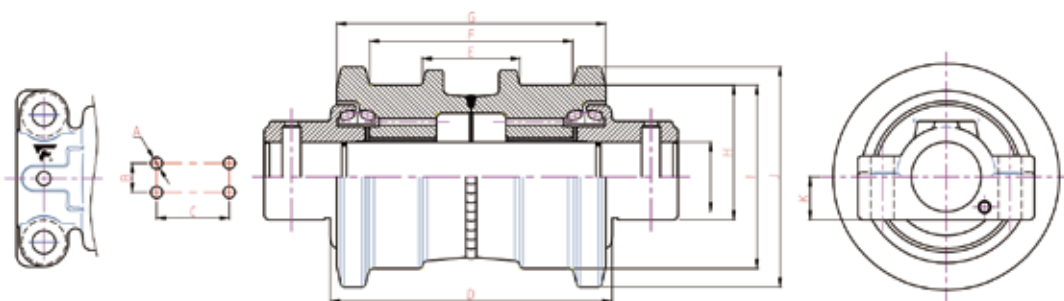


Compatible Models	Main Dimensions of Installation									
	A	B	D	E	F	G	H	I	J	K
CAT320D	Φ22	98	243	/	175	224	115.5	Φ155	Φ190	38
EX60-5	Φ15	82	163	/	128	156	82.5	Φ115	Φ140	25
EX100M	Φ17	89	228	/	160	200	105	Φ140	Φ170	35
EX200-5	Φ19	102	243	/	175	224	113.5	Φ155	Φ190	36
PC200-5	Φ20	110	243	/	175	232	116	Φ158	Φ190	37
SH200	Φ20	110	243	/	175	224	105	Φ160	Φ195	25
SK130-8	Φ18	100	200	/	132	176	90	Φ140	Φ170	20
ZX200	Φ19	102	243	/	175	224	113.5	Φ155	Φ190	36

Compatible Models	Main Dimensions of Installation												
	A	B	C	C	E	F	G	I	L	M	N	S	T
D20	Φ155	Φ135	104	104	147	249	133	98.5	Φ18	82	22	/	/
D31	Φ198	Φ170	125	125	196	294	154	100	Φ17	102	24	54	192
D50	Φ234	Φ200	175	175	238	382	218	116	Φ18	110	28	84	227
D60	Φ245	Φ210	196.5	196.5	258	403	235	121	Φ19	114	30	96	234
D85	Φ258	Φ222	210	210	305	457	252	127	Φ23.5	136	36	100	248

托轮 Carrier Rollers

- **Accurate Track Alignment**—Maintains proper track tension and positioning
- **High Load-Bearing Capacity**—Built for upper structure support
- **Smooth Operation**—Reduces vibration and track wear

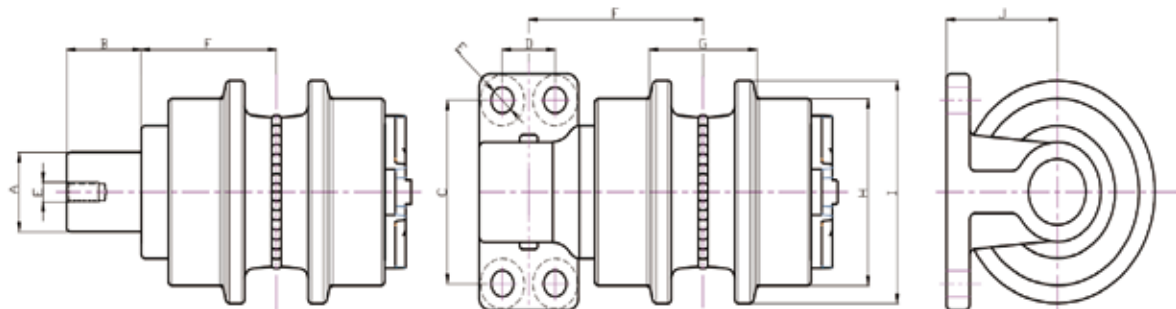

Compatible Models	Main Dimensions of Installation									
	A	B	C	D	E	F	G	H	I	J
ZAX120-6	Φ35	/	110	35	4-Φ13	97	74	Φ101	Φ115	71.5
SK200-3	Φ46	70	/	/	/	90	83	Φ120	Φ140	/
EC290	Φ57.2	80	/	/	/	117	96	Φ155	Φ185	/
EX400-5	/	/	140	65	4-Φ19	165	102	Φ160	Φ190	56
DX520	Φ57	95	/	/	/	111	96	Φ180	Φ210	/
D6H	Φ57.2	110	/	/	/	119	100	Φ185	Φ217	/
D31PX-21	Φ41	80	/	/	/	76	52	Φ143	Φ170	/


引导轮 Idlers

- **Tension Regulation**—Keeps optimal track tightness for smooth movement
- **Reinforced Core**—Resists cracking, and heavy loads
- **Reliable Guidance**—Supports efficient and consistent track travel




Compatible Models	Main Dimensions of Installation									
	A	B	C	D	E	F	G	H	I	J
DX300	290	120	4-M16*2	65	315	235	190	100	Φ580	Φ630
CAT330B	370	135	4-M20*2.5	60	350	267	205	105	Φ630	Φ680
EC460C	315	130	4-M20*2.5	70	360	290	205	105	Φ630	Φ680
R140-7	175	100	2-M16*2	/	210	183	135	70	Φ510	Φ550
R3000LC-7	290	130	4-M16*1.5	65	360	290	205	105	Φ580	Φ630
PC200-8-5G	196	105	6-M16*2	66	280	246	160	83	Φ500	Φ540


齿圈 齿块 Sprockets and Segments

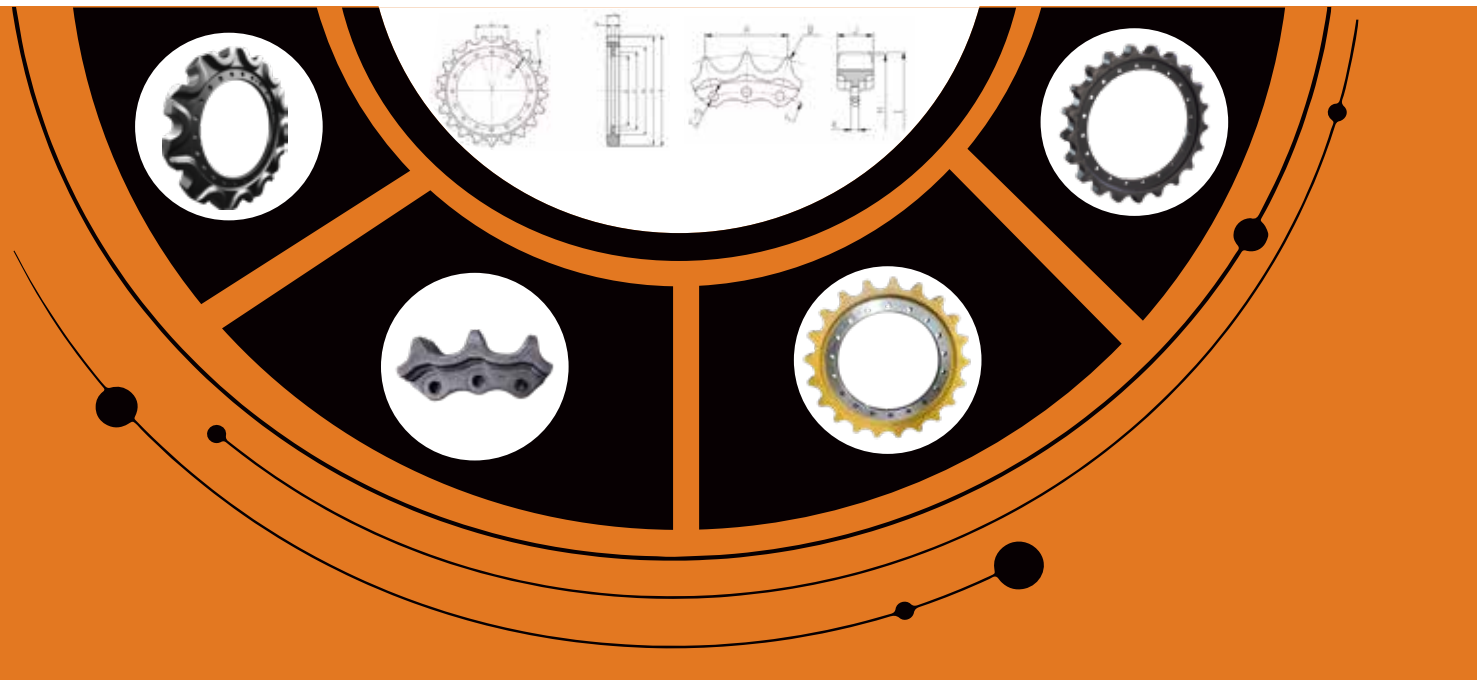

- **Precise Engagement**
-Designed for accurate track drive performance
- **Hardened Teeth**
-Ensures long wear life under constant operation
- **Strong Core Structure**
-Easy to install, replace, and maintain
- **Segmented Design for Bulldozers**
-Provides stable drive and long service life

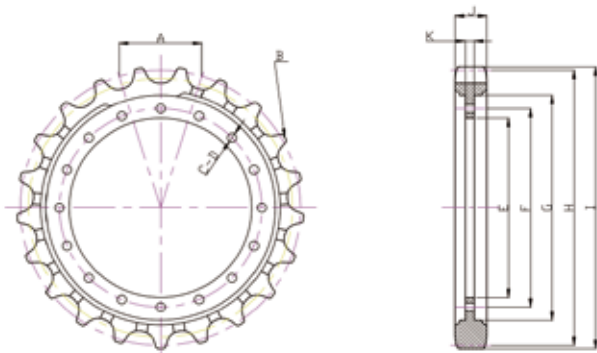

Compatible Models	Main Dimensions of Installation										
	A	B	C	D	E	G	H	I	F	J	K
R480	216	23	30	Φ20.5	Φ545	Φ648	Φ800.2	Φ820	Φ592	95	28
CAT330-6	216	23	16	Φ25	Φ515	Φ625	Φ800.6	Φ810	Φ566	80	28
CAT320	190	21	16	Φ21.5	Φ456	Φ536/Φ547	Φ644.6	Φ660	Φ497	67	22
EX60-1	154	21	12	Φ17	Φ290	Φ375	Φ522.5	Φ533.6	Φ330	50	16
PC300-8MO	216	21	24	Φ21.5	Φ526	Φ609	Φ732.8	Φ746	Φ560	85	20
SH120-3	171.4	21	15	Φ17	Φ325	Φ416/Φ420	Φ581.5	Φ594	Φ364	55	18
ZAX200	190	21	16	Φ21.5	Φ420	Φ528	Φ644.6	Φ660	Φ465	73	21
SK120	171.4	21	15	Φ17	Φ325	Φ416/Φ420	Φ581.5	Φ594	Φ364	55	18

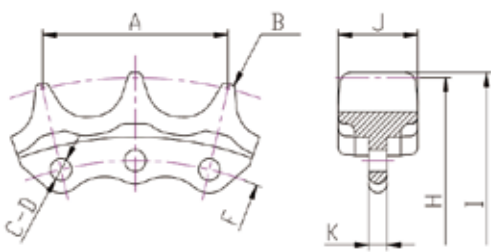

斗轴 轴套 Pins and Bushings

- **Heat-Treated for Strength**–Engineered to resist wear and deformation
- **Tight Tolerance Fit**–Reduces play and extends joint life
- **Ideal for Overhauls**–Perfect for maintaining bucket and linkage integrity



Pins 斗轴

Bushings 轴套



Specifications (Diameter*Length, mm)					Specifications (Inner Diameter*Outer Diameter*Height, mm)				
45*270	65*250	80*840	110*330	120*1100	30*40*35	55*65*50	80*95*80	90*105*90	100*120*120
45*300	65*720	85*810	110*390	120*1150	35*45*35	60*75*60	80*90*90	90*106*90	105*120*120
50*140	70*180	90*520	110*610	120*1170	40*50*40	60*75*70	80*95*85	90*115*90	110*125*80
50*220	70*520	90*540	105*540	130*310	40*50*50	65*80*70	80*96*80	90*120*80	110*125*90
50*360	70*680	90*870	105*610	130*1200	45*55*45	70*85*85	80*95*80	90*125*90	110*125*100
55*250	71*230	100*590	105*1030	130*1230	45*55*50	70*85*80	80*95*75	90*120*100	110*125*120
58*200	75*230	100*640	110*1030	140*800	50*60*50	75*90*80	80*105*90	100*115*94	110*125*130
58*485	75*820	100*665	115*620	150*1280	50*60*60	75*90*75	85*100*80	100*115*100	120*135*120
60*210	80*500	100*950	120*650	170*1360	55*65*70	75*90*70	85*100*90	100*120*130	120*140*120



斗齿销 Bucket Tooth Pins

- **Secure Locking Mechanism**—Keeps components firmly in place
- **Corrosion-Resistant Coating**—Withstands mud, moisture, and abrasion
- **Various Sizes Available**—Compatible with multiple brands and applications



Specifications (Diameter*Length, mm)				
11*61	18*70	20*105	26*98	35*155
14*55	18*85	22*125	26*120	35*240
14*68	18*100	22*122	26*160	36*169
14*79	18*110	23*130	27*146	40*170
14*92	19*75	25*98	30*145	18S
16*79	19*101	25*120	30*146	22S
16*80	19*105	25*125	30*190	25S
16*92	20*80	25*135	32*155	30S
17*68	20*98	25*160	32*185	35S

挖斗 Buckets

- **Reinforced Structure**—Designed to handle tough digging and loading tasks
- **High-Wear-Resistant Materials**—Built to perform in abrasive conditions
- **Precision Fit**—Compatible with various models



链销 链通 Track Pins and Bushings

- **Heat-Treated Core**—Built for strength and long-lasting performance
- **Tight Fit Design**—Reduces track play and wear
- **Multiple Sizes**—Compatible with a wide range of excavators and bulldozers



Specifications		
Track Pins (Diameter*Length, mm)	Track Master Pins (Diameter*Length, mm)	Track Bushings (Inner Diameter*Outer Diameter*Length, mm)
22.3*140	22*157	35.3*23*80
24.2*140	24*147	39.3*23*78
28.3*140	27.8*155	41.4*25*92
33.5*180	29.8*195	46.4*31*105
36.5*210	33.2*200	51*34*125
38*215	37.8*220	59.5*38.8*150
44.7*248	47*275	67.1*45.5*175
57.6*317	56.8*345	71.5*48.5*180

螺栓 螺母 Bolts and Nuts

- **High-Tensile Strength**—Withstands heavy loads and shock
- **Anti-Loosening Thread**—Ensures secure and stable connection
- **Corrosion-Resistant Coating**—Durable in harsh conditions



Specifications (Diameter*Length, mm)			
φ 10*38	φ 14*60	φ 18*65	φ 22*60
φ 12*45	φ 14*70	φ 18*110	φ 22*65
φ 12*50	φ 16*53	φ 19*56	φ 22*72
φ 12*55	φ 16*57	φ 19*60	φ 24*65
φ 12*60	φ 16*90	φ 19*65	φ 24*78
φ 13*40	φ 16*100	φ 20*57	φ 27*82
φ 13*47	φ 16*115	φ 20*60	φ 27*90
φ 14*40	φ 18*56	φ 20*65	φ 30*95
φ 14*55	φ 18*60	φ 20.5*56	φ 33*105