

以客户为导向　为客户创造价值

CUSTOMER-ORIENTED TO CREATE VALUE FOR CUSTOMERS

烟台众信达液压器材有限公司

Yantai Zhongxinda Hydraulic Equipment Co., Ltd.

众信达液压器材
ZHONGXINDA HYDRAULIC EQUIPMENT

HYDRAULIC EQUIPMENT

产 品 手 册

PRODUCT MANUAL









烟台众信达液压器材有限公司

Yantai Zhongxinda Hydraulic Equipment Co., Ltd.

公司简介
Company Profile

烟台众信达液压器材有限公司成立于2017年，我公司坐落于美丽的海滨城市山东省烟台市，距离中国最大的港口之一青岛港较近，出口运输便利。我们是一家集设计、生产、销售为一体的生产企业,注册资本300万，工厂面积3000多平方米，职工人数40余人。

公司主要生产：各种挖掘机焊接，无焊接破碎锤管路，破碎锤、抓钢器、抓木器、液压剪、打桩机、连接器、莲花抓、振动夯、拆车钳等挖掘机前端装置产品。 目前我司已于三一，卡特皮勒，小松，神钢，临工，徐工，日立，柳工，山河智能，中联重科等厂家或代理商达成战略合作伙伴关系。

公司产品先后通过ISO9001认证和CE认证。我们坚信质量是企业的生命，抓住质量源头，在生产方面严格控制产品的质量和制作工艺。

我们本着"保障品质，诚信服务"的宗旨，以顾客的满意为我们的追求目标，经过我们多年的不懈努力和创新，赢得了国内外客户的一致认可和好评。

我们的产品广销全国各大城市，并远销日本，韩国，北非，东南亚，中东及欧美等国家。每年出口销售额达5000万美金。

如果你对我们的任何产品感兴趣或者想讨论定制订单，欢迎随时联系我们。

Yantai Zhongxinda Hydraulic Equipment Co., Ltd. founded in 2017. It is located in Yantai city, a beautiful coastal city of Shandong Province, which is close to Qingdao Port, one of the largest ports in China and convenient for export transportation. we are a company dealing with the produce, design and selling of the product .The registered capital is 3 million, the factory area is more than 3000 square meters, and the number of employees is more than 40 peoples.

The company mainly produces: hydraulic breaker ,welding or bolt pipeline kits,quick hitch coupler,earth auger drill ,steel grabber, wood grabber, hydraulic shear, pile driver,Plate Compactor,Hydraulic Pulverizer and other excavator front-end device products for all brands of excavators.

At present, our company has reached strategic partnership with Sany, Caterpillar, Kobelco, Komatsu, Lingong, Xugong, Hitachi, Liugong, Sunward, Zoomlion and other manufacturers or agents.

The company's products have passed ISO9001 certification and CE certification. We firmly believe that quality is the life of the enterprise, seize the source of quality, and strictly control the quality and production process of products in production.

After years of unremitting efforts and innovation, we win the unanimous recognition and praise of domestic and foreign customers in line with the "guaranteed quality, integrity service" purpose, in pursuit of customer satisfaction as our goal.

Our products are widely sold in major cities throughout the country, and exported to Japan, South Korea, North Africa, Southeast Asia, the Middle East, Europe and America and other countries. Annual export sales of 50 million US dollars.

If you are interested in any of our products or would like to discuss customized orders, please feel free to contact us.









破碎锤管路
Hydraulic breaker pipeline kit
































*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压快速连接器
QUICK HITCH COUPLER





进口油缸使用更持久，更耐用
Reinforced cylinder with imported oil seals. (Simrit Germany brand) position.



伸缩虎口更加耐磨，更加坚固，防止断裂
High-abrasive front tiger mouth design.



安全销更加精准、牢固、安全
Strong safety pin at accurate



类别/Category	Unit	MINI	HNC-02	HNC-04	HNC-06	HNC-08	HNC-08S	HNC-10	HNC-14	HNC-17	HNC-20
总长度 C	mm	300-450	520-542	581-610	760	920-955	950-1000	965-1100	980-1120	1005-1150	1100-1200
总宽度 B	mm	150-250	260-266	265-283	351-454	450-483	445+493	543-572	550-600	602-666	610-760
总高度 G	mm	225-270	312	318	400	512	512-540	585	550-600	560-615	620-750
A Arm open width A	mm	82-180	155-172	181-205	230-317	290-345	300-350	345-425	380-450	380-480	500-650
D Pins center distance	mm	95-220	220-275	290-350	350-400	430-480	450-505	485-530	550-600	520-630	600-800
Pin diameter	mm	20-45	40-45	45-55	50-70	70-90	90	90-100	100-110	100-110	120-140
E Cylinder strok E	mm	95-200	200-300	300-350	340-440	420-510	450-530	460-560	510-580	500-650	600-700
Vertical pins center distance	mm	170-190	200-210	205-220	240-255	300	320	350-370		370-380	
Weight	kg	30-40	50-75	80-110	170-210	350-390	370-410	410-520	550-750	550-750	1300-1500
Working pressure	kgf/cm3	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400
Necessary flow	l	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20
Carrier	ton	0.8-4	4-6	6-9	10-16	18-25	25-26	26-30	30-40	40-52	55-90







*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

摆动连接器
TILTING QUICK HITCH COUPLER

适用对象

0.8-25吨挖掘机

产品特点

- ●可将铲斗或附件倾斜至180 度;
- ●双重安全锁设计，安全性强;
- ●无外露油缸，不惧恶劣天气;
- ●可变销中心设计，可安装不同销中心距的属具。


Applications

Fit to 0.8-25 ton excavator

Main features

- ●Tilting cylinder can tilt buckets or attachmen upto 180 degree,
- ●Double safty locking, Front & Rear Safety Locksbacked up by powerful springs;
- ●No exposed cylinders which make this quickcoupler last in the tough environments ;
- ●Variable pin center design. it could install theattachments with different pin center distances









类别/Category	Unit	HNC-00	HNC-01	HNC-02A	HNC-02B	HNC-04A	HNC-04B	HNC-06	HNC-06S	HNC-08
Tilt Degree	°	180°	180°	180°	180°	180°	180°	140°	140°	140°
Tilt Working Pressure	Bar	210	210	210	210	210	210	210	210	210
Tilt Necessary Flow	Lpm	2-4	5-16	5-16	5-16	5-16	15-44	19-58	22-67	35-105
Working Pressure	Bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300
Necessary Flow	Lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25	17-29	15-25
Carrier	Ton	0.8-1.5	2-3.5	4-6	4-6	7-9	7-9	10-15	16-20	20-25
Overall Dimension (L*W*H)	mm	477*280*567	477*280*567	518*310*585	545*310*585	541*350*608	582*350*649	720*450*784	800*530*864	858*500*911
Weight	Kg	55	85	156	156	170	208	413	445	655

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压破碎锤
HYDRAULIC BREAKER



适用对象

应用于矿山、爆破、建筑、采石场等，可安装于所有普通液压挖掘机、小型挖掘机及其它载货设备上，如滑移装载机、反铲装载机、起重机、伸缩式装卸机、轮式装载机等机械。

产品特点

1.缸和主阀:精密加工，防止拉伤;
2.活塞与中缸体一对一配磨;
3.钎杆:42CrMo,性能可靠;
4.油封:原装进口NOK油封。









Applications

Used for mining,demolition,construction, quarry.It can be mounted on all common hydraulic excava-tor as well as mini excavator and other carrier likeskid steer loader, backhoe loader, crane, telescopichandler,wheel loader and other machinery.

Main features

1.Cylinder & valves: prevents scuffing with preci-sion finishing treatment.
2.Piston:every piston tolerance machined perfectlyaccording to each cylinder.3.Chisel:42CrMo, exceptional performance andreliability.
4.Seal kit: original NOK.

类别/Category	Unit	HNC-450	HNC-530	HNC-680	HNC-750	HNC-850	HNC-1000	HNC-1250	HNC-1350	HNC-1400
Body Weigh	kg	67	85	152	210	278	475	616	846	916
Total Weight (SiderTop/Box)	kg	91/91/125	154/154/151	259/339/357	331/405/446	554/633/729	757/862/1003	1273/1304/1367	1649/1843/1889	1763/2055/2007
Operating Pressure	bar	88-117	88-117	108-137	118-147	127-157	147-167	147-167	157-176	157-176
Working Flow Rate	L/min	20-30	25-50	40-70	50-90	60-100	80-110	90-120	130-150	120-180
Impact Rate	bpm	700-1200	600-1100	500-900	400-800	400-800	350-700	350-650	400-800	350-500
Hose Diameter	inch	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1
Chisel Diameter	inch	1.77	2.08	2.68	2.95	3.35	3.94	4.92	5.31	5.51
Suitable Carrier	ton	1.2-3.0	2.5-4.5	4-7	6-9	7-14	10-15	15-18	18-26	18-26

类别/Category	Unit	1400A	1500	1550	1650	1650F	1750	1850F	1950	2100
Body Weigh	kg	952	1088	1309	1438	1586	1 929	2411	2626	3396
Total Weight (SiderTop/Box)	kg	1805/2090/2007	214/2376/2453	2573/2750/2964	2747/3152/2912	3273/3443/2917	3901/4053/3898	4376/4809	5039/5164	6683/6993
Operating Pressure	bar	157-176	157-176	176-196	176-196	176-196	176-196	186-216	186-216	196-235
Working Flow Rate	L/min	120-180	150-190	200-260	200-260	200-260	210-290	220-270	220-290	290-350
Impact Rate	bpm	350-500	350-700	250-400	250-400	250-380	200-350	200-250	180-200	150-200
Hose Diameter	inch	1	1	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
Chisel Diameter	inch	5.51	5.91	6.1	6.5	6.5	6.89	7.28	7.68	8.27
Suitable Carrier	ton	18-26	27-35	28-36	30-40	30-40	35-40	35-45	40-55	60-80

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specifications may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

拇指夹
HYDRAULIC THUMB



适用对象

辅助挖斗有更强的功能特点。

产品特点

1.一指多用，简便的辅助装置，成本低，效率高，
2.安装方便，操作灵变，根据不同需求设计定做。

Application

Make buckets much more functional and keep rocks or other objects from dropping.

Main featurese


1.Easy to install and operate.
2.Custom service available.
3.Fit several buckets.Supportive tool; lower thecost and improve





类别/Category	Unit	HNC-00	HNC-01	HNC-02	HNC-04	HNC-06	HNC-08
Oil pressure	bar	110-140	110-140	110-140	120-160	150-170	160-180
Operating flow	lpm	30-55	30-55	30-55	50-100	90-110	100-140
SuitableExcavator	ton	1-2	2-4	4-6	7-10	12-16	17-23
Length A	mm	582	770	915	1143	1450	1780
Width B	mm	155	246	349	394	450	510
Base Plate Length	mm	813	1043.5	1220.5	1404.5	1845	2166
Weight	kg	41	65	110	165	325	520
Overall Dimension	mm	813*155*229	1044*246*322	1221*349*354	1405*392*466	1845*450*580	2166*510*657

松土器
RIPPER

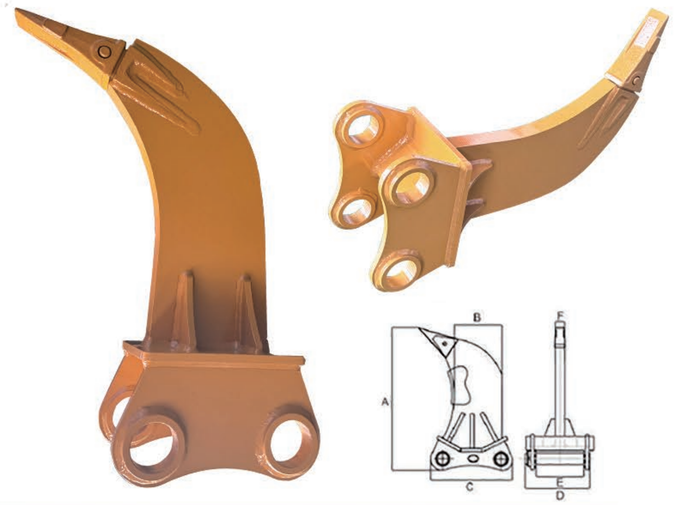

适用对象

适用对象风化石硬土、冻土层有裂缝的岩层。

产品特点

耐磨保性能板材，不易断裂。

Application

Ripping hard soil such as weathered soil and rocks,tundra etc.

Main features


Abrasion resistant steel and diamond teeth, longservice life.

类别/Category	Unit	HNC-00	HNC-01	HNC-02	HNC-04	HNC-06	HNC-08	HNC-08S	HNC-10	HNC-14	HNC-17	HNC-20
Total Length A	mm	523	523	656	656	885	1080	1080	1290	1290	1500	1550
Width B	mm	130	130	180	180	240	345	345	400	400	465	465
Thickness F	mm	36	36	55	55	80	90	90	90	110	110	110
Carrier	Ton	1-2	3-4	4-6	6-9	12-16	20-23	23-26	26-30	30-40	40-52	50-90
Weight	kg	30	40	80	85	185	400	410	600	760	1030	1200

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specifications may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

旋转抓木器
ROTATING WOOD GRAPPLE



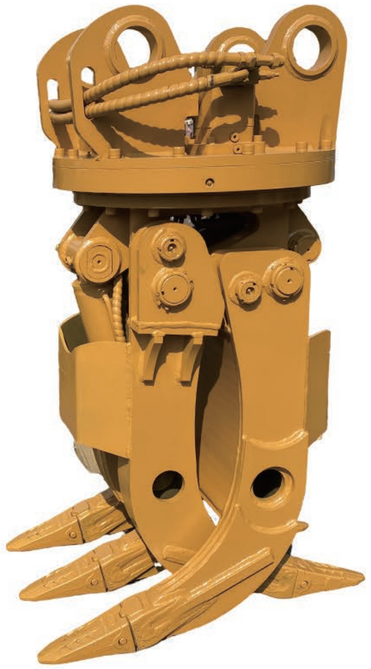

适用对象

抓木头、抓大物件杂物

产品特点

●M+S马达带刹车功能，油缸带美国SUN安全平衡阀

●根据需求可做加宽型，下抓可定做3+2,4+3,5+4；

●电控和液控系统带美国SUN节流阀和减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Wood and other large scraps handling, moving, loading and organizing.

Main features


●Driven by M+S motor with brake valve; cylinder with USA safety valve(USA SUN brand)

●3+2.4+3.5+4 fingers for your option.

●Throttle, pressure reducing valve, relief valve (all the valves are USA

●SUN brand)are in electrical and hydraulic control system, making it safer and much more stable and durable in use.



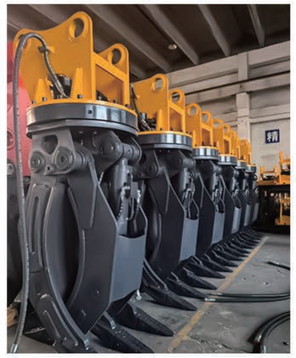



类别/Category	Unit	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Max Jaw Opening	mm	1247	1470	1650	2375	2493
Motor Pressure	kg/cm²	110-120	110-120	130-150	130-150	130-150
Necessary Flow	lpm	30-55	30-55	40-70	40-70	40-70
Oil Cylinder Pressure	kg/cm²	160-200	160-200	180-230	180-230	200-250
Oil Cylinder FORCE	ton	7	8	14	22	27.5
Weight	kg	375-395	400-430	765-795	1420-1450	1700
Dimension L*W*H	mm	1332*595*405	1352*687*405	1745*805*550	2082*1076*675	2250*1120*812
Carrier	ton	4-6	6-9	12-16	17-25	26-35

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

旋转抓石(钢)器
ROTATING STONE/SCRAP STEEL GRAPPLE





适用对象

抓玉石、大理石等珍贵石材，抓废铁

产品特点

●M+S马达带刹车功能，油缸带美国SUN安全平衡阀;

●根据需求可做加宽型，下抓可定做3+2,4+3,5+4;

●电控和液控系统带美国SUN节流阀和减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Stones, steel and iron scraps demoliting, Scrap handling, Cleaning, Moving, Loading, Sorting andOrganizing materials in order.

Main features

●Driven by M+S motor with brake valve, cylinder with USA safety valve(USA SUN brand).

●Custom service is available.(3+2, 4+3, 5+4 fingers for your option).

●Throttle, pressure reducing valve, relief valve (all the valves are USA SUN brand)are in electricaand hydraulic control system, making it safer and much more stable and durable in use.

类别/Category	Unit	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Max Jaw Opening	mm	1247	1352	1650	2375	2493
Motor Pressure	kg/cm²	110-120	110-120	130-150	130-150	130-150
Necessary Flow	lpm	30-55	30-55	40-70	40-70	40-70
Oil Cylinder Pressure	kg/cm²	160-200	160-200	180-230	180-230	200-250
Oi Cylinder FORCE	ton	7	8	14	22	27.5
Weight	kg	390-410	420-450	790-820	1450-1480	2050-
Dimension L"WH	mm	1342*595*405	1385*646*405	1745*805*550	2099*1030*675	2265*1021*812
Carrier	ton	4-6	6-9	12-16	17-25	26-35

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

加强抓
DEMOLITION GRAPPLE

适用对象

一些强硬建筑垃圾的装卸及拆建，废铁的装卸主要高强度杂物的拆卸。


产品特点

●大小杂物都可以一起抓起;耐磨板材设计，更耐磨，使用更持久;
●M+S马达带刹车功能，油缸带美国SUN安全平衡阀
●电控和液控系统带美国SUN节流阀和减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Demolition of solid structures, scrap handling,cleaning,moving, loading,sorting and organizing materials in order.Main features

- Capable of grabing materials of different sizes in bulk.
- Abrasion resistant steel, durable in use.
- Driven by M+S motor with brake valve;cylinder with USA safety valve(USA SUN brand).
- Throttle,pressure reducing valve, relief valve (all the valves are USA SUNbrand) are in electrical and hydraulic control system, making it safer andmuch more stable and durable in use.

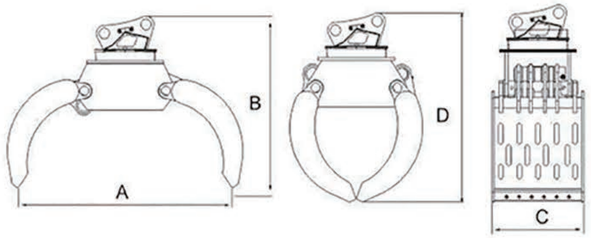









类别/Category	Unit	HNC-01	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Rotation Angle		360	360	360	360	360	360
Motor Pressure	kg/cm²	90-110	110-120	110-120	130-150	130-150	130-150
Necessary Flow	lpm	20-35	30-55	30-55	40-70	40-70	40-70
Oil Cylinder FORCE	ton	4	8	9	15	16	18
Oil Cylinder Pressure	kg/cm²	110-140	160-200	160-200	180-230	180-230	200-250
Operating flow	lpm	25-40	30-55	50-100	90-110	100-140	90-150
Carrier	ton	3-4	4-6	6-9	12-16	17-25	26-35
Open width A	mm	1160	1400	1500	1700	1950	2400
Width C	mm	450	500	600	800	1030	1200
Weight	kg	200-220	310-330	440-460	900-960	1350-1500	1700-2100

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压废料抓
ECCENTRIC PIN HYDRAULIC GRAPPLE



适用对象

园林，垃圾场，矿山。

产品特点


结构新颖、坚固，可调轴距。

Applications

Widely used in waste recyle yards, gradens and mines.

Main features

Eccentric pin design making pin center distanceadjustable.NM400 steel.

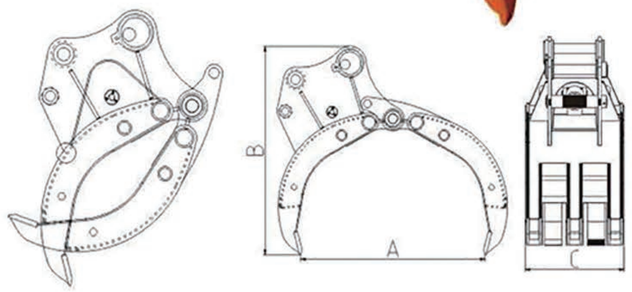







类别/Category	Unit	HNC-MINI	HNC-MINI	HNC-02	HNC-04	HNC-06	HNC-08
Oil Pressure	bar	80-110	80-110	110-140	120-160	150-170	160-180
Operating Flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140
Carrier	ton	1-2	2-3	4-6	6-9	12-16	17-23
Oil Cylinder Thrust	T	3.9	6.6	10	10	12	24
Open Width A	mm	610	745	830	890	1225	1510
Height B	mm	680	900	1000	1105	1325	1675
Width C	mm	435	400	495	545	620	820
Weight	kg	110-130	130-190	250-290	350-380	570-620	650-800

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

莲花抓
ORANGE PEEL GRAPPLE



适用对象

汽车吊，挖机，抓取废钢、废塑料、垃圾等

产品特点

- ●销轴经过热处理调质；
- ●花瓣选用NM400—500耐磨板；
- ●使用寿命长；抓举力量大；
- ●可增加360度旋转功能。


Applications

Steel scraps,wastes handling,loading and unloading.

Main features

- ●Using NM500 steel and all pins are heat treated making our grapple with a very lon service life and high carrying capacity.
- ●360° rotation function available.



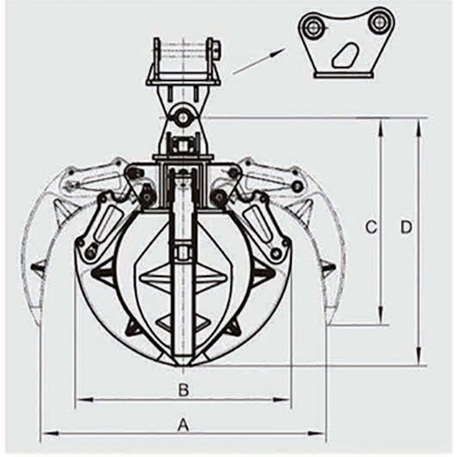

类别/Category	Unit	HNC-01	HNC-04	HNC-06	HNC-08	HNC-10
(A) open width	mm	1100	1275	1623	1998	2474
(B) Close width	mm	887	1064	1283	1684	2067
(C) Hight	mm	937	990	1083	1335	1550
(D) Hight	mm	1065	1117	1255	1537	2024
Cylinder thrust	ton	3.14	3.14	5.6	9	15.7
Oil pressure	Mpa	16-20	16-20	18-23	18-23	20-25
Capacity(closed)	m³	0.10	0.15	0.25	0.60	0.90
Capacity(open)	m³	0.39	0.61	1.08	2.24	2.99
Carrier	ton	3-4	4-9	12-16	17-25	26-35
Weight	kg	200-250	400-600	900-1100	1200-1500	1800-2200

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压剪
HYDRAULIC CRUSHER

适用对象

破碎拆除化工设备;破碎拆除房屋。

产品特点


- ●刀牙选用蒂森克虏伯XAR系列耐磨板;耐用;破碎力大加工精度高;不易变形
- ●可增加360度旋转功能;

Applications

Can be used to demolish buildings and constructions.

Main features

- ●Material ThyssenKrupp XAR steel; High precision; moredurable in use.
- ●360"rotation function available





类别/Category	Unit	HNC-01	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Suitable Excavator	Ton	3-4	4-5	6-8	12-14	20-22	30-35
Max. Operating Pressure	Mpa	24.5	24.5	27.4	31.4	31.4	31.4
A Overall Length	mm	1120	1310	1570	1950	2260	2570
B Max.Jaw Opening	mm	225	375	505	700	855	1010
C Min, Jaw Opening	mm	-95	-110	-120	-150	-190	-210
D Cutting Blade Length(bottom side + tip side)	mm	165+103	205+155	260+175	325+210	400+260	450+310
E Tip Cutting Force	KN	245	323	431	735	990	1270
F Center Cutting Force	KN	372	500	627	1060	1440	1870
Weight	kg	330	450	800	1540	2490	3790

钢材剪
HYDRAULIC SCRAP SHEAR

适用对象

剪切各种钢结构，用于废钢厂，报废汽车厂，化工厂。

产品特点


- ●刀牙选用蒂森克虏伯XAR系列耐磨板;耐用;破碎力大;加工精度高;不易变形;
- ●可增加360度旋转功能;


Applications

Widely used in steel scrap and scrap car factories

Main features

- ●Material ThyssenKrupp XAR steel. Durable in use, high level machining precision and high breaking capacity.
- ●360° rotation function available



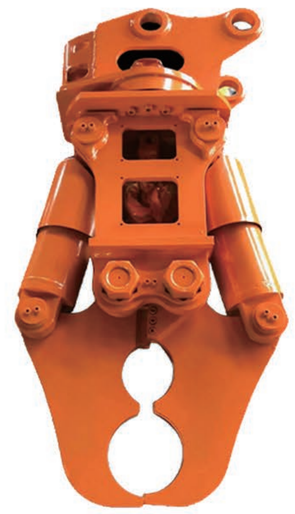

类别/Category	Unit	HNC-01	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Suitable Excavator	Ton	3-4	4-5	6-8	12-14	20-22	30-35
Operating Pressure	Mpa	24.5	24.5	24.5	31.4	31.4	31.4
Max. Operating Pressure	MPa	24.5	24.5	27.4	34.3	34.3	34.3
A Overall Length	mm	970	1180	1700	2070	2370	2780
B Max.Jaw Opening	mm	360	500	620	1000	1100	1550
C Cutting blade length	mm	100	110	130	180	210	240
D Crushing force at tip	kn	235	343	431	725	1080	1380
E Crushing force at center	kn	-	529	676	1120	1610	2110
Weight	kg	270	370	710	1370	2240	3500

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压旋转抓木锯
HYDRAULIC ROTATING WOOD GRAB SAW



产品特点：
1.360°旋转液压驱动：旋转平稳，原木夹紧、切割精准。
2.多功能抓木锯：一款集抓取与切割于一体的林业专用工具。
3.重型钢结构：耐磨，非常适合农场/林业的艰巨任务。
4.通用挖掘机适配：兼容5-10吨挖掘机，快速安装。
5.高效切割：锋利的刀片，快速的木材剪切，提高工作效率。
6.低维护设计：密封液压系统，防漏油，使用寿命长。

Product Features：
1.360° hydraulic rotation drive: Smooth rotation, enabling accurate log clamping and cutting.
2.Multifunctional wood grab saw: An integrated forestry tool combining grabbing and cutting functions.
3.Heavy-duty steel structure: Wear-resistant, perfectly suitable for heavy-duty farm and forestry operations.
4.Universal excavator compatibility: Fits 5-10 ton excavators with quick and easy installation.
5.High-efficiency cutting: Equipped with sharp blades for fast wood shearing and improved working efficiency.
6.Low-maintenance design: Sealed hydraulic system prevents oil leakage and extends service life.





类别/Category	Unit	HNC-00	HNC-01	HNC-02	HNC-04	HNC-06	HNC-06S	HNC-08
Rotation Angle	°	360	360	360	360	360	360	360
Motor Pressure	kg/cm²	80-100	90-110	110-120	110-120	130-150	130-150	130-150
Necessary Flow	lpm	25-40	20-35	30-55	30-55	40-70	40-70	40-70
Oil Cylinder FORCE	ton	2	3	6	9	12	12	13
Oil Cylinder Pressure	kg/cm²	110-140	110-140	160-200	160-200	180-230	180-230	180-230
Operating flow	lpm	25-40	25-40	30-55	50-100	90-110	90-110	100-140
Carrier	ton	1-2	3-4	4-6	6-9	11-14	14-16	17-25
Open width A	mm	905	1222	1322	1525	1833	1950	2530
Width c	mm	313	330	407	470	644	488	604
Weight	kg	110-120	240-260	350-370	420-450	740-770	810-860	1100-1160

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement


旋转抱式抓木器
ROTATING LIGHT WOOD GRAPPLE



适用对象
抓木头，抓农作物等。
产品特点
- M+S马达带刹车功能，油缸带美国SUN安全平衡阀;
- 根据需求可做加宽型;
- 电控和液控系统带美国SUN节流阀和减压阀 、溢流阀，更安全稳定，操作方便故障率低;



Applications
Light duty job like waste handling cleaning andorganizing,

Main features
- Driven by M+S motor with brake valve; cylinder with USAsafety valve(USA SUN brand);
- Throttle, pressure reducing valve, relief valve (all the valves are USA SUN brand)are in electrical and hydraulic control system, making it safer and much more stable and durable in use;
- Custom service is available.

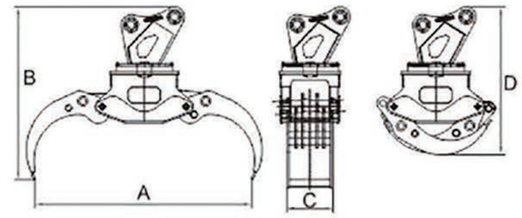

类别/Category	Unit	HNC-00	HNC-01	HNC-02	HNC-04	HNC-06	HNC-06S	HNC-08
Rotation Angle	°	360	360	360	360	360	360	360
Motor Pressure	kg/cm²	80-100	90-110	110-120	110-120	130-150	130-150	130-150
Necessary Flow	lpm	25-40	20-35	30-55	30-55	40-70	40-70	40-70
Oil Cylinder FORCE	ton	2	3	6	9	12	12	13
Oil Cylinder Pressure	kg/cm²	110-140	110-140	160-200	160-200	180-230	180-230	180-230
Operating flow	lpm	25-40	25-40	30-55	50-100	90-110	90-110	100-140
Carrier	ton	1-2	3-4	4-6	6-9	11-14	14-16	17-25
Open width A	mm	905	1222	1322	1525	1833	1950	2530
Width c	mm	313	330	407	470	644	488	604
Weight	kg	110-120	240-260	350-370	420-450	740-770	810-860	1100-1160

抱式抓木器
LIGHT WOOD GRAPPLE

类别/Category	Unit	HNC-00	HNC-01	HNC-02	HNC-04	HNC-06	HNC-06S	HNC-08
A	mm	906	1222	1322	1525	1833	1950	2530
Working Pressure	bar	110-140	110-140	160-200	160-200	180-230	180-230	180-230
Carrier	ton	1-2	3-4	4-6	6-9	11-14	14-16	17-25
Weight	kg	80-110	180-220	280-320	365-400	410-440	520-560	800-860

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压链式挖沟机
HYDRAULIC CHAIN TRENCHER




主要应用
适用于铺设公用设施（水管/燃气管道、光缆、电力线）、道路建设（排水沟）等。农业项目（灌溉系统）。它在速度、沟渠均匀度以及对坚硬土壤或岩石条件的适应性方面，都优于传统的挖掘机铲斗。
主要优势
*** 提供精确、笔直的沟渠，具有一致的深度和宽度。**
*** 实现一次连续挖掘，显着降低人工和时间成本。**
*** 结构紧凑，操作灵活，适合大型工程和狭窄的工作空间。**

Main Applications
Suitable for laying public utilities (water/gas pipelines, optical cables, power lines), road construction (drainage ditches), etc.
Agricultural projects (irrigation systems).
It outperforms traditional excavator buckets in terms of speed, trench uniformity, and adaptability to hard soil or rocky conditions.

Key Advantages
Delivers precise, straight trenches with consistent depth and width.
Enables single-pass continuous excavation, significantly reducing labor and time costs.
Compact structure and flexible operation, ideal for large-scale projects and confined workspaces.





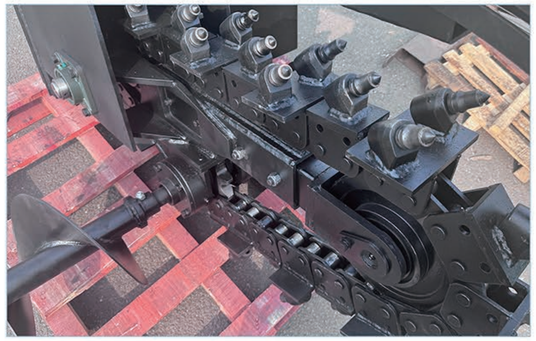



*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

打桩锤
PILE DRIVING HAMMER









类别/Category	Unit	150	250	300	330	350	450
Frequency	RPM	2600	2800	2800	2800	2800	2800
Eccentric Moment	NM	28	33	50	62	65	85
Exciting Force	TON	24	38	44	58	65	75
Main Weight	KG	1500	2100	2500	2800	3100	3500
Arm Weight	KG	400	700	700	750	750	750
Hydraulic Pressure	BAR	180-230	200-260	200-260	300-330	300-330	330-350
Required Flow	LPM	130-180	150-200	240-280	250-380	250-380	310-390
Max Pile Length	M	6	9	12	15	15	18
Suitable Excavator	TON	15-18	20-28	28-32	30-35	35-40	40-55

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

振动夯
HYDRAULIC PLATE COMPACTOR



适用对象

高速公路铁路护坡及路面的平整，工地及厂房地面平整

产品特点

进口轴承，意大利节流阀、单向阀，美国的安全阀，操作稳定。

Application

Leveling of high-speed way and railway slopes, roads.construction sites and building floors

Main features

Imported bearing (Japan) throttle(Italy) and safety valves(USA),stableand high efficient performance.

原装进口马达，更加稳定有力
PERMCo motor.stabie and powerful.



原装进口阀安全可靠，操作方便。
Imported relief vaive protecting motor well.




减震胶块更持久耐用。
Long service life rubber pads



类别/Category	Unit	HNC-mini	HNC-02/04	HNC-06	HNC-08	HNC-10
Height	mm	435	530	650	720	730
Width	mm	442	550	700	900	900
Impulse force	ton	3	4	6.5	11	15
Vibration frequency	rpm/min	2000	2000	2000	2200	2200
Oil flow	l/min	30-60	45-85	85-105	120-170	120-170
Operating pressure	kg/cm²	100-130	100-130	100-150	150-200	150-200
Bottom measurement	mm	800*442	900*550	1160*700	1300*900	1500*1000
Carrier	ton	2-4	4-10	12-16	18-24	30-40
Weight	kg	200	350-500	650-800	900-1000	1100-1300







*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specifications may vary with different excavators and are subject to change without prior notice for products improvement

粉碎钳
PULVERIZER





适用对象

粉碎房屋梁柱、水泥杆等。

产品特点

- ●材料选用蒂森克虏伯XAR耐磨板，精加工；破碎和剪断钢筋一体功能不变形，破碎力量大；
- ●可增加360度旋转功能。

Application

Crush beam columns and concrete building material.

Main features

Material THYSSENKRUPP XAR high precision; with both crush andcut functions. Durable in use.e360° rotation function available.

类别/Category	Unit	HNC-02	HNC-04	HNC-06	HNC-08	HNC-08S	HNC-10
B Max Open	mm	420	600	750	860	900	1100
C Cutter Length	mm	75	95	112	180	180	360
E Crushing Force	Kn	170	260	470	994	994	1350
Working Pressure	Mpa	24	24	31	32	32	32
Oil Flow	Lpm	80-120	100-140	120-180	180-250	180-250	200-300
Carrier	Ton	3-5	6-9	10-15	18-25	20-30	30-40
Weight	kg	270	480	880	1600	1980	2700









*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specifications may vary with different excavators and are subject to change without prior notice for products improvement

筛分斗
SCREENING BUCKET



主要特点：
适用对象：表土、采石、污染土壤海滩修复、拆迁垃圾和绿色回收作业

主要特点：
1：网孔不易堵塞；
2：筛筒可前后旋转，便于筛分；
3：结构简单，维护方便；
4：筛网可根据您的要求定制 1MM 至 120MM；
5：由专业制造商设计，提高了筛查系统的产量和可靠性，操作简单，质量可靠，并有完善的售后系统。

Aplicable objects:
top-soil, quarried stone,remediation of contaminated soils beaches, demolition waste and green recycling duties.

Main features:
1:The mesh hole is not easy to block;
2:The screening cylinder can be rotated forward and backward for easy screening;
3:Simple structure and convenient maintenance;
4:The screening mesh can be made to order from 1mm to 120mm, according to your requirement;
5:Designed by professional manufacturers, the output and reliability of the screening system are improved, the operation is simple and the quality is reliable, and there is a perfect after-sales system.












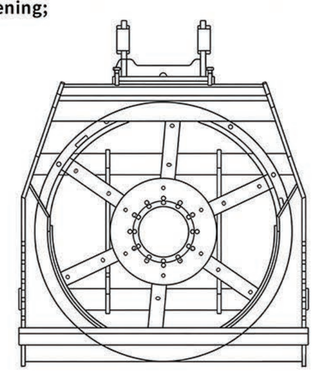

类别/Category	unit	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Suitable excavator	ton	2-4	6-10	12-17	18-23	25-36
Weight	kg	240	630	1020	1920	2430
Rotary Screen Diameter	mm	610	810	1000	1350	1500
r/min	l/min	60	65	65	65	65
Working Pressure	mm	150	220	230	250	250
Oil Flow	l/min	30	60	80	110	110

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

铲斗夹
CLAMP BUCKE

主要特点：
该产品主要由固定体、滑动体和伸缩油缸组成。
臂筒采用高强度 700 材质，内置伸缩油管，能够有效避免障碍物对于管路的损伤。
它也具有负载伸缩功能，能越过部分障碍直接施工作业，一般携带挖斗使用，可完成深坑挖掘；也可配合贝壳斗用于抓土、抓沙、抓煤等。

This product is mainly composed of a fixed body,a sliding body and an extendable cylinder.
The arm is made of high-strength 700 material. Embedded hydraulic hoses can effectively prevent damage caused by obstacles. It also has a load-extension unction, which can work over some obstacles directly. Generally, it carries a bucket to complete deep pit excavation as well as be matched with a clamshell bucket to grab soil, sand, coal, etc.









类别/Category	Unit	HNC-00	HNC-01	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Bucket width	mm	300	350/400	400	400	530	700	1000
A(Max jaw opening)	mm	770	900	1335(1300)	1335	1800	2275	2300
Oil pressure	bar	80-120	90-150	120-160	120-160	150-170	168-180	180-200
Oil cylinder thrust	T	1.8-2.7	2.9-4.9	6-8	6-8	11.7-13.3	21.2-23.8	27-30
Operating flow	lpm	20-30	25-35	50-100	50-100	90-110	100-140	140-160
Carrier	ton	1.5-3	3-4	4-6	6-9	9-16	17-23	25-30
Weight	kg	90-120	156	280-330(245-260)	280-330	730	1185-1260	1420





*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

粉碎斗
Crushing bucket









类别/Category	HNC-70	HNC-120	HNC-200	HNC-300	HNC-670	HNC-870
Excavator Weight(t)	6-10	10-18	18-30	30-45	50-70	75-90
Bucket Capacity(m)	0.2	0.45	0.74	1.15	1.47	2.23
Oi Flow(Vmin)	45-55	80-100	180-220	260-280	340-360	440-460
Feeding Size(mm)	400*330	400*550	500*700	500*1000	670*1150	670*1315
Whole Size(mm)	1630*1030*1150	1950*1120*1500	2505*1325*1730	2345*1575*1665	2880*2105*2135	2880*2270*2135
Overall Weight(kg)	888	1360	3450	4220	6850	7668

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specifications may vary with different excavators and are subject to change without prior notice for products improvement

拓荒机
Mulcher



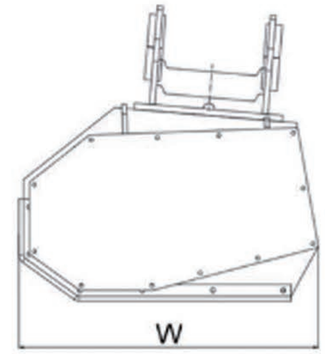

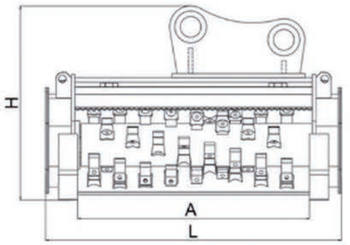

类别/Category	Unit	HNCHB-02	HNCHB-04	HNCHB-06	HNCHB-08
Suitable excavator	Ton	3-5	5-10	12-14	20-22
Opening WithJaw	mm	500	700	900	1500
Overall Length	Lmm	730	950	1170	1800
Overall Width	W mm	760	760	1165	1365
Overall Height	H mm	700	720	760	780
Driving Pressure	bar	100-180	100-200	100-300	100-350
Rated Speed	r/min	4000	4000	3700	3000
Number of blades	Pieces	16	24	32	60
Weight	Kg	380	460	625	1400


*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specifications may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

铲斗
EXCAVATORS BUCKET







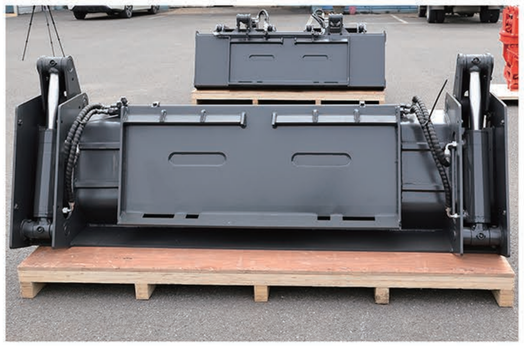




类别/Category	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Excavator weight（ton）	2-3	4-5	6-8	10-14	18-23
Bucket width A(mm）	500	600	700	900	1100
Bucket volume （m3）	0.08	0.18	0.29	0.52	0.75
opening B (mm）	427	608	812	1018	976
pressure（Mpa）	18	21	24	24	24
weight（kg）	150	250	310	720	1200


*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement


挖掘机液压树剪
EXCAVATOR TREE SHEAR

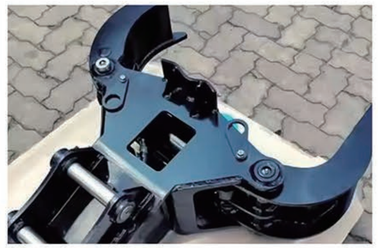





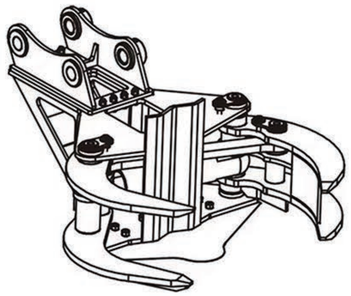

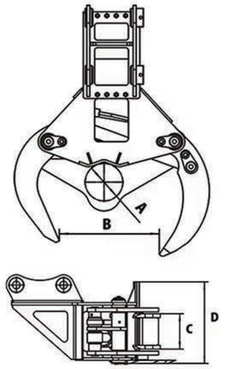



类别/Category	Unit	HNCHB02	HNCHB04	HNCHB06	HNCHB08	HNCHB10
Application	tons	1-4	5-9	14-18	20-26	27-35
Weight	kg	200	400	800	1500	2000
Max jaw opening	mm	500	650	800	1000	1300
Blade length	mm	110	150	200	280	350
Height	mm	1150	1300	1500	1650	1800
Width	mm	400	450	550	670	670
Shearing force	tons	12	20	25	30	45


*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement


旋转倾斜快换
ROTATING AND TILTING QUICK COUPLER












类别/Category	Unit	HB-mini	HB-02	HB-04	HB-06	HB-08	HB-10	HB-14
Oil pressure	Bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300
Operating flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25
Carrier	ton	1-3	3-6	6-9	10-16	16-23	25-35	30-40
pin diameter	mm	20-40	40-45	45-60	60-70	70-80	90-100	100-110
weight	kg	25-40	50-75	70-110	70-110	300-400	550-650	650-800

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

铲斗
BUCKET





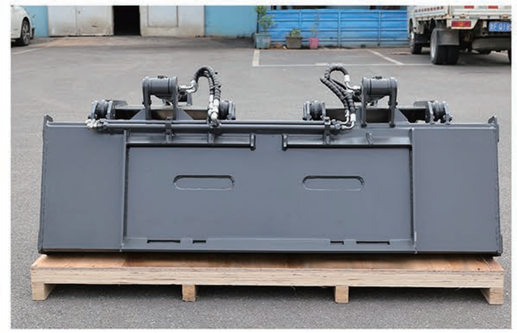





类别/Category	HNC-02	HNC-04	HNC-06	HNC-08	HNC-10
Excavator weight（ton）	2-3	4-5	6-8	10-14	18-23
Bucket width A(mm）	500	600	700	900	1100
Bucket volume （m3）	0.08	0.18	0.29	0.52	0.75
opening B (mm）	427	608	812	1018	976
pressure（Mpa）	18	21	24	24	24
weight（kg）	150	250	310	720	1200


*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

液压软管
HYDRAULIC HOSE







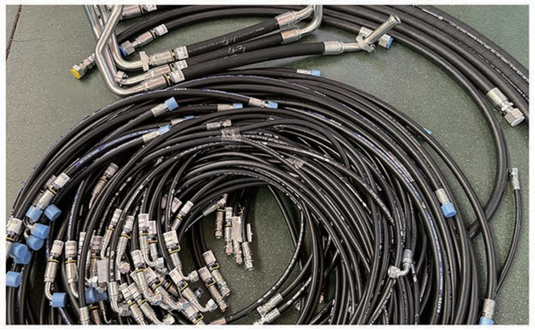

锤背夹
BREAKER BACK CLAMP



类别/Category	HNC-04	HNC-06	HNC-08
Compatible vehicle（ton）	5-9	10-16	17-23
WEIGHT（kg）	65	130	155
Plate thickness（mm）	14	14	16
length (mm)	514	623	790
high（mm）	475	630	731
Opening（mm）	355	376	529








*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

耙斗
EXCAVATOR RAKE

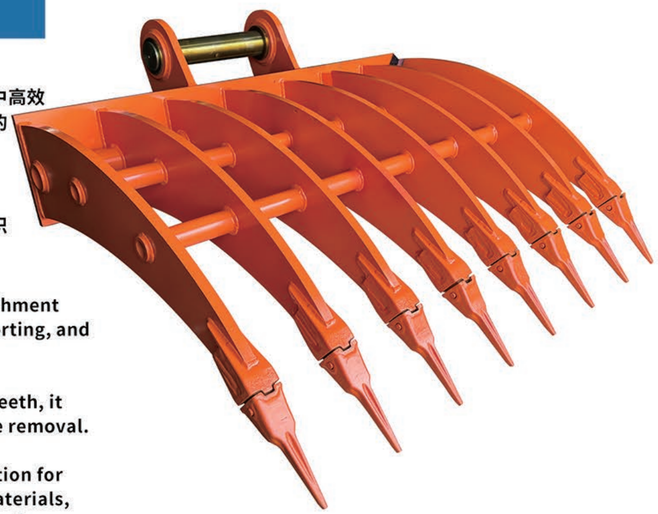



主要特点：
挖掘机耙是一个强大的附件，设计用于在各种环境中高效清除、分类和收集碎片。凭借其坚固的设计和坚固的牙齿，耙子非常适合土地清理、景观美化、和碎片清除。
它为收集岩石、树枝、根和其他材料提供了一种快速、有效的解决方案，确保了一个更清洁、更有组织的工作场所。

Main Features:
Our excavator rake is a high-performance attachment engineered for fast, efficient debris clearing, sorting, and collection across all job sites.

Built with a heavy-duty frame and reinforced teeth, it excels at land clearing, landscaping, and waste removal.

This attachment delivers a rapid, reliable solution for gathering rocks, branches, roots, and other materials, keeping your worksite clean, safe, and organized.








类别/Category	Unit	HNCHB02	HNCHB04	HNCHB06	HNCHB08	HNCHB10	HNCHB12
Suitable excavator	ton	4-6	5-9	10-16	17-24	24-30	30-40
Weight	kg	200	280	420	700	900	1200
Length	mm	800	1100	1220	1500	1600	1700
Width	mm	1000	1200	1400	1800	1850	1900
Height	mm	450	500	560	600	750	900




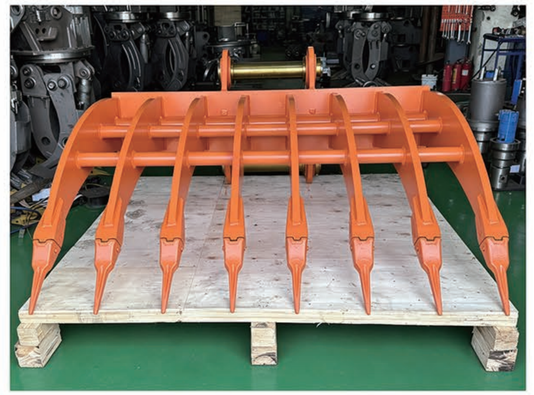

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

螺旋钻
DrillingAuger



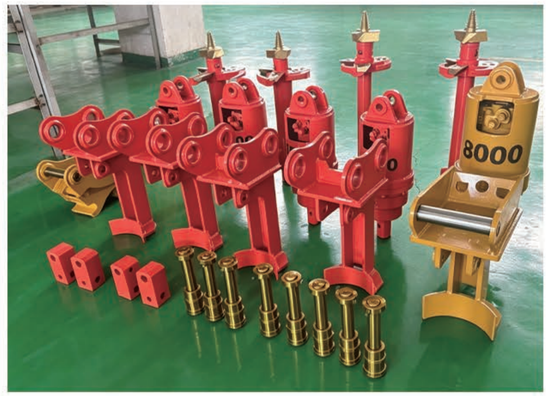



接杆、托架
Connecting Rod And Bracket





- Side shift frame for skid steer
  装载机托架



- Double pin cradle hitch
  双销托架（带定位）



- Double pin hitch
  装载机托架（不带定位）

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement



EXCAVATORS AND LOADERS 1T-5.5T
适配小型挖掘机和装载机1T-5.5T

型号 Type	适配挖机 Excavator	最大转速 Max.Rotate.speed (r/min)	最大扭矩 Max.totque (Nm)	流量范围 Flow Range (L/min)	最大工作压力 Max.Pressure (bar)	输出轴(标准) Output shaft (mm)	钻孔直径 Drilling Diameter Range (mm)
HB1000	0.8T-1.5T	72r/min	980Nm	25-75L/m	210Bar	Hex 41mm	50-300mm
HB2500	1.5T-2.5T	65r/min	2500Nm	25-75L/m	210Bar	0D 65mm Hex 51mm	100-400mm
HB3000	2.5T-3.5T	62r/min	3095Nm	25-75L/m	210Bar	0D 65mm Hex 51mm	100-500mm
HB4500	2T-4T	56r/min	4610Nm	25-75L/m	210Bar	0D 65mm Hex 51mm	100-600mm
HB5000	4T-5.5T	52r/min	5050Nm	45-95L/m	210Bar	0D 65mm Hex 51mm	100-700mm

- 适用范围：场、市政园林、植树、公路
  Scope of application: field, municipal gardens, tree planting, roads



EXCAVATORS AND LOADERS 4.5T-9T
适配中小型挖掘机和装载机4.5T-9T

型号 Type	适配挖机 Excavator	最大转速 Max.Rotate.speed (r/min)	最大扭矩 Max.totque (Nm)	流量范围 Flow Range (L/min)	最大工作压力 Max.Pressure (bar)	输出轴(标准) Output shaft (mm)	钻孔直径 Drilling Diameter Range (mm)
HB5500	4.5T-6T	48r/min	5560Nm	50-200L/m	240Bar	SQ 75mm	100-750mm
HB6000	5T-7T	45r/min	6050Nm	50-200L/m	240Bar	SQ 75mm	100-800mm
HB7000	6T-8T	42r/min	7130Nm	50-200L/m	240Bar	SQ 75mm	100-800mm
HB8000	7T-9T	40r/min	8060Nm	50-200L/m	240Bar	SQ 75mm	100-900mm

- 适用范围：市政园林、植树、公路、钻井、电力工程、地基。
  Scope of application: Municipal gardens, tree planting, roads, drilling, electric power Engineering, Foundation



EXCAVATOR 8T-20T
适配中型挖掘机8T-20T

型号 Type	适配挖机 Excavator	最大转速 Max.Rotate.speed (r/min)	最大扭矩 Max.totque (Nml)	流量范围 Flow Range (L/min)	最大工作压力 Max.Pressure (barl)	输出轴(标准) Outputshaft (mml)	钻孔直径 Drilling Diameter Range (mml)
HB10000	8T-12	38r/min	9880Nm	70-200L/m	240Bar	SQ 75mm	100-1000mm
HB15000	10T-15T	35r/min	15200Nm	70-200L/m	240Bar	SQ 75mm	100-1200mm
HB20000	12T-20T	32r/min	20100Nm	70-200L/m	240Bar	SQ75mm	100-1200mm

- 适用范围：植树、公路、钻井、电力工程、地基。
  Scope of application: Tree planting, road, drilling, Electric power Engineering, Foundation



EXCAVATOR 18T-28T
适配中大型挖掘机18T-28T

型号 Type	适配挖机 Excavator	最大转速 Max.Rotate.speed (r/min)	最大扭矩 Max.totque (Nml)	流量范围 Flow Range (L/min)	最大工作压力 Max.Pressure (barl)	输出轴(标准) Outputshaft (mml)	钻孔直径 DrillingDiameter Range (mml)
HB25000	20T-25T	35r/min	24400Nm	80-268L/m	240Bar	SQ75mm	200-1500mm
HB30000	20T-28T	30r/min	30200Nm	80-268L/m	240Bar	SQ 75mm	200-1500mm



EXCAVATORS 30T-90T
适配大型挖掘机30T-90T

- 适用范围：植树、公路、钻井、电力工程、地基。
  Scope of application: Tree planting, road, drilling, Electric power Engineering, Foundation


型号 Type	适配挖机 Excavator	最大转速 Max.Rotate.speed (r/min)	最大扭矩 Max.totque (Nm)	流量范围 Flow Range (L/min)	最大工作压力 Max.Pressure (bar)	输出轴(标准) Output shaft (mm)	钻孔直径 Drilling Diameter Range (mm)
HB50000	30T-45T	28r/min	51200Nm	100-425L/m	320Bar	SQ110mm	300-1800mm
HB80000	45T-60T	25r/min	81500Nm	100-625L/m	320Bar	SQ110mm	300-1800mm
HB160000	70T-90T	13r/min	163500Nm	120-625L/m	400Bar	SQ 130mm	300-1800mm

- 适用范围：房屋基础、公路、钻井、电力工程、地基。

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

Wear-resistant Replaceable Accessories For Drilling Auger
螺旋钻杆耐磨替换配件


150230-06


Cutting Teeth


AG-3


AGPT-3


XFT-108


SB25


SB120


SBW35-LHX


AG-6


150574-04


4PT-41-6


PTC-4


150-230-4


AG44-6


AG44-9

Wear-resistant Replaceable Accessories For Drilling Auger
螺旋钻杆耐磨替换配件


1136A


HA-5T30B


1136B


1136L


40/50


005507


HA-5T30C


35C


AG-2


SHX-141-S


00459


RT74


WA70


A44-6


250-6


51-6


75×75


110×110

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement

挖斗 Bucket









类别/Category	Bucket Type	Tonnage	Width(inch/mm)	Teeth(pc)	Weight(Kg)	Material &Plates Combinations
HNCS2	Standard Bucket	2T	18"/457mm	4	90	Q355+NM400 Teeth,adapters, side cutters
HNCS5	Standard Bucket	5T	24"/610mm	5	160	
HNCS8	Standard Bucket	8T	30"/762mm	5	260	
HNCS12	Standard Bucket	12T	36"/915mm	5	405	
HNCS15	Standard Bucket	15T	42"/1067mm	6	570	
HNCS20	Standard Bucket	20T	48"/1220mm	6	910	
HNCS25	Standard Bucket	25T	48"/1220mm	6	1130	
HNCS30	Standard Bucket	30T	54"/1372mm	5	1395	
HNCR12	Rock Bucket	12T	30"/762mm	4	388	Q355/Q460+NM400 Thicker plate and higher quality parts(teeth adapters,side cutters)
HNCR15	Rock Bucket	15T	36"/915mm	5	600	
HNCR18	Rock Bucket	18T	42"/1067mm	5	815	
HNCR20	Rock Bucket	20T	48"/1220mm	5	1085	
HNCR25	Rock Bucket	25T	54"/1372mm	6	1407	
HNCR30	Rock Bucket	30T	60"/1524mm	6	1725	
HNCR36	Rock Bucket	36T	60/1524mm	6	1725	
HNCR49	Rock Bucket	49T	66"/1676mm	6	2370	
HNCE20	Extreme Duty Rock	20T	48"/1220mm	5	1282	Q355/Q460+NM400 /NM 500/HARDOX40 Rock teeth,adapters side cutters,wing protectors,side wearing plates,back wearing bars
HNCE25	Extreme Duty Rock	25T	54"/1372mm	6	1681	
HNCE30	Extreme Duty Rock	30T	60"/1524mm	6	2122	
HNCE36	Extreme Duty Rock	36T	60"/1524mm	6	2122	
HNCE49	Extreme Duty Rock	49T	66"/1676mm	6	2735	

*具体数据根据挖掘机型号及所配设备尺寸有所浮动，产品不断改进升级中，数据改动不再另行通知。
The specificalions may vary with different excavators and are subjecl to change withoul prior notice for producls improvement