宁国市鑫茂玻璃纤维制品有限公司
Ningguo Xinmao Fiberglass Products Co.,Ltd
+86 13865635511
https://www.xmfiresleeve.com
0563-4028098
ahngyym@163.com
安徽省宁国市河沥园区振宁路
Zhenning Road, Heli Park, Ningguo City, Anhui Province

WhatsApp.

WeChat.

QIAN-ZE

鑫茂产品画册

XINMAO PRODUCT ALBUM

QIAN-ZE

宁国市鑫茂玻璃纤维制品有限公司
Ningguo Xinmao Fiberglass Products Co.,Ltd.

Ningguo Xinmao Fiberglass Products Co.,Ltd was established in 2011 , located in Economic & Technical Development Zone, Ningguo City, Anhui Province, China.



Ningguo Xinmao Fiberglass Products Co.,Ltd. has been specializing in manufacturing high temperature resistant, thermal insulation products(such as, fiberglass fireproof sleeves, fireproof tape, fireproof fabric, etc for hose, cable, pipe, tube and equipment in high temperature area) for over 10 years.

Our target is to built a well-known brand” QIAN-ZE” in the world base on our high quality and scientific management.

Catalog

1. Main Products(page3-18)
2. Enterprise honors and certifications

1. Fireproof sleeves(silicone fiberglass sleeves)





The main material of fire sleeve is high-quality alkali-free glass fiber. The alkali-free glass fiber is combined into strands by sand mixing equipment, and woven into circular tubular embryo tube through tight 8-shaped track to ensure the uniformity of weaving and the tightness of structure. The embryo tube is coated with silicone rubber through the coating cylinder, and then vulcanized through the drying channel. Fire sleeve has four colors: rust red, glittering silver, sky blue and pure black. It can keep the soft elastic property at the temperature from -65℃ to 260℃. and it can be insisted at the temperature 1600℃ for 15S-30S. Fiberglass can still worked when silicon rubber was burned at the high temperature.

These products can be used for iron, smelting,boat and chemical high temperature area. Such as cable, fluid pipe, rolling mill cable oil pipe, generator, electrical voltage equipment.large building, hydraulic pressure equipment, automotive harness system and exhaust pipe.


Sleeve size: ϕ4MM-ϕ150MM

Color: rust red, glittering silver, sky blue,yellow, grey, black, and some other color can be customized.





2. Buckle type sleeves(detachable sleeves)

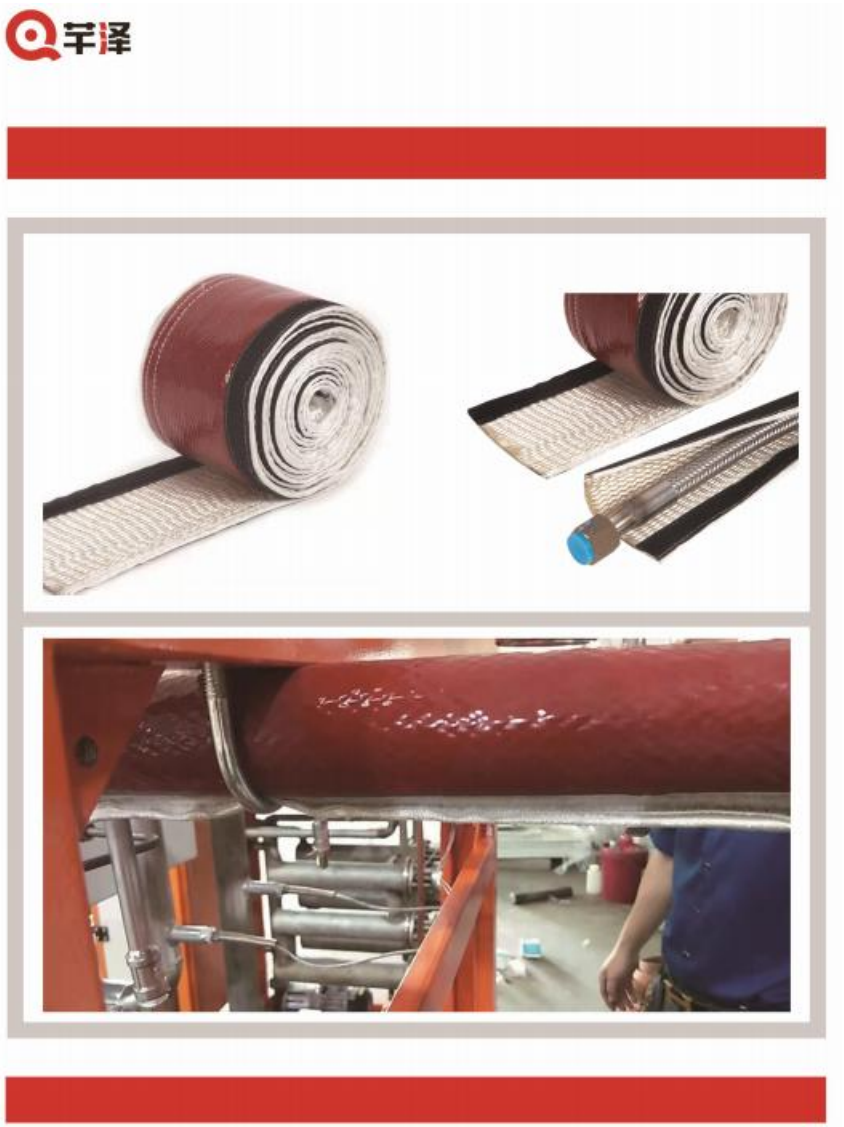

Size width: 15MM-130MM
Length: 10M-25M
Remark: other size can be customized

This products are suit for equipment with big size, and it is no need to disassemble the equipment, and it is convenient for equipment maintenance.

3.Aluminum foil fiberglass cloth



This products was made by alkali-free fiberglass togather with fireproof aluminum foil. it can be worked for long time under the temperature 250℃. and can be worked for short time at the temperature 550℃. This is delicated to the cable.

Material	E-grade fiberglass & Aluminum foil
Working temperature	Longtime:≤250℃（Aluminum foil） ≤650℃（E-grade fiberglass)
Style	winding tape, protective blanket,bonding, metal button,tube.
Size	φ15MM-φ20MM-φ25MM-φ32MM-φ40MM-φ50MM-φ60MM Lenth:1M each
Color	silver
Common domain	soft hose, oil pipe, baking line, calbe,harness.

4.Nylon sleeves



1. Product presentation
   characteristic: Oil absorption and dustproof, anti-wear, noise reduction, better tensil strenth. can be used for hydraulic pipe, oil pipe, air hose for automotive industry and hevey equipment.

Material	Polyester fibre
Working temperature	Long term:-50℃-150℃ Melting point: 250℃
Dimention	ID 12MM-72MM(1/2" -2/3/4")
Color	Black(Other color can be customized)

5.Basalt sleeves



Basalt sleeves

1. Product presentation

This products was weaved by basalt fiber yarn, and coated with silicon rubber. It has some advantages such as high strenth. better extensibility, high temperature resistance, antioxidation, radiation resistance, noise reduction. It can be used for protecting soft pipe,wire and cable. This products can resist ghydraulic oil, lubricating oil and fuel.

2. Characteristic

Long term working temperature: -269℃-1100℃

Better waterproofness, water absorption≤1%

Elasticity modulus(93-110 GPA)

Tensil strenth(2800-3800MPA), rabbinic strength is 2-2.5 times than metal parts. It can keep stable at the temperature from 100℃ to 250℃.

Noise absorbing (0.9-0.99)

Low thermal conductivity(0.03-0.038W/(m·K))

6.Turbocharger gear shield






1. Product presentation

This products can isolate the heat from turbocharger, to protect the plastic, rubber hose and wire nearby, surface baking paint for engine room and cover. The main reason for damage of turbocharger is the temperature difference in different area. Turbine cover can isolate the high temperature from the turbocharger. It can keep the temperature in the turbocharger and improve its efficiency.

Specification	Width(MM)	Height （MM）	Max Width(MM)	Min Width(MM)
T25	175	165	83	73
T3	180	170	85	75
T4	230	205	105	95
T6	280	240	125	115

7.Nonmetallic Compensator skin

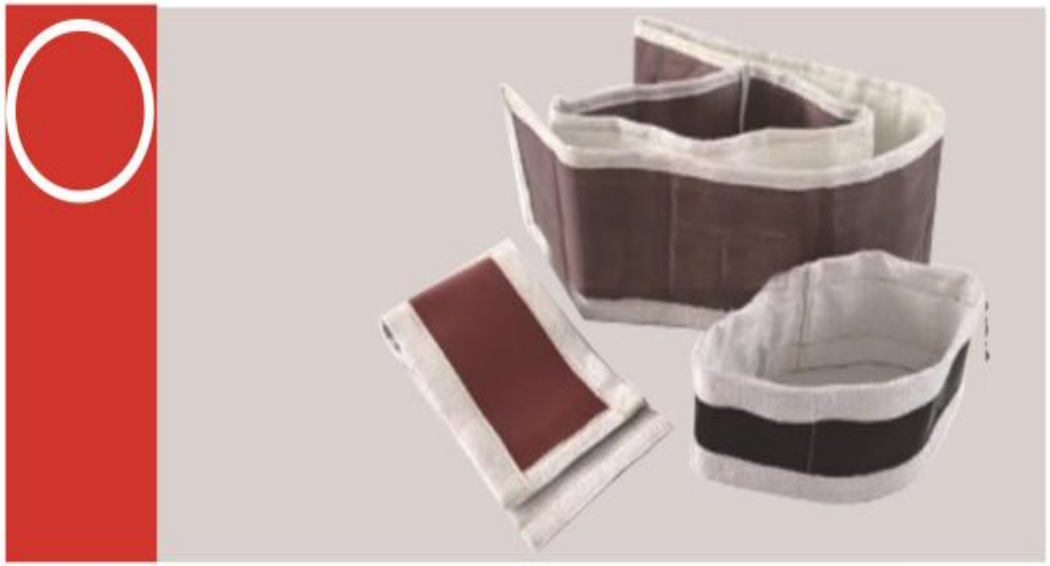



1.Nonmental compensator sheath/soft conection/Expansion joint can provide bigger lateral displacement under the lesser dimensions.

2. Main material: fiberglass and coating component. with better high temperature resistance, corrosion resistance and sealing. Convenient installation and maintenance.

3. It can be used for cement plant, power plant, mining machinery, metallurgical iron and steel equipment.

8.Insulated cover







Valve insulated cover is used for the important site of valve, we developed the detachable insulation cover with fireproof material, it has inside, middle, outside 3 layers.

Characteristic:
1. High and low temperature resistance(-70℃-1000℃)
2. Stable chemical property: Strong acid and alkali resistance.
3. Fireproof property: grade A, B1 can be selected.
4. Better property of aging resistant, corrosion resistance and weather resistance
5. Fireproof/oilproof

9.Fiberglass wrapping belt









It was used to exhaust system of enging,
Characteristic:
1. Thermal insulation
2. Wear resisting.
3. Noise reduction.
4. Long term high temperature resistance-650℃.
5. So many colors can be customized.

Material	Alkali-free fiberglass
Working temperature	Long term: ≤650℃
Style	winding tape, protective blanket,bonding, metal button,tube.
Dimention	Width:20/25/30/40/50/75/100/150/200 Wall thickness:1.5MM/2MM/3M Lenth:25M
Color	Red/black/blue/yellow/green/white/purple/oringe

10.Self-adhesive belt





Material	Silicon rubber imported from Germany
Voltage range	≤35KV
Dimention(thickness*width*length)	0.5MM * 25MM * 5M/10M 0.8MM * 50MM * 5M/10M
Color	Red/grey/blue/yellow/green/
Working temperature	-60℃-260℃

11.High silicone adhesive-slit tape



名称	产品代号 Product Code	基布型号 Base fabric	silica content,%	工作温度 Operating temperature℃	宽度规格 Width mm	厚度 thickness mm	M/ROLL
高硅氧背带 High silica adhesive-slit tape	XM-QZ-50-0.75	HS-600	>96%	1000	50	0.75	10
	XM-QZ-100-0.75	HS-600	>96%	1000	100	0.75	10
	XM-QZ-50-1.3	HS-1200	>96%	1000	50	1.3	10
	XM-QZ-50-1.3	HS-1200	>96%	1000	100	1.3	10

12.Middle silicone cloth



Color: yellow Working teperature:800℃ SiO2：70%±5					
Thickness	0.5mm	0.7mm	1.3mm	2mm	3mm
Width	100mm	92/100/152	92/100/152	100mm	100mm

13.High silicone cloth



Color: white Working teperature:1000℃ SiO2≥96%						
Thickness	0.3mm	0.5mm	0.7mm	1mm	1.3mm	1.35mm
Width	92	92	92/100/130	92/100	92/100	92

14.Builked Silicone cloth





Material	Akali-free fiberglass
Working temperature	650℃



Thickness	0.8MM	1MM	1.5MM	2MM	3MM	Length(30M/50M)	Width 1M
Weight	620g	800g	1000g	1300g	1800g		

15.Basalt fiber cloth





Material	Basalt fiber
Working temperature	-260℃-1100℃
Dimention	Width:1000MM Thickness:0.6mm(can be customized)
Weight	330g/㎡/520g/㎡/620g/㎡

16.Aluminum foil fiberglass cloth



1. Aluminum foil fiberglass cloth is a specil combined technology by aluminum foil and fiberglass. Smoothness in the surface, high reflective rate and tensil strenth. Airtight and wahtertight.

2. Characteristic:

- working temperature: -70℃-500℃
- waterproof and oilproof, better corrosion and ageing resistance,lifetime 10 years.
- Soft and machinable, high strenth, better noise reducing.



Type of production	Thickness	Width	Length per package	Material
XM-QZ-100	0.2MM	1000MM	50/100MM	Akali-free
XM-QZ-101	0.5MM	1000MM	50/100MM	Akali-free
XM-QZ-102	1.0MM	1000MM	50/100MM	medium-Akali/akali-free
XM-QZ-103	1.5MM	1000MM	50/100MM	medium-Akali/akali-free

17.Silicone fiberglass cloth



1. This products is combined with silicon rubber and fiberglass,

2. Characteristic:

- working temperature: -70℃-500℃
- waterproof and oilproof, better corrosion and ageing resistance,lifetime 10 years.
- Soft and tencity , high strenth, better noise reducing.

Type of production	Thickness(mm)	Width(mm)	Length per package(mm)	One side/two sided
XM-QZ-100	0.5/0.8	1200/1500	50/100	One side/two sided
XM-QZ-101	1.0/1.2/1.5	1000/1200	30	One side/two sided
XM-QZ-102	2	1000/1200	30	One side/two sided
XM-QZ-103	3	1000	30	One side

18.High silica fiber rope





1. This products is weaved by high silica fiber wich was imported.

2. Characteristic:

- Smooth, soft, high tempetature proof, fireproof, insulated.
- Working temperature:SiO2≥96% melting point is 1650℃, can be worked for longtime at 900℃。
- This products has no asbestors, it can meet the environmental requirement from Euope and USA.
- This products was suitable for soft tube, oile pipe,cable which at high temperatures.

19.Silica fiberglass rope



1. This products is weaved by high silica fiber wich was imported.

2. Characteristic:

- Smooth, soft, high tempetature proof, fireproof, insulated.
- Working temperature:SiO2≥96% melting point is 1650℃, can be worked for longtime at 900℃。
- This products has no asbestors, it can meet the environmental requirement from Euope and USA.
- This products was suitable for soft tube, oile pipe,cable which at high temperatures.


营业执照

统一社会信用代码 91341891580101368B(1-1)

（副本）

名　称　宁国市鑫茂玻璃纤维制品有限公司

类　型　有限责任公司(自然人投资或控股)

法定代表人　俞月银

经营范围　玻璃纤维及复合产、销售、五金电器、精密制品、塑料制品、化工原料（除危险品）、汽车零部件销售。（自营和代理各类商品和技术的进出口业务（国家法定公司经营或禁止进出口的商品和技术除外）。（依法须经批准的项目，经相关部门批准后方可开展经营活动）

注册资本　伍佰万圆整

成立日期　2011年07月26日

营业期限　2011年07月26日至2031年07月25日

住　所　宁国市开环南路7号

登记机关　2021　07　28


商标注册证

第 38477855 号

芊泽

核定使用商品/服务项目（国际分类：17）

第17类：非金属制管道；软管(非金属的)；非金属软管；电绝缘材料；电绝缘带；防水包装物；绝缘、隔热、隔音用玻璃纤维；合成泡沫；橡胶海绵制管；绝缘、隔热、吸音用的物（超出）

注 册 人　宁国市鑫茂玻璃纤维制品有限公司

注册人地址　安徽省宣城市宁国市开环南路7号

注册日期　2020年02月21日　有效期至　2030年02月20日

局　长　发证机关


SGS　Made-in-China

Report Number: QIP-A.SI2191154

Audit Date : 09 Nov.2021

This report is issued by Focus Technology Co., Ltd. (Made-in-China.com) and the supervising inspectorate (SGS-CSTC Standards Technical Services Co., Ltd.) to confirm that:

Company Name : Ningguo Xinmao Fiberglass Products Co., Ltd.
宁国市鑫茂玻璃纤维制品有限公司

Showroom : https://ningguoxinmaofiberglass.en.made-in-china.com/

Address : No. 31, Zhanming Road, Heli Development Zone, Ningguo City, Xuancheng, Anhui, China

Product : Fire Sleeve

has been on site audited for the Following Scope of Activity

1. General Information
2. Foreign Trade Capacity
3. Product Research & Development Capacity
4. Management System and Product Certification
5. Production Capacity & Quality Control
6. Financial Position
7. Working Environment
8. Energy Saving and Emission Reduction
9. Photos

General Comments:

Ningguo Xinmao Fiberglass Products Co., Ltd. is a manufacturer with 30 employees; it was established in 2011, located in No. 31, Zhanming Road, Heli Development Zone, Ningguo City, Xuancheng, Anhui, China. The workshops occupy an area of around 3000 square meters.

Sign for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd.

Page No.: 1 of 16


CTI 华测检测


检测报告

报告编号　A221022479101200IC　第 1 页共 14 页

CNAS　TC.21.06.002478

2021-07-06

华测检测　MA　检测报告

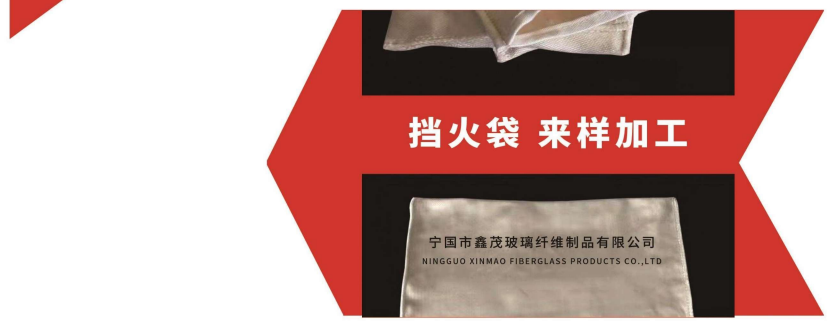

荣誉资质

ENTERPRISE HONORS AND QUALIFICATIONS