




产品介绍

沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

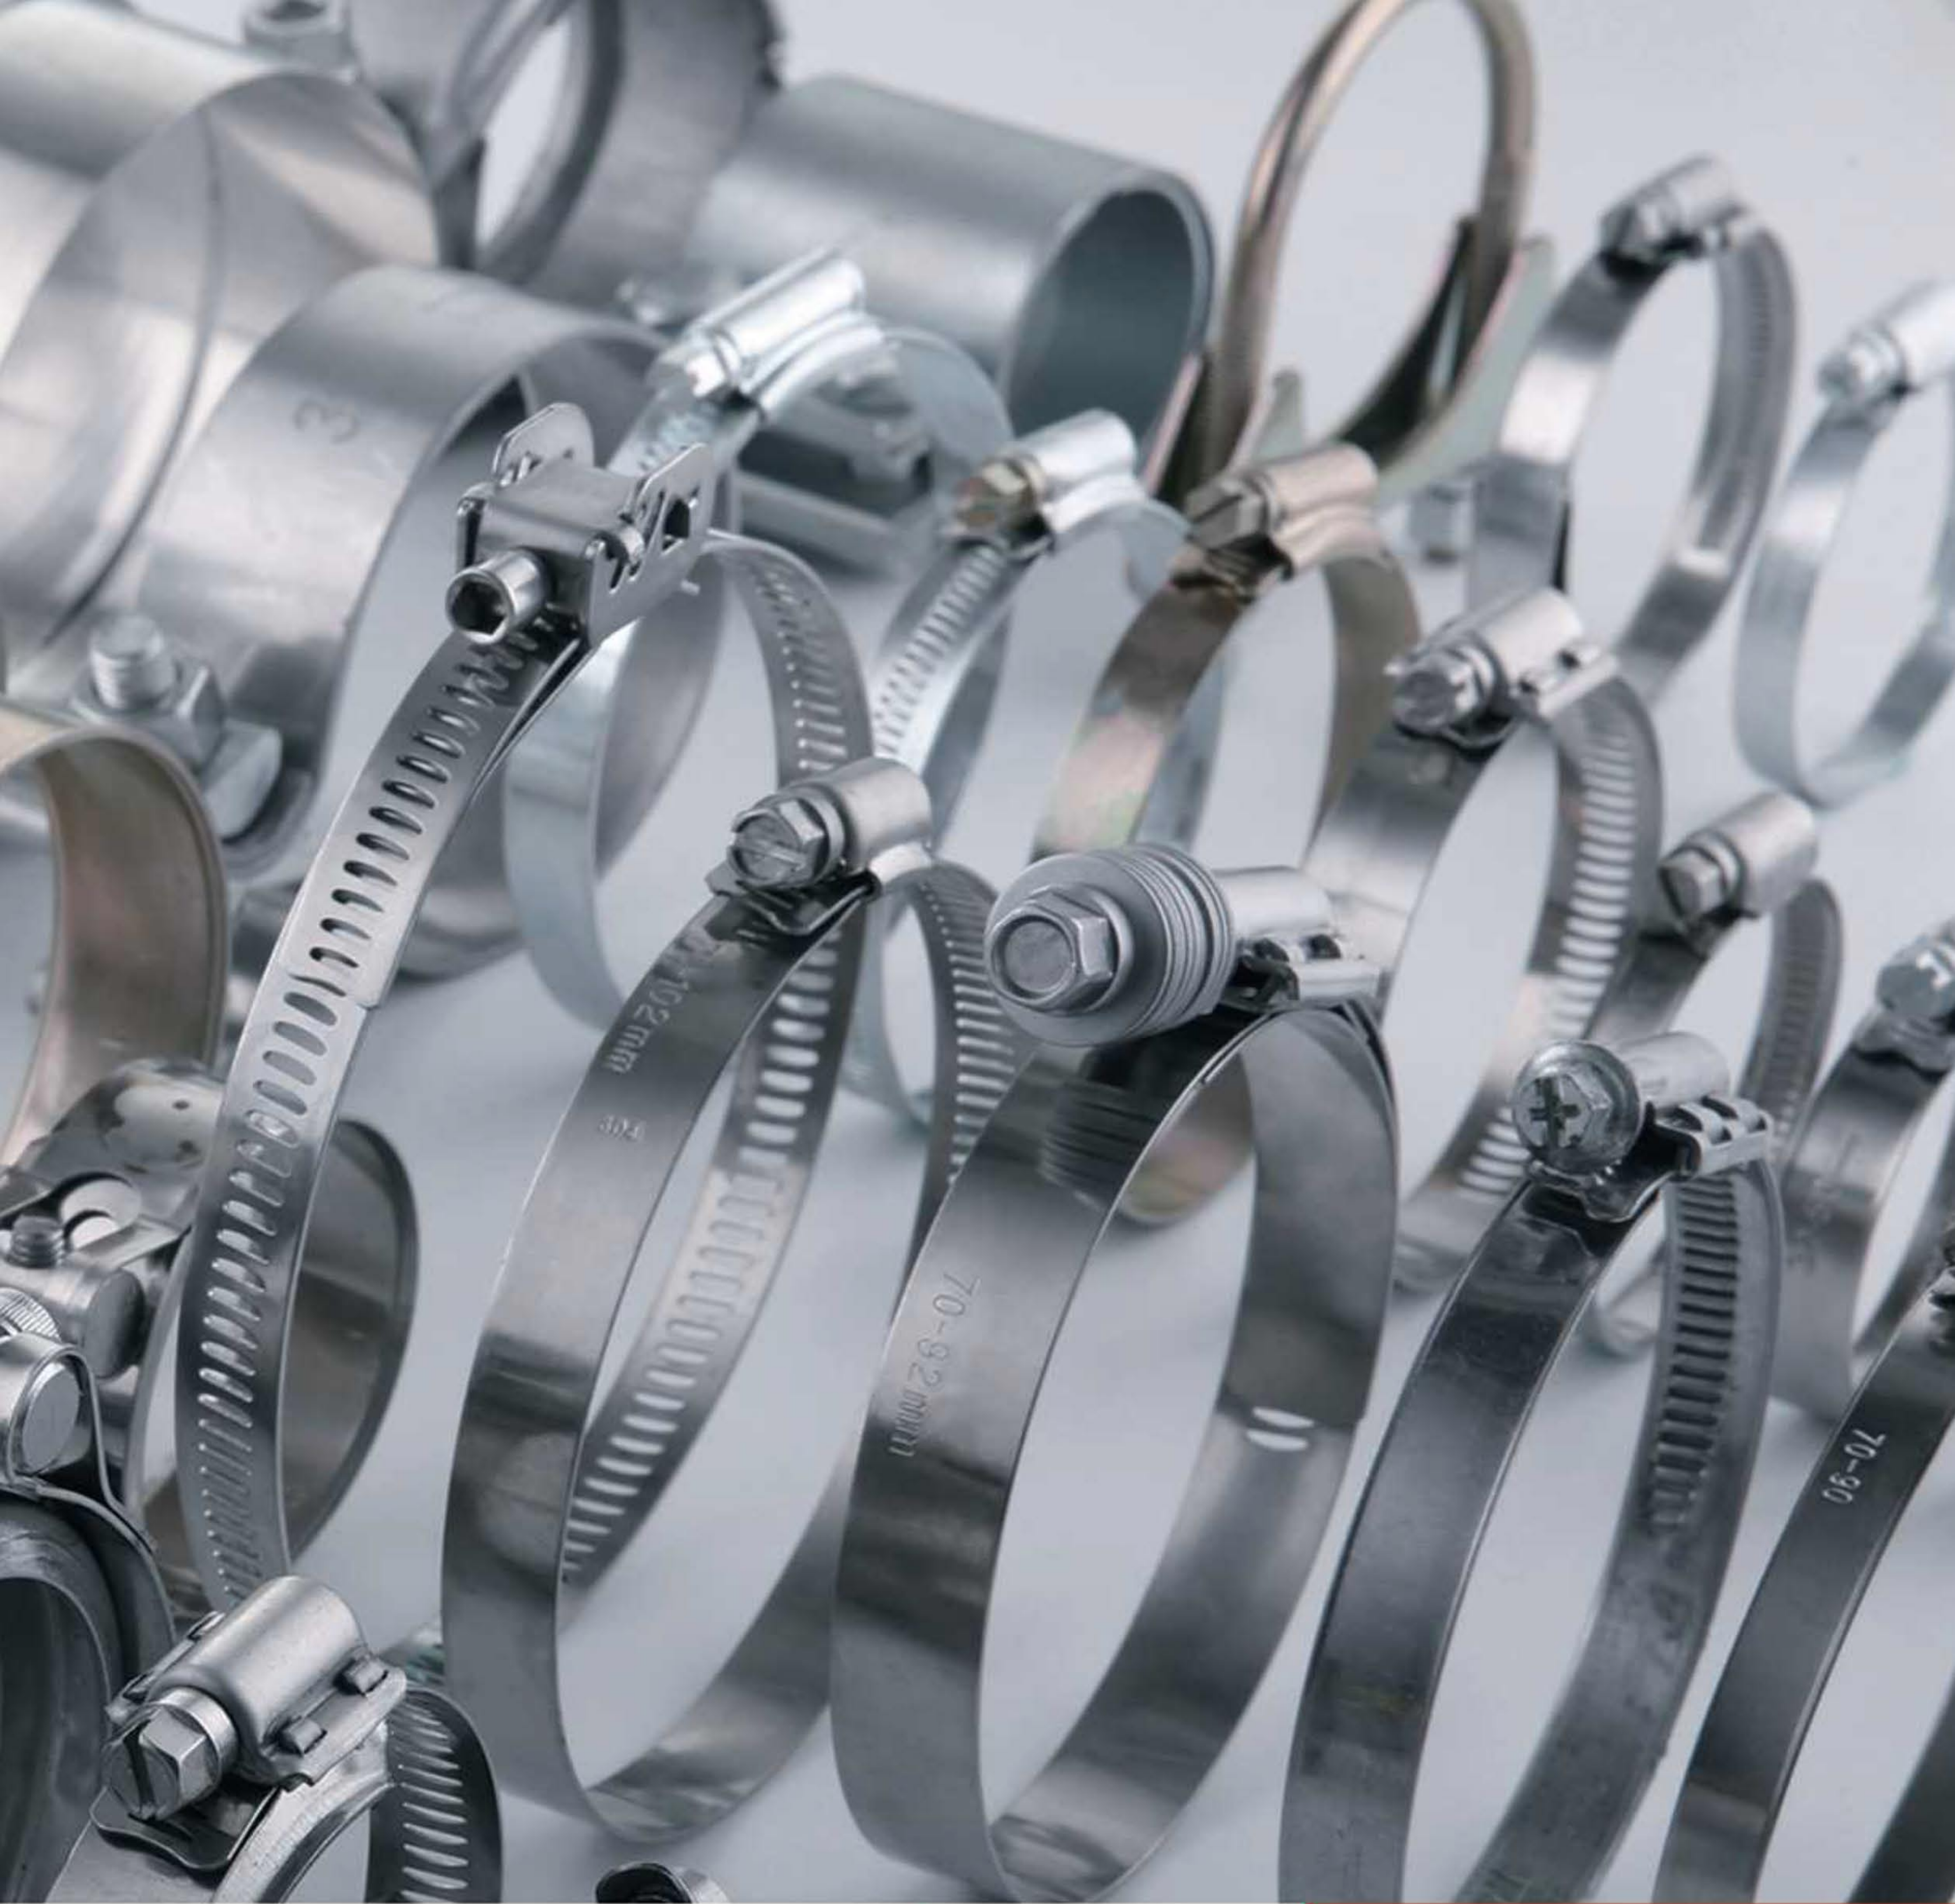

■ 沧州新宇紧固件有限公司(原名路通喉箍厂),始建于1991年,于2009年更名为沧州新宇紧固件有限公司,座落在106国道的卧佛堂镇镇上开发区。位于河北省中北部,距京、津不足一小时路程,通讯、交通十分便利。

我公司是一家专业生产卡箍类产品的企业,公司现有员工200多人。公司占地面积为12000平方米,资产总额约五百万元,我公司产品主要分为两大系列:各种型号规格的喉箍、卡箍、模具、电瓶夹、点火线圈和不锈钢管束总成。年生产能力可达11000万套件(套),并为诸多家重点主机厂配套,且产品远销美国,韩国,俄罗斯等国家。

随着市场份额的不断扩大,我公司进行了多次大规模的基础设施投入、产品升级和技术自动化改造,年产值不断提高,生产的“LT”牌系列产品广泛适用于汽车油路、发动机管路、排水管道、污水管道等到各个行业门类,先后荣获“河北省著名商标”、“河北省名牌产品”、“沧州市文明诚信经营先进单位”、“2010出口创汇先进企业”“河北省守合同、重信用单位”等称号。

多年来公司始终信守“以质量求生存,以信誉求发展”的创业宗旨,深入贯彻“坚持持续改进,达到顾客满意”的质量方针,为贯彻这一方针,我们健全了质量管理机构,完善了各项管理制度,充实了质量管理工作的软硬件,培训了各级人员,使员工的质量意识,改进意识和为顾客服务的意识有了极大的提高。

展望未来,我们将以务实、创新、高效的专业团队,携手客户与合作伙伴,不断确立目标,不断进取超越,成就事业实现梦想。

Cangzhou Xinyu Fastener Co.,Ltd. (formerly known as Lutong Hose Clamp Factory) was established at 1991, located in the Wofotang development zone, near Beijing and Tianjin. Communication and transportation are very convenient.

Our company is a manufacturer specializing in the production of clamps. Our company has more than 200 employees, covering an area of 12,000 square meters and total assets of about 5 million yuan. Our products are mainly divided into two series: hose clamps, molds, battery clips, ignition coils and stainless steel tube bundle assemblies of various models and specifications. Annual production capacity being up to 110 million sets, products are exported to the United States, South Korea, Russia and other countries.

Over the years, our company has always adhered to the pioneering tenet of "survive by quality and develop by reputation", and has thoroughly implemented the quality policy of "adhere to continuous improvement and achieve customer satisfaction". To implement this guideline, we have improved the quality management organization and improved Various management systems have enriched the hardware and software of quality management work, trained personnel at all levels, and greatly improved employees awareness of quality, awareness of improvement, and awareness of customer service

In the forward-looking future, we will work together with customers and partners with practical innovative and efficient professional teams to constantly establish goals, continue to make progress, achieve success and realize our dreams.

Product Description

► 产品介绍 / SMO254卡箍

SMO254 Hose Clamp



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD


SMO254卡箍 / SMO254 Hose Clamp



高合金超级奥氏体不锈钢 SMO254
优异的耐点蚀和抗缝隙腐蚀，PRE ≥ 42.5
突出的抗均匀腐蚀，最低红锈 $> 4,000$ 小时
Material SMO254
Excellent resistance against pitting and crevice corrosion, PRE ≥ 42.5
Min time to red rust - well over 4,000 hours

■ 技术参数-SMO254卡箍 / Technical Data - Hose Clamp

货号 Item #	带宽 Band width(mm)	范围 Clamping range (mm)
LTSMO/12B1524	12	15-24
LTSMO/12B1928	12	19-28
LTSMO/12B2232	12	22-32
LTSMO/12B2638	12	26-38
LTSMO/12B3244	12	32-44
LTSMO/12B3850	12	38-50
LTSMO/12B4456	12	44-56
LTSMO/12B5065	12	50-65
LTSMO/12B5875	12	58-75
LTSMO/12B6885	12	68-85
LTSMO/12B7795	12	77-95
LTSMO/12B87112	12	87-112
LTSMO/12B104138	12	104-138
LTSMO/12B130165	12	130-165
LTSMO/12B150180	12	150-180
LTSMO/12B175205	12	175-205
LTSMO/12B200231	12	200-231
LTSMO/12B226256	12	226-256
LTSMO/12B251282	12	251-282
LTSMO/12B277307	12	277-307

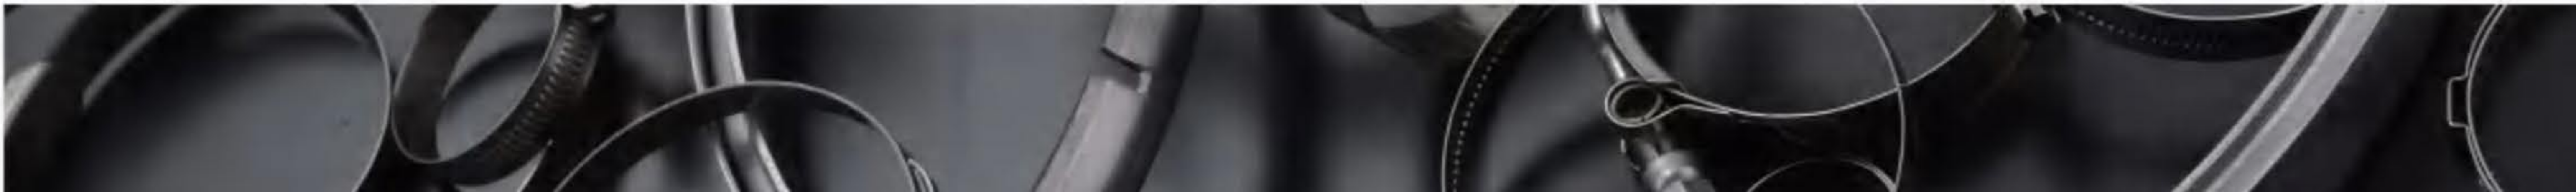



Product Description

► 产品介绍 / 美式卡箍

American Hose Clamp



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

AMERICAN HOSE CLAMP

美式喉箍



I 技术参数-美式卡箍 / TECHNICAL DATA – AMERICAN HOSE CLAMP


型号	产品货号 Item No.			
SAENo.	LTMS 8.0 (Bandwidth 8.0mm)		LTMS 12.7 (Band width 12.7mm)	
	inch	mm	inch	mm
04	3/8-5/8	10-16	3/8-5/8	10-16
05	1/2-3/4	13-19	1/2-3/4	13-19
06	1/2-7/8	12-22	5/8-7/8	16-23
08	5/8-1	16-25	3/4-1 1/16	19-27
10	3/4-1 1/16	19-29	5/8-1 1/4	16-32
12	7/8-1 1/4	22-32	3/4-1 1/2	19-38
16	1-1 1/2	25-38	3/4-1 3/4	19-44
20	1 1/4-13/4	32-44	1 1/4-2	32-51
24	1 3/8-2	35-51	1 1/2-2 1/4	38-57
28	1 1/2-2 1/4	38-57	1 9/16-2 1/2	40-64
32	1 1/2-2 3/8	35-60	1 13/16-2 3/4	46-70
36	1 3/4-2 1/2	44-64	2 1/4-3	57-76
40	2-2 3/4	51-70	2 5/8-3 1/4	67-83
44	2 3/4-3 1/4	64-76	2 9/16-3 1/2	65-89
48	2 13/16-3 1/2	70-89	2 13/16-3 3/4	72-95
52	2 13/16-3 3/4	72-95	3 1/16-4	78-101
56	3 1/16-4	78-101	3 5/16-4 1/4	84-108
60	/	/	3 9/16-4 1/2	91-114
64	/	/	4 1/8-5	105-127
72	/	/	4 5/8- 5 1/2	117-140
80	/	/	5 1/8-6	105-152
88	/	/	5 9/16-6 1/2	114-165
96	/	/	6 1/8-7	156-178
104	/	/	7-8	177-203
116	/	/	8-9	203-228
120	/	/	9-10	228-254

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	Band (8mm) — 2. iNm Band (12.7mm)—3.8 Nm
W2	AISI SS201/SS301	AISI SS201/SS301	Zinc Plated Steel	Band (8mm) — 2.1Nm Band (12.7mm) — 6 Nm
W2B	AISISS201	Zinc Plated Steel	Zinc Plated Steel	
W4	AISI SS201/SS301/SS304	AISI SS201/SS301/SS304	AISI SS201/SS301/SS304	
W5	AISI SS316	AISISS316	AISI SS316	

CONSTANT TENSION CLAMP

美式重型恒定压力卡箍

Belleville Spring and clamp construction is built to response to constant temperature fluctuations. The Larger, heavier-gauge, precision-formed springs provide higher rates of band tension and adjustment for a more dependable seal. Inner liner protects against shearing of the hose surfaces.

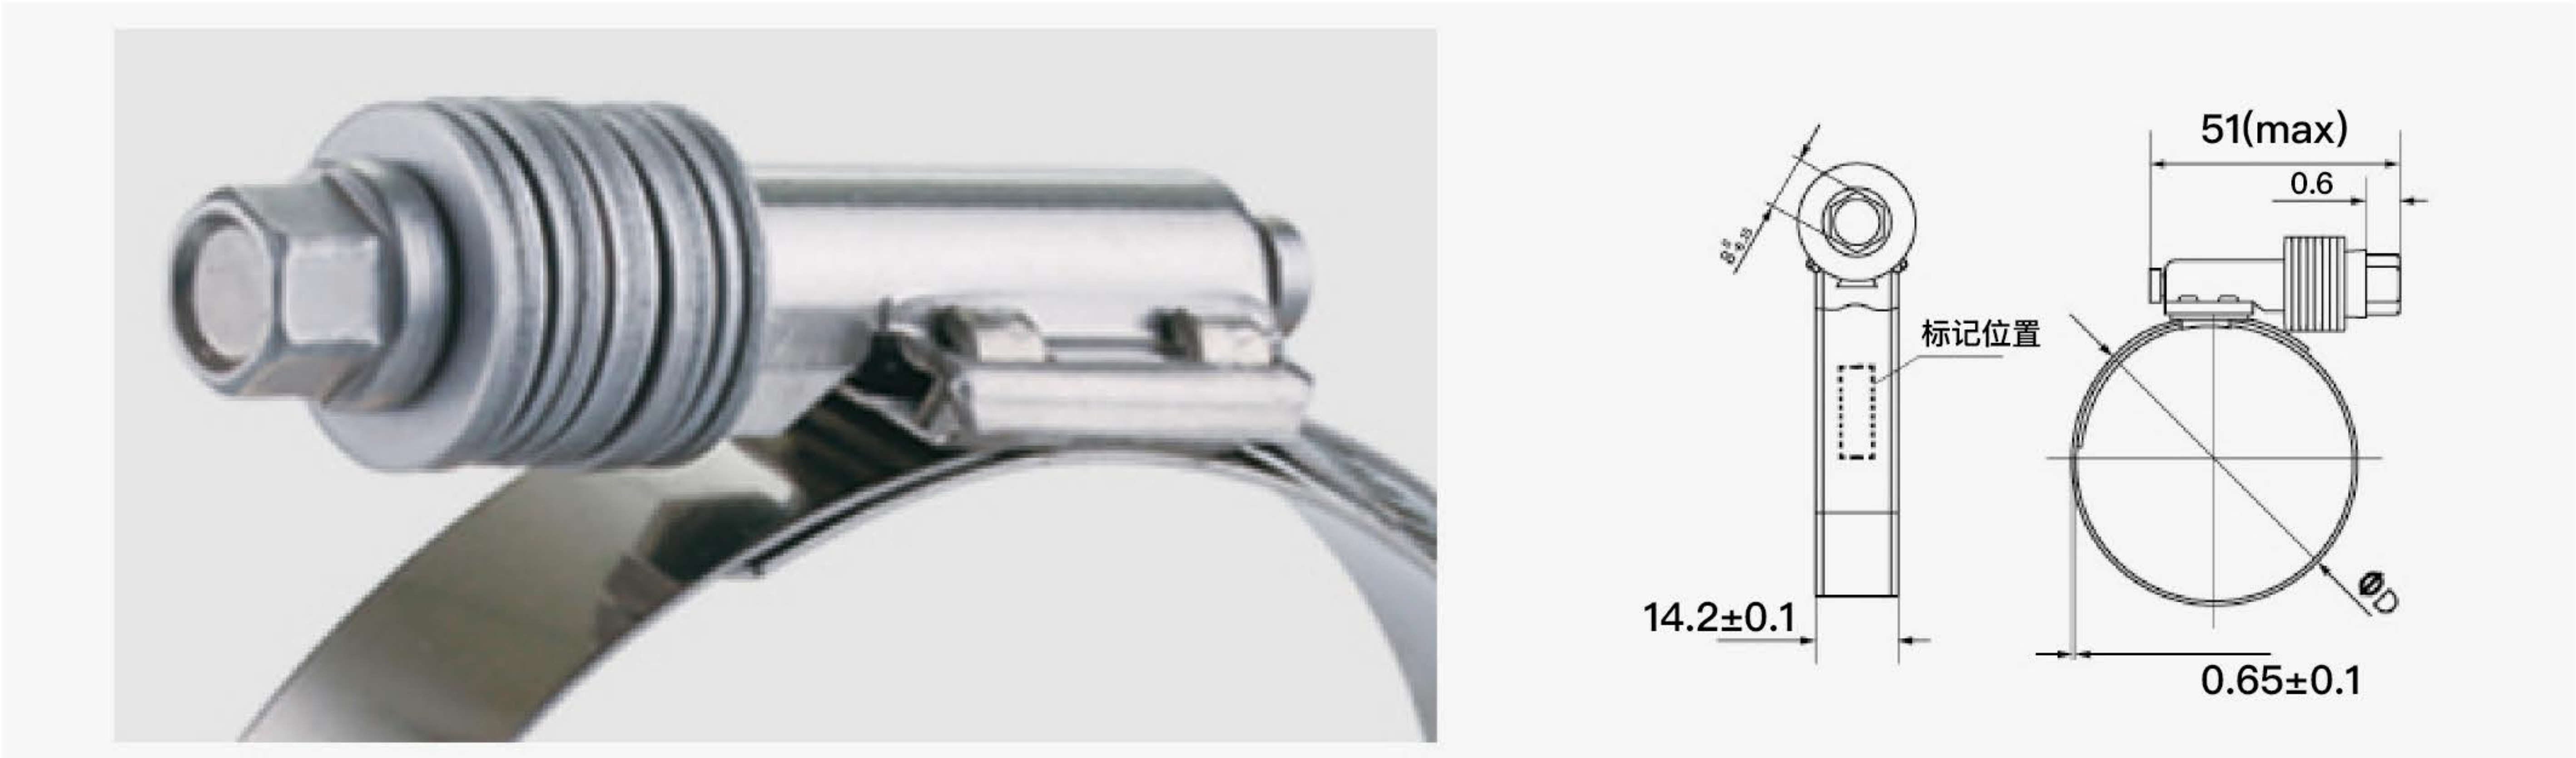

I 技术参数-美式重型恒定压力卡箍 / TECHNICAL DATA -CONSTANT TENSION CLAMP

LTZX 15.8 (Band width 15.8mm)		
Size	inch	mm
175	1-1 3/4	25-45
212	1 1/4-2 1/8	32-54
262	1 3/4-2 5/8	45-66
312	2 1/4-3 1/8	57-79
362	2 3/4-3 5/8	70-92
412	3 1/4-4 1/8	83-105
462	3 3/4-4 5/8	95-117
512	4 1/4-5 1/8	108-130
562	4 3/4-5 5/8	121-143
612	5 1/4-6 1/8	133-155
662	5 3/4-6 5/8	146-168
712	6 1/4-7 1/8	159-181
762	6 3/4-7 5/8	172-193
812	7 1/4-8 1/8	184-206
862	7 3/4-8 5/8	197-219
912	8 1/4-9 1/8	210-232



材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	垫圈 Washers	建议安装扭力 Suggested Install Torque
W2	AISISS301/SS304	AISISS301/SS304	Zinc Plated Steel	AISISS410	11 Nm
W4	AISISS301/SS304	AISISS301/SS304	AISISS301/SS304	AISISS410	

AMERICAN HOSE CLAMP WITH HANDLE

美式手柄系列



POWER-GEAR HOSE CLAMP

美式扣盖喉箍



I 技术参数-美式扣盖喉箍 / TECHNICAL DATA – POWER-GEAR HOSE CLAMP

型号	产品货号 Item No.						
Size	LTKG 12.5 (Bandwidth 12.5mm)		LTKG 14.2 (Band width 14.2mm)		LTKG 15.8 (Band width 15.8mm)		
	inch	mm	inch	mm	Size	inch	mm
6	7/16-3/4	11-20	/	/	175	1-1 3/4	25-45
8	1/2-15/16	13-23	/	/	212	1 1/4-2 1/8	32-54
10	9/16-1 1/16	14-27	9/16-1 1/16	14-27	262	1 3/4-2 5/8	45-66
12	11/16-1 1/4	18-32	11/16-1 1/4	18-32	312	2 1/4-3 1/8	57-79
16	13/16-1 1/2	21-38	13/16-1 1/2	21-38	362	2 3/4-3 5/8	70-92
20	13/16-1 3/4	21-44	13/16-1 3/4	21-44	412	3 1/4-4 1/8	83-105
24	1 1/16-2	27-51	1 1/16-2	27-51	462	3 3/4-4 5/8	95-117
28	1 5/16-2 1/4	33-57	1 5/16-2 1/4	33-57	512	4 1/4-5 1/8	108-130
32	1 9/16-2 1/2	40-64	1 9/16-2 1/2	40-64	562	4 3/4-5 5/8	121-143
36	1 13/16-2 3/4	46-70	1 13/16-2 3/4	46-70	612	5 1/4-6 1/8	133-155
40	2 1/16-3	52-76	2 1/16-3	52-76	662	5 3/4-6 5/8	146-168
44	2 5/16-3 1/4	59-83	2 5/16-3 1/4	59-83	712	6 1/4-7 1/8	159-181
48	2 9/16-3 1/2	65-89	2 9/16-3 1/2	65-89	762	6 3/4-7 5/8	172-193
52	2 13/16-3 3/4	71-95	2 13/16-3 3/4	71-95	812	7 1/4-8 1/8	184-206
56	3 1/16-4	78-102	3 1/16-4	78-102	862	7 3/4-8 5/8	197-219
60	3 5/16-4 1/4	84-108	3 5/16-4 1/4	84-108	912	8 1/4-9 1/8	210-232
64	3 9/16-4 1/2	90-114	3 9/16-4 1/2	90-114	/	/	/
72	4 1/16-5	103-127	4 1/16-5	103-127	/	/	/
80	4 5/8-5 1/2	117-140	4 5/8-5 1/2	117-140	/	/	/
88	5 1/8-6	130-152	5 1/8-6	130-152	/	/	/
96	5 9/16-6 1/2	141-165	5 9/16-6 1/2	141-165	/	/	/

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	LTKG12.5--5.3Nm
W2	AISISS201/SS301/SS203	AISI SS201/SS301/SS203	Zinc Plated Steel	LTKG 14.2--7.5 Nm
W4	AISISS304	AISI SS304	AISI SS304	LTKG15.8--UNm

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

QUICK RELEASE HOSE CLAMP
美式快速释放卡箍



I 技术参数-美式快速释放卡箍 / TECHNICAL DATA – QUICK RELEASE HOSE CLAMP

型号	货号 Item No.	
SAE No.	LTSF 12.7 (Band width 12.7mm)	
	inch	mm
12	1/2-1 1/4	13-32
20	3/4-1 3/4	19-44
24	1-2	26-51
28	1-2 1/4	26-57
36	1-2 3/4	26-70
48	1 1/2-3 1/2	38-89
56	1-4	26-101
72	2-5	51-127
88	2-6	51-152
104	2-7	51-178
116	1 3/4-7 3/4	45-197
128	4 1/4-8 1/2	108-216
136	1 3/4-9	45-228
152	2-10	51-254
188	2-12 1/4	51-311

HOSE CLAMP SET
美式卡箍组件

Bandwidth 12.7mm; all 200/300 stainless steel; 8.0mm hex-head screw
Band width 8mm; Material: all 200/300 stainless steel; 6.0mm hex-head screw. Galvanized Carbon steel.



I 技术参数-美式卡箍组件/ TECHNICAL DATA – HOSE CLAMP SET

Part No.	Band Width	Thickness	length	Material	MOQ
AEB08	Band of 8mm	0.6mm	30m	SS201,SS304,SS316	100rolls
AEB13	Band of 12.7mm	0.6mm	30m	SS201,SS304,SS316	100rolls
AEH08	Housing for 8mm			W2&W4/SS201,SS304	1000pcs.
AEH13	Housing for 12.7mm			W2&W4/SS201,SS304	1000pcs.

- 可根据客户要求提供更多尺寸和材质。以上数据仅供参考
MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

Product Description


► 产品介绍 / 德式卡箍

Germany Type Hose Clamp



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

GERMANY TYPE HOSE CLAMP
 德式喉箍

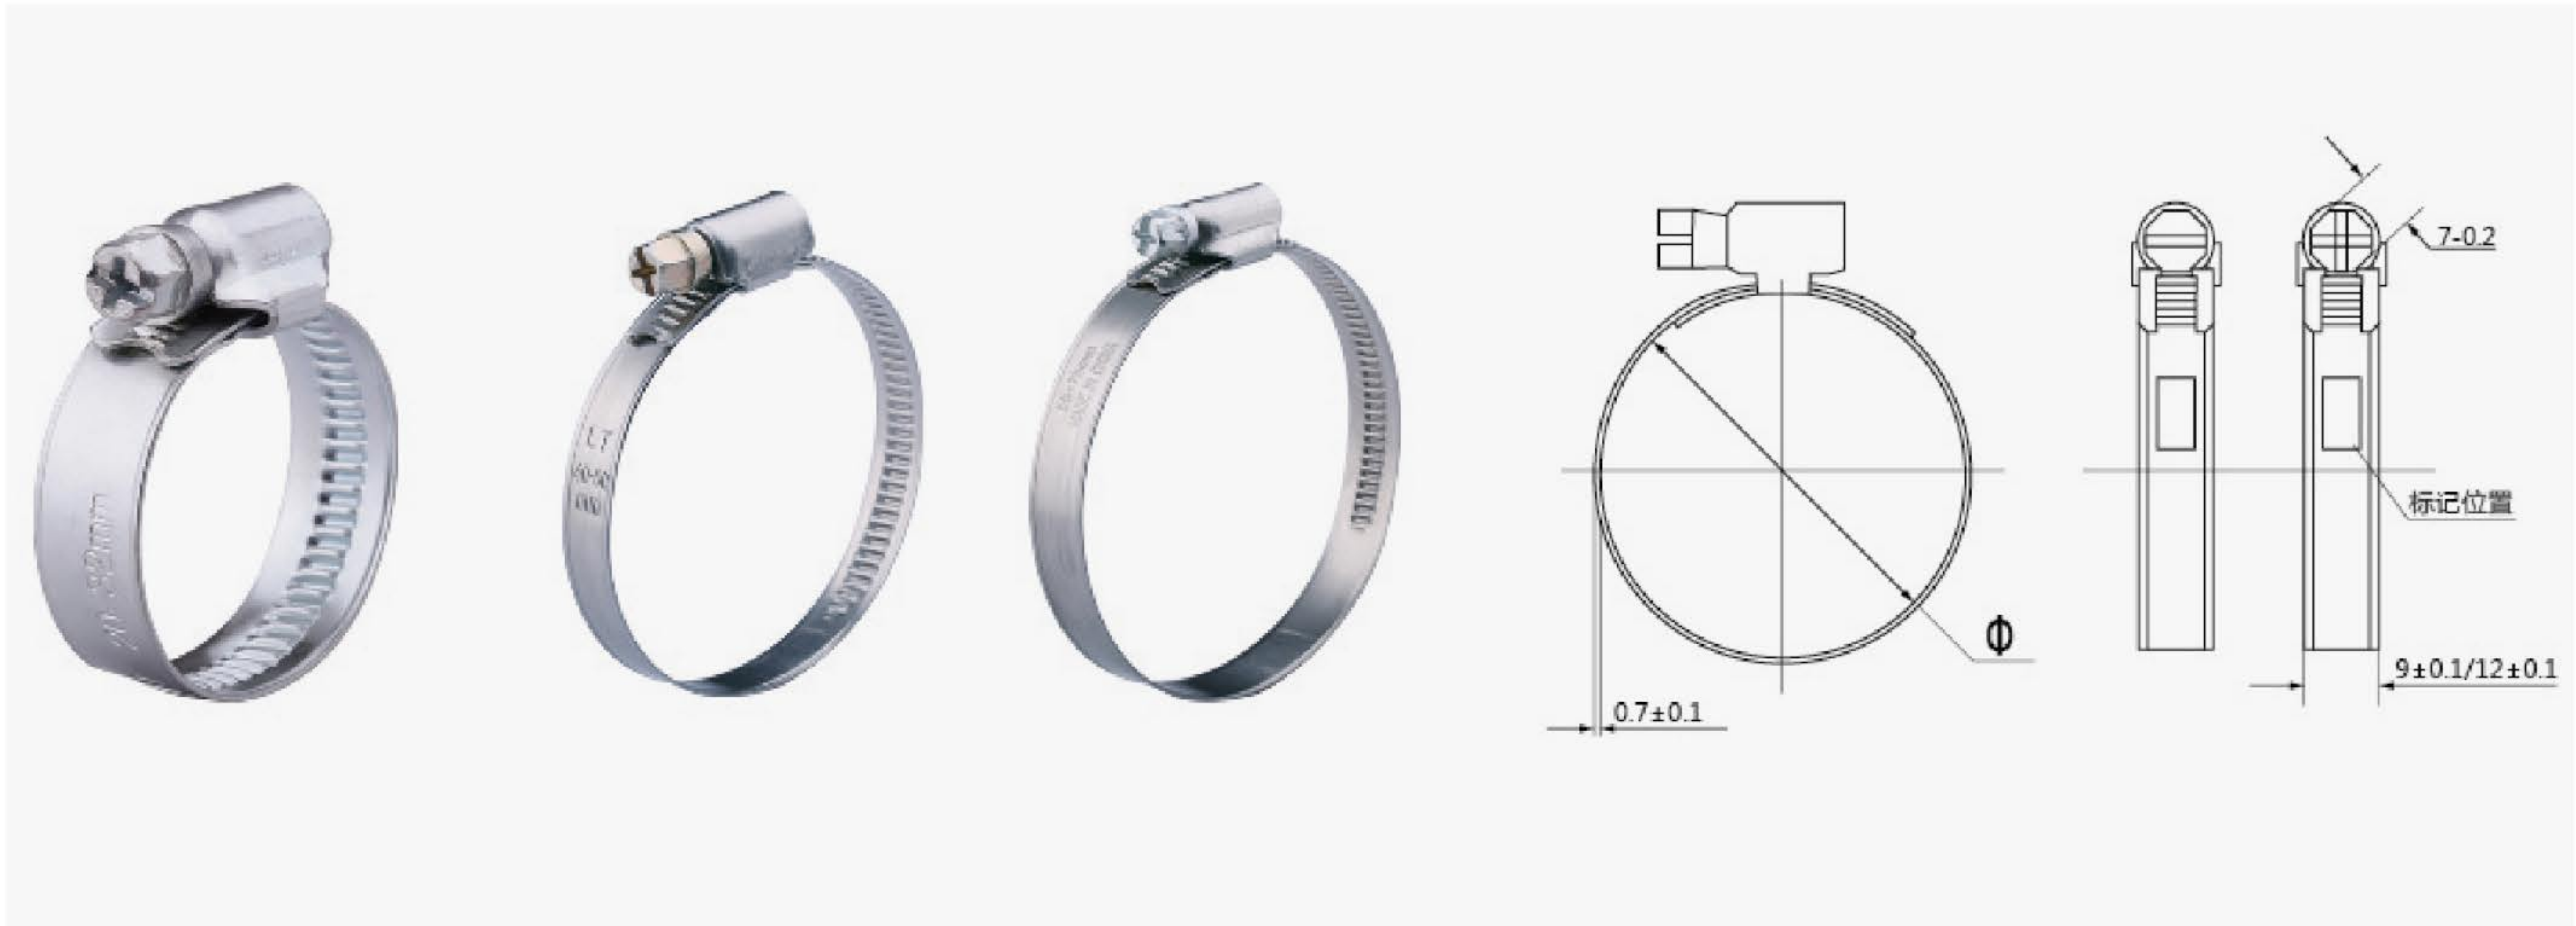

I 技术参数-德式喉箍 / TECHNICAL DATA-GERMANY TYPE HOSE CLAMP

带宽 9mm 货号 Item no.		紧固范围 Range mmQ675	紧固范围 Range mm DIN3017	Smm	带宽 12mm 货号 Item no.		紧固范围 Range mmQ675	紧固范围 Range mm DIN3017	Smm
W1 W2	W4 W5				W1 W2	W4W5			
LTDS/09B0812	LTDS/09Q0812	8-12	8-12	23	/	/	/	/	/
LTDS/09B1016	LTDS/09Q1016	10-16	10-16	23	/	/	/	/	/
LTDS/09B1222	LTDS/09Q1222	12-22	12-22	23	LTDS/12B1220	LTDS/12Q1220	12-22	12-22	23
LTDS/09B1627	LTDS/09Q1627	16-27	16-27	23	LTDS/12B1625	LTDS/12Q1625	16-27	16-27	23
LTDS/09B2032	LTDS/09Q2032	23-35	20-32	23	LTDS/12B2032	LTDS/12Q2032	23-35	20-32	23
LTDS/09B2540	LTDS/09Q2540	25-40	25-40	26	LTDS/12B2540	LTDS/12Q2540	30-45	25-40	26
LTDS/09B3250	LTDS/09Q3250	32-50	30-45	26	LTDS/12B3250	LTDS/12Q3250	32-50	30-45	26
			35-50	26				35-50	26
LTDS/09B4060	LTDS/09Q4060	40-60	40-60	26	LTDS/12B4060	LTDS/12Q4060	40-60	40-60	26
LTDS/09B5070	LTDS/09Q5070	50-70	50-70	26	LTDS/12B5070	LTDS/12Q5070	50-70	50-70	26
LTDS/09B6080	LTDS/09Q6080	60-80	60-80	26	LTDS/12B6080	LTDS/12Q6080	60-80	60-80	26
LTDS/09B7090	LTDS/09Q7090	70-90	70-90	26	LTDS/12B7090	LTDS/12Q7090	70-90	70-90	29
LTDS/09B80100	LTDS/09Q80100	80-100	80-100	26	LTDS/12B80100	LTDS/12Q80100	80-100	80-100	29
LTDS/09B90110	LTDS/09Q90110	90-110	90-110	26	LTDS/12B90110	LTDS/12Q90110	90-110	90-110	29
LTDS/09B100120	LTDS/09Q100120	100-120	100-120	26	LTDS/12B100120	LTDS/12Q100120	100-120	100-120	31
LTDS/09B110130	LTDS/09Q110130	110-130	110-130	26	LTDS/12B110130	LTDS/12Q110130	110-130	110-130	31
LTDS/09B120140	LTDS/09Q120140	120-140	120-140	26	LTDS/12B120140	LTDS/12Q120140	120-140	120-140	31
LTDS/09B130150	LTDS/09Q130150	130-150	130-150	26	LTDS/12B130150	LTDS/12Q130150	130-150	130-150	31
LTDS/09B140160	LTDS/09Q140160	140-160	140-160	26	LTDS/12B140160	LTDS/12Q140160	140-160	140-160	31

GERMANY TYPE HOSE CLAMP

德式喉箍



材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque	Note
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated	0 W 25 Band(9mm) 3.0 Nm Band(12mm) 3.4Nm M 27 Band(9mm) 3.4 Nm Band(12mm) 3.8Nm	
W2	AISI SS430/SS200/ SS304	AISI SS430/SS200/ SS304	Zinc Plated		
W4	AISISS304	AISISS304	AISISS304	W 25 Band(9mm) 4.0 Nm Band(12mm) 4.9Nm M 27 Band(9mm) 4.5 Nm Band(12mm) 4.8Nm	
W5	AISISS316	AISISS316	AISISS316		



GERMAN TYPE HEAD HOSE CLAMP

德式偏头喉箍

I 技术参数-德式偏头喉箍

TECHNICAL DATA-GERMAN TYPE HEAD HOSE CLAMP

货号 Item No.			
Dimendon		LTDP9.0 (Bandwidth 9.0mm)	LTDP12.0 (Bandwidth 12.0mm)
8-12	5/16-1/2	LTDP0912	/
10-16	3/8-5/8	LTDP0916	/
12-20	1/2-3/4	LTDP0920	/
12-22	1/2-7/8	LTDP0922	/
16-25	5/8-1	LTDP0925	/
16-27	5/16-11/16	LTDP0927	LTDP1227
20-32	3/4-1 1/4	LTDP0932	LTDP1232
32-35	7/8-1 3/8	LTDP0935	LTDP1235
25-40	1-1 5/8	LTDP0940	LTDP1240
30-45	1 3/16-1 3/4	LTDP0945	LTDP1245
32-50	1 1/4-2	LTDP0950	LTDP1250
40-60	1 5/8-2 3/8	LTDP0960	LTDP1260
50-70	2-2 3/4	LTDP0970	LTDP1270
60-80	2 3/8-3 1/8	LTDP0980	LTDP1280
70-90	2 3/4-3 1/2	LTDP0990	LTDP1290
80-100	3 1/8-4	LTDP09100	LTDP12100
90-110	3 1/2-4 3/8	LTDP09110	LTDP12U0
100-120	4-4 3/4	LTDP09120	LTDP12120
110-130	4 3/8-5 1/8	LTDP09130	LTDP12130
120-140	4 3/4-5 1/2	LTDP09140	LTDP12140
130-150	5 1/8-5 7/8	LTDP09150	LTDP12150
140-160	5 1/2-6 1/4	LTDP09160	LTDP12160
150-170	5 15/16-6 11/16	LTDP09170	LTDP12170
160-180	6 5/16-7 1/16	LTDP09180	LTDP12180
170-190	6 11/16-7 1/2	LTDP09190	LTDP12190
180-200	7 1/16-7 7/8	LTDP09200	LTDP12200
190-210	7 1/2-8 1/4	LTDP09210	LTDP12210
200-220	7 7/8-8 11/16	LTDP09220	LTDP12220



GERMAN HOSE CLAMP WITH HANDLE

德式手柄



- 可根据客户要求提供更多尺寸和材质。以上数据仅供参考
- MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

Product Description

► 产品介绍 / 英式卡箍

British Type Hose Clamp



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

BRITISH TYPE HOSE CLAMP
英式喉箍



I 技术参数-英式喉箍/ TECHNICAL DATA-BRITISH TYPE HOSE CLAMP

货号 Item No.										
LTYS with welded Housing (英式点焊喉箍)				LTYS with rivetd Housing (英式钏头喉箍)				LTYS with Tube Housing (英式挂头喉箍)		
Part No.	Size (inch)	Size (mm)	Bandwidth (mm)	Part No.	Size (inch)	Size (mm)	Bandwidth (mm)	Size (inch)	Size (mm)	Band Width (mm)
OOO	1/2	9-13	9.7	OOO	1/2	9-13	9.7	1/2	9-13	9.7
MOO	5/8	13-16	9.7	MOO	5/8	13-16	9.7	5/8	13-16	9.7
OO	3/4	13-19	9.7	OO	3/4	13-19	9.7	3/4	13-19	9.7
O	7/8	16-22	9.7/11.7	O	7/8	16-22	9.7/11.7/12.7	7/8	16-22	9.7/11.7
OX	1	19-25	9.7/11.7	OX	1	19-25	9.7/11.7/12.7	1	19-25	9.7/11.7
1A	1 1/7	22-29	9.7/11.7	1A	1 1/7	22-29	9.7/11.7/12.7	1 1/7	22-29	9.7/11.7
1	1 1/2	25-35	11.7	1	1 1/2	25-35	11.7/12.7	1 1/2	25-35	11.7
IX	1 5/7	28-41	11.7	IX	1 5/7	28-41	11.7/12.7	1 5/7	28-41	11.7
2A	2	31-48	11.7	2A	2	31-48	11.7/12.7	2	31-48	11.7
2	2 1/4	38-54	11.7	2	2 1/4	38-54	11.7/12.7	2 1/4	38-54	11.7
2X	2 1/2	44-60	11.7	2X	2 1/2	44-60	11.7/12.7	2 1/2	44-60	11.7
3	2 3/4	50-70	11.7	3	2 3/4	50-70	11.7/12.7	2 3/4	50-70	11.7
3X	3 1/7	60-80	11.7	3X	3 1/7	60-80	11.7/12.7	3 1/7	60-80	11.7
4	3 1/2	70-90	11.7	4	3 1/2	70-90	11.7/12.7	3 1/2	70-90	11.7
4X	3 8/9	80-102	11.7	4X	3 8/9	80-102	11.7/12.7	3 8/9	80-102	11.7
5	4 1/3	95-115	11.7	5	4 1/3	95-115	11.7/12.7	4 1/3	95-115	11.7
6	5 1/8	104-127	11.7	6	5 1/8	104-127	11.7/12.7	5 1/8	104-127	11.7
6X	5 8/9	127-146	11.7	6X	5 8/9	127-146	11.7/12.7	5 8/9	127-146	11.7
7	6 2/7	140-160	11.7	7	6 2/7	140-160	11.7/12.7	6 2/7	140-160	11.7
7X	7 1/9	160-180	11.7	7X	7 1/9	160-180	11.7/12.7	7 1/9	160-180	11.7
8	7 7/8	180-200	11.7	8	7 7/8	180-200	/	8 1/16	175-205	11.7
/	9 1/9	210-230	11.7	/	9 1/9	210-230	/	9 2/16	200-231	11.7
/	9 5/6	230-250	11.7	/	9 5/6	230-250	/	10 1/16	226-256	11.7
/	11	260-280	11.7	/	11	260-280	/	11 2/16	251-282	11.7

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	229 3.0Nm 4)M40 4.8Nm 4)M44 5.2Nm
W2	AISI SS301/SS304	AISI SS301/SS304	Zinc Plated Steel	
W4	AISI SS301/SS304	AISI SS301/SS304	AISI SS301/SS304	

HOSE CLAMP SET

英式卡箍组件



I 技术参数-德式偏头喉箍

TECHNICAL DATA-GERMAN TYPE HEAD HOSE CLAMP

Part No.	BEB09
Band Width	Band of 9mm
Thickness	0.6mm
Band Length	30m
Worm Head	as per buyer* s option
Material	SS430
MOQ	100rolls

QUICK RELEASE HOSE CLAMP

英式释放卡箍



I 技术参数-英式释放卡箍/

TECHNICAL DATA-QUICK RELEASE HOSE CLAMP

货号 Item No.					
LTYSSF9.0					
Size (mm)	Band Width (mm)	Size (mm)	Band Width(mm)	Size (mm)	Band Width(mm)
25-100	9	25-250	9	25-500	9
25-125	9	25-275	9	25-550	9
25-150	9	25-300	9	25-600	9
25-175	9	25-350	9	25-650	9
25-200	9	25-400	9	25-700	9
25-225	9	25-450	9	25-750	9

材质 Material	钢带 Band	箍头 Housing	螺丝 Screw	建议安装扭力 Suggested Install Torque
W1	Zinc Plated Steel	Zinc Plated Steel	Zinc Plated Steel	2.6 Nm
W2	AISI SS430	Zinc Plated Steel	AISI SS430	

BRITISH TYPE HOSE CLAMP WITH HANDLE

英式手柄卡箍



● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

Product Description

► 产品介绍 / 排气系统卡箍

Exhaust System Clamp



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD



NEW

钛合金卡箍 / Ti clamp

比不锈钢轻 40% 且抗摔性提升 2 倍

具有较高的熔点和热稳定性，耐高温达 700-750°C

在多种化学介质中表现出色的耐腐蚀性，能够抵御酸、碱和盐的侵蚀

Strength comparable to steel with 40% less in weight


Withstands high temperatures up to 700° - 750°

Excellent resistance against crevice corrosion for special environments

EXHAUST SYSTEM CLAMP


排气系统卡箍

T型V槽卡箍 / T-BOLT V BAND CLAMP

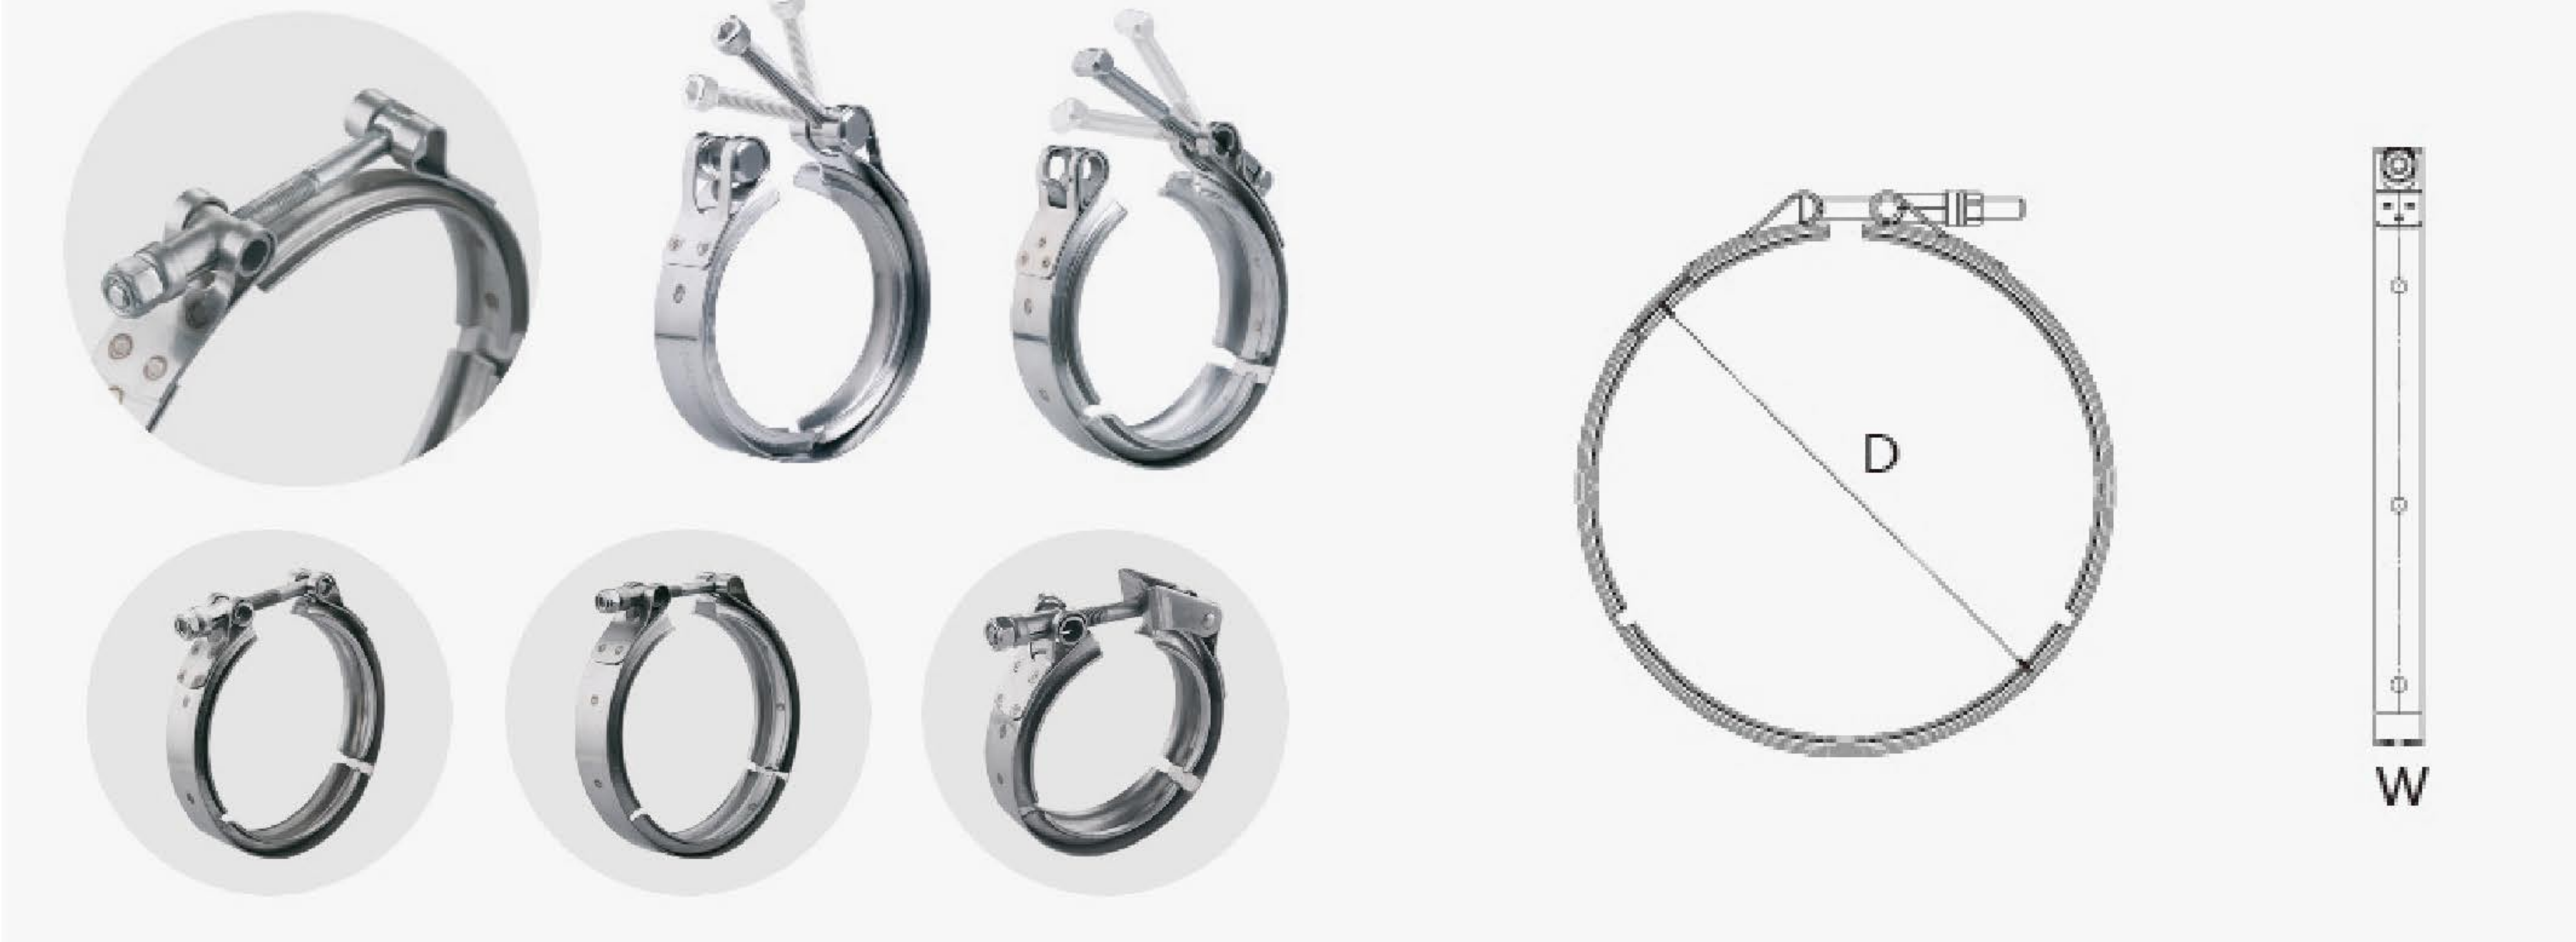

LATCH STYLES

NAME 名称	PICTURES 图片	KNOB AND T-HANDLE DESCRIPTION 功能介绍
T-BOLT LATCH 逸螺栓锁		This T-bolt latch is used for permanent or semi-permanent applications and/or safety on pressurized systems. The T-bolt latch is our most economical latch. 该种锁具用于永久或半永久应用中或安全加 压系统中；该种锁具是我们最经济的一种锁 具。
QUICK RELEASE LATCH 快速释放锁		This quick release latch is used for ease of disassembly and is required where the ability to replace bolts is desired. 该种锁具易于拆卸，并且可以按照要求用 T 型螺栓来替换。
SADDLE QUICK RELEASE LATCH 鞍座式快速释放锁		The saddle quick release latch is also used for ease of disassembly and where the ability to replace bolts is desired. It is not recommended for diameters larger than 10 in. [254 mm] due to trunnion/band interference. 该种锁具也易于拆卸，也可以按照要求替换 螺栓。由于耳轴 / 箍带的干扰，不建议用于直 径大于 10”（254mm）
QUICK RELEASE LATCH 快速释放锁		This quick release latch is also used for ease of disassembly and where the ability to replace bolts is desired. 该种锁具也易于拆卸，也可以按照要求替换 螺栓。

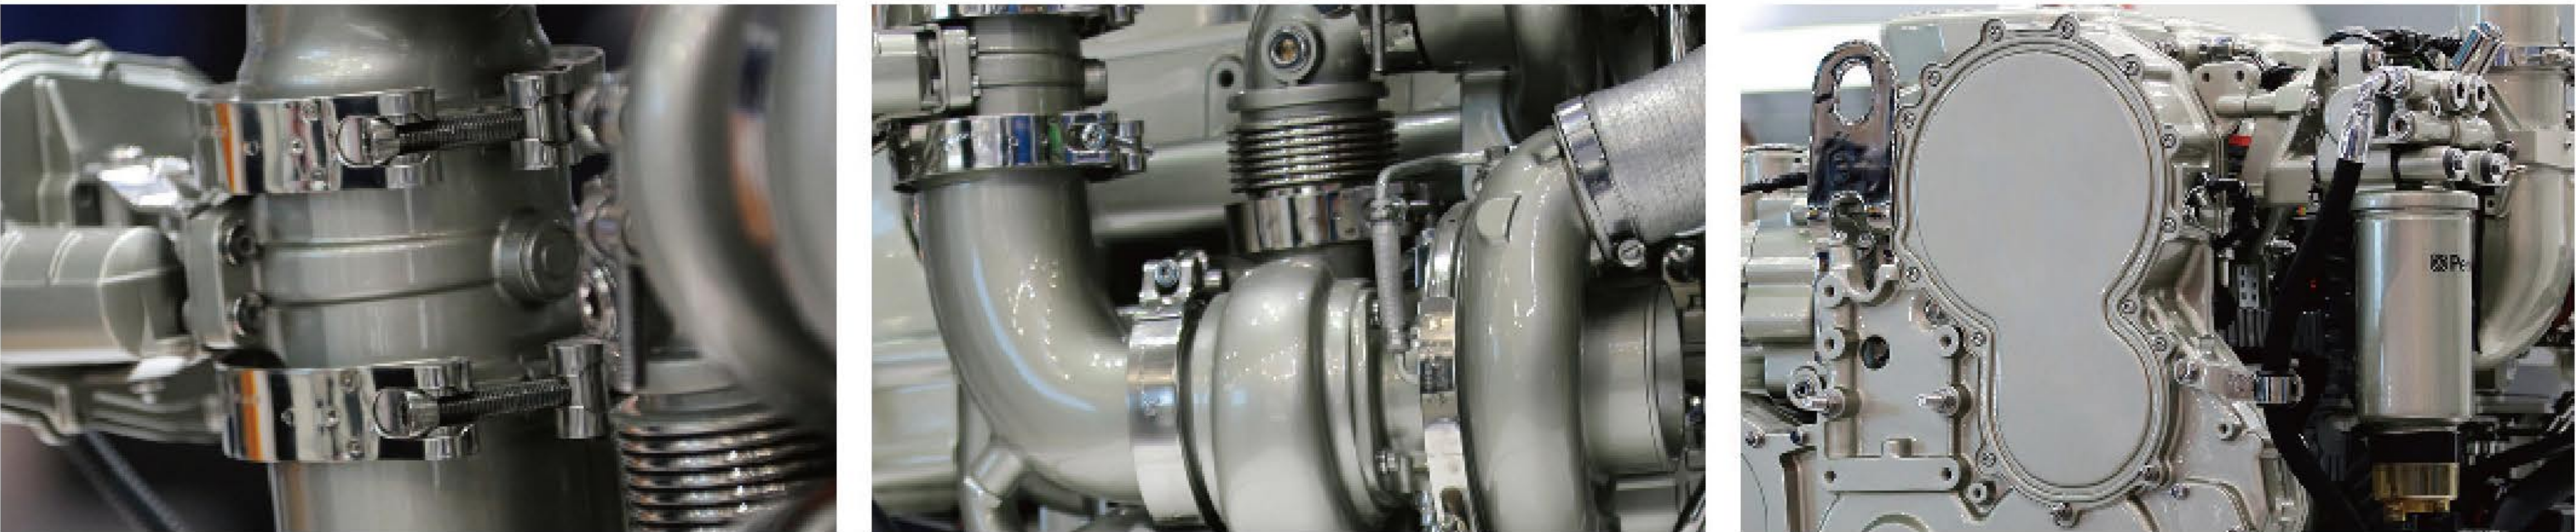

BOLT CODE

CODE 编号	THREAD SIZE 螺纹尺寸	BOLT DESCRIPTION 螺栓描述	PICTURE 图片
LTB1	10-32 1/4-28 M6X1 5/16-24 3/8-16 1/2-13	4037 Alloy Heat Treated to 125,000 – 145,000 psi, Zinc Plated 4037 合金热处理 125000-145000psi 铁镀锌	
LTB2	10-32 1/4-20 1/4-28 5/16-18 5/16-24 3/8-16 10-32	18-8 Stainless Steel (302 or 305) 18-8 不锈钢 (302 或 305)	
LTB3	1/4-28 5/16-24	431, 420 or 410 Stainless Steel Heat Treated to 140,000 to 160,000 psi 不锈钢 431,420,410 热处理 140000-160000psi	
LTB4	10-32 1/4-28	A286 Stainless Steel, 130,000 psi minimum 不锈钢 A286, 最小 130000psi	
LTB5	1/4-28 M6X1 M8X1.25	316 Stainless Steel 不锈钢 316	

KNOB CODE

CODE 型号	KNOB AND T-HANDLE DESCRIPTION 功能介绍	PICTURES 图片
LTK1	Knob for hand tightening, plastic with Brass insert, 1 in. long [25.4 mm] 手紧旋钮，塑料外壳，黄铜插入件，1” 长（25.4mm）	
LTK2	Knob for hand tightening, plastic with Brass insert, 1.75 in. long [44.5 mm] 手紧旋钮，塑料外壳，黄铜插入件，1.75- 长（44.5mm）	
LTK3	T-Handle for hand tightening, Steel, Cadmium or Zinc Plated, 3 in. long [76.2 mm] 手紧旋钮，钢，镀铬或铁镀锌，3” 长（76.2mm）	

NUT CODE


CODE 型号	NUT DESCRIPTION 功能介绍	TEMP RATING 温度等级	SELF-LOCKING 是否自锁	PICTURES 图片
LTS1	Steel, self-locking, nylon insert, Cadmium or Zinc Plated 钢，自锁，尼龙镶嵌，镀铬或镀锌	250° F [120° C]	Yes	
LTS2	All metal, Steel, self-locking, collar or short beam design, Cadmium or Zinc Plated 全铁，钢，自锁，短梁设计，镀铬或镀锌	550° F [290° C]	Yes	
LTS3	All metal, 18-8 Stainless Steel*, self-locking, collar or short beam design, Silver Plated 全铁，18-8 不锈钢，自锁，短梁设计，镀银	800 ° F [425° C]	Yes	
LTS4	All metal, 347 Stainless Steel*, self-locking, collar or short beam design, Silver Plated 全铁，347 不锈钢，自锁，短梁设计，镀银	1200° F [650° C]	Yes	
LTS5	18-8 Stainless Steel, self-locking, nylon insert, Silver Plated 18-8 不锈钢，自锁，尼龙镶聚，镀银	250° F [120° C]	Yes	
LTS6	Stainless Steel Hex Nut, Silver Plated 不锈钢六角螺母，镀银	800° F [425° C]	No	
LTS7	Steel Hex Nut, Zinc Plated 钢六角螺母，铁镀锌	--	No	

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

EXHAUST SYSTEM CLAMP

排气系统卡箍

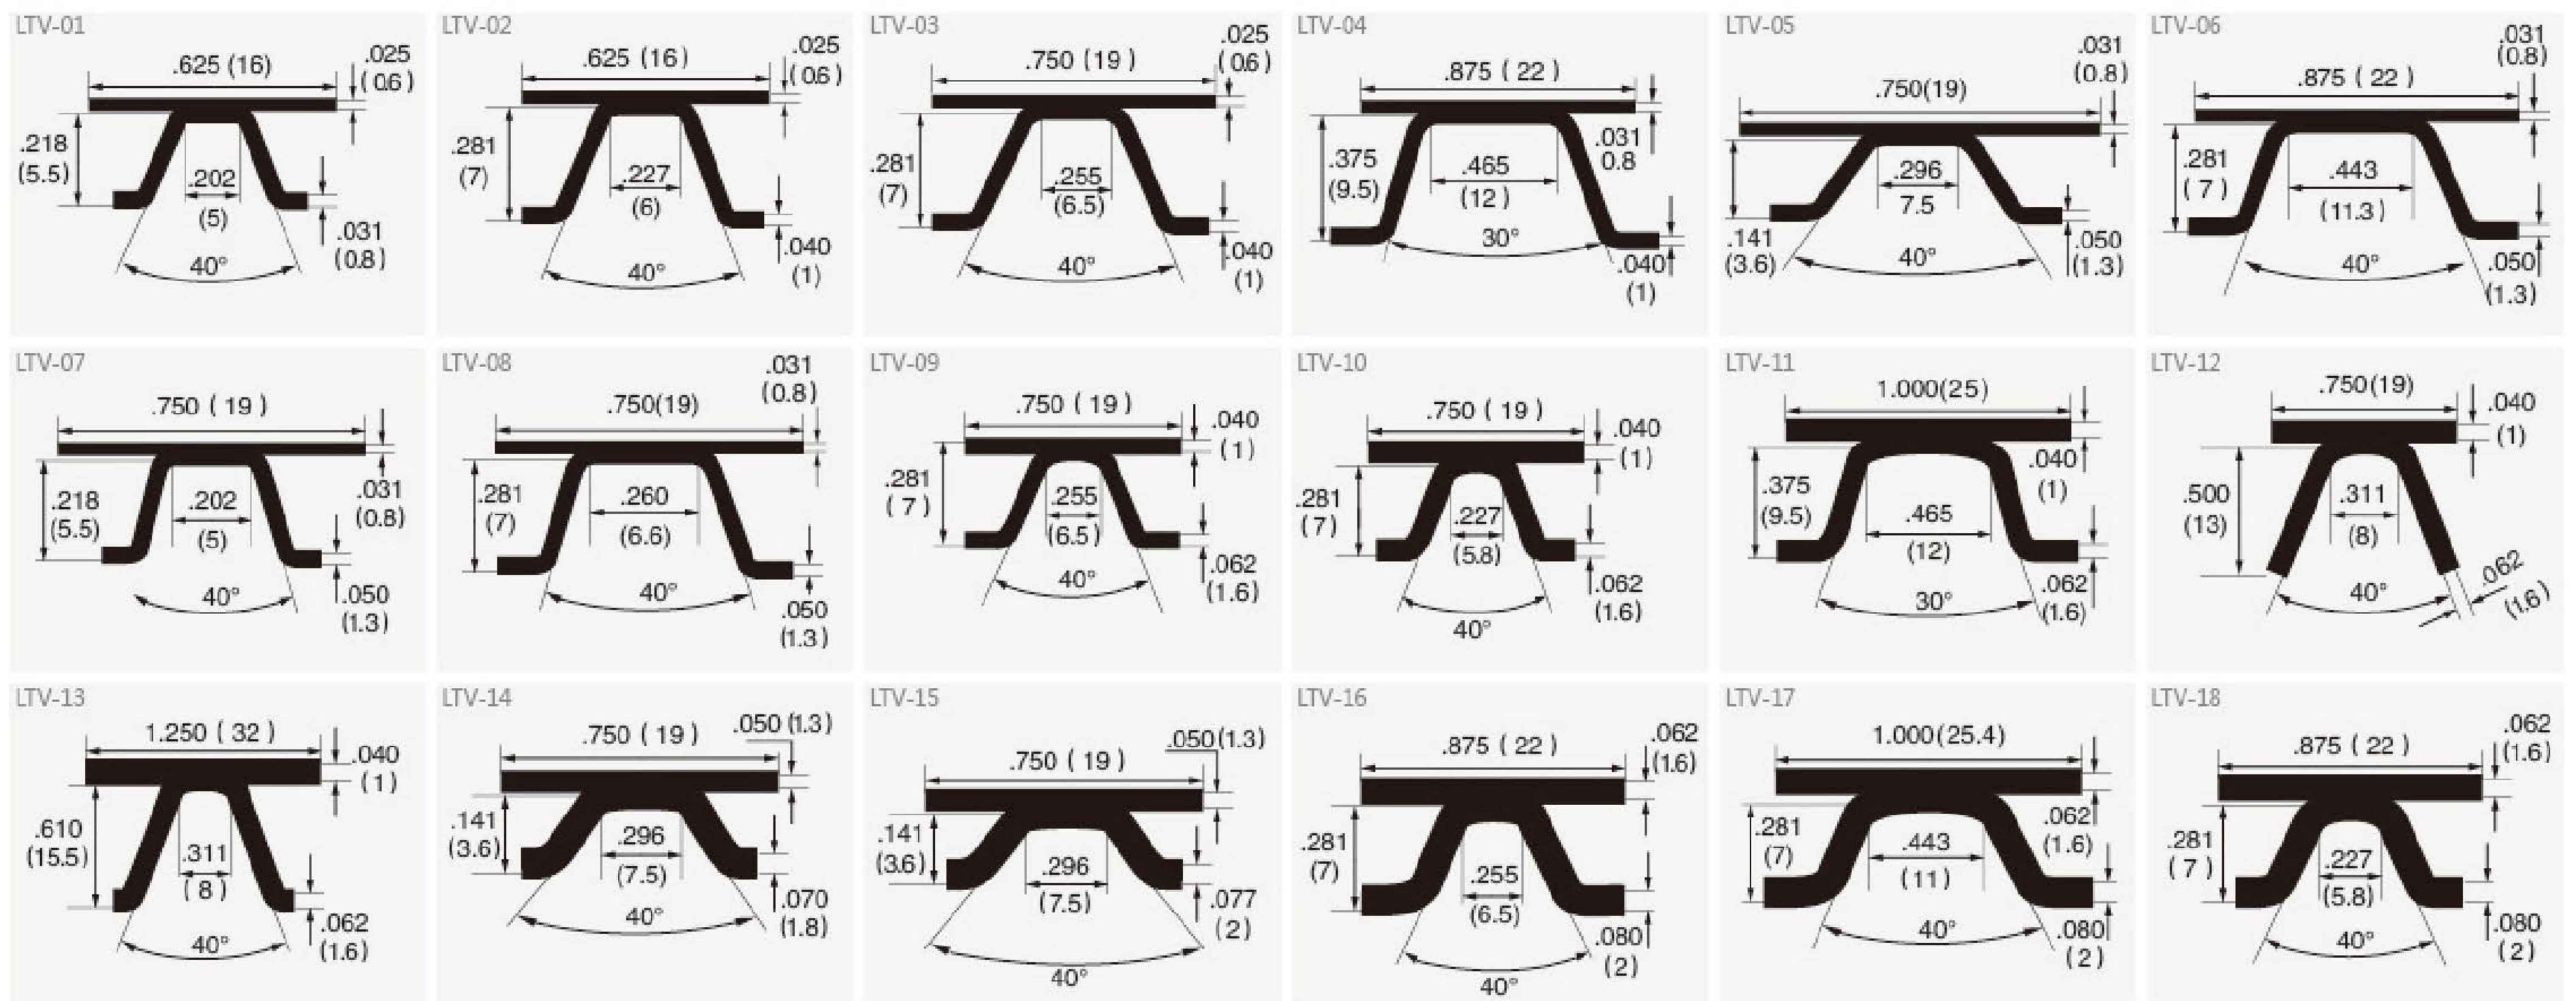

T-BOLT HOSE CLAMP
T型卡箍



T-BOLT SPRING LOADED CLAMP
T型弹簧卡箍



I 技术参数-T型卡箍、T型弹簧卡箍

TECHNICAL DATA – T-BOLT HOSE CLAMP^T-BOLT SPRING LOADED CLAMP

货号 Item No.							
T- bolt Hose Clamp (T 型卡箍)			T-Bolt Spring Loaded Clamp (T 型弹簧卡箍) Standard Duty With Small Spring			TBolt Spring Loaded Clamp(T 型重型弹簧卡箍) Heavy Duty With Large Spring	
SAE No.	规格 Size		SAE No.	规格 Size		规格 Size	
	Inch	mm		Inch	mm	Inch	mm
/	1 1/4-1 7/16	32-37	/	/	/	2 1/8-2 7/16	54-62
/	1 3/8-1 9/16	35-40	/	/	/	2 1/4-2 9/16	57-65
/	1 1/2-1 11/16	38-43	/	/	/	2 1/8-2 11/16	60-68
/	1 5/8-1 7/8	41-46	/	/	/	2 1/2-2 13/16	64-72
28	1 3/4 -2	44-52	/	/	/	2 5/8-2 15/16	67-75
30	1 13/16-2 1/16	46-54	/	/	/	2 3/4-3 1/16	70-78
34	1 15/16-2 1/4	50-58	34	1 15/16-2 1/4	50-58	2 7/8-3 3/16	73-81
40	2 1/8-2 7/16	54-62	40	2 1/8-2 7/16	54-62	3-3 5/16	76-84
46	2 5/16-2 5/8	59-67	46	2 5/16-2 5/8	59-67	3 1/16-3 3/8	78-86
52	2 1/2-2 13/16	64-72	52	2 1/2-2 13/16	64-72	3 1/8-3 7/16	80-87
58	2 11/16-3	69-77	58	2 11/16-3	69-77	3 1/4-3 9/16	83-91
64	2 7/8-3 3/16	73-81	64	2 7/8-3 3/16	73-81	3 3/8-3 11/16	86-94
70	3 1/16-3 3/8	78-86	70	3 1/16-3 3/8	78-86	3 1/2-3 13/16	89-97
76	3 1/4-3 9/16	83-91	76	3 1/4-3 9/16	83-91	3 9/16-3 7/8	91-98
82	3 7/16-3 3/4	88-96	82	3 7/16-3 3/4	88-96	3 5/8-3 15/16	92-100
88	3 5/8-3 15/16	92-100	88	3 5/8-3 15/16	92-100	3 3/4-4 1/16	95-103
94	3 13/16-4 1/8	97-105	94	3 13/16-4 1/8	97-105	4 1/16-4 3/8	103-111
100	4-4 5/16	102-110	100	4-4 5/16	102-110	4 1/8-4 7/16	105-122
108	4 1/4-4 9/16	108-116	108	4 1/4-4 9/16	108-116	4 1/2-4 9/16	108-116
116	4 1/2-4 13/16	114-122	116	4 1/2-4 13/16	114-122	4 1/2-4 13/16	114-122
124	4 3/4-5 1/16	121-129	124	4 3/4-5 1/16	121-129	4 9/16-4 7/8	116-124
132	5-5 5/16	127-135	132	5-5 5/16	127-135	5-5 5/16	127-135
140	5 1/4-5 9/16	134-142	140	5 1/4-5 9/16	134-142	5 1/4-5 9/16	133-141
148	5 1/2-5 13/16	140-148	148	5 1/2-5 13/16	140-148	5 1/2-5 13/16	140-148
156	5 3/4-6 1/16	146-154	156	5 3/4-6 1/16	146-154	5 3/4-6 1/16	146-154
164	6-6 5/16	153-161	164	6-6 5/16	153-161	6-6 5/16	152-160
172	6 1/4-6 9/16	159-167	172	6 1/4-6 9/16	159-167	6 1/4-6 9/16	159-167
180	6 1/2-6 13/16	165-173	180	6 1/2-6 13/16	165-173	6 1/2-6 13/16	165-173

带宽 Bandwidth mm	材质 Material	钢带 Band	舌板 Bridge	三通管 Trunnion	三通冒 Cap	弹簧 Spring	螺栓 Bolt	螺母 Nut	建议安装扭力 Suggested Install Torque
19	W2	AISISS301/ SS304	AISISS301/ SS304	AISISS301/ SS304	AISISS304	Zinc plated steel	Zinc plated steel	Zinc plated steel	9Nm
19	W4	AISISS301/ SS304	AISISS301/ SS304	AISISS301/ SS304	AISISS304	/	AISISS304	AISISS304	

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考


MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

EXHAUST SYSTEM CLAMP

排气系统卡箍


排气系统 / EXHAUST CLAMP

- The pre-formed wideband exhaust clamp with step is designed for fast, easy and accurate installation. There is no need to separate pipes or exhaust members before clamping.
Diameter Range: 2" –6" (50.8mm—152.4mm)
Materials: Aluminum steel and bright finish 304 stainless steel
Pre-formed band with step provides fast, accurate installation

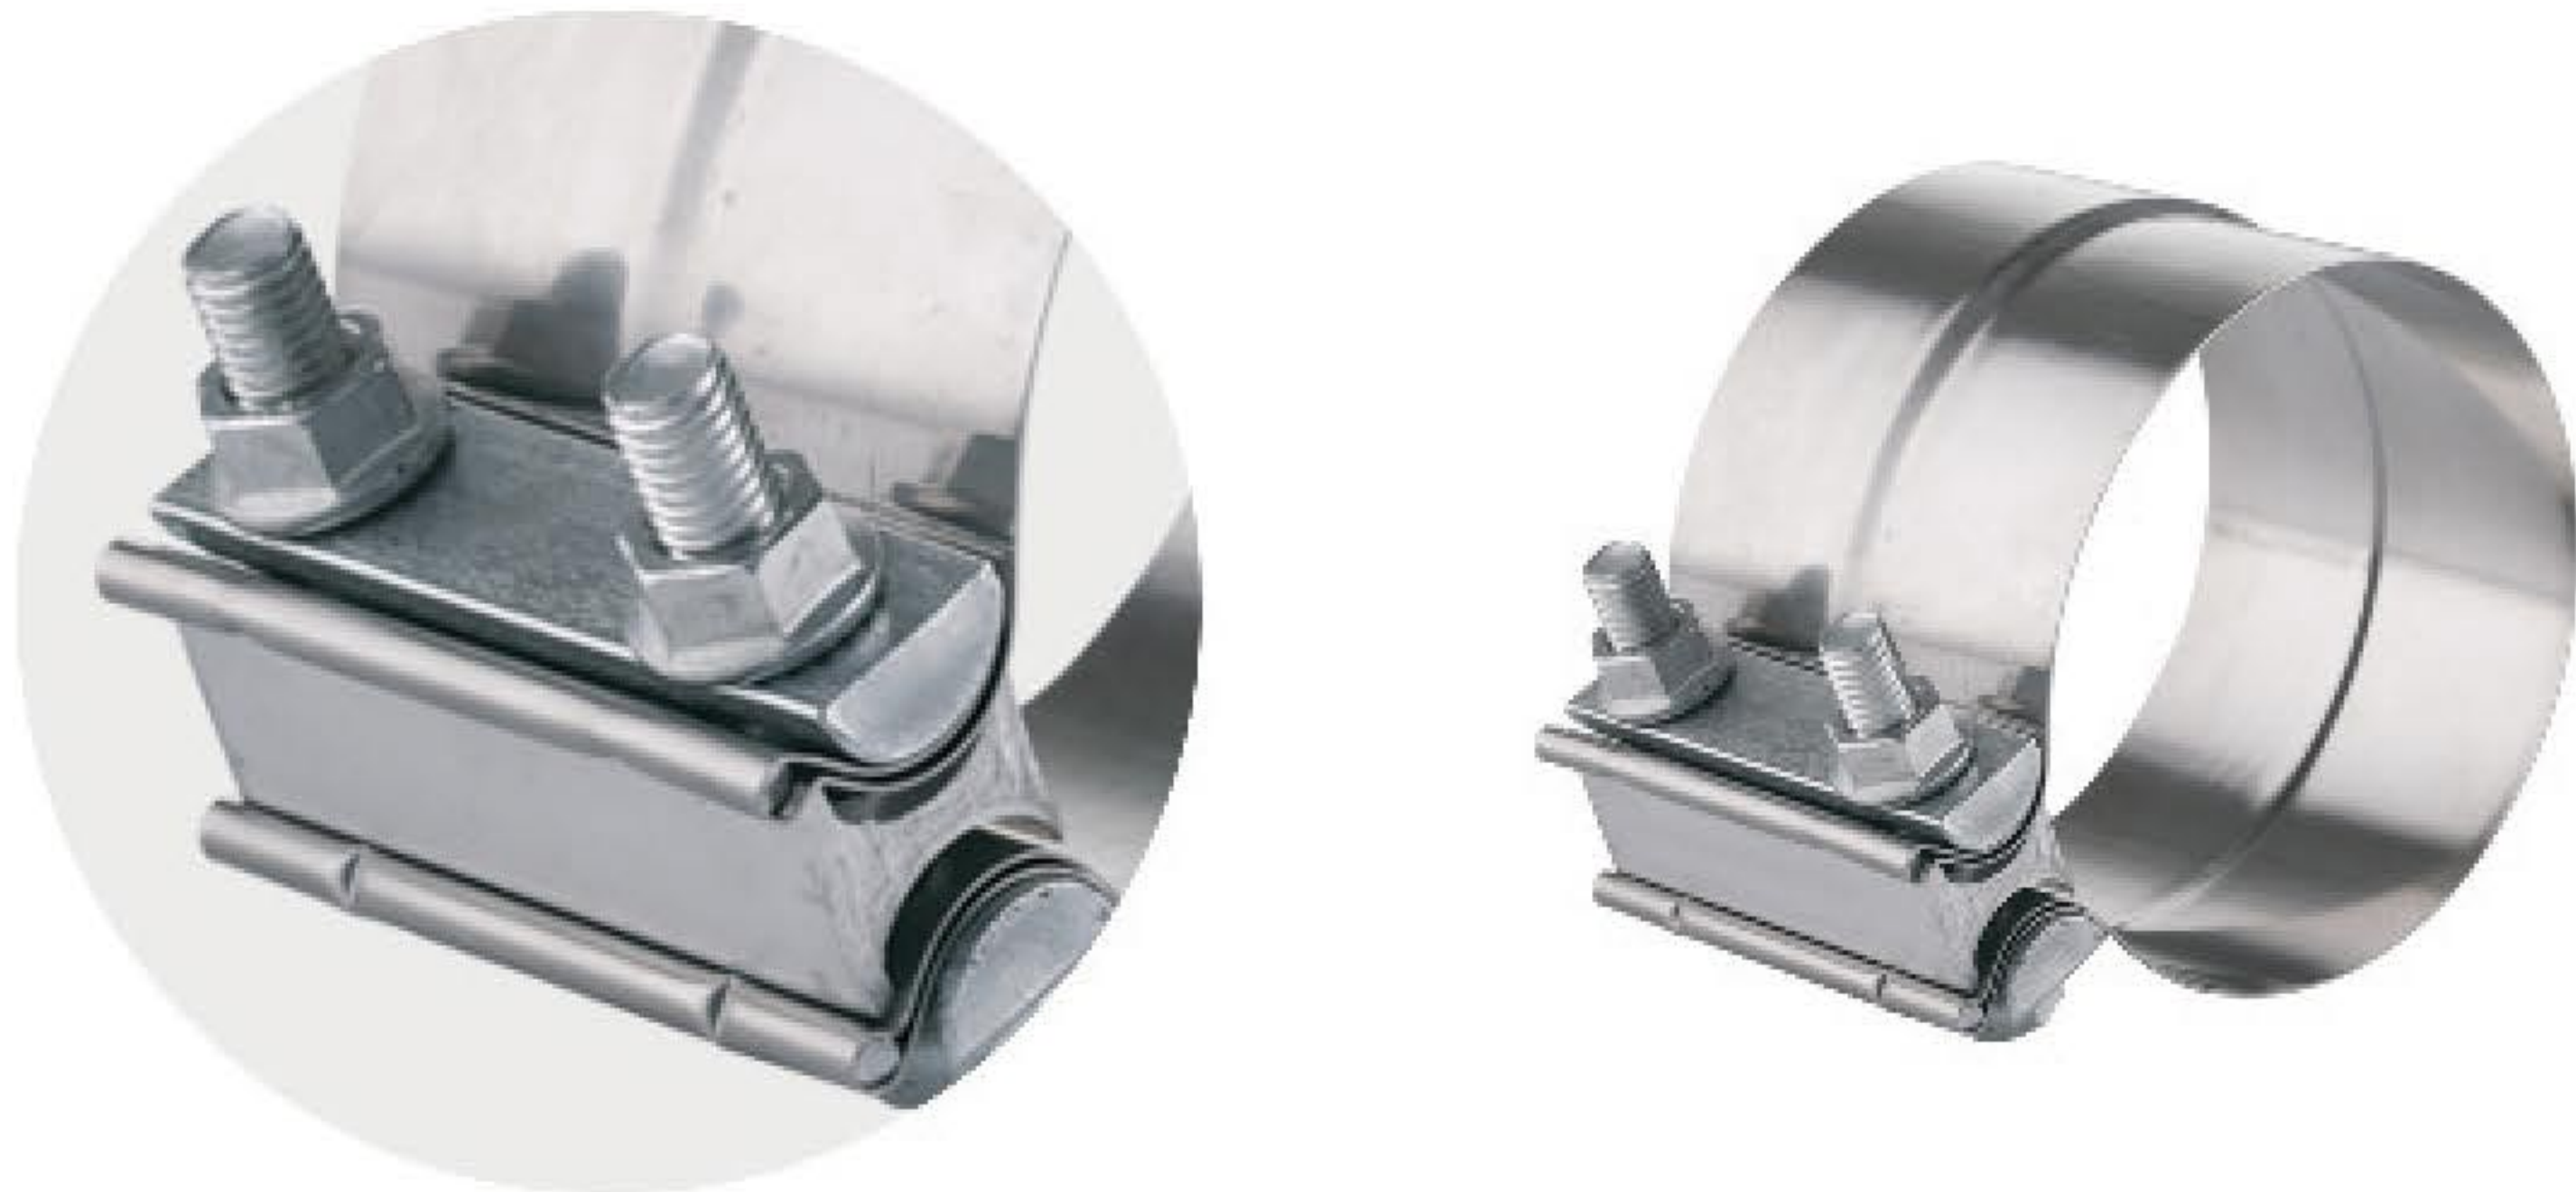


Dimension	
Inch	mm
2	51
2.25	57
2.5	64
2.75	70
3	76
3.5	89
4	101
4.5	114
5	127
6	152

- Service-specific sealing solution that does not require the use of slotted pipe ends.
For Lap and Butt Style Joint Connections Unique Sealing Performance Easy, Fast Accurate Installation
304 Stainless Steel Diameter Range 2" –8W

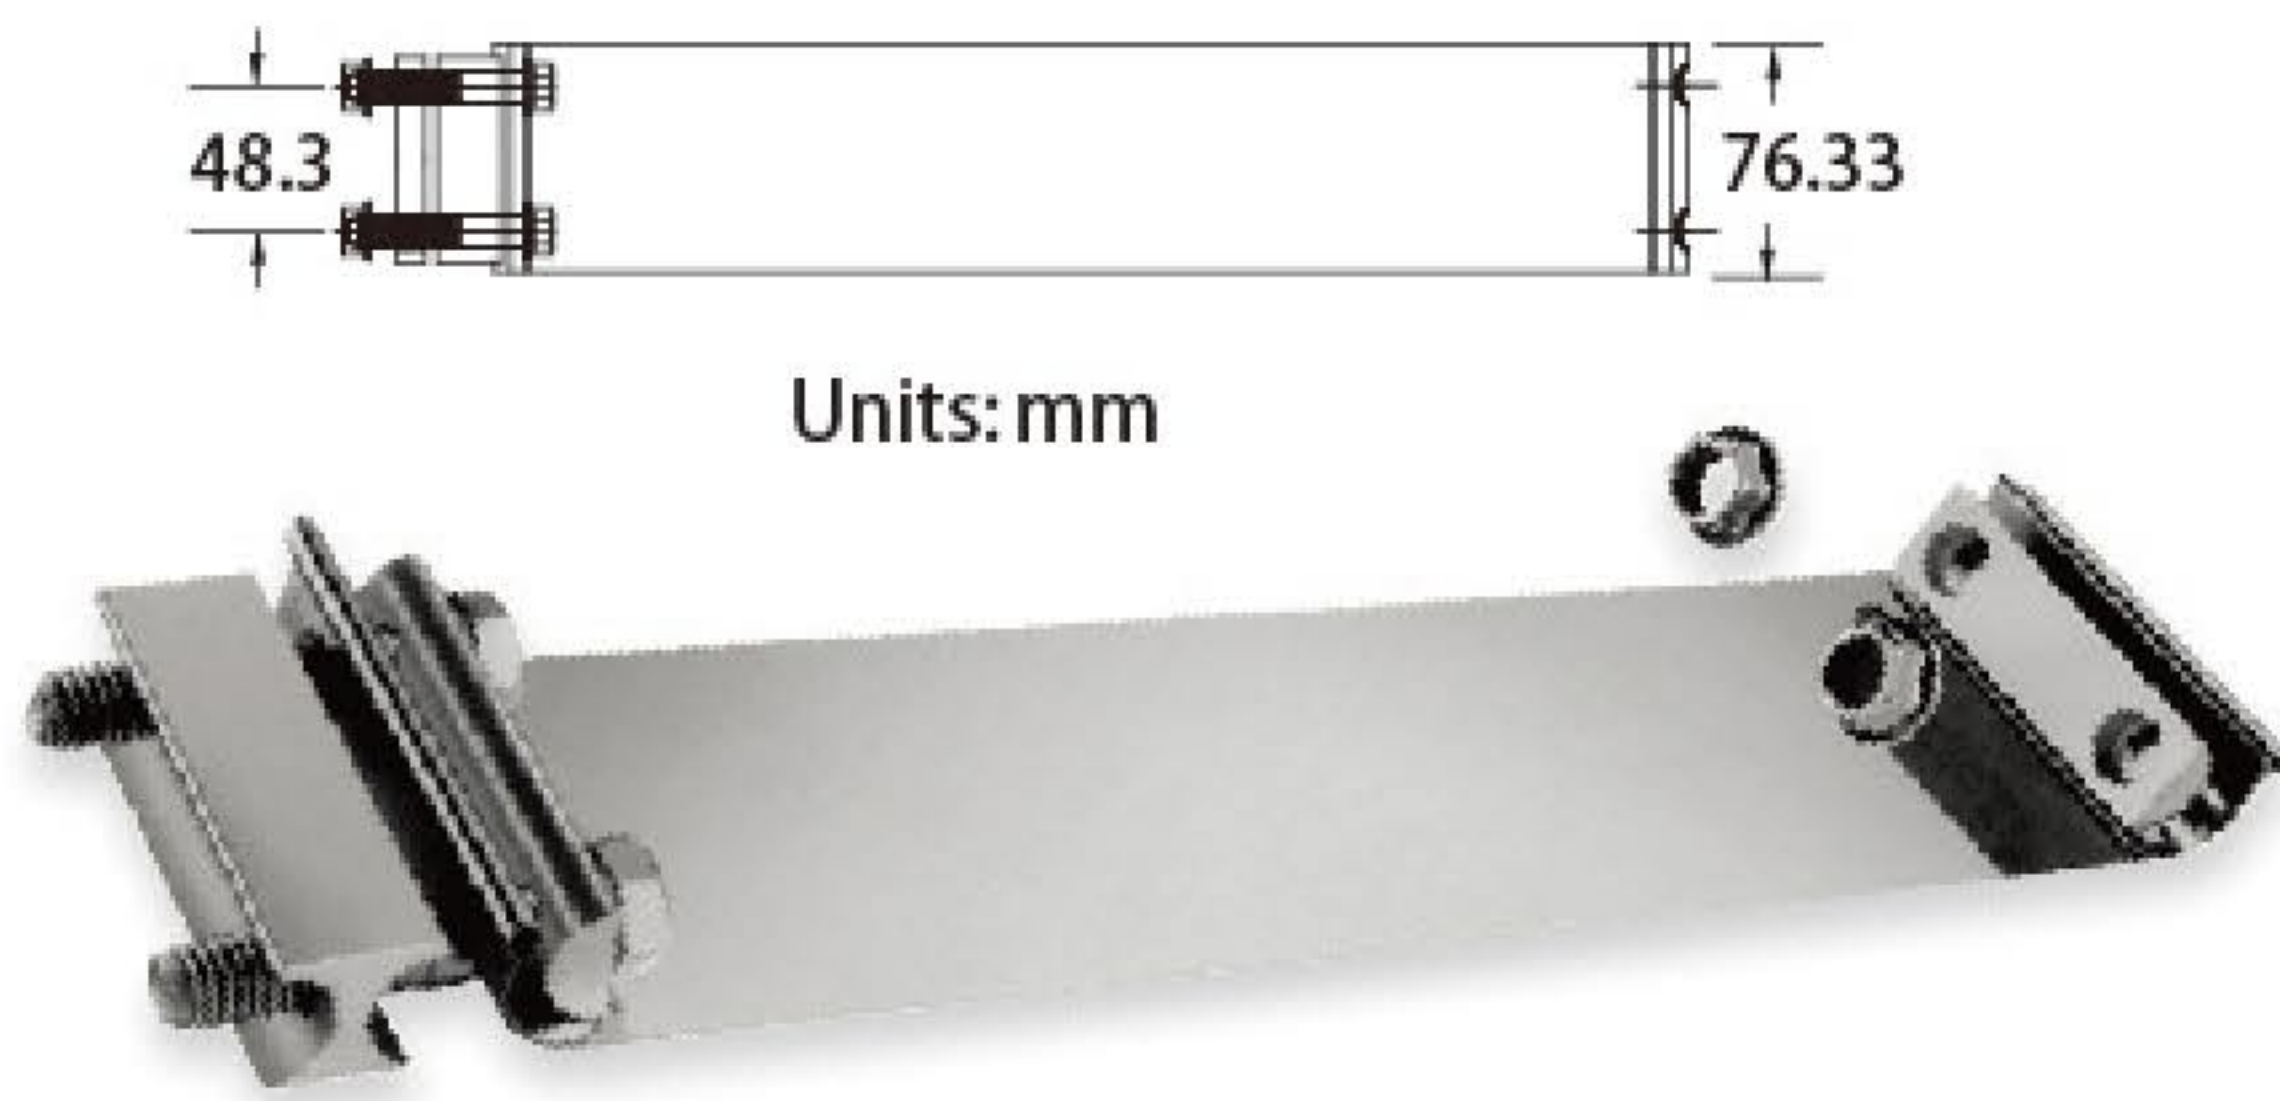


Nominai Joint Diameter	
Inch	mm
2	50.8
2 1/4	57.2
2 1/2	63.5
2 3/4	69.9
3	76.2
3 1/2	88.9
4	101.6
4 1/2	114.3
5	127
6	152.4
7	177.8
8	203.2

- Durable sealing performance for slotted overlap joint automotive exhaust systems. For Slotted Lap Joint Connection Superior Clamp Load Capacity Reaction Block Technology
Diameter Range 1 3/4M –7"

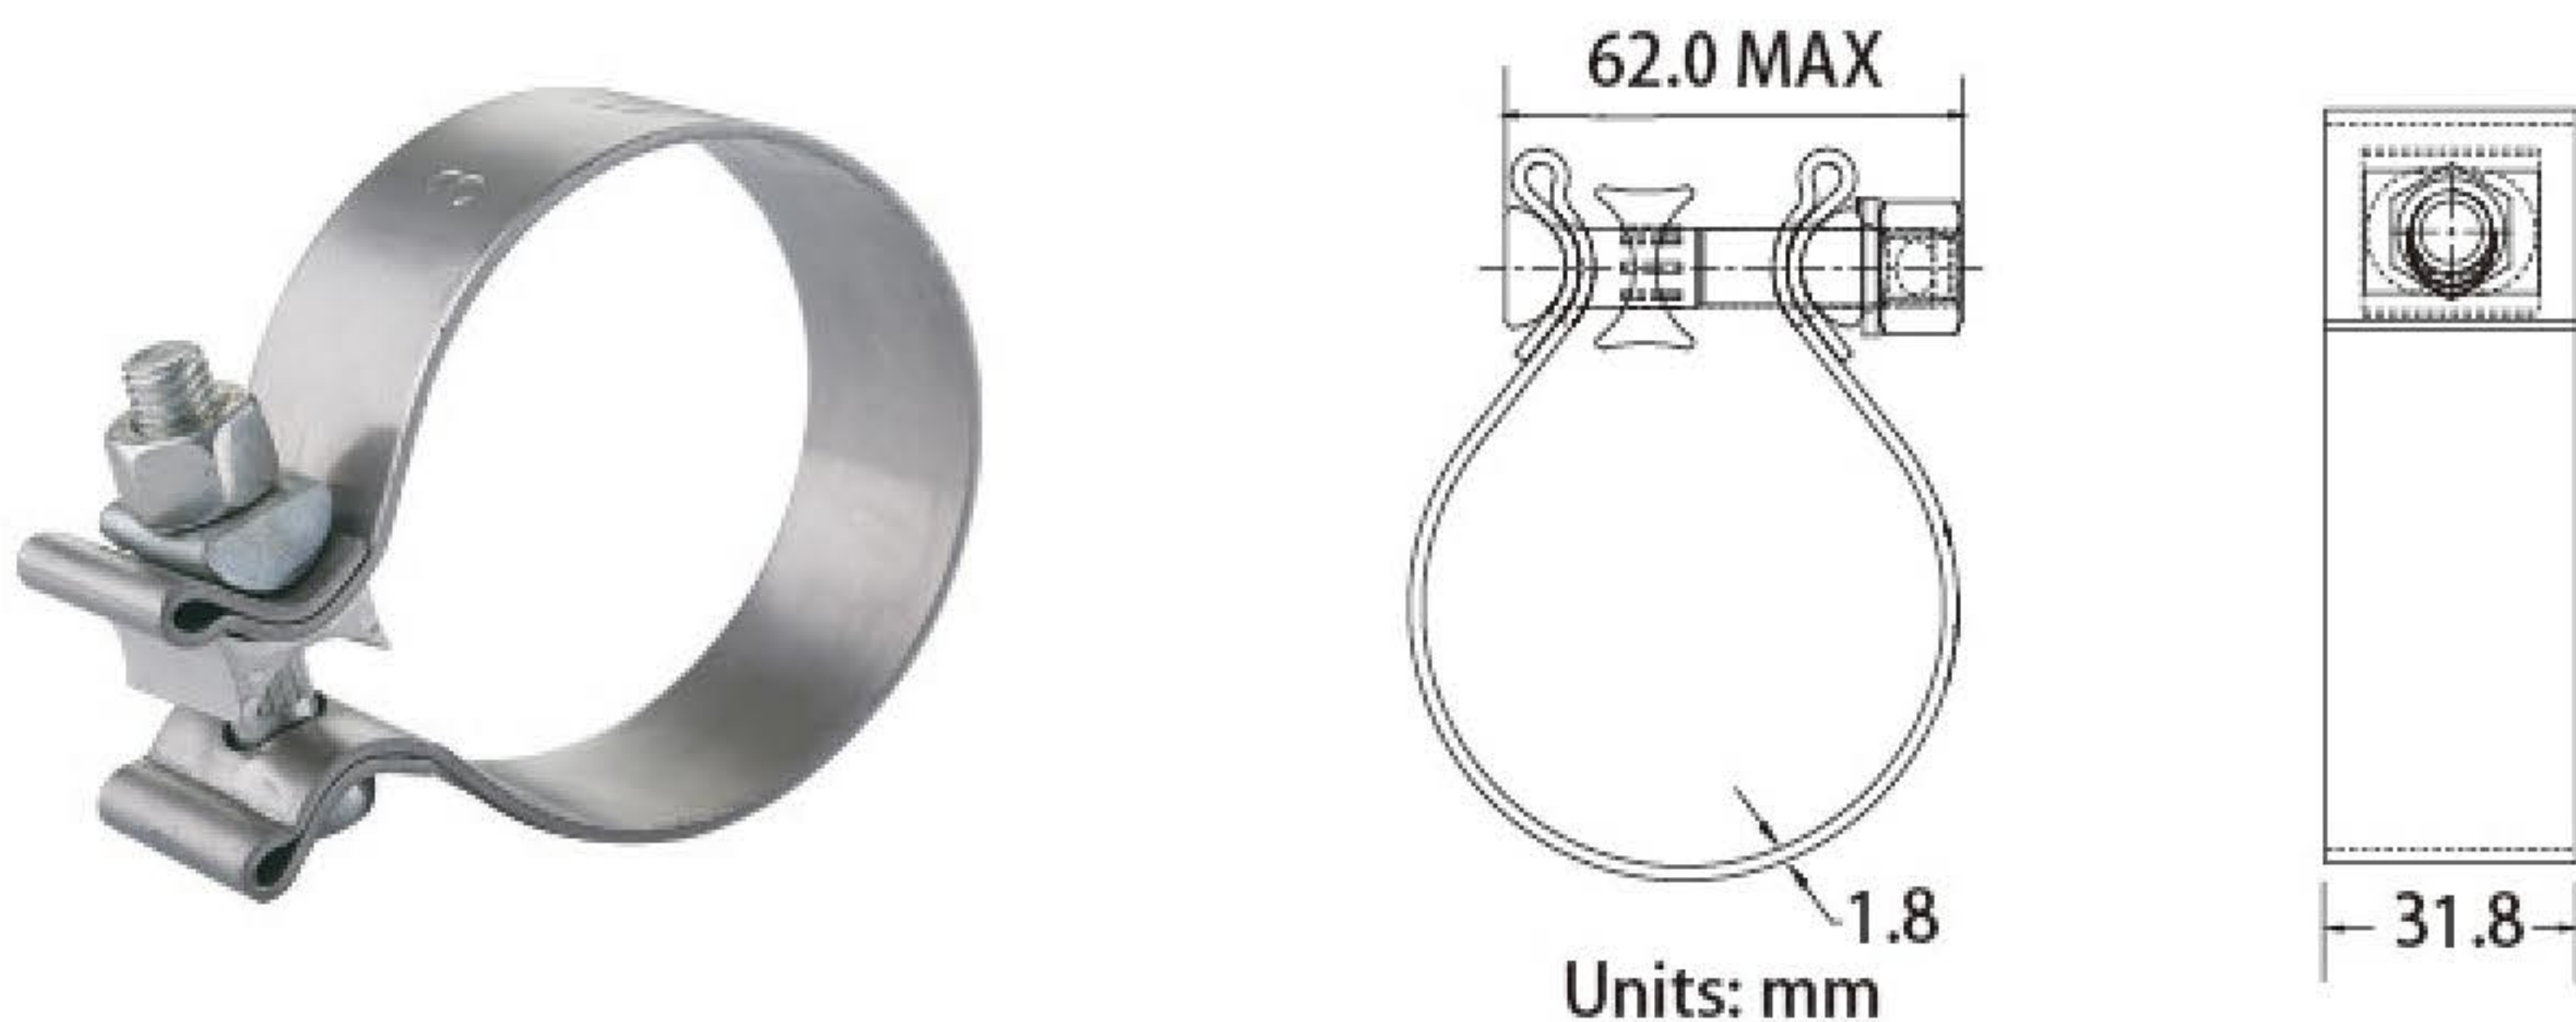

Nominai Joint Diameter	
Inch	mm
1 3/4	44.5
2	50.8
2 1/4	57.2
2 1/2	63.5
2 3/4	69.9
3	76.2
3 1/2	88.9
4	101.6
4 1/2	114.3
5	127
6	152.4
7	177.8

■ Pre-assembled sealing performance and superior clamp load capacity without pipe overlap. For Butt Joint Style Connections 15mmMaxGapAllows33.5–44mm Insertions per Pipe Diameter Range 1 3/4–3 1/2M

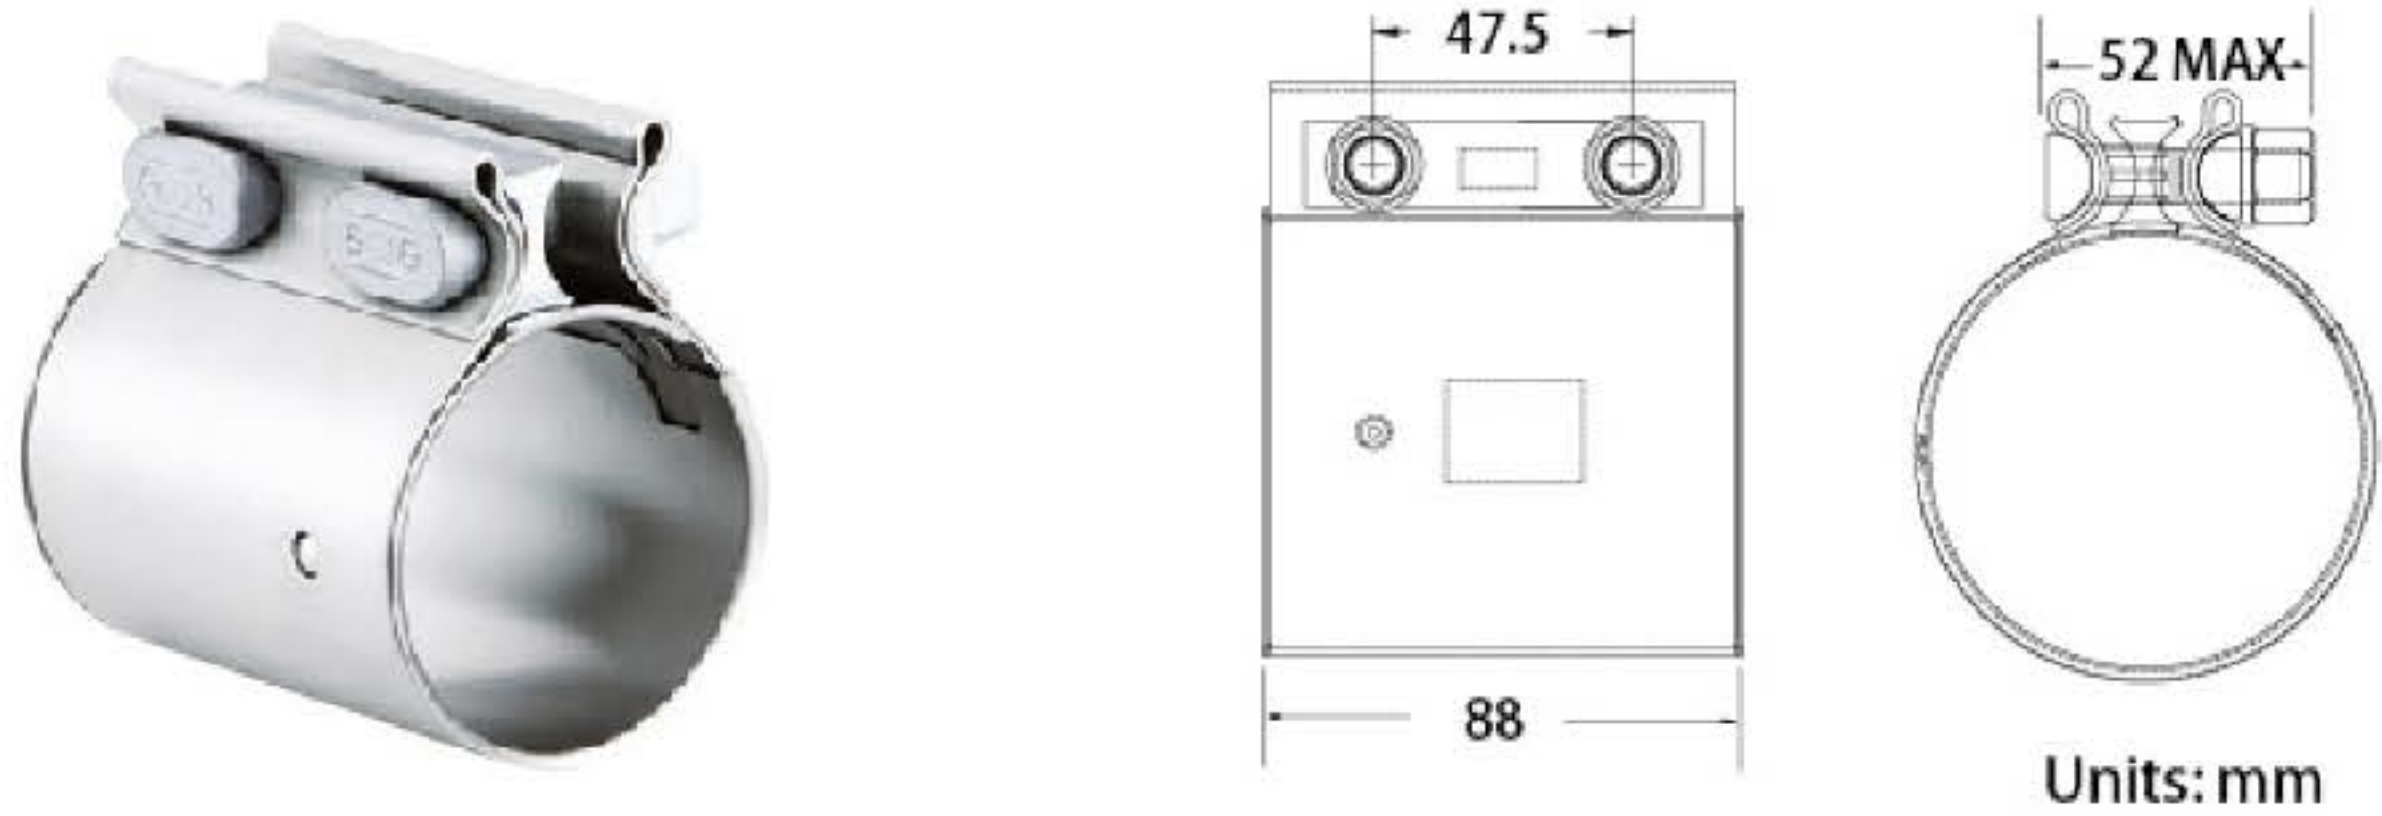

Nominal Joint Diameter (Pipe O.D.)	
Inch	mm
2 1/4	57
2 1/2	63
2 3/4	69
3	76
3 1/2	90

Wide DPF Coupler

■ Large Diameter Diesel Particulate Filter (DPF) clamp creates a reliable joint seal between separate sections of DPF. For Butt Joint Style Connections Tall Hardware for Socket Clearance Low Profile for Tight Packaging Space Diameter Ranges 10 9/16M –13




Nominal Joint Diameter (Pipe O.D.)	
Inch	mm
10 9/16	267.6
11 13/16	300.75
13 9/16	345.2

U-BOLT CLAMP
U型卡箍

I 技术参数-U型卡箍 / TECHNICAL DATA – U-BDT CLAMP

款式 type	规格 / 型号 size	高度 H	宽度 W	螺纹长 L	F	M	K	S	螺母样式 NUT SIZE
A 式	36	63	63	25	28.5	M8	15	2	六角螺母
	38	64	64	25	29				
	42	65	70	25	31				
	45	73	73	30	33				
	48	77	76	30	34				
	50	79	78	30	36				
	54	83	82	30	37				
	58	87	86	30	40				
	63.5	75	92	30	43				
	65	94	93	30	44				
	70	95	100	40	43				
B 式	73	110	102	40	43	M10	17 21	3	六角法兰面螺母
	54	89	87	40	32				
	94	128	128	45	60				
	106	150	138	45	65				

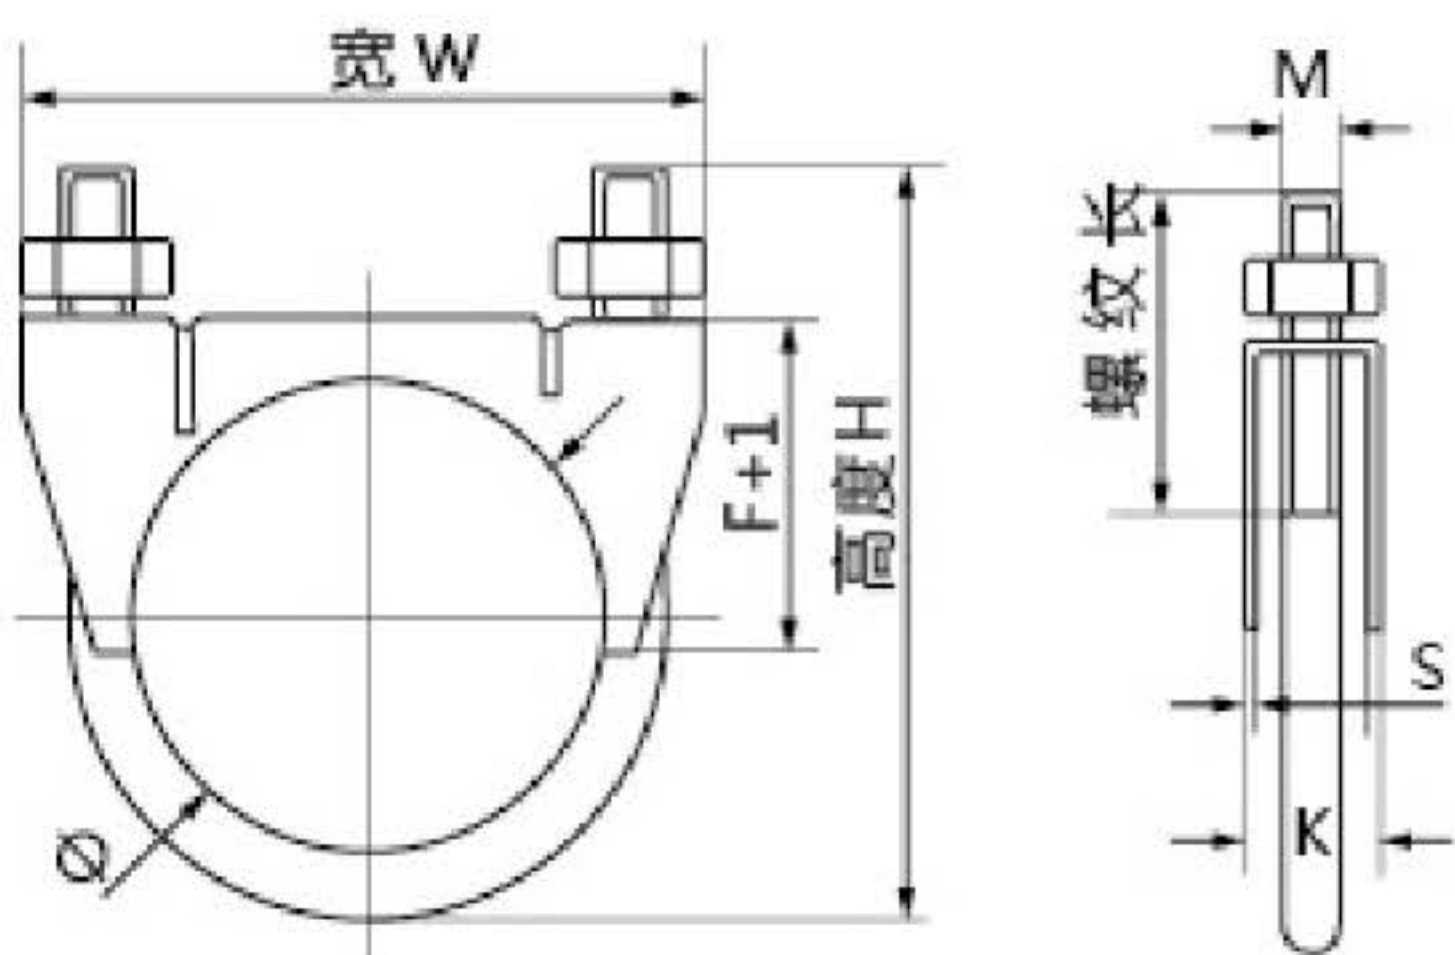

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考
MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.



Product Description

► 产品介绍 / 单耳、双耳、迷你、弹簧、CLIC卡箍

Ear、Low Profile、2-Ear、Mini、Spring、CLIC Clamp



新宇卡箍
LTHOSECLAMP

沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD


EAR CLAMP (SS304)
单耳卡箍



I 技术参数-单耳卡箍 / TECHNICAL DATA-EAR CLAMP (SS304)

Part No.	Dimension (mm)	Part No.	Dimension (mm)	Part No.	Dimension (mm)
6.5-505R	5.5-6.5	22.6-706R	19.4-22.6	66.5-706R	63.3-66.5
7.0-505R	5.8-7.0	23.5-706R	20.3-23.5	68.0-706R	64.8-68.0
8.0-505R	6.8-8.0	24.1-706R	20.9-24.1	69.5-706R	66.3-69.5
8.7-505R	7.0-8.7	25.6-706R	22.4-25.6	71.0-706R	67.8-71.0
9.0-505R	7.3-9.0	27.1-706R	23.9-27.1	72.5-706R	69.3-72.5
9.5-505R	7.8-9.5	28.6-706R	25.4-28.6	74.0-706R	70.8-74.0
10.0-505R	8.3-10.0	30.1-706R	26.9-30.1	75.5-706R	72.3-75.5
10.5-505R	8.8-10.5	30.8-706R	27.6-30.8	77.0-706R	73.8-77.0
10.9-505R	9.2-10.9	31.8-706R	28.4-31.6	78.5-706R	75.3-78.5
11.3-505R	9.6-11.3	33.1-706R	29.9-33.1	80.0-706R	76.8-80.0
11.8-505R	10.1-11.8	34.6-706R	31.4-34.6	81.5-706R	78.3-81.5
11.9-706R	9.4-11.9	36.1-706R	32.9-36.1	83.0-706R	79.8-83.0
12.3-706R	9.8-12.3	37.6-706R	34.4-37.6	84.5-706R	81.3-84.5
12.8-706R	10.3-12.8	38.1-706R	34.9-38.1	86.0-706R	82.8-86.0
13.3-706R	10.8-13.3	39.6-706R	36.4-39.6	87.5-706R	84.3-87.5
13.8-706R	11.3-13.8	41.0-706R	37.8-41.0	89.0-706R	85.8-89.0
14.0-706R	11.5-14.0	42.5-706R	39.3-42.5	90.5-706R	87.3-90.5
14.5-706R	12.0-14.5	44.0-706R	40.8-44.0	92.0-706R	88.8-92.0
14.8-706R	12.3-14.8	45.5-706R	42.3-45.5	93.5-706R	90.3-93.5
15.3-706R	12.8-15.3	47.0-706R	43.8-47.0	95.0-706R	91.8-95.0
15.7-706R	13.2-15.7	48.5-706R	45.3-48.5	96.5-706R	93.3-96.5
16.2-706R	13.7-16.2	50.0-706R	46.8-50.0	98.0-706R	94.8-98.0
16.6-706R	14.1-16.6	51.5-706R	48.3-51.5	99.5-706R	96.3-99.5
16.8-706R	14.3-16.8	53.0-706R	49.8-53.0	101.0-706R	97.8-101.0
17.0-706R	14.5-17.0	54.5-706R	51.3-54.5	102.5-706R	99.3-102.5
17.8-706R	14.6-17.8	56.0-706R	52.8-56.0	104.0-706R	100.8-104.0
18.0-706R	14.8-18.0	57.5-706R	54.3-57.5	105.5-706R	102.3-105.5
18.5-706R	15.3-18.5	59.0-706R	56.8-59.0	108.5-706R	105.3-108.5
19.2-706R	18.0-19.2	60.5-706R	57.3-60.5	110.0-706R	106.8-110.0
19.8-706R	16.5-19.8	62.0-706R	58.8-62.0	111.5-706R	108.3-111.5
21.0-706R	17.5-21.0	63.5-706R	60.3-63.5	113.0-706R	109.8-113.0



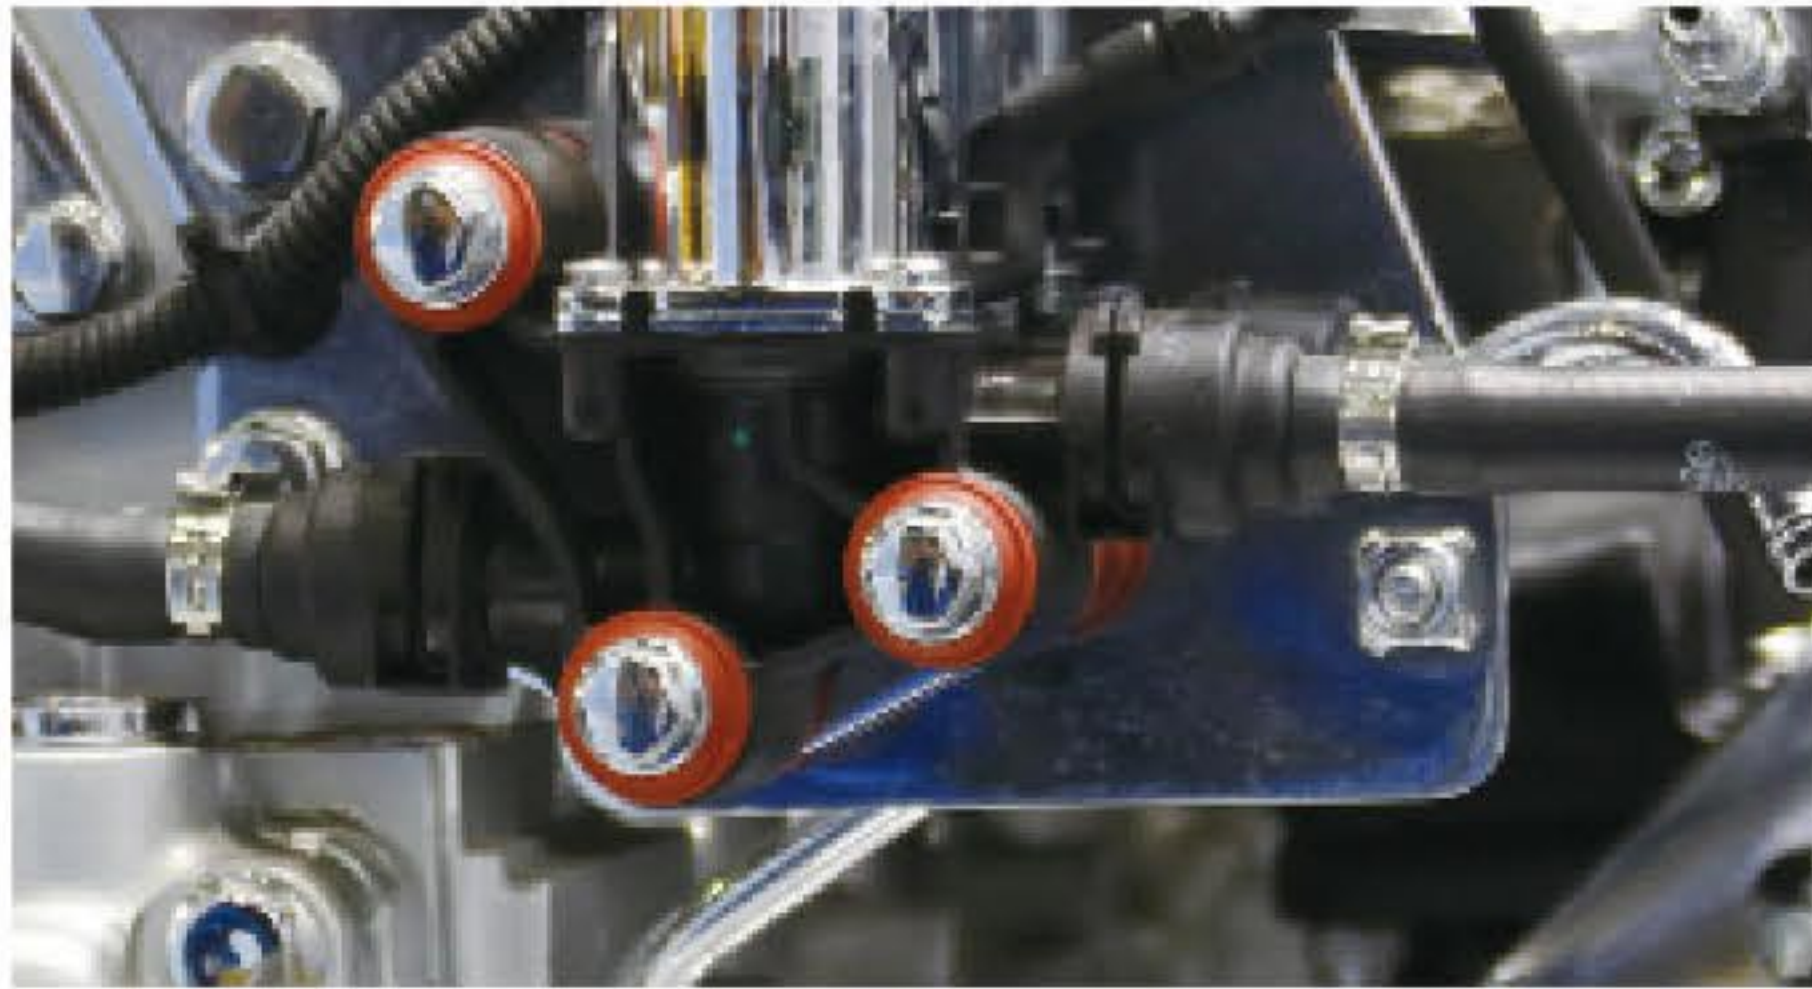

I 技术参数-单耳卡箍 / TECHNICAL DATA-EAR CLAMP (SS304)

Part No.	Dimension (mm)	Part No.	Dimension (mm)	Part No.	Dimension (mm)
29.0-1008R	25.8-29.0	62.0-1010R	58.8-62.0	91.5-1010R	88.3-91.5
29.5-1008R	26.3-29.5	63.5-1010R	60.3-63.5	92.0-1010R	88.2-92.0
30.5-1008R	27.3-30.5	65.0-1010R	61.8-65.0	92.5-1010R	89.3-92.5
31.0-1008R	27.8-31.0	65.5-1010R	62.3-65.5	93.0-1010R	89.8-93.0
31.5-1008R	28.3-31.5	66.5-1010R	63.3-66.5	93.5-1010R	90.3-93.5
32.0-1008R	28.8-32.0	68.0-1010R	64.8-68.0	94.0-1010R	90.8-94.0
32.5-1008R	29.3-32.5	69.0-1010R	65.8-69.0	95.0-1010R	91.8-95.0
33.0-1008R	29.8-33.0	69.5-1010R	66.3-69.5	95.5-1010R	92.3-95.5
33.5-1008R	30.3-33.5	71.0-1010R	67.8-71.0	96.0-1010R	92.8-96.0
34.0-1008R	30.8-34.0	72.5-1010R	69.3-72.5	96.5-1010R	93.3-96.5
34.5-1008R	31.3-34.5	74.0-1010R	70.8-74.0	97.5-1010R	94.3-97.5
35.0-1008R	31.8-35.0	75.5-1010R	72.3-75.5	98.0-1010R	94.8-98.0
36.0-1008R	32.8-36.0	77.0-1010R	73.8-77.0	98.5-1010R	95.3-98.5
36.5-1008R	33.3-36.5	78.5-1010R	75.3-78.5	99.5-1010R	96.3-99.5
37.0-1008R	33.8-37.0	80.0-1010R	76.8-80.0	101.0-1010R	97.8-101.0
38.0-1008R	34.8-38.0	81.5-1010R	78.3-81.5	102.0-1010R	98.8-102.0
39.5-1008R	36.8-39.5	82.0-1010R	78.8-82.0	102.5-1010R	99.3-102.5
40.0-1008R	36.8-40.0	83.0-1010R	79.8-83.0	104.0-1010R	100.8-104.0
41.0-1008R	37.8-41.0	83.5-1010R	80.3-83.5	105.5-1010R	102.3-105.5
42.5-1008R	39.3-42.5	84.0-1010R	80.8-84.0	107.0-1010R	103.8-107.0
43.0-1008R	39.8-43.0	84.5-1010R	81.3-84.5	108.5-1010R	105.5-108.5
44.0-1008R	40.8-44.0	85.0-1010R	81.3-85.0	110.0-1010R	106.8-110.0
45.5-1008R	42.3-45.5	85.5-1010R	82.3-85.5	111.5-1010R	108.3-111.5
47.0-1008R	43.8-47.0	86.0-1010R	82.8-86.0	113.0-1010R	109.8-113.0
48.5-1008R	45.3-48.5	86.5-1010R	83.3-86.5	114.5-1010R	111.3-114.5
50.0-1008R	46.8-50.0	87.5-1010R	84.3-87.5	115.0-1010R	111.8-115.0
51.5-1008R	48.3-51.5	88.0-1010R	84.8-88.0	116.0-1010R	112.8-116.0
53.0-1008R	49.8-53.0	89.0-1010R	85.8-89.0	117.5-1010R	114.3-117.5
54.5-1008R	51.3-54.5	90.0-1010R	86.8-90.0	119.0-1010R	115.8-119.0
56.0-1008R	52.8-56.0	90.5-1010R	87.3-90.5	120.5-1010R	117.3-120.5
57.5-1008R	54.3-57.5	91.0-1010R	87.8-91.0	121.5-1010R	118.3-121.5
59.0-1008R	55.8-59.0				
60.5-1008R	55.3-60.5				




Part No.	Dimension Range	Material	Band Width	Band Thickness
A045	25.0~45.0mm	Stainless Steel AISI304	7mm	0.6mm
A120	60.0~120mm	Stainless Steel AISI 304	7mm	0.6mm



● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考
MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

LOW PROFILE CLAMP
无耳无极卡箍

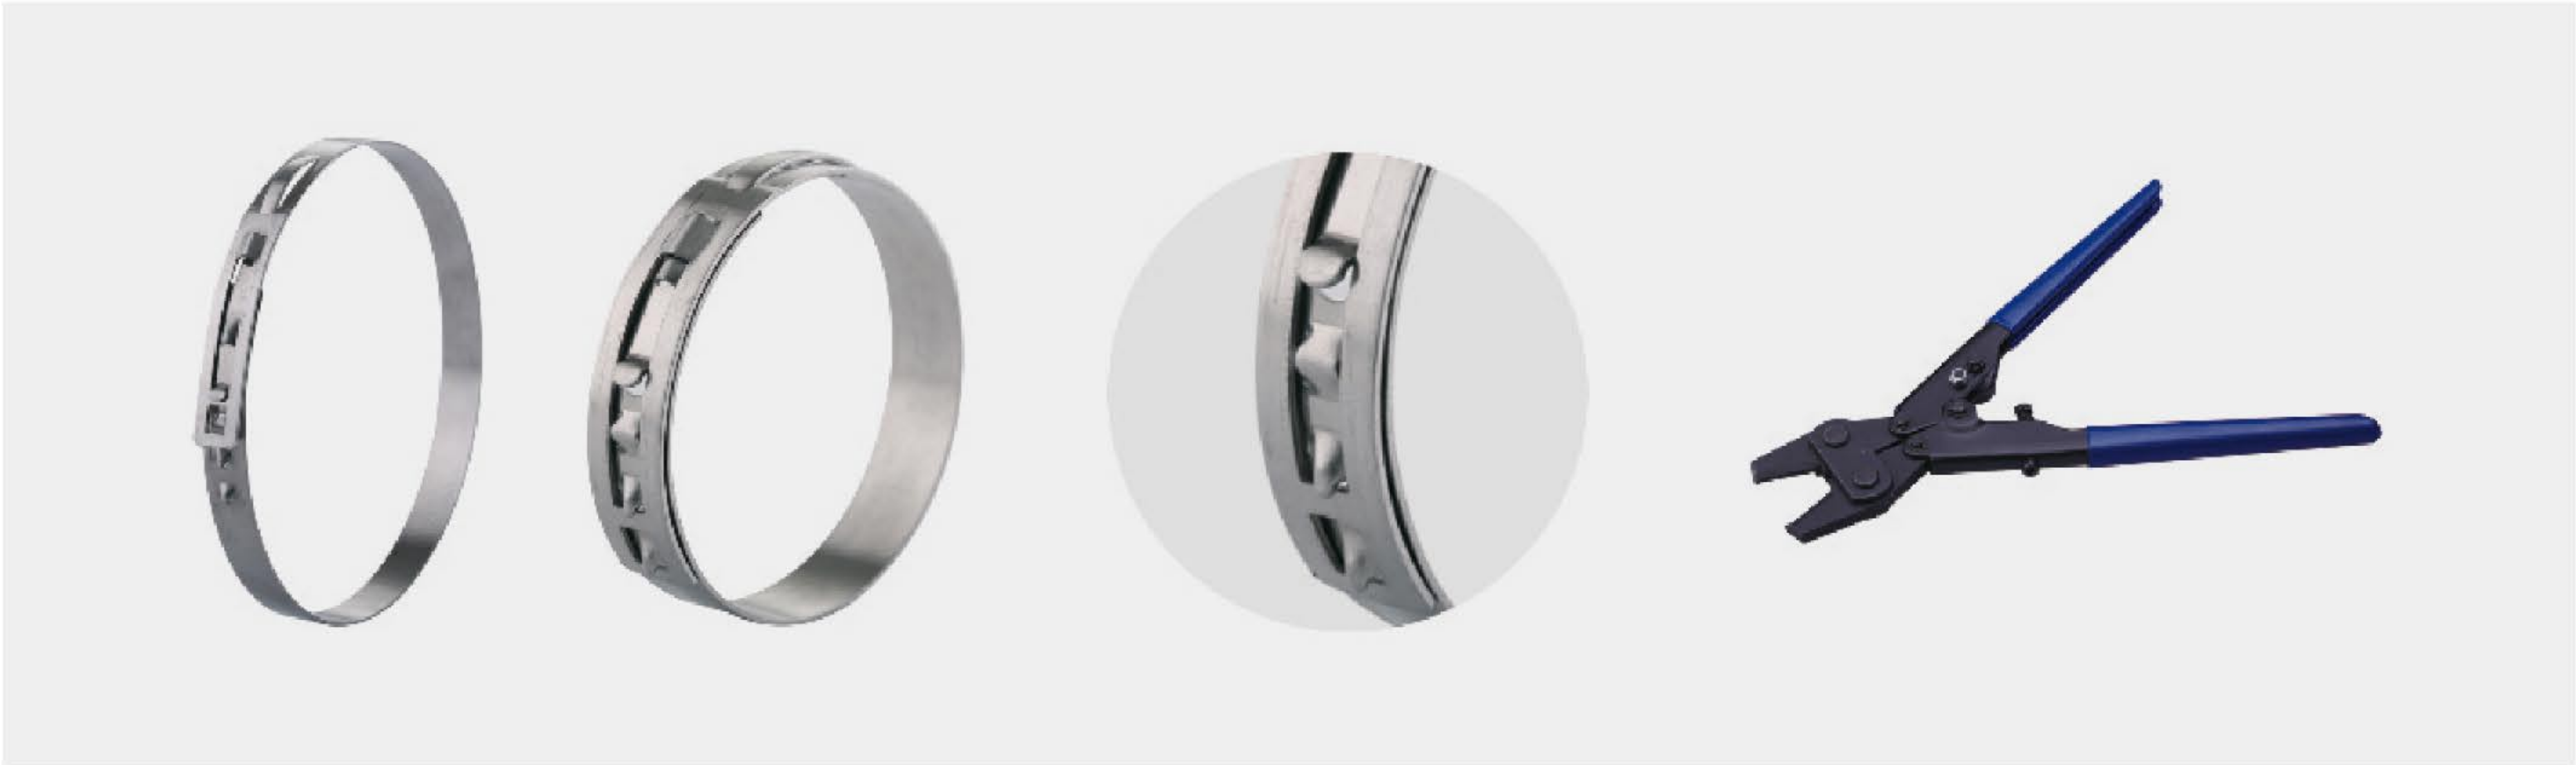

I 技术参数-无耳无极卡箍 / TECHNICAL DATA-LOW PROFILE CLAMP

Part No.	Normal Situation Dimension (mm)	Working Situation Dimension (mm)
64.4-706R	64.4	60
64.9-706R	64.9	60.5
65.4-706R	65.4	61
65.9-706R	65.9	61.5
66.4-706R	66.4	62
... ..		
... ..		
112.4-706R	112.4	108
112.9-706R	112.9	108.5
113.4-706R	113.4	109
113.9-706R	113.9	109.5
114.4-706R	114.4	110

Part No.	Normal Situation Dimension (mm)	Working Situation Dimension (mm)
22.0-906R	22	19.5
22.5-906R	22.5	20
23.0-906R	23	20.5
23.5-906R	23.5	21
24.0-906R	24	21.5
... ..		
... ..		
110.5-906R	110.5	108
111.0-906R	111	108.5
111.5-906R	111.5	109
112.0-906R	112	109.5
112.5-906R	112.5	110

注：带宽7毫米，带厚6毫米(706R)，直径范围66.9毫米至111.9毫米，卡箍每0.5毫米一个规格按要求提供
带宽9毫米，带厚6毫米(906R)，直径范围24.5毫米至110毫米，卡箍每0.5毫米一个规格按要求提供

NOTE: band 7mm, thickness 6mm—706R Demention range from 66.9mm to 111.9mm, clamps can be supplied per 0.5mm.
band 9mm, thickness 6mm— 906R Demention range from 24.5mm to 110mm, clamps can be supplied per 0.5mm.

2-EAR CLAMP

双耳卡箍

I 技术参数-双耳卡箍/ TECHNICAL DATA-2-EAR CLAMP

Part No.	Dimension (mm)	Band Thickness
LTSR07	5-7	6 ±0.2
LTSR09	7-9	7 ±0.2
LTSR11	9-11	7 ±0.2
LTSR13	11-13	7 ±0.2
LTSR15	13-15	7.5 ±0.2
LTSR18	15-18	7.5 ±0.2
LTSR20	17-20	7.5 ±0.2
LTSR23	20-23	9 ±0.2
LTSR25	21-25	9 ±0.2
LTSR27	23-27	9 ±0.2
LTSR28	25-28	9 ±0.2
LTSR31	28-31	9.5 ±0.2
LTSR34	31-34	9.5 ±0.2
LTSR37	34-37	9.5 ±0.2
LTSR40	37-40	10 ±0.2
LTSR43	41-43	10 ±0.2
LTSR46	43-46	10 ±0.2



MINI CLAMP

迷你卡箍



I 技术参数-迷你卡箍/ TECHNICAL DATA-MINI CLAMP


Part No.	Dimension (mm)	Band Thickness (mm)	Part No.	Dimension (mm)	Band Thickness (mm)
LTMN08	6-8	0.6	LTMN22	20-22	0.7
LTMN09	7-9	0.6	LTMN23	21-23	0.7
LTMN10	8-10	0.6	LTMN24	22-24	0.7
LTMN11	9-11	0.6	LTMN25	23-25	0.7
LTMN12	10-12	0.6	LTMN26	24-26	0.7
LTMN13	11-13	0.6	LTMN27	25-27	0.7
LTMN14	12-14	0.6	LTMN28	26-28	0.7
LTMN15	13-15	0.6	LTMN29	27-29	0.7
LTMN16	14-16	0.6	LTMN30	28-30	0.7
LTMN17	15-17	0.6	LTMN31	29-31	0.7
LTMN18	16-18	0.6	LTMN32	30-32	0.7
LTMN19	17-19	0.6	LTMN33	31-33	0.7
LTMN20	18-20	0.6	LTMN34	32-34	0.7
LTMN21	19-21	0.6	LTMN48	46-48	0.7

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

SPRING CLAMP

弹簧卡箍

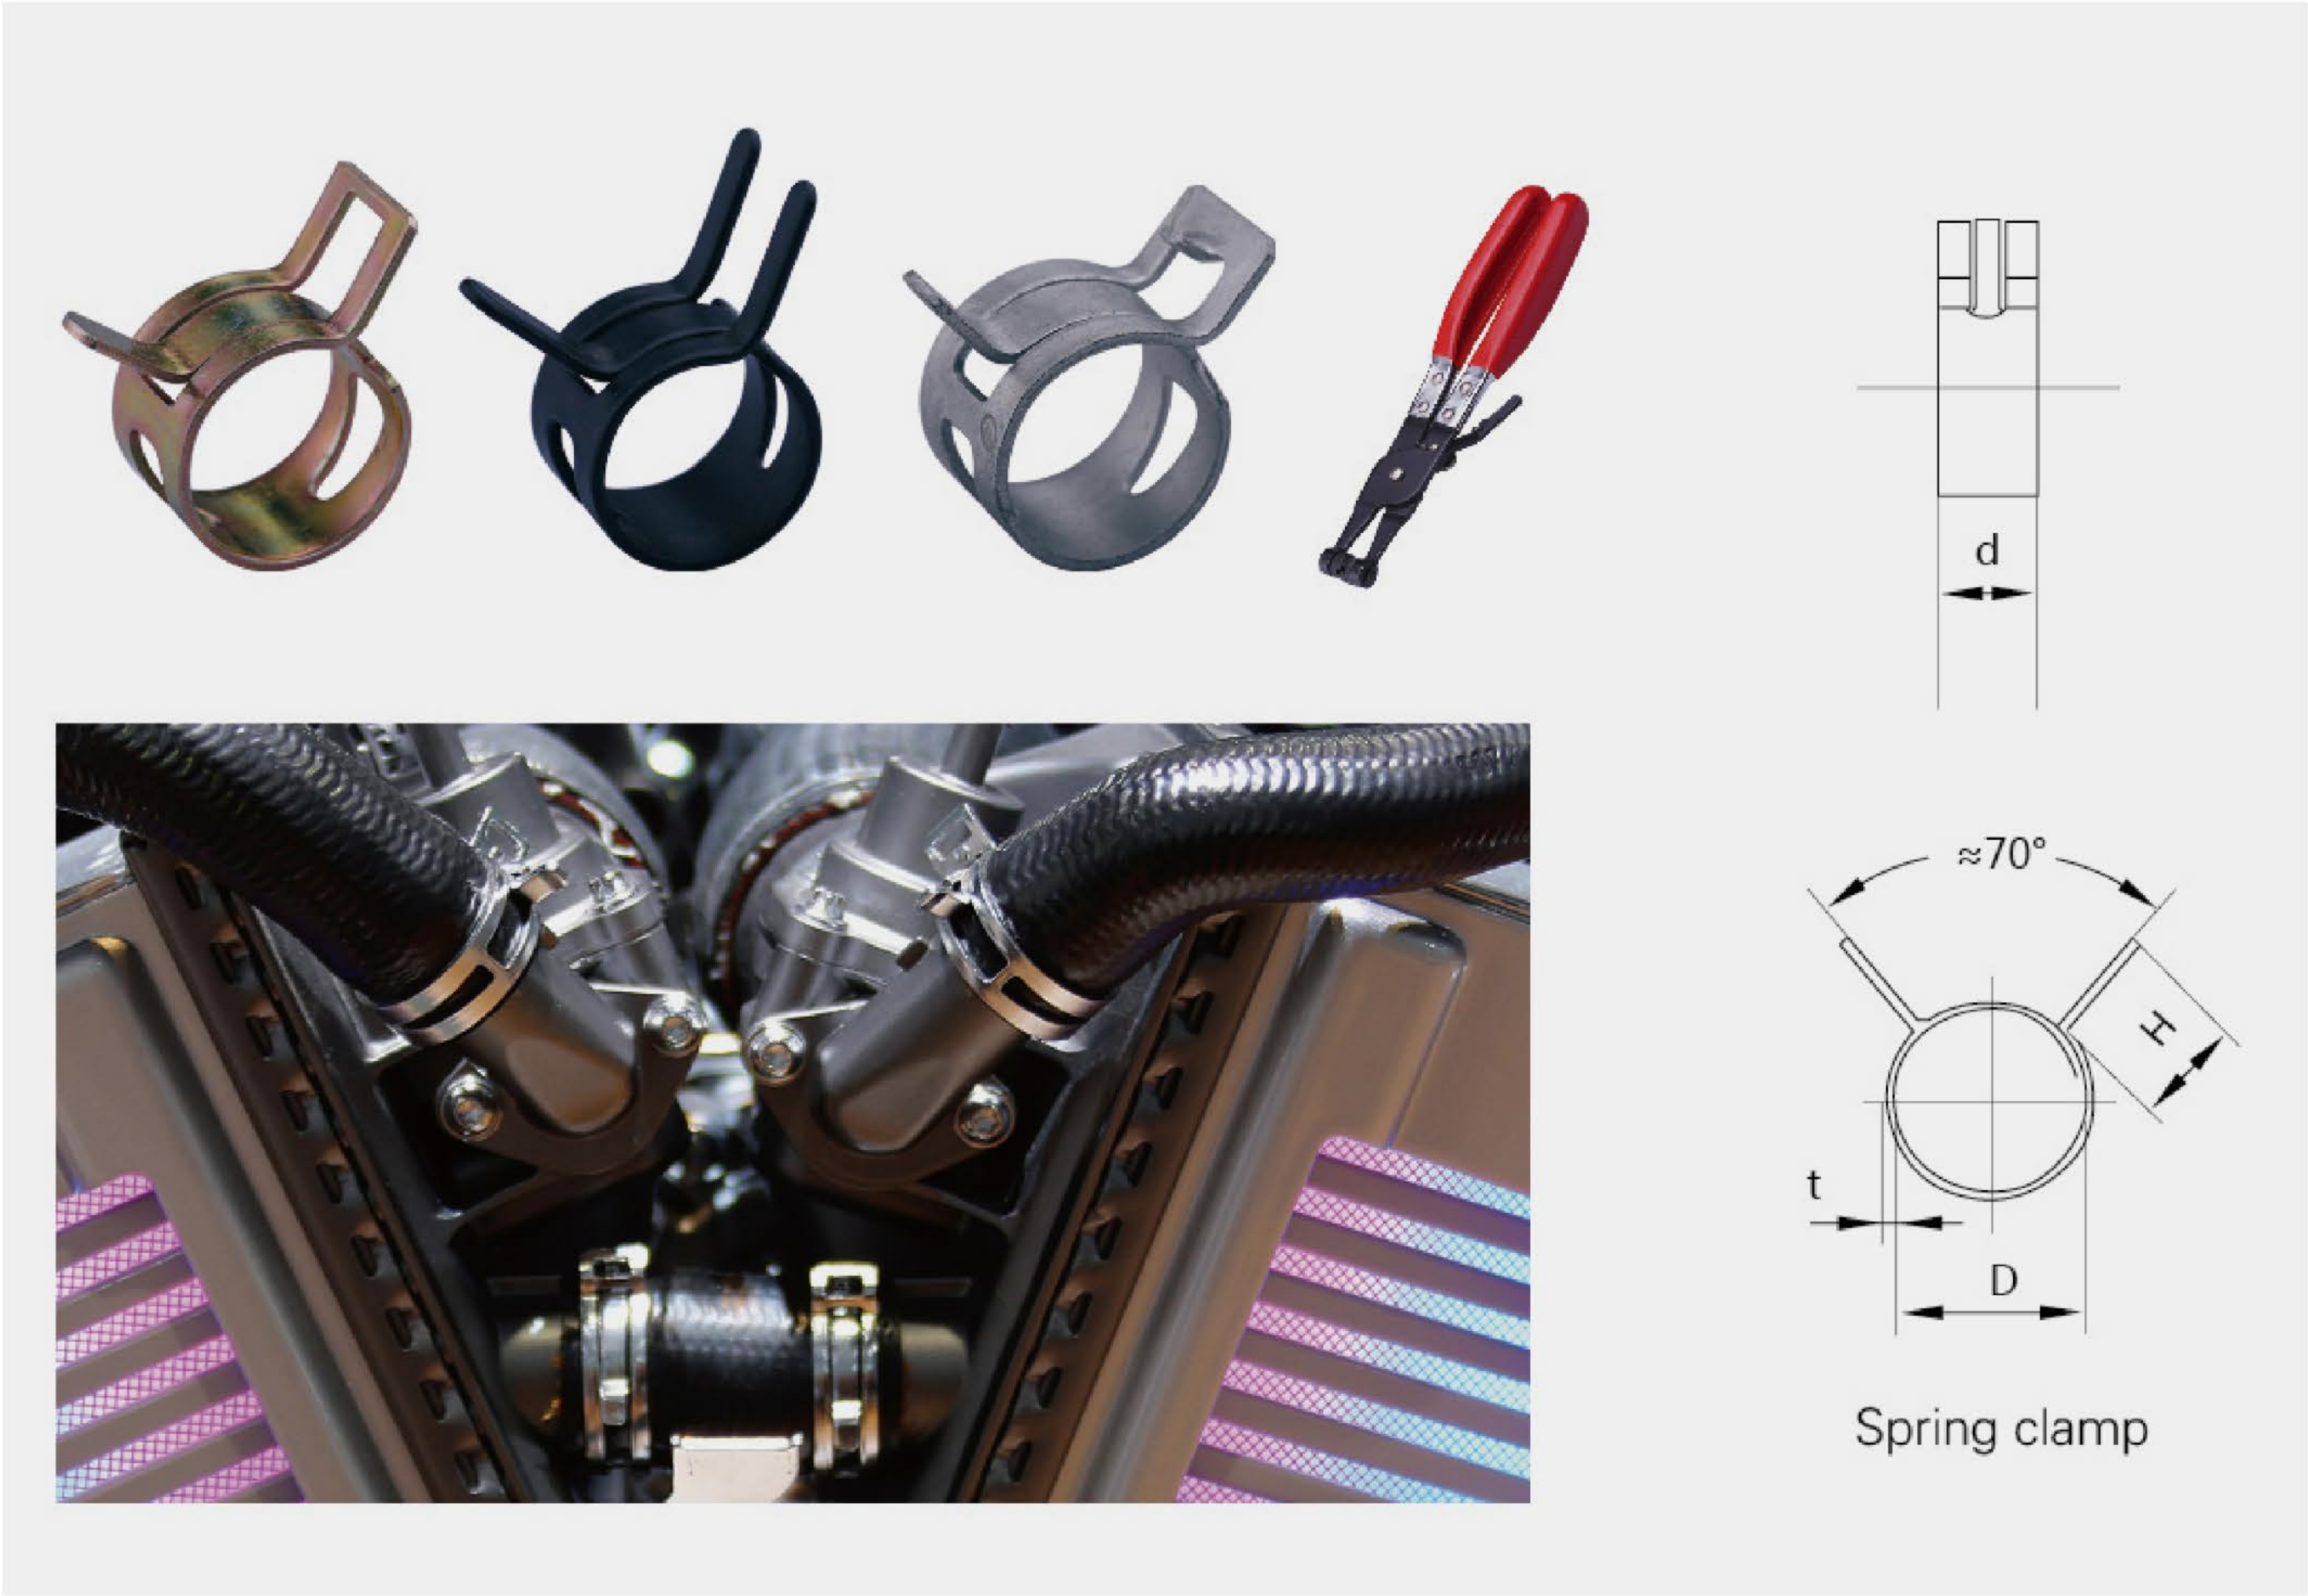

I 技术参数-T弹簧卡箍 / TECHNICAL DATA-SPRING CLAMP

Part No.	D (mm)	S (mm)	B (mm)	D1 (mm)	D2 (mm)	Part No.	D (mm)	S (mm)	B (mm)	D1 (mm)	D2 (mm)
LTTH7.0	7.0	0.6	6.0	7.6	8.3	LTTH15.0	15.0		10.0	16.2	17.0
LTTH8.0	8.0			8.6	9.5	LTTH15.5	15.5			16.7	18.4
LTTH8.5	8.5			9.2	10.2	LTTH16.0	16.0			17.3	19.1
LTTH9.0	9.0			9.7	10.7	LTTH16.5	16.5			17.9	19.7
LTTH9.5	9.5			10.3	11.3	LTTH17.0	17.0			18.4	20.2
LTTH10.0	10.0			10.8	11.9	LTTH17.5	17.5			18.9	20.9
LTTH10.5	10.5		8.0	11.4	12.5	LTTH18.0	18.0	1.0		19.4	21.4
LTTH11.0	11.0			11.9	13.1	LTTH18.5	18.5			20.0	22.1
LTTH11.5	11.5	0.8		12.4	13.7	LTTH19.0	19.0		12.0	20.5	22.6
LTTH12.0	12.0			13.0	14.3	LTTH19.5	19.5			21.1	23.3
LTTH12.5	12.5			13.5	14.9	LTTH20.0	20.0			21.6	23.8
LTTH13.0	13.0			14.0	15.5	LTTH20.5	20.5			22.2	24.4
LTTH13.5	13.5			14.5	16.1	LTTH21.0	21.0			22.7	25.0
LTTH14.0	14.0			15.1	16.7	LTTH23.0	23.0			24.8	27.4
LTTH14.5	14.5		10.0	15.7	17.3	LTTH24.0	24.0	1.2		25.9	28.5
						LTTH25.0	25			27.0	29.8

CLIC



I 技术参数-CLIC/ TECHNICAL DATA-CLIC

Part No.	Diameter (Inch)	Diameter (mm)	Band Width (mm)	Band Thickness (mm)
8	0.33–0.37	8.38–9.40	5.8	0.5
8.5	0.35–0.41	8.89–10.41		
9	0.37–0.43	9.40–10.92		
9.5	0.39–0.45	9.91–11.43		
10	0.41–0.47	10.41–11.94		
10.5	0.43–0.49	10.92–12.45		
11	0.45–0.51	11.43–12.95		
11.5	0.47–0.53	11.94–13.46		
12	0.49–0.55	12.45–13.97		
12.5	0.51–0.55	12.95–13.97		
13	0.53–0.59	13.46–14.99		
13.5	0.55–0.60	13.97–15.24		
14	0.57–0.62	14.48–15.75	7.8	
14.5	0.59–0.64	14.99–16.26		
15	0.60–0.66	15.24–16.76		
15.5	0.62–0.68	15.75–17.27		
16	0.64–0.70	16.26–17.78		
16.5	0.66–0.72	16.76–18.29		
17	0.68–0.74	17.27–18.80		
17.5	0.70–0.76	17.78–19.30		
18	0.72–0.76	18.29–19.30		
18.5	0.74–0.80	18.80–20.32		
19	0.76–0.82	19.30–20.83		
19.5	0.78–0.84	19.81–21.34		
20	0.80–0.86	20.32–21.84		
20.5	0.82–0.90	20.83–22.86		
21	0.84–0.92	21.34–23.37		
21.5	0.86–0.94	21.84–23.88		
22	0.88–0.96	22.35–24.38		
23	0.92–0.99	23.37–25.15		
23.5	0.94–1.01	23.88–25.65		

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考
MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS
REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.



Product Description

► 产品介绍 / 强力及其他

Bolts Power Clamp and Others



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

HEAVY DUTY HOSE CLAMP

实心强力空心强力卡箍



I 技术参数-实心强力空心强力卡箍 / TECHNICAL DATA-HEAVY DUTY HOSE CLAMP WITH ONE BOLT


货号 Item No.							
Heavy Duty Hose Clamp With one Bolt 实心强力卡箍		Heavy Duty Hose Clamp With Hollow Shaft 空心强力卡箍		Band Width (mm)	Screw	Thickness	
Part No.	Size(inm)	Part No.	Size(mm)			W1(mm)	W4(mm)
LTSX19	17-19	LTKX19	17-19	18	M5*40	0.6	0.6
LTSX21	19-21	LTKX21	19-21				
LTSX22	20-22	LTKX22	20-22				
LTSX23	21-23	LTKX23	21-23				
LTSX25	23-25	LTKX25	23-25				
LTSX28	26-28	LTKX28	26-28				
LTSX31	29-31	LTKX31	29-31	20	M6*50	0.8	0.8
LTSX35	32-35	LTKX35	32-35				
LTSX39	36-39	LTKX39	36-39				
LTSX41	38-41	LTKX41	38-41				
LTSX43	40-43	LTKX43	40-43				
LTSX46	43-46	LTKX46	43-46				
LTSX47	44-47	LTKX47	44-47	22	M6*55	1.2	0.8
LTSX51	48-51	LTKX51	48-51				
LTSX55	52-55	LTKX55	52-55				
LTSX59	56-59	LTKX59	56-59				
LTSX63	60-63	LTKX63	60-63				
LTSX67	64-67	LTKX67	64-67				
LTSX73	68-73	LTKX73	68-73	24	M8*70	1.5	0.8
LTSX79	74-79	LTKX79	74-79				
LTSX80	76-80	LTKX80	76-80				
LTSX85	80-85	LTKX85	80-85				
LTSX91	86-91	LTKX91	86-91				
LTSX97	92-97	LTKX97	92-97				
LTSX103	98-103	LTKX103	98-103	26	M8*80	1.7	1
LTSX112	104-112	LTKX112	104-112				
LTSX121	113-121	LTKX121	113-121				
LTSX130	122-130	LTKX130	122-130				
LTSX139	131-139	LTKX139	131-139				
LTSX148	140-148	LTKX148	140-148				
LTSX161	149-161	LTKX161	149-161	26	M10*110	1.7	1
LTSX174	162-174	LTKX174	162-174				
LTSX187	175-187	LTKX187	175-187				
LTSX200	188-200	LTKX200	188-200				
LTSX213	201-213	LTKX213	201-213				
LTSX226	214-226	LTKX226	214-226				
LTSX239	227-239	LTKX239	227-239	26	M10*110	1.7	1
LTSX252	240-252	LTKX252	240-252				

材质 Material	钢带 Band	舌板 Bridge	轴 Trunnion	螺栓 Bolt	建议安装扭力 Suggested Install Torque
W1	zinc plated steel	zinc plated steel	zinc plated sted	zinc plated steel	巾 W28 4.5Nm 巾至 67 9Nm 巾 W130 18Nm 巾至 252 29Nm
W4	AISISS301/ SS304	AISI SS301/ SS304	AISI SS301/ SS304	A2-70	

DOUBLE BOLTS POWER CLAMP
双头强力喉箍

I 技术参数-双头强力喉箍 / TECHNICAL DATA-DOUBLE BOLTS POWER CLAMP

Double Bolts and Double Band Super Clamps 双头强力喉箍				
Part No	Dimension Range (mm)	Bandwidth (mm)	Band Thickness (mm)	Screw
LTST40	30-40	20	1.0	M6*45
LTST45	35-45	20	1.0	M6*45
LTST50	40-50	20	1.0	M6*45
LTST55	45-55	20	1.0	M6*45
LTST60	50-60	20	1.0	M6*45
LTST65	55-65	20	1.0	M6*45
LTST70	60-70	20	1.0	M6*45
LTST75	65-75	20	1.0	M6*45
LTST80	70-80	20	1.0	M6*45
LTST85	75-85	24	1.2	M8*60
LTST90	80-90	24	1.2	M8*60
LTST95	85-95	24	1.2	M8*60
LTST100	90-100	24	1.2	M8*60
LTST105	95-105	24	1.2	M8*60
LTST110	100-110	24	1.2	M8*60
LTST115	105-115	24	1.2	M8*60
LTST120	110-120	24	1.2	M8*60
LTST130	120-130	24	1.2	M8*60
LTST135	125-135	24	1.2	M8*60
LTST140	130-140	24	1.2	M8*60
LTST145	135-145	24	1.2	M8*60
LTST150	140-150	24	1.2	M8*60
LTST155	145-155	24	1.2	M8*60
LTST160	150-160	24	1.2	M8*60
LTST165	155-165	24	1.2	M8*60
LTST170	160-170	24	1.2	M8*60
LTST175	165-175	24	1.2	M8*60
LTST180	170-180	24	1.2	M8*60
LTST190	180-190	24	1.2	M8*60
LTST200	190-200	24	1.2	M8*60
LTST210	200-210	24	1.2	M8*60
LTST220	210-220	24	1.2	M8*60
LTST230	220-230	24	1.2	M8*60
LTST240	230-240	24	1.2	M8*60
LTST250	240-250	24	1.2	M8*60
LTST260	250-260	24	1.2	M8*60
LTST270	260-270	24	1.2	M8*60
LTST280	270-280	24	1.2	M8*60
LTST290	280-290	24	1.2	M8*60
LTST30	290-300	24	1.2	M8*60

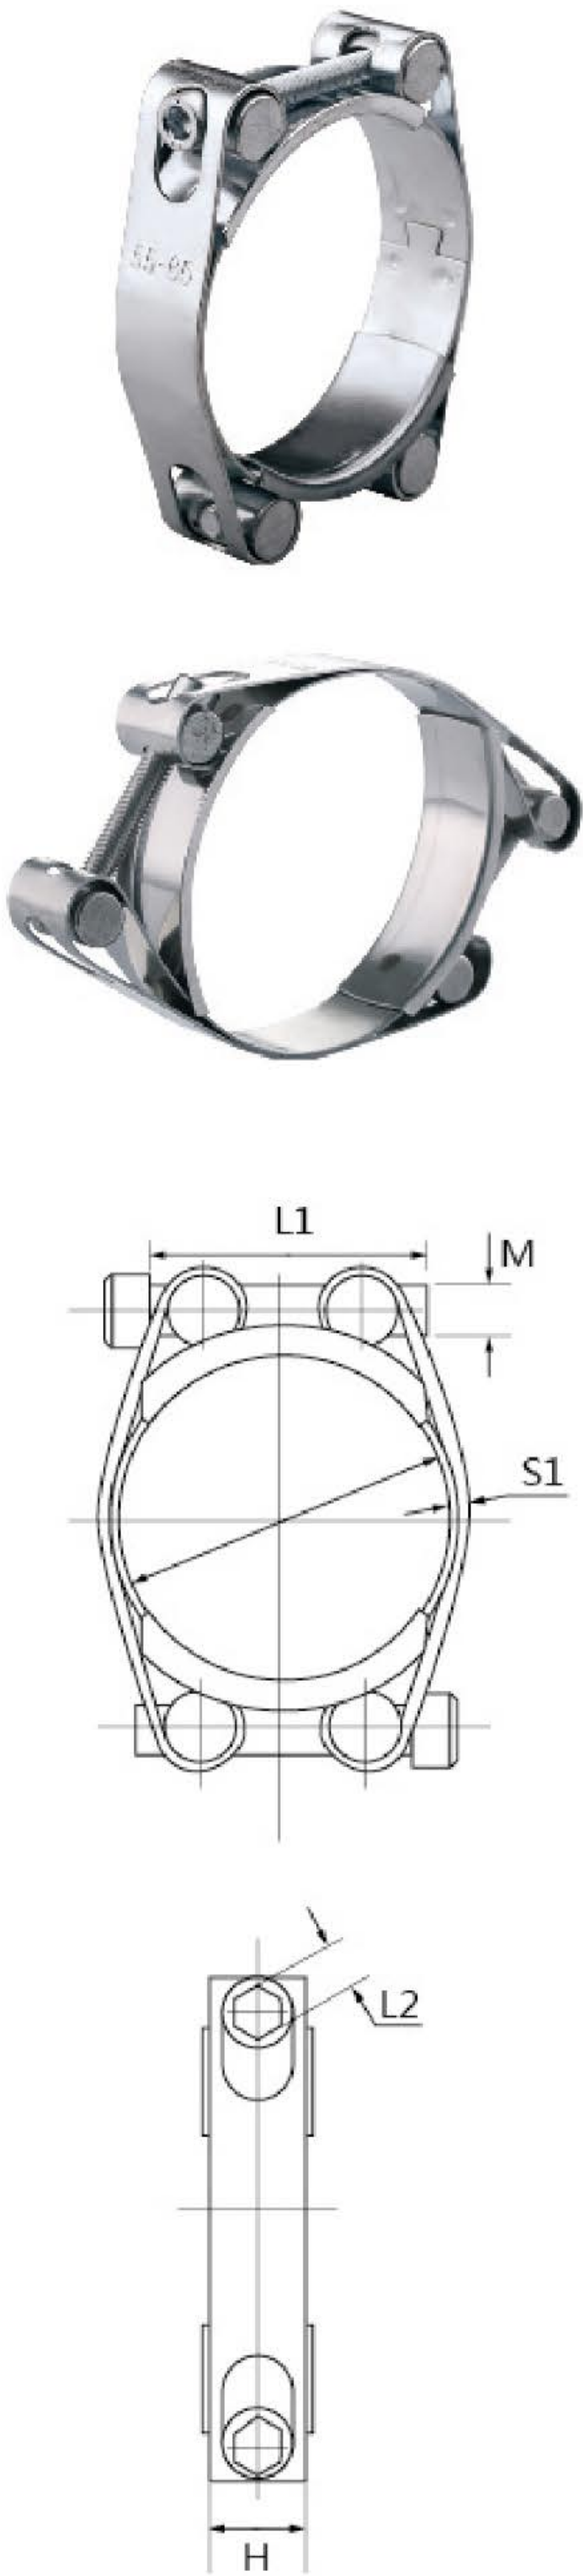

材质 Material	钢带 Band	舌板 Bridge	轴 Trunnion	螺栓 Bolt	建议安装扭力 Suggested Install Torque
W1	zinc plated steel	zinc plated steel	zinc plated sted	zinc plated steel	巾 W28 4.5Nm 巾至 67 9Nm 巾 W130 18Nm 巾至 252 29Nm
W4	AISISS301/SS304	AISI SS301/SS304	AISI SS301/SS304	A2-70	
W5	AIS ISS316	AISI SS316	AISI SS316	A2-70	


● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考
MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

DOUBLE WIRE HOSE CLAMP

双钢丝卡箍

I 技术参数-双钢丝卡箍 / TECHNICAL DATA-DOUBLE WIRE HOSE CLAMP

Wire Hose Clamp 双钢丝卡箍				
Q672 Size No.	规格 Size		丝径 (mm) Wire Diameter	螺钉尺寸 Screw
	Inch	mm		
14	7/16-9/16	11-14	1.2	M5*35
16	1/2-5/8	13-16		
18	9/16-11/16	15-18		
20	11/16-13/16	17-20	1.8	
22	6/8-7/8	19-22		
24	13/16-15/16	20-24		
26	7/8-1	22-26		
28	15/16-1 1/8	24-28		
30	1-1 3/16	26-30	2.2	M6*50
32	1 1/8-1 1/4	28-32		
35	1 1/4-1 3/8	31-35		
38	1 5/16-1 1/2	34-38		
40	13/8-19/16	35-40		
42	1 7/16-1 5/8	37-42		
45	1 9/16-1 3/4	40-45		
48	1 11/16-17/8	43-48		
50	1 3/4-2	45-50		
52	1 7/8-2 1/16	47-52		
55	2-2 3/16	50-55		
58	2 1/16-2 1/4	53-58		
60	2 3/16-2 3/8	55-60		
62	2 1/8-2 7/16	54-62		
65	2 3/8-2 9/16	60-65	2.5	M8*70
68	2 1/2-2 11/16	63-68		
70	2 9/16-2 3/4	65-70		
75	2 3/4-215/16	70-75		
80	2 15/16-3 1/8	75-80		
85	3 1/8-3 3/8	80-85		
90	3 5/16-3 9/16	84-90		
95	3 1/2-3 3/4	89-95		
100	3 11/16-3 15/16	94-100		
105	3 7/8-4 1/8	98-105		
110	4 1/16-4 5/16	103-110		
115	4 1/4-4 1/2	108-115		
120	4 7/16-4 3/4	113-120		

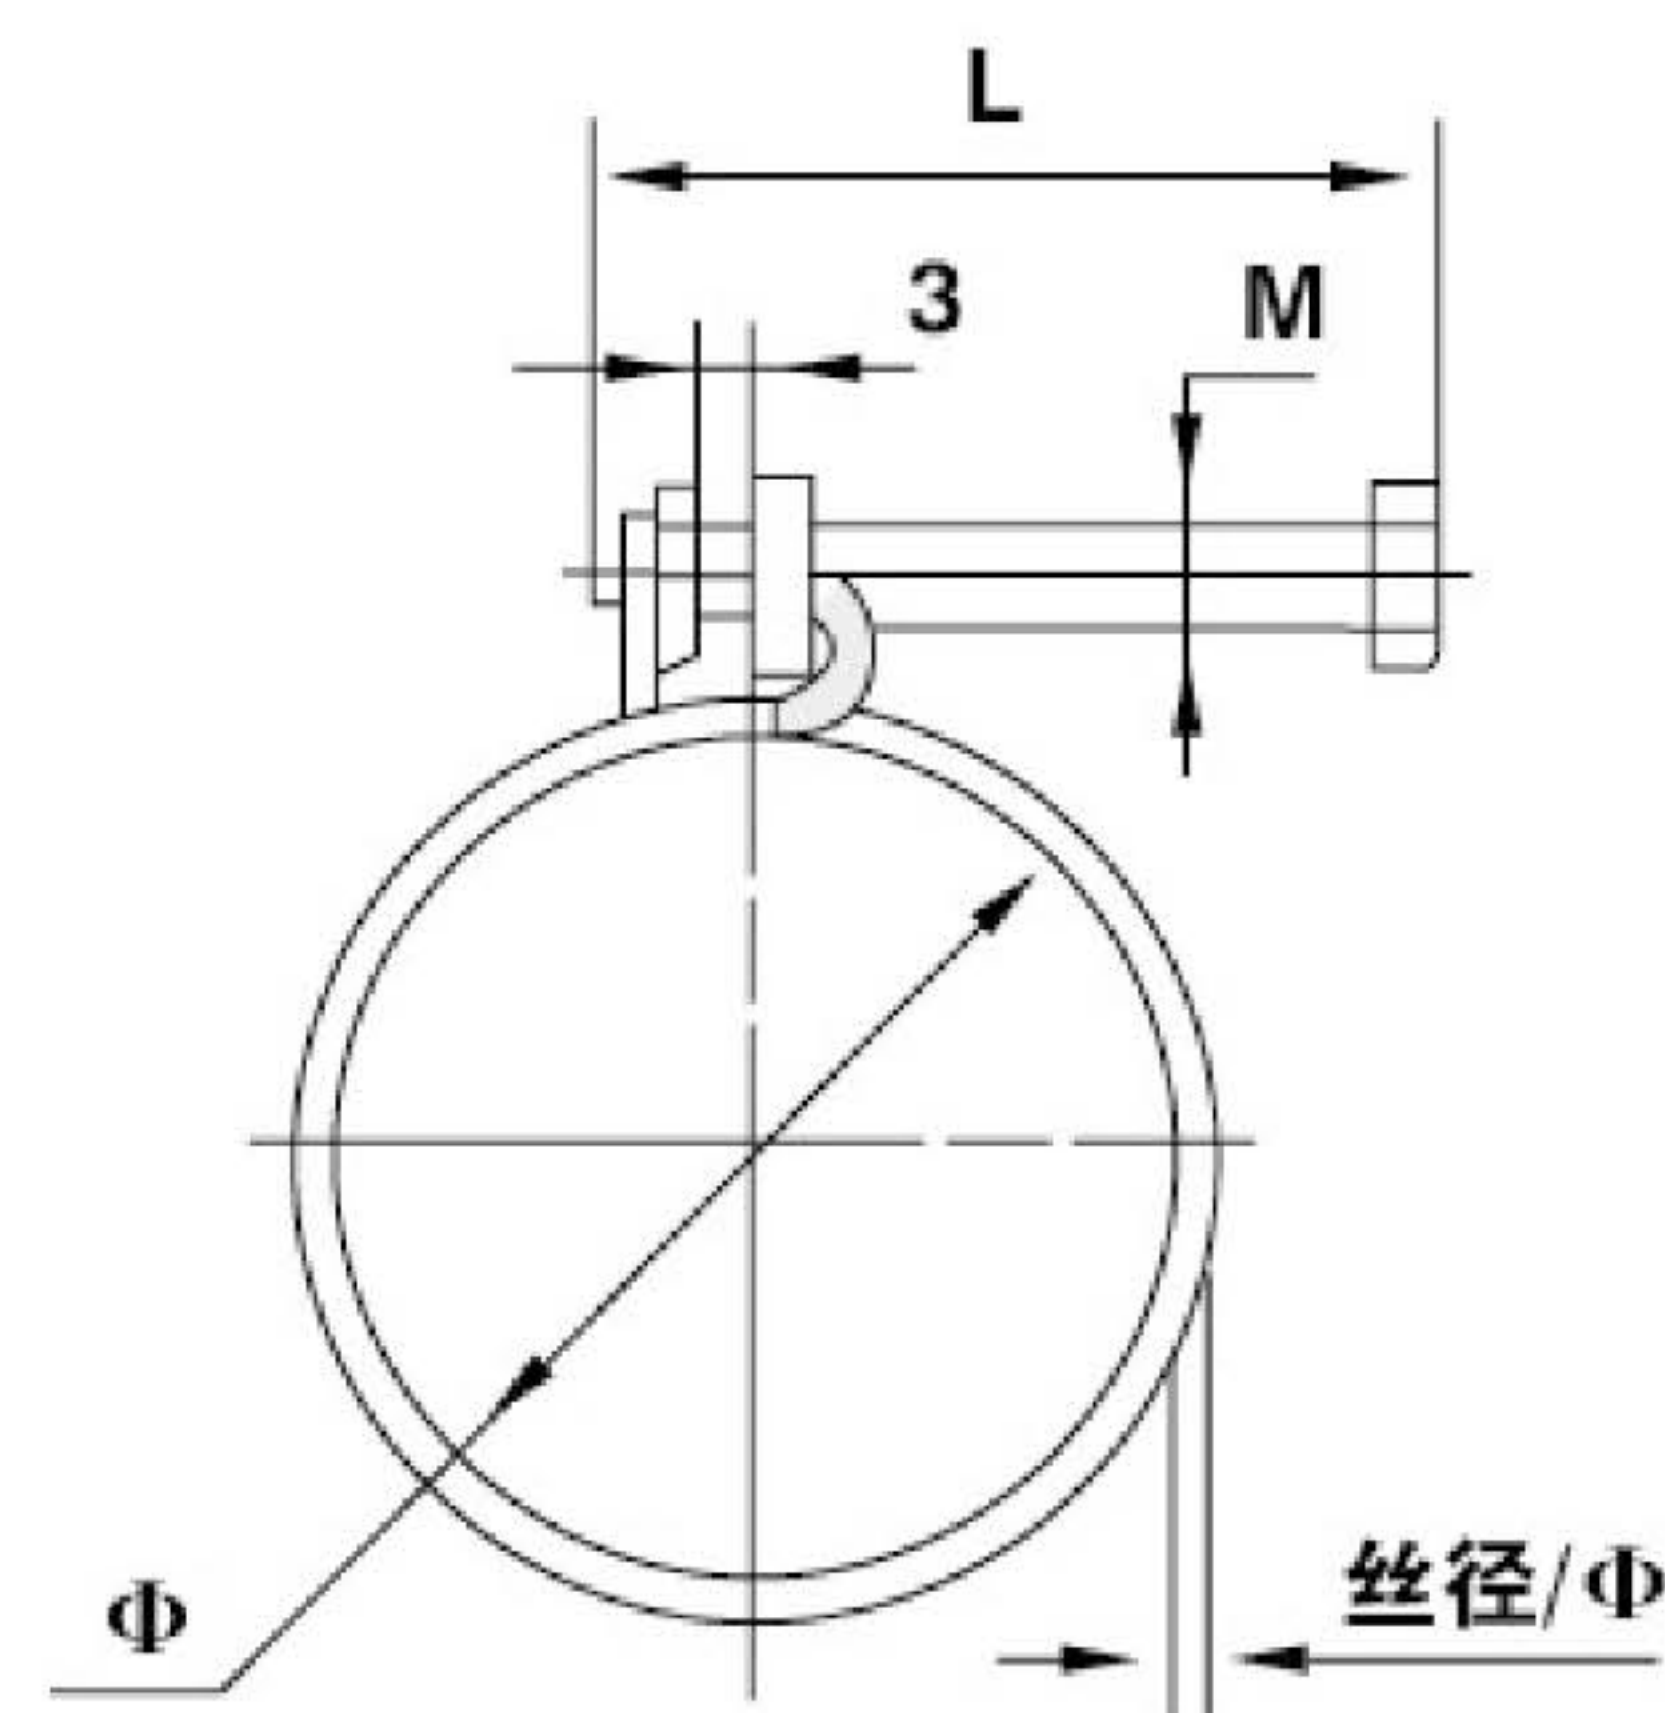

DOUBLE BOLTS POWER CLAMP

双头强力喉箍



I 技术参数-双头强力喉箍 / TECHNICAL DATA-DOUBLE BOLTS POWER CLAMP

Throbbing Clamps 不锈钢扎带					
Part No.	Dimension (mm)	Dimension (inch)	Band Width	Band Width	Band Width
THC32	32	1 1/4"	6.3	15	/
THC35	35	1 3/8"	6.3	15	/
THC38	38	1 1/2"	6.3	15	/
THC44	44	1 3/4"	6.3	15	/
THC51	51	2"	6.3	15	19
THC57	57	2 1/4"	6.3	15	19
THC64	64	2 1/2"	/	15	19
THC70	70	2 3/4"	/	15	19
THC76	76	3"	/	15	19
THC89	89	3 1/2"	/	15	19
THC102	102	4"	/	15	19
THC114	114	4 1/2"	/	15	19
THC127	127	5"	/	15	19
THC152	152	6 "	/	15	19
THC178	178	7"	/	15	19
THC203	203	8"	/	15	19

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

SPIRAL BOLT HOSE CLAMP

老虎夹



I 技术参数-老虎夹 / TECHNICAL DATA-SPIRAL BOLT HOSE CLAMP


Size		Band Thickness (mm)	Bolt Diameter (mm)
Inch	mm		
1	33	1	6
1.2	40	1	6
1.5	48	1	6
2	62	1	6
2.2	70	1	6
2.5	78	1.2	8
3	93	1.2	8
3.5	105	1.2	8
4	116	1.2	8
4.5	130	1.2	8
5	143	1.2	8
5.5	155	1.2	8
6	167	1.5	10
6.5	187	1.5	10
8	220	1.5	10
8.5	245	1.5	10
10	280	1.5	10
10.5	300	1.5	10
12	330	1.5	10

FIXING CLAMP

连胶条

I 技术参数-连胶条 / TECHNICAL DATA-FIXING CLAMP

Size(d1)	Band Width(b1)				
mm	9mm	12mm	15mm	20mm	25mm
4	R0904	R1204	/	/	/
6	R0906	R1206	R1506	/	/
8	R0908	R1208	R1508	/	/
10	R0910	R1210	R1510	/	/
12	R0912	R1212	R1512	/	/
14	R0914	R1214	R1514	R2014	R2514
16	R0916	R1216	R1516	R2016	R2516
18	R0918	R1218	R1518	R2018	R2518
20	R0920	R1220	R1520	R2020	R2520
22	R0922	R1222	R1522	R2022	R2522
24	R0924	R1224	R1524	R2024	R2524
26	R0926	R1226	R1526	R2026	R2526
28	R0928	R1228	R1528	R2028	R2528
30	R0930	R1230	R1530	R2030	R2530
32	/	/	R1532	R2032	R2532
34	/	/	R1534	R2034	R2534
36	/	/	R1536	R2036	R2536
38	/	/	R1538	R2038	R2538
40	/	/	R1540	R2040	R2540
42	/	/	R1542	R2042	R2542
44	/	/	R1544	R2044	R2544
46	/	/	R1546	R2046	R2546
48	/	/	/	R2048	R2548
50	/	/	/	R2050	R2550
54	/	/	/	R2054	R2554
56	/	/	/	R2056	R2556

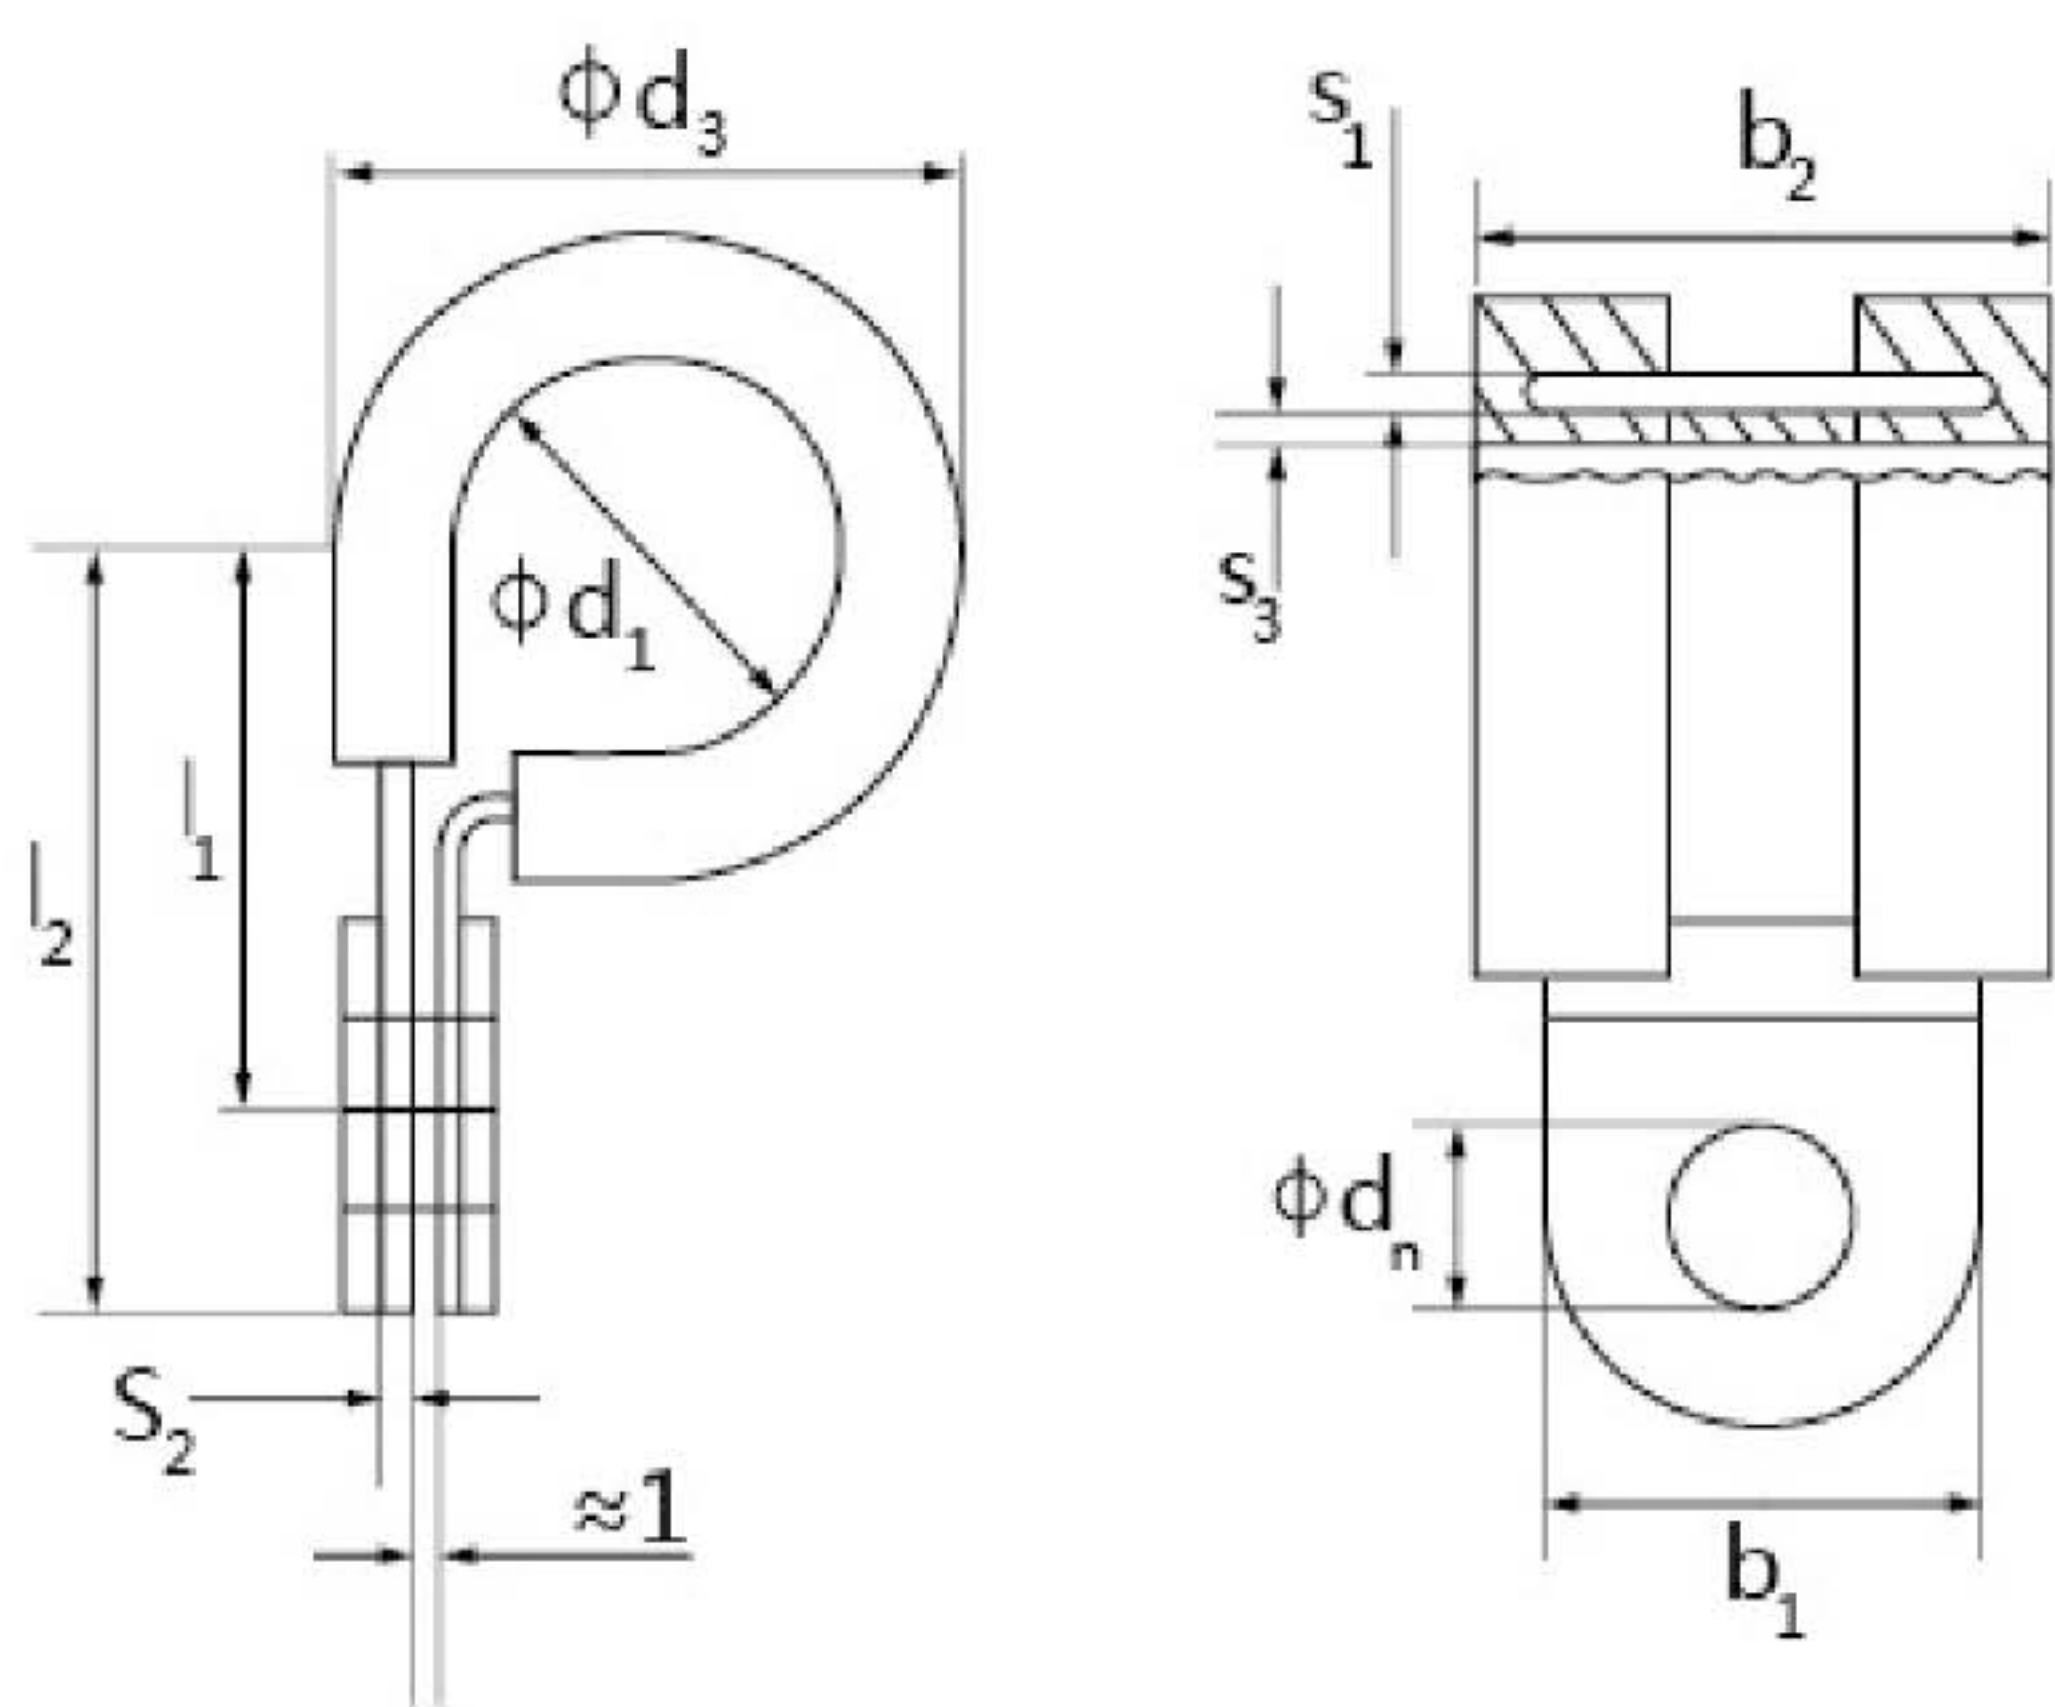

Od1	b1 ± 0.3	b2	dn	d3		11+1-0.2		12 max		S1 W1 w4w5		S2 W1 w4w5		S3 ± 0.3
4 to 30	9	13 ± 0.8	4.3	d1 ±	5.2	d1 ±	4.7	d1/2+	9.2	0.4		1.4		1
4 to 30	12	15 ± 0.8	5.3		5.8		6.8		13	0.5		1.5		1.2
6 to 14	15	19 ± 1.0	6.4		7.4		9.7		17.2	0.6		1.6		1.5
16 to 46										0.8	0.6	1.8	1.6	
14 to 24	20	26 ± 1.0	6.4		9		12.5		22.5	0.8		2.3		2
14 to 54										1	0.8	2.5	2.3	
14 to 48	25	31 ± 1.0	10.5		13		14.5		27	1		2.5		3
50 to 150										1.2	1	2.7	2.5	

● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.

Product Description

► 产品介绍 / 管束、单 / 双卡式管道连接修补器

Coupling、Single/Double Cassette Piped Patch



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

COUPLING
管束

CHA型管束 / TYPE CHA COUPLING



I 技术参数-CHA型管束
TECHNICAL DATA-TYPE CHA COUPLING

规格 Specifiecation	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	41*31*24	12
3"	100	56*41*26	15
4"	100	70*51*27	19
5"	50	49*33*53	15
6"	50	57*37*53	17
8"	20	45*45*32	30

B型•耳板式卡箍 / TYPE B COUPLING



C型•夹板式卡箍 / TYPE C COUPLING



I 技术参数-B型-耳板式卡IB
TECHNICAL DATA-TYPE B COUPLING

规格 Specifiecation	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	41*31*24	12
3"	100	56*41*26	15
4"	100	70*51*27	19
5"	50	49*33*53	15
6"	50	57*37*53	17
8"	20	45*45*32	30

I 技术参数-B型-耳板式卡IB
TECHNICAL DATA-TYPE B COUPLING

规格 Specifiecation	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	41*31*24	12
3"	100	56*41*26	15
4"	100	70*51*27	19
5"	50	49*33*53	15
6"	50	57*37*53	17
8"	20	45*45*32	30

F型•高层卡箍 / TYPE F COUPLING



A型•箍带式卡箍 / TYPE A COUPLING



I 技术参数-F型-高层卡箍卡箋
TECHNICAL DATA-TYPE F COUPLING


规格 Specifiecation	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
2"	100	37*29*32	23
3"	100	48*39*32	26
4"	100	70*49*31	33
5"	50	61*44*42	29
6"	50	71*49*42	31
8"	30	70*47*55	30
10"	10	55*28*54	22
12"	10	64*33*74	27
15"	10	80*40*74	37

I 技术参数-A型-箍带式卡箍
TECHNICAL DATA -TYPE A COUPLING


规格 Specifiecation	只 / 箱 Pcs/carton	包装尺寸 Packing Size(cm)	重量 Weigh(kg)
1.5"	100	33*24*32	12
2"	100	37*29*32	14
3"	100	48*39*32	18
4"	100	61*49*32	22
5"	50	58*49*41	23
6"	50	70*49*41	25
8"	30	67*46*53	21
10"	30	80*54*55	27
12"	16	65*65*57	30

SINGLE/DOUBLE CASSETTE PIPED PATCH

单 / 双卡式管道连接修补器

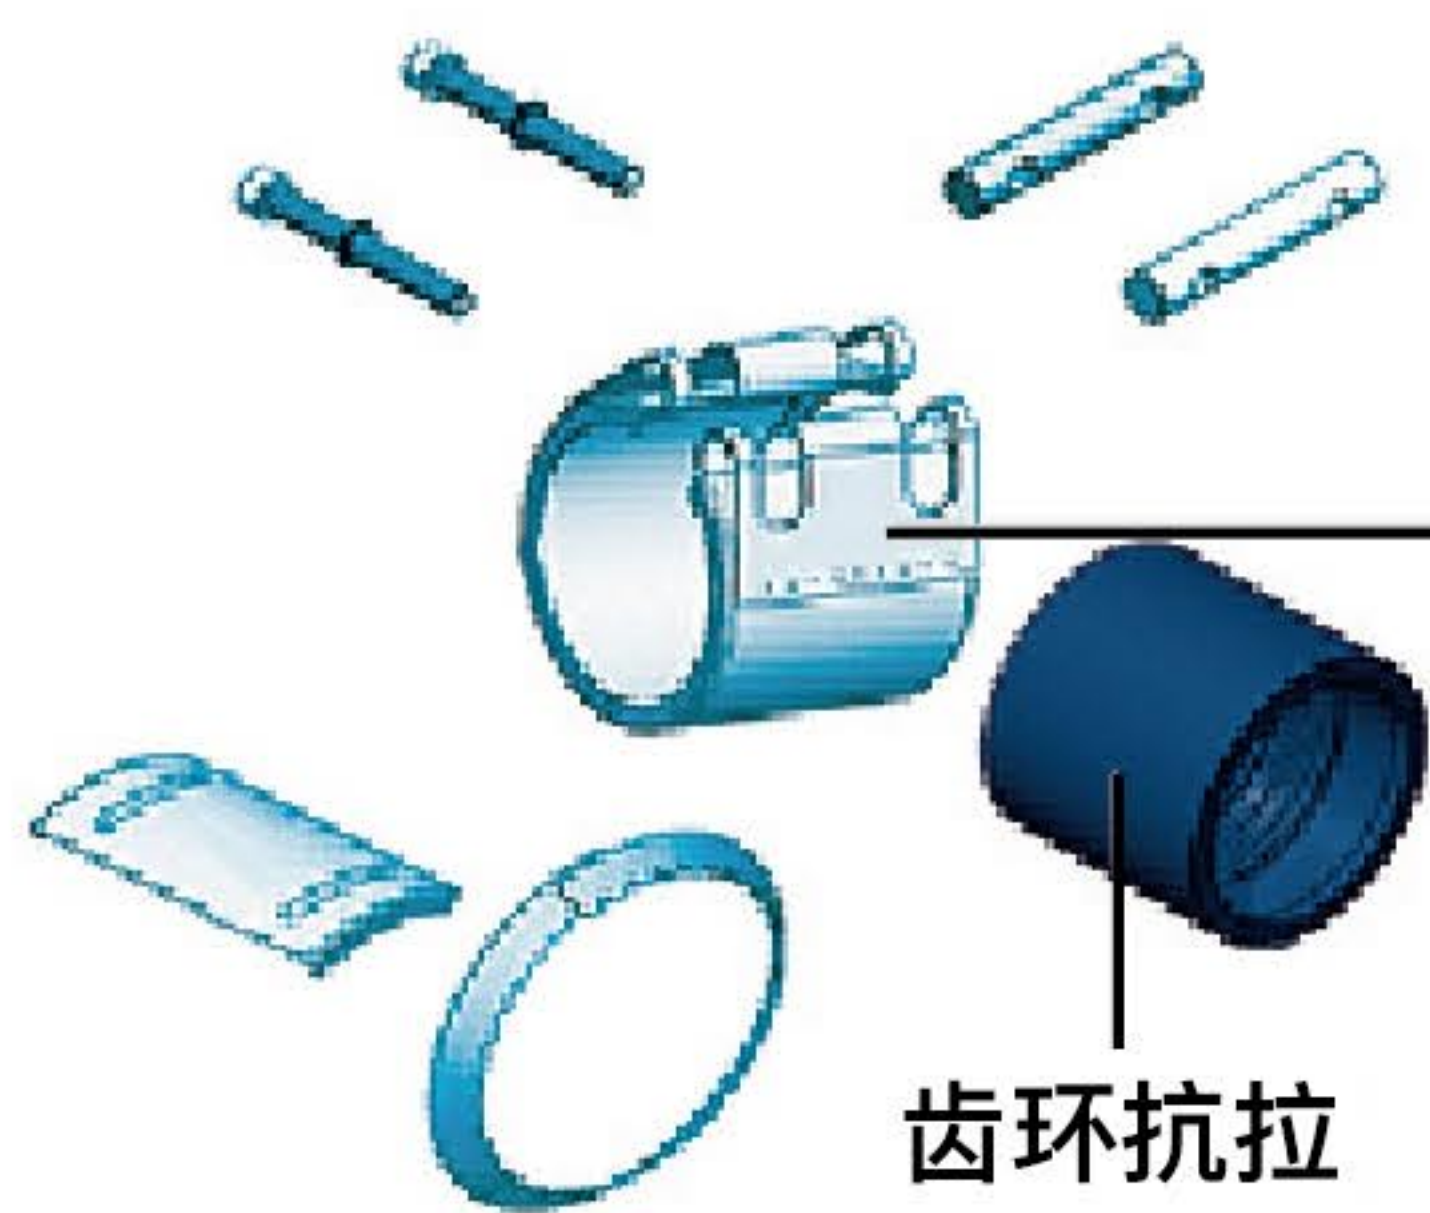


外壳材质:
V1: AISI 304 不锈钢
V2: AISI 316L 不锈钢
V3: AISI 316TI 不锈钢

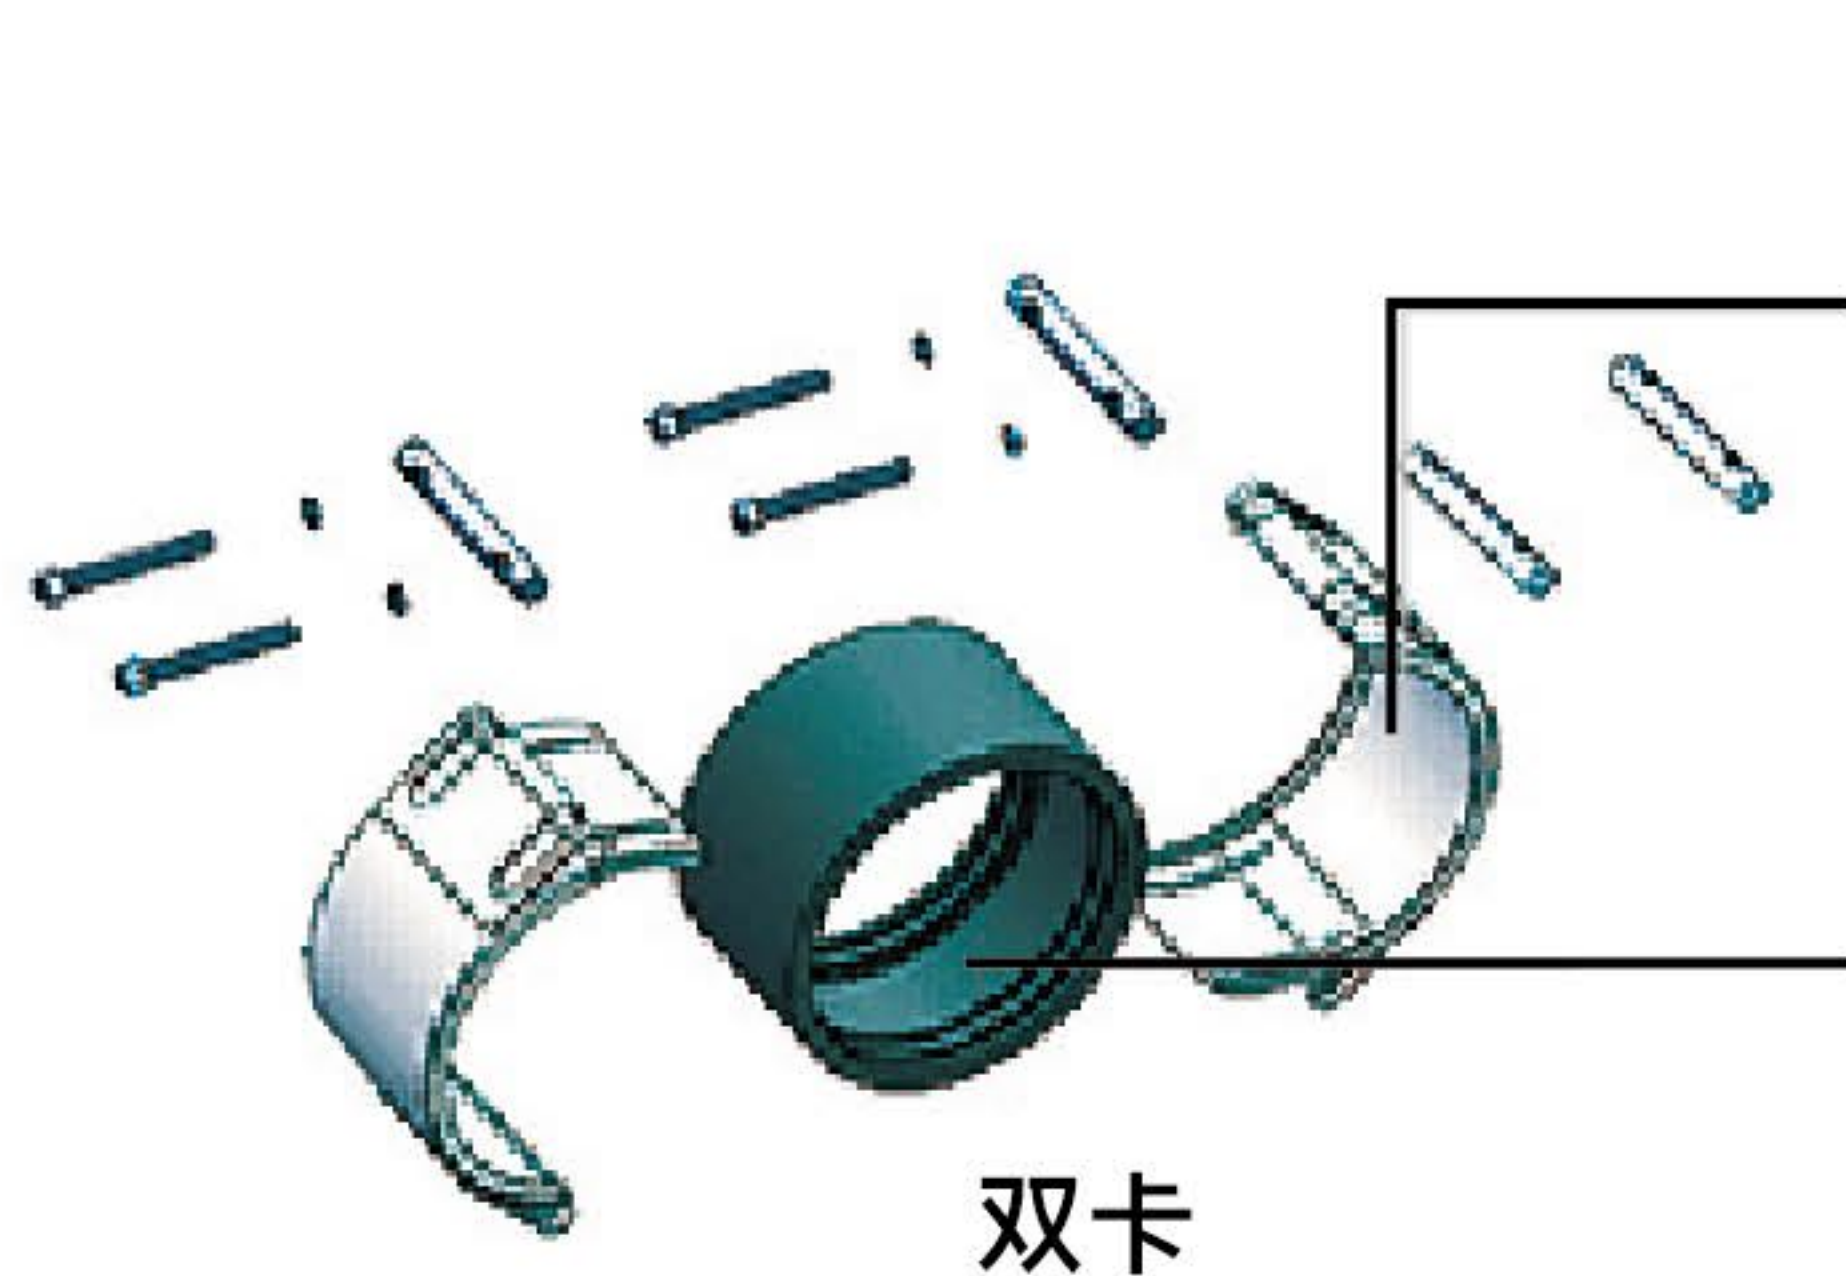


外壳材质:
V1: AISI 304 不锈钢
V2: AISI 316L 不锈钢
V3: AISI 316TI 不锈钢

密封圈材质:
EODM: (适用介质:水、空气、固体)
NBR: (适介质:琰气、油、燃料、碳氢化部5)
MVQ: (耐热耐化学腐蚀)


密封圈材质	适用材质	适用温度
EPDM(三元乙丙橡胶)	水、废水、空气、粉尘和普通水蒸气	-30℃+120℃
NBR(丁腈橡胶)	天然气、油、汽油及其他碳氧化合物	-30℃+100℃
SILICONE(硅橡胶)	耐暴晒、耐高温	-70℃+260℃
Vition(氟橡胶)	耐热、耐化学腐蚀	-95℃+300℃

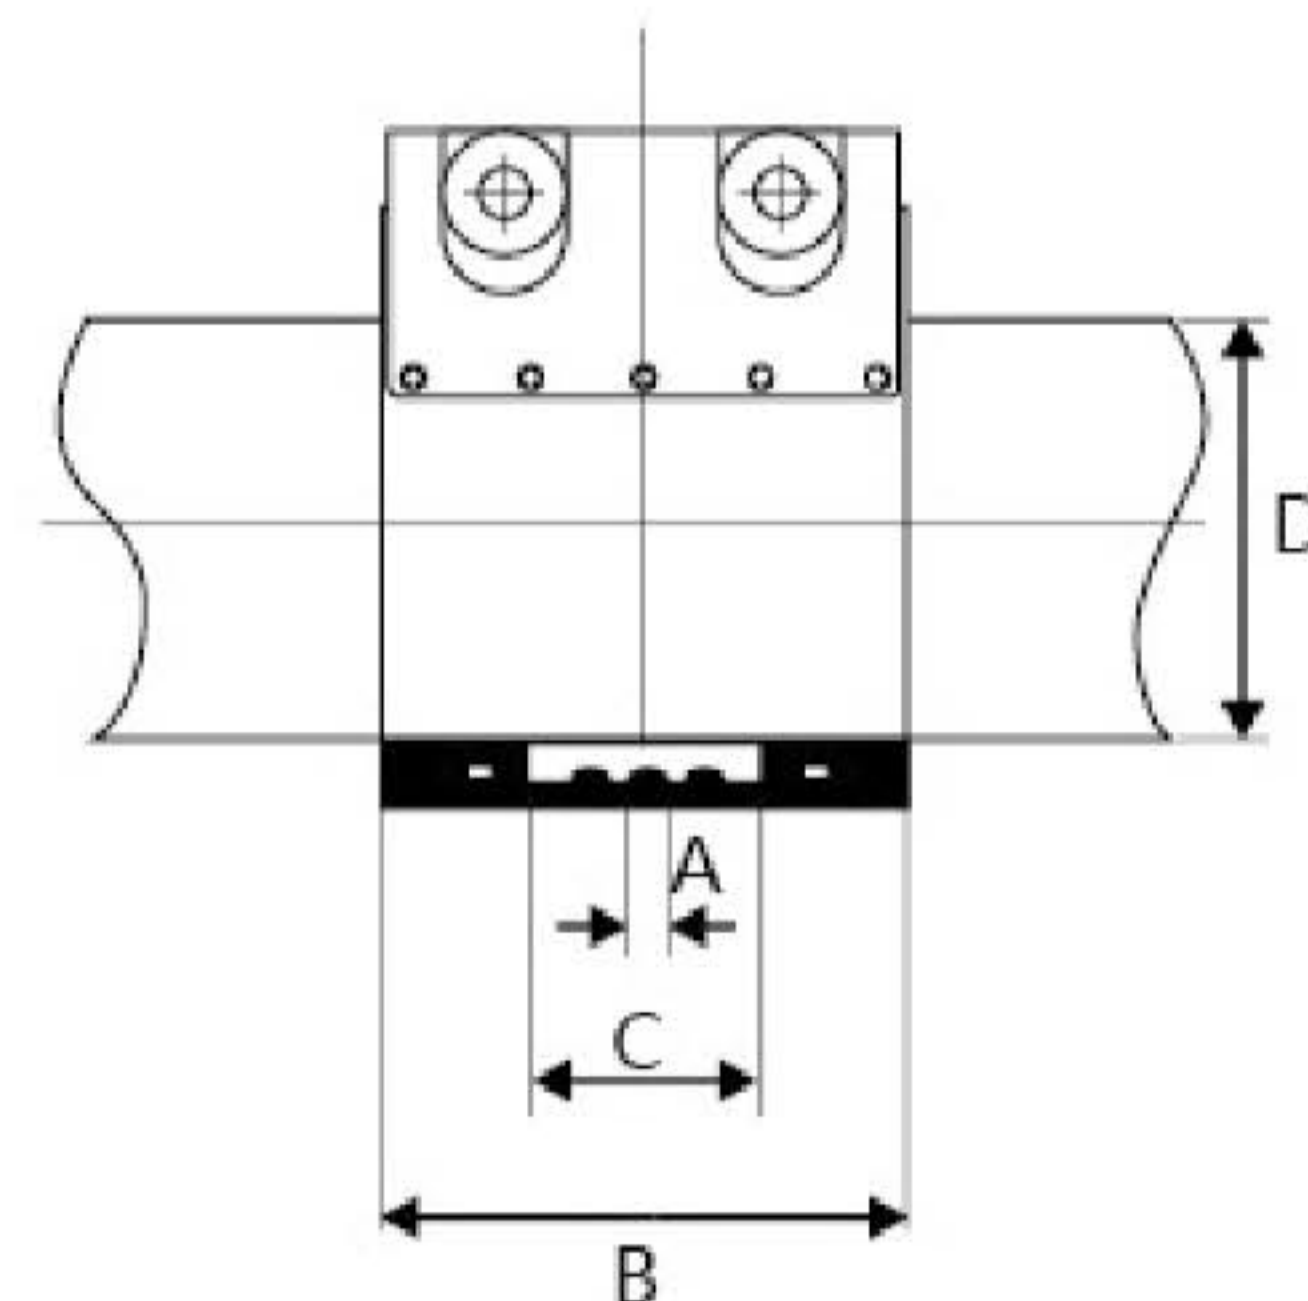

连接器安装步骤

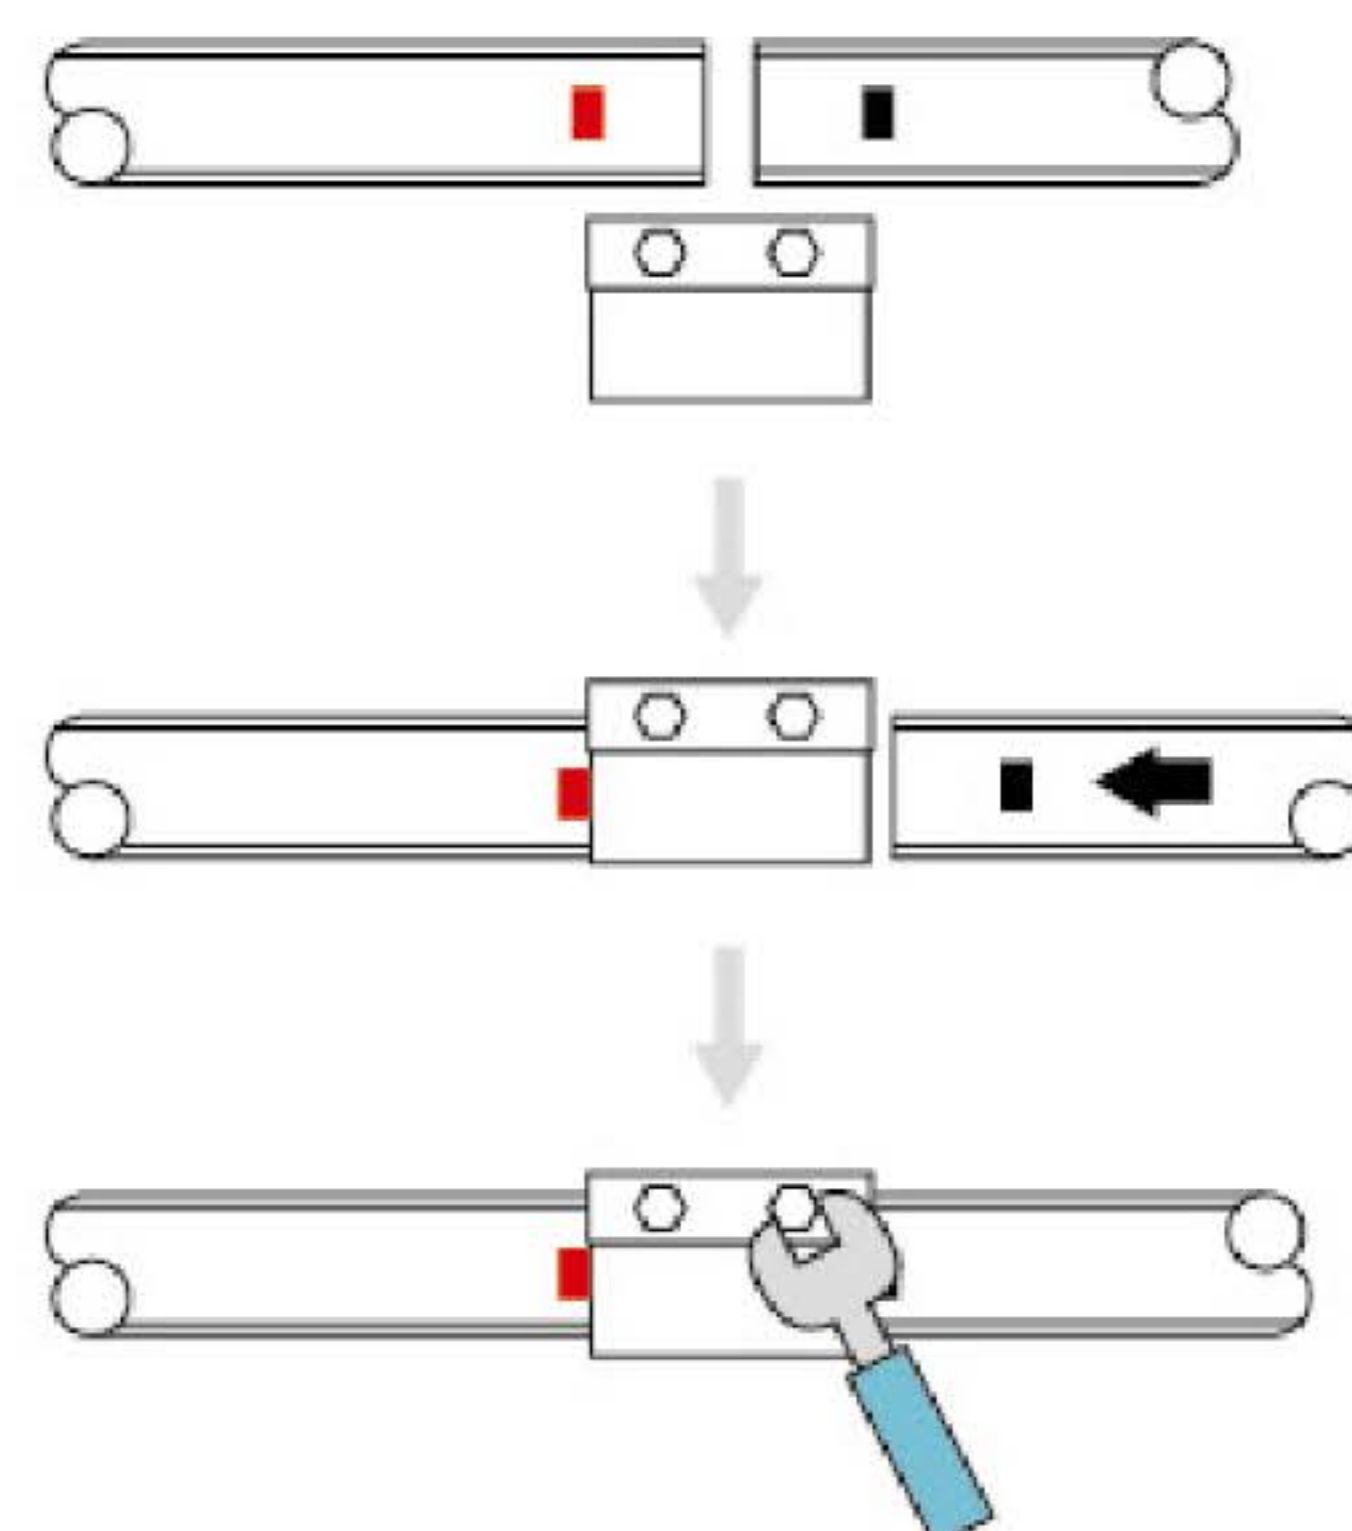

修补器安装步骤

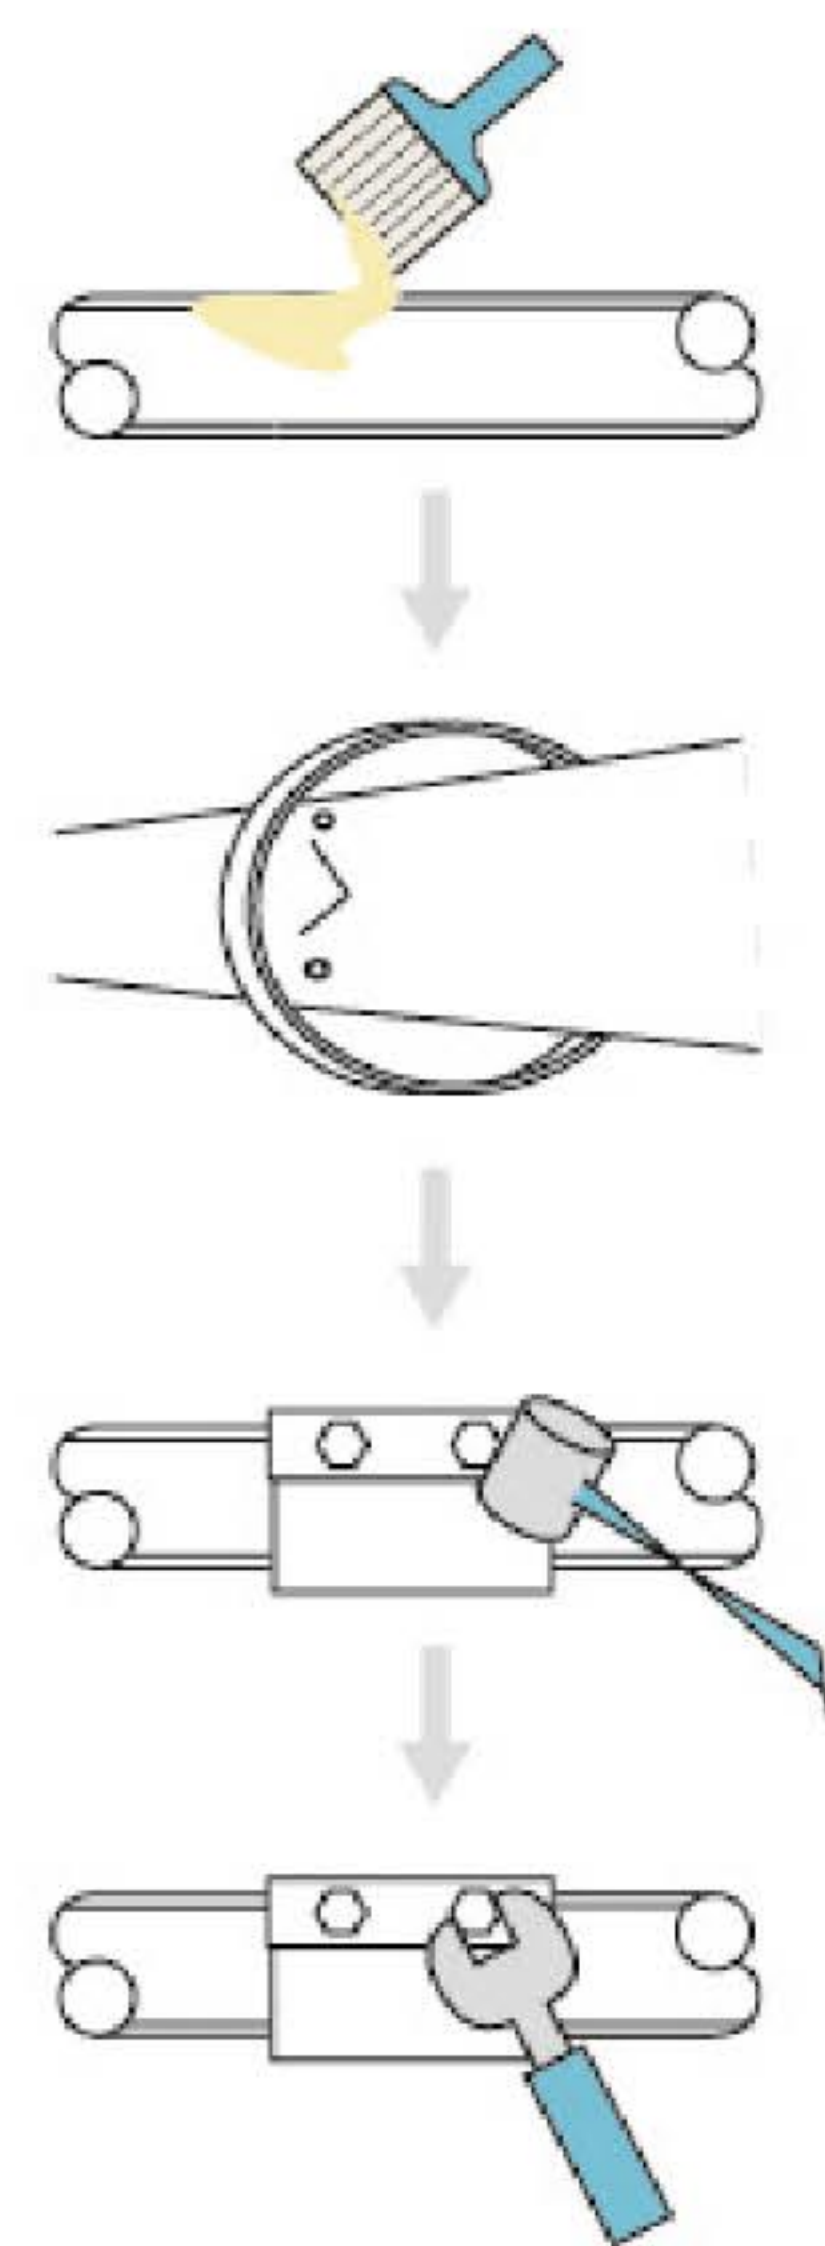

拆卸



● 可根据客户要求提供更多尺寸和材质。以上数据仅供参考

MORE SIZE AND MATERIAL CAN BE SUPPLIED ACCORDING TO CUSTOMERS REQUIREMENTS. ABOVE DATA JUST FOR REFERENCE.



沧州新宇紧固件有限公司
CANGZHOU XINYU FASTENER CO.,LTD

网站: www.czxy.lt.com 电话: 0317-3823091
邮箱: ltk@czxy.lt.com 传真: 0317-3190238