LGCM GLOBAL



SOCIAL MEDIA



marketing@laigong.com
www.lgcmglobal.com
www.wheel-loader.com

Company Introduction



Founded in 1998, Shandong Laigong Machinery Manufacturing Co., Ltd. leads China’s small construction machinery industry. It boasts strong R&D, numerous core patents, titles like "National Specialized & High-Tech Enterprise", and international certifications (CE, ISO, EAC), with products sold globally to showcase "Made in China" quality.


As a modern group integrating R&D, production, sales, service and finance, Laigong has 5 product manufacturing departments, 2 sales companies (domestic/international), and 4 intelligent production bases (300,000㎡ total). Its products cover wheel loaders, skid steer loaders, self-loading mixers, excavators and forklifts.

Established in 2018, Shandong Laigong International Business Co., Ltd. (the group’s global strategy core) builds and manages Laigong’s overseas construction machinery distribution system. It now has a marketing network across 70+ countries, with subsidiaries in Southeast Asia, Europe, Russia, etc., providing localized rapid response and services.

In 2025, Laigong acquired Shandong Heracles Machinery – a key move for its "High-endization & Globalization" strategy. Integrating a 40,000㎡ intelligent factory, it leverages Laigong’s manufacturing experience and global resources to focus on hydrostatic loaders and agricultural machinery, aiming to be a global hydrostatic equipment R&D and manufacturing hub.

Adhering to "Excellent Quality, Integrity First", Laigong looks forward to partnering with you for shared success.



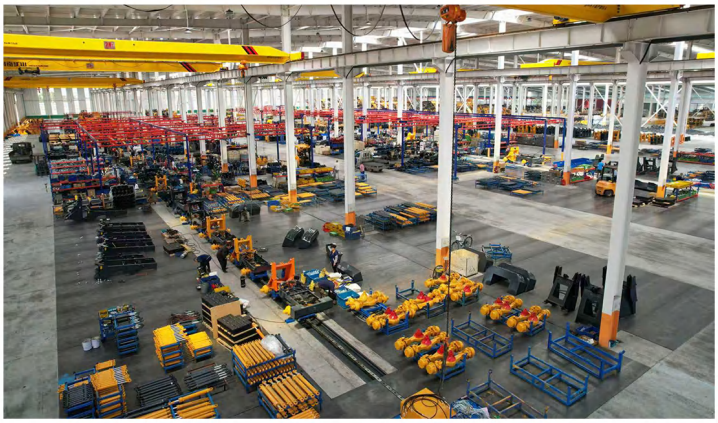


























LGCM GLOBAL

http://www.wheel-loader.com http://www.lgcmglobal.com

WHEEL LOADER

LGCM GLOBAL

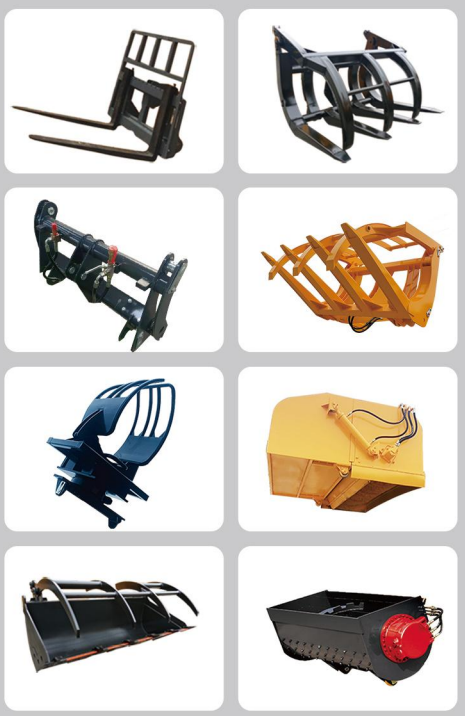



http://www.wheel-loader.com

http://www.lgcmglobal.com

video

SOCIAL MEDIA

TECHNICAL PARAMETER



LGE10	
Operating weight	2900KGS
rated load	1000KGS
model	YUCHAI
Power	36.8KW



LGE15	
Operating weight	3600KGS
rated load	1500KGS
model	YUCHAI
Power	36.8KW



LGE18	
Operating weight	4400KGS
rated load	1800KGS
model	YUCHAI
Power	55.8KW



LGE20	
Operating weight	6100KGS
rated load	2000KGS
model	YUCHAI
Power	74KW




LGE25	
Operating weight	6500KGS
rated load	2500KGS
model	YUCHAI
Power	81KW



LG30	
Operating weight	9300KGS
rated load	3000KGS
model	YUCHAI
Power	92KW

PRODUCT DETAILS







UPGRADE OPTIONS









Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

LGE06

LGCM GLOBAL











http://www.wheel-loader.com **http:**//www.lgcmglobal.com

video

SOCIAL MEDIA

TECHNICAL PARAMETER




LGE06			
Operating weight	1800kg	Tire size	26x12.00-12
Length	3995mm	Dumping height	2040mm
Width	1120mm	Max. lifting height	3400mm
Height	2200mm	Power	18.2kw
Whee l base	1380mm	Number of cylinder	3
Wheel track	830mm	Transmission type	Hydrostatic
Rated load	700kg		

PRODUCT DETAILS








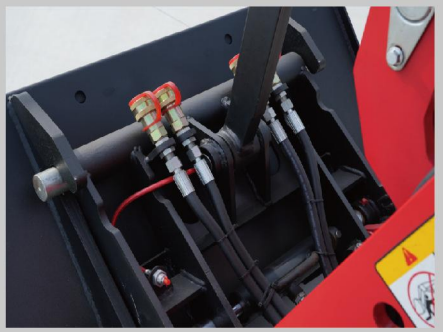





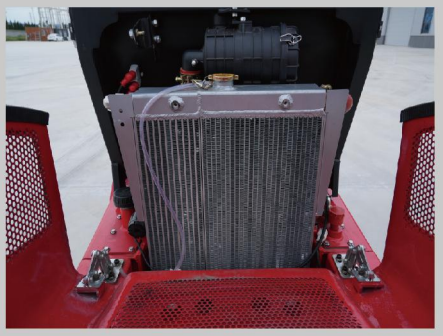



Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

DIESEL FORKLIEFT

LGCM GLOBAL









http://www.wheel-loader.com **http:**//www.lgcmglobal.com

video

SOCIAL MEDIA

TECHNICAL PARAMETER



CPC20

Engine Model	XINCHAI
Rated Lifting Capacity	2000kg
Standard Max. Lifting height	3000mm
Optional Lifting height	3500mm/4000mm/4500mm/5000mm/6000mm
Standard Fork Length	1070mm
Tire type F/R	Pneumatic tire(7.00*12-12PR / 6.00*9-10PR)
Option	Side shifter/ Full-free lift/Fork adjustor/Gasoline/LPG/Solid tire/Double front tire



CPC30

Engine Model	XINCHAI
Rated Lifting Capacity	3000kg
Standard Max. Lifting height	3000mm
Optional Lifting height	3500mm/4000mm/4500mm/5000mm/6000mm
Standard Fork Length	1070mm
Tire type F/R	Pneumatic tire(28*9-15 / 6.50-10)
Option	Side shifter/ Full-free lift/Fork adjustor/Gasoline/LPG/Solid tire/Double front tire



CPC35



Engine Model	XINCHAI
Rated Lifting Capacity	3500kg
Standard Max. Lifting height	3000mm
Optional Lifting height	3500mm/4000mm/4500mm/5000mm/6000mm
Standard Fork Length	1070mm
Tire type F/R	Pneumatic tire(28*9-15 / 6.50-10)
Option	Side shifter/ Full-free lift/Fork adjustor/Gasoline/LPG/Solid tire/Double front tire



CPCD50

Engine Model	XINCHAI
Rated Lifting Capacity	5000kg
Standard Max. Lifting height	3000mm
Optional Lifting height	3500mm/4000mm/4500mm/5000mm/6000mm
Standard Fork Length	1220mm
Tire type F/R	Pneumatic tire(8.25-15-14PR / 8.25-15-14PR)
Option	Side shifter/ Full-free lift/Fork adjustor/Gasoline/LPG/Solid tire/Double front tire

PRODUCT DETAILS




Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

AUTO SELF-LOADING CONCRETE MIXER TRUCK

LGCM GLOBAL



http://www.wheel-loader.com

http://www.lgcmglobal.com

video

SOCIAL MEDIA

TECHNICAL PARAMETER



H15	
Geometrical drum volume	2m³
Drum rotation speed	20r\min
Concrete produced as	1.5m³\drum
Engine Type	Yunnei490 Turbocharging
Engine power(KW)	58KW




H20	
Geometrical drum volume	3.5m³
Drum rotation speed	20r\min
Concrete produced as	2m³\drum
Engine Type	Yunnei 4102 Turbocharging
Engine power(KW)	76KW





H35	
Geometrical drum volume	5.55m³
Drum rotation speed	20r\min
Concrete produced as	3.5m³\drum
Engine Type	Yuchai 4105 Turbocharging
Engine power(KW)	85KW

PRODUCT DETAILS









Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

ALL-TERRAIN FORKLIFT

LGCM GLOBAL







http://www.wheel-loader.com **http:**//www.lgcmglobal.com

video

SOCIAL MEDIA

TECHNICAL PARAMETER



LG35R

Engine Model	YUNNEI 490	Standard Fork Length	1220mm
Power	36.8kw	Min.Ground Clearance	240mm
Rated Lifting Capacity	3500kg	Min.Turning Radius	3600mm
Standard Max. Lifting height	3000mm	Max.Climbing Angle	35°
Optional Lifting height	3500mm/4000mm/ 4500mm/5000mm/6000mm	Tire type F/R	23.5/70-16
		Option	Side shifter/ Full-free lift/Fork adjustor/ Solid tire/Air Conditioner/ Heater



LG40R

Engine Model	YUNNEI 4100 Turbocharging	Standard Fork Length	1220mm
Power	55kw	Min.Ground Clearance	300mm
Rated Lifting Capacity	4000kg	Min.Turning Radius	3800mm
Standard Max. Lifting height	3000mm	Max.Climbing Angle	35°
Optional Lifting height	3500mm/4000mm/ 4500mm/5000mm/6000mm	Tire type F/R	16/70-20
		Option	Side shifter/ Full-free lift/Fork adjustor/ Solid tire/Air Conditioner/ Heater



LG50R

Engine Model	YUNNEI 4102 Turbocharging	Standard Fork Length	1220mm
Power	75kw	Min.Ground Clearance	330mm
Rated Lifting Capacity	5000kg	Min.Turning Radius	3900mm
Standard Max. Lifting height	3000mm	Max.Climbing Angle	35°
Optional Lifting height	3500mm/4000mm/ 4500mm/5000mm/6000mm	Tire type F/R	16/70-24
		Option	Side shifter/ Full-free lift/Fork adjustor/ Solid tire/Air Conditioner/ Heater



LG60R

Engine Model	YUNNEI 4102 Turbocharging	Standard Fork Length	1220mm
Power	75kw	Min.Ground Clearance	330mm
Rated Lifting Capacity	6000kg	Min.Turning Radius	4100mm
Standard Max. Lifting height	3000mm	Max.Climbing Angle	35°
Optional Lifting height	3500mm/4000mm/ 4500mm/5000mm/6000mm	Tire type F/R	12R-22.5
		Option	Side shifter/ Full-free lift/Fork adjustor/ Solid tire/Air Conditioner/ Heater



LG35R New Model


Engine Model	YUNNEI 490	Standard Fork Length	1220mm
Power	36.8kw	Min.Ground Clearance	240mm
Rated Lifting Capacity	3500kg	Min.Turning Radius	3600mm
Standard Max. Lifting height	3000mm	Max.Climbing Angle	35°
Optional Lifting height	3500mm/4000mm/ 4500mm/5000mm/6000mm	Tire type F/R	23.5/70-16
		Option	Side shifter/ Full-free lift/Fork adjustor/ Solid tire/Air Conditioner/ Heater

PRODUCT DETAILS









Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

MINI EXCAVATOR

LGCM GLOBAL





http://www.wheel-loader.com **http:**//www.lgcmglobal.com

video

SOCIAL MEDIA

TECHNICAL PARAMETER



LG10	
Machine Weight	800kg
Bucket capacity	0.025m³
Max.digging depth	1630mm
Engine Type	KOOP KD 192FD
Rated power	7kW



LG12A	
Machine Weight	1100kg
Bucket capacity	0.025m³
Max.digging depth	1680mm
Engine Type	KUBOTA D722
Rated power	10.2kW



LG12EV	
Machine Weight	1200kg
Bucket capacity	0.025m³
Max.digging depth	1680mm
Power system	73.6 V/202Ah
Motor power	5kW



LG15	
Machine Weight	1200kg
Bucket capacity	0.03m³
Max.digging depth	1960mm
Engine Type	YANMAR 370
Rated power	10.3kW



LG18	
Machine Weight	1400kg
Bucket capacity	0.035m³
Max.digging depth	1860mm
Engine Type	YANMAR 374
Rated power	11.8kW




LG35	
Machine Weight	2200kg
Bucket capacity	0.07m³
Max.digging depth	2400mm
Engine Type	YANMAR 380F
Rated power	15.4kW

PRODUCT DETAILS










Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

LGCM GLOBAL

STOCK READY IN EUROPE





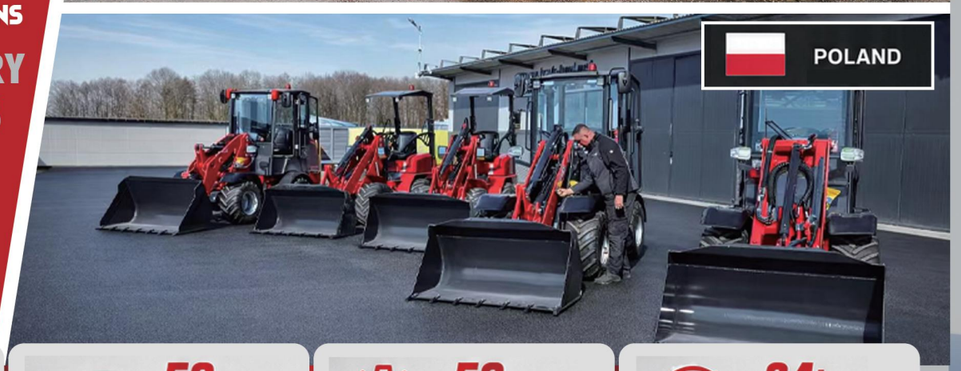

OUR EUROPEAN LOCATIONS

3 LOCAL DELIVERY CENTERSACROSS EUROPE

- **≈1,500 m²** WAREHOUSE AREA (APPROX.)
- **50+** UNITS IN STOCK PER WAREHOUSE
- **50+** SPARE PARTS SKUS
- **24h** REPAIR RESPONSE
- **WITHIN 1 WEEK** DELIVERY TIME
- **10+** RESIDENT STAFF
- **LOCAL** TECHNICIANS AVAILABLE
- **FINANCING** SUPPORT AVAILABLE

FAST LOCAL DELIVERY | SERVICE SUPPORT | PARTNER OPPORTUNITIES

RELIABLE MACHINES BUILT TO PERFORM

STRONG SUPPORT YOU CAN COUNT ON

GROW TOGETHER. SUCCEED TOGETHER.

HYDROSTATIC WHEEL LOADER

LGCM GLOBAL



http://www.wheel-loader.com **http://** www.lgcmglobal.com

social media











Technical data 技术参数	LG13			LG13E	LG14	LG15		LG16	LG16T	LG19	LG19S	LG19T	LG22	LG22S	LG22T	LG22E	LG22ES	LG22ET
Engine model 发动机类型	ZONSEN GB460B	ZONSEN GB680 Ⅱ	ZONSEN GB680 Ⅱ	Ternary Lithium Battery 14kW/h	LONCIN LC2V80FD	ZONSEN GB680 Ⅱ	YANMAR 3TNM72-AFF	YANMAR 3TNV76-KYT		YANMAR 3TNV88-BWTY			4TNV88-BIGE			Ternary Lithium Battery 36.11kW/h		
Fuel type 燃油类型	Gasoline				Gasoline	Gasoline	Diesel	Diesel		Diesel			Diesel					
Emission standards 排放标准	Stage V&EPA				Stage V &EPA	Stage V&EPA		Stage V&EPA		Stage V			Stage V					
Engine power 发动机功率(kW)	11kW	17kW	17kW		20kW	17kW	18.2kW	17.8kW		18.4kW			18.5kW					
Operating weight 操作重量(kg)	500kg				700kg	1180kg		1300kg	1350kg	2000kg	2200kg	2200kg	2600kg	2750kg	2700kg	2600kg	2750kg	2600kg
Max tipping load 倾翻载荷(kg)	400kg				500kg	900kg		1000kg	1000kg	1300kg	1900kg	1300kg	1500kg	2000kg	1500kg	1500kg	2000kg	1500kg
Max lifting capacity 举升重量(kg)	350kg				350kg	750kg		800kg	800kg	1000kg	1500kg	1000kg	1200kg	1600kg	1200kg	1200kg	1600kg	1200kg
Tire size 轮胎尺寸	18x9.50-8				20x10.00-10	23x8.5-12		23x8.50-12NHS-4TL		10.0/75-15.3 or 400/60-15.5			10.0/75-15.3 or 31/15.5-15					
Working hydraulic flow 液压流量 (l/min)	20 l/min	20 l/min	32 l/min	20 l/min	20/40 l/min	20/40 l/min		40 l/min		40 l/min			40 l/min			60 l/min		
Travel speed 行驶速度 (km/h)	0~15km/h				0~20km/h	0~20km/h		0~20km/h		0~20km/h			0~25km/h			0~20km/h		
Max lifting height 举升高度(m)	1.88m				1.4m	1.424m		1.92m	2.533m	2.625m	2.189m	3.407m	2.61m	2.225m	3.407m	2.61m	2.225m	3.407m
Transmission type 传动类型	Hydrostatic			Electric	Hydrostatic	Hydrostatic		Hydrostatic		Hydrostatic			Hydrostatic			Electric direct drive		










Technical data 技术参数	LG28	LG28S	LG28T	LG28E	LG28ES	LG28ET	LG38	LG38S	LG38T	LG58	LG58T	LG58	LG58T	S25	DT10	
Engine model 发动机类型	4TNV88-BIGE			Ternary Lithium Battery 36.11kW/h			4TNV88C-KTY			YUCHAI YCF3675-S580		YANMAR 4TNV98CT-VSY		KUBOTA D1105	Briggs＆Stratton	HONDA GX390
Fuel type 燃油类型	Diesel						Diesel			Diesel				Diesel	Gasoline	
Emission standards 排放标准	Stage V						Stage V&EPA			Stage V		Stage V&EPA		Stage V &EPA	Stage V &EPA	Stage V
Engine power 发动机功率(kW)	18.5kW						34.3kW			55.8kW		53.7kW		18.2kW	10kW	8.7kW
Operating weight 操作重量(kg)	3000kg	3000kg	3500kg	3000kg	3000kg	3000kg	3500kg	3500kg	3500kg	6000kg	6000kg	6000kg	6000kg	1312kg	500kg	
Max tipping load 倾翻载荷(kg)	1700kg	2200kg	1700kg	1700kg	2200kg	1700kg	2100kg	2300kg	2100kg	3500kg	3500kg	3500kg	3500kg	720kg	Front tipping	
Max lifting capacity 举升重量(kg)	1500kg	1800kg	1500kg	1500kg	1800kg	1500kg	1800kg	2000kg	1800kg	3000kg	3000kg	3000kg	3000kg	500kg	1000kg	
Tire size 轮胎尺寸	10.0/75-15.3 or 31/15.5-15						10.0/75-15.3 or 31/15.5-15			16/70-20				6.50-10	SC180*72*34	
Working hydraulic flow 液压流量 (l/min)	60 l/min			60 l/min			60 l/min			90 l/min				40 l/min	21.6 l/min	
Travel speed 行驶速度 (km/h)	0~25km/h			0~20km/h			0~30km/h			0~40km/h				0~13.8km/h	0~4.2km/h	
Max lifting height 举升高度(m)	2.95m	2.225m	3.3375m	2.95m	2.225m	3.3375m	2.95m	2.225m	3.3375m	3.33m	4.685m	3.33m	4.685m	2.399m	/	
Transmission type 传动类型	Hydrostatic			Electric direct drive			Hydrostatic			Powershift	Powershift	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	

技术参数若有变动,恕不另行通知。产品以实物为准。解释权和最终解释权归公司所有。

Technical parameters are subject to change without further notice. All products are subject to the physical object. The right of interpretation and final interpretation shall belong to Laigong.

莱工标准化命名规范下，本系列产品型号以字母组合标识技术特征：E型为纯电动驱动；T型配置多级同步伸缩起重臂系统；

Under Laigong's naming standard, product models in this series use letter combos for tech features: E for pure electric drive, T for multi - stage synchronous telescopic boom.