

GHWE、GWWE系列-蜗轮式骨架油封系列

GHWE、GWWE Series – Turbine Groove Oil Seal Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GWWE7-236 (7 inch)	3.5KN.m	14.2KN.m	22KN.m	290KN	94KN	90KN	83KN	47:1	≤0.15°	35kg
	2.58 lbf.ft	10.48x10 ³ lbf.ft	16.24x10 ³ lbf.ft	214x10 ³ lbf	69.4x10 ³ lbf	66.4x10 ³ lbf	61.3x10 ³ lbf			
GHWE9-314 (9 inch)	8KN.m	35.6KN.m	38.7KN.m	578KN	215KN	136KN	115KN	62:1	≤0.15°	52kg
	5.9x10 ³ lbf.ft	26.3x10 ³ lbf.ft	28.6x10 ³ lbf.ft	426.6x10 ³ lbf	158.7x10 ³ lbf	100.4x10 ³ lbf	84.9x10 ³ lbf			
GHWE12-400 (12 inch)	9.5KN	57KN	43KN.m	760KN	280KN	190KN	148KN	78:1	≤0.15°	66kg
	7.01x10 ³ lbf.ft	42.1x10 ³ lbf.ft	31.7x10 ³ lbf.ft	560.9x10 ³ lbf	206.6x10 ³ lbf	140.2x10 ³ lbf	109.2x10 ³ lbf			
GHWE14-435 (14 inch)	10.8KN.m	71KN.m	48KN.m	960KN	360KN	230KN	200KN	86:1	≤0.15°	70kg
	7.97x10 ³ lbf.ft	52.4x10 ³ lbf.ft	35.4x10 ³ lbf.ft	708.5x10 ³ lbf	265.7x10 ³ lbf	169.7x10 ³ lbf	147.6x10 ³ lbf			
GHWE17-523 GWWE17-523 (17 inch)	12.96KN.m	142.4KN.m	72.3KN.m	1166KN	435KN	280KN	231KN	104:1	≤0.1°	96kg
	9.6x10 ³ lbf.ft	105x10 ³ lbf.ft	53.4x10 ³ lbf.ft	262x10 ³ lbf	97.8x10 ³ lbf	62.9x10 ³ lbf	51.9x10 ³ lbf			
GWWE19-600 (19 inch)	25KN.m	203.4KN.m	80KN.m	1808KN	675KN	293KN	250KN	93:1	≤0.1°	130kg
	18.5x10 ³ lbf.ft	150.1x10 ³ lbf.ft	59x10 ³ lbf.ft	1334x10 ³ lbf	498x10 ³ lbf	216x10 ³ lbf	184.5x10 ³ lbf			
GHWE21-639 (21 inch)	28.7KN	203KN	105.8KN.m	1598KN	640KN	385KN	335KN	125:1	≤0.1°	174kg
	21.2x10 ³ lbf.ft	149.8x10 ³ lbf.ft	78.1x10 ³ lbf.ft	1179x10 ³ lbf	472.3x10 ³ lbf	284.1x10 ³ lbf	247.2x10 ³ lbf			
GHWE25-760 (25 inch)	34.2KN.m	310KN.m	158.3KN.m	2360KN	945KN	590KN	470KN	104:1	≤0.1°	118kg
	25.2x10 ³ lbf.ft	228.8x10 ³ lbf.ft	116.8x10 ³ lbf.ft	1741.7x10 ³ lbf	697.4x10 ³ lbf	435.4x10 ³ lbf	346.9x10 ³ lbf			

GSE系列-斜齿式骨架油封系列

GSE Series – Helical Teeth Oil Seal Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GSE5-160 (5 inch)	600N.m	71KN.m	5KN.m	84KN	64KN	98KN	75KN	62:1	≤0.15°	14kg
	443 lbf.ft	5.24x10 ³ lbf.ft	3.69x10 ³ lbf.ft	62x10 ³ lbf	47.2x10 ³ lbf	72.3x10 ³ lbf	55.35x10 ³ lbf			
GSE7-236 (7 inch)	3.3KN.m	11.2KN.m	16KN.m	210KN	85KN	64KN	55KN	71:1	≤0.15°	18.3kg
	2.444x10 ³ lbf.ft	8.274x10 ³ lbf.ft	11.84x10 ³ lbf.ft	154.94x10 ³ lbf	62.74x10 ³ lbf	47.24x10 ³ lbf	40.64x10 ³ lbf			
GSE9-314 (9 inch)	7.32KN.m	33.9KN.m	38.7KN.m	338KN	135KN	81KN	71KN	61:1	≤0.15°	48.7kg
	5.44x10 ³ lbf.ft	254x10 ³ lbf.ft	28.64x10 ³ lbf.ft	249.34x10 ³ lbf	99.634x10 ³ lbf	59.84x10 ³ lbf	52.44x10 ³ lbf			
GSE12-400 (12 inch)	7.5KN.m	54.3KN.m	43KN.m	475KN	190KN	114KN	100KN	78:1	≤0.15°	65kg
	5.544x10 ³ lbf.ft	40.14x10 ³ lbf.ft	31.74x10 ³ lbf.ft	350.64x10 ³ lbf	140.24x10 ³ lbf	84.14x10 ³ lbf	73.84x10 ³ lbf			
GSE14-435 (14 inch)	10.8KN.m	67.8KN.m	48KN.m	555KN	222KN	133KN	117KN	85:1	≤0.15°	69.9kg
	7.974x10 ³ lbf.ft	504x10 ³ lbf.ft	35.44x10 ³ lbf.ft	409.64x10 ³ lbf	163.84x10 ³ lbf	98.14x10 ³ lbf	86.34x10 ³ lbf			
GSE17-523 (17 inch)	15.1KN.m	135.6KN.m	72.3KN.m	977KN	391KN	235KN	205KN	102:1	≤0.15°	95kg
	11.144x10 ³ lbf.ft	100.14x10 ³ lbf.ft	53.44x10 ³ lbf.ft	7214x10 ³ lbf	288.64x10 ³ lbf	173.44x10 ³ lbf	151.34x10 ³ lbf			
GSE21-639 (21 inch)	15KN.m	203KN.m	105.8KN.m	1598KN	640KN	385KN	335KN	125:1	≤0.15°	145kg
	11.14x10 ³ lbf.ft	149.84x10 ³ lbf.ft	78.14x10 ³ lbf.ft	1179.34x10 ³ lbf	472.34x10 ³ lbf	284.14x10 ³ lbf	247.24x10 ³ lbf			
GSE25-760 (25 inch)	18KN.m	271KN.m	158.3KN.m	2360KN	945KN	590KN	470KN	150:1	≤0.15°	204kg
	13.34x10 ³ lbf.ft	199.94x10 ³ lbf.ft	116.84x10 ³ lbf.ft	1741.74x10 ³ lbf	697.44x10 ³ lbf	435.44x10 ³ lbf	346.94x10 ³ lbf			

6B SPLINE OPTIONAL

6B花键可选

SPECIAL DESIGN BASE ON CUSTOMER'S REQUIREMENT

可根据顾客的要求进行非标设计



NOTICE 注意:


- Please be sure to remain under the curve.选型时请确保实际载荷在曲线范围内。
- This drawing is just for your refenece.以上图纸仅供参考。
- This drawing is subject to change due to new design without prior notice.本公司保留改进产品的权利而不再另行通知。
- Please contact the technical department for dimensions and performance parameters of the drives.如果需要装置的外形尺寸和性能参考数，请与技术部门联系。

工程机械

SLEWING DRIVE

江阴缙基彼机械科技 回转传动解决方案

JIANGYIN TECHNOGEAR BEARINGS CO., LTD
SLEWING DRIVE SOLUTION

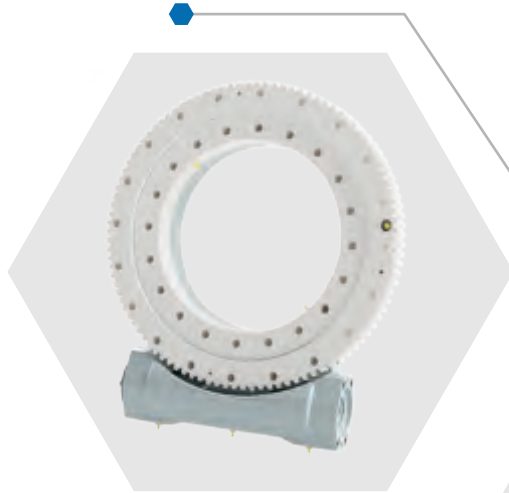

Contact Us



+86 177 2138 9216
+86 21 5882 2730



sales@technogearbearings.com



www.technogearbearings.com



江苏省江阴市港城大道1172号

1172 Gangcheng Avenue, Jiangyin City, Jiangsu Province, China.



TechnoGear
Bearings



TechnoGear
Bearings

GSGE系列-斜齿式密封条系列

GSGE Series - Helical Teeth Sealing Strip Series

回转减速器性能参数表

Slewing Drive Performance Parameters




Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GSGE9-314 (9 inch)	8KN.m	35.6KN.m	38.7KN.m	578KN	215KN	136KN	115KN	61:1	≤0.15°	45.5kg
GSGE14-435 (14 inch)	5.9x10 ³ lb.ft	26.3x10 ³ lb.ft	28.6x10 ³ lb.ft	426.5x10 ³ lb.ft	158.7x10 ³ lb	100.4x10 ³ lb	84.9x10 ³ lb	85:1	≤0.15°	63.6kg
GSGE17-523 (17 inch)	10.8KN.m	71.2KN.m	48KN.m	960KN	360KN	230KN	200KN	85:1	≤0.15°	93kg
GSGE21-639 (21 inch)	7.9x10 ³ lb.ft	52.5x10 ³ lb.ft	35.4x10 ³ lb.ft	708.5x10 ³ lb	265.7x10 ³ lb	169.7x10 ³ lb	147.6x10 ³ lb	102:1	≤0.15°	141kg
GSGE25-760 (25 inch)	12.96KN.m	142.4KN.m	72.3KN.m	1166KN.m	280KN	190KN	148KN	125:1	≤0.15°	198kg
GSGE37-1050 (37 inch)	9.56x10 ³ lb.ft	105.1x10 ³ lb.ft	53.4x10 ³ lb.ft	860.5x10 ³ lb	206.6x10 ³ lb	140.2x10 ³ lb	109.2x10 ³ lb	150:1	≤0.15°	312kg
GSGE14-435-2 (14 inch)	28.7KN.m	203.4KN.m	105.8KN.m	1598KN	640KN	384KN	336KN	150:1	≤0.15°	450KN
GSGE17-523-2 (17 inch)	21.2x10 ³ lb.ft	150.1x10 ³ lb.ft	78.1x10 ³ lb.ft	1179.3x10 ³ lb	472.3x10 ³ lb	283.4x10 ³ lb	248x10 ³ lb	150:1	≤0.15°	450KN
GSGE21-639-2 (21 inch)	34.2KN.m	300KN.m	42.5KN.m	2190KN	832KN	517KN	410KN	150:1	≤0.15°	450KN
GSGE25-760-2 (25 inch)	25.2x10 ³ lb.ft	221.4x10 ³ lb.ft	105.2x10 ³ lb.ft	1616.2x10 ³ lb	614x10 ³ lb	381.5x10 ³ lb	302.6x10 ³ lb	150:1	≤0.15°	450KN
GSGE37-1050-2 (37 inch)	35KN.m	450KN.m	171KN.m	2100KN	875KN	650KN	450KN	150:1	≤0.15°	450KN

GSGP系列-直齿式系列

GSGP Series - Straight Tooth Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GSGP12-310 (12 inch)	5.4KN.m	32KN.m	10.6KN.m	447KN	191KN	190 KN	40kN	67:15	≤0.06°	71kg
GSGP17-410 (17 inch)	3.9x10 ³ lb.ft	23.6x10 ³ lb.ft	7.8x10 ³ lb.ft	329.8x10 ³ lb	140.9x10 ³ lb	140.2x10 ³ lb	103.3x10 ³ lb	83:15	≤0.06°	86kg
GSGP21-523 (21 inch)	8.4KN.m	56KN.m	12.5KN.m	591KN	253KN	296KN	156KN	83:15	≤0.06°	86kg
GSGP25-760 (25 inch)	6.2x10 ³ lb.ft	41.3x10 ³ lb.ft	9.2x10 ³ lb.ft	436.1x10 ³ lb	186.7x10 ³ lb	218.4x10 ³ lb	115.1x10 ³ lb	83:15	≤0.06°	86kg

GHWE-2系列-双蜗杆涡轮式骨架油封系列

GHWE-2 Series - Double Worm Turbine Groove Oil Seal Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GHWE14-435-2 (14 inch)	16.2KN.m	71.2KN.m	72KN.m	960KN	360KN	230KN	200KN	85:1	≤0.15°	84.5kg
GHWE17-523-2 (17 inch)	11.96x10 ³ lb.ft	52.5x10 ³ lb.ft	53.1x10 ³ lb.ft	708.5x10 ³ lb	265.7x10 ³ lb	169.7x10 ³ lb	147.6x10 ³ lb	102:1	≤0.15°	110kg
GHWE21-639-2 (21 inch)	19.4KN.m	142.4KN.m	108.5KN.m	1166KN	435KN	280KN	231KN	88:1	≤0.15°	196kg
GHWE25-760-2 (25 inch)	14.3x10 ³ lb.ft	105.1x10 ³ lb.ft	30.1x10 ³ lb.ft	860.5x10 ³ lb	321x10 ³ lb	206.6x10 ³ lb	170.5x10 ³ lb	150:1	≤0.15°	235kg
GHWE14-435-2 (14 inch)	48KN.m	203KN.m	179.9KN.m	1598KN	640KN.m	385KN	335KN	150:1	≤0.15°	235kg
GHWE17-523-2 (17 inch)	35.4x10 ³ lb.ft	149.8x10 ³ lb.ft	132.8x10 ³ lb.ft	1179.3x10 ³ lb	472.3x10 ³ lb	284.1x10 ³ lb	247.2x10 ³ lb	150:1	≤0.15°	235kg
GHWE21-639-2 (21 inch)	58KN.m	310KN.m	270KN.m	2360KN	945KN	590KN	470KN	150:1	≤0.15°	235kg
GHWE25-760-2 (25 inch)	42.8x10 ³ lb.ft	228.8x10 ³ lb.ft	99x10 ³ lb.ft	1741.2x10 ³ lb	697.4x10 ³ lb	435.4x10 ³ lb	346.9x10 ³ lb	150:1	≤0.15°	235kg

GSE-2系列-双蜗杆斜齿式骨架油封系列

GSE-2 Series - Double Worm Helical Teeth Oil Seal Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GSE14-435-2 (14 inch)	20KN.m	67.8KN.m	47.5KN.m	555KN	222KN	133KN	117KN	85:1	≤0.15°	92kg
GSE17-523-2 (17 inch)	14.8x10 ³ lb.ft	50x10 ³ lb.ft	35.1x10 ³ lb.ft	409.6x10 ³ lb	163.8x10 ³ lb	98.2x10 ³ lb	86.3x10 ³ lb	102:1	≤0.15°	112kg
GSE21-639-2 (21 inch)	25KN.m	135.6KN.m	72.3KN.m	977KN	391KN	235KN	205KN	125:1	≤0.15°	165kg
GSE25-760-2 (25 inch)	18.4x10 ³ lb.ft	100x10 ³ lb.ft	53.4x10 ³ lb.ft	721.3x10 ³ lb	288.6x10 ³ lb	173.4x10 ³ lb	151.2lb	150:1	≤0.15°	260kg
GSE14-435-2 (14 inch)	48KN.m	203KN.m	105.8KN.m	1598KN	640KN	385KN	335KN	150:1	≤0.15°	260kg
GSE17-523-2 (17 inch)	35.4x10 ³ lb.ft	149.8x10 ³ lb.ft	132.8x10 ³ lb.ft	1179.3x10 ³ lb	472.3x10 ³ lb	284.1x10 ³ lb	247.2x10 ³ lb	150:1	≤0.15°	260kg
GSE21-639-2 (21 inch)	50KN.m	300KN.m	193KN.m	2360KN	945KN	590KN	470KN	150:1	≤0.15°	260kg
GSE25-760-2 (25 inch)	36.9x10 ³ lb.ft	221.4x10 ³ lb.ft	142.4x10 ³ lb	1741.7x10 ³ lb	697.4x10 ³ lb	435.4x10 ³ lb	346.9x10 ³ lb	150:1	≤0.15°	260kg

GWE系列-涡轮式骨架油封系列

GWE Series - Turbine Groove Oil Seal Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GWE3-130 (3 inch)	400N.m	1.6KN.m	950N.m	27KN	15KN	8.7KN	7.6KN	62:1	≤0.15°	10.4kg
GWE7-236 (7 inch)	295.2 lb.ft	1.18x10 ³ lb.ft	701.1 lb.ft	1993x10 ³ lb	11.1x10 ³ lb	5.42x10 ³ lb	5.61x10 ³ lb	44:1	≤0.15°	29kg
GWE9-314 (9 inch)	3.5KN.m	14.2KN.m	22KN.m	290KN	94KN	90KN	83KN	61:1	≤0.15°	46kg
GWE12-400 (12 inch)	2.58 lb.ft	10.48x10 ³ lb.ft	16.24x10 ³ lb.ft	214x10 ³ lb	69.4x10 ³ lb	66.4x10 ³ lb	61.3x10 ³ lb	79:1	≤0.15°	61kg
GWE14-435 (14 inch)	8.0KN.m	35.6KN.m	38.7KN.m	578KN	215KN.m	136KN	115KN	85:1	≤0.13°	62kg
GWE17-523 (17 inch)	5904 lb.ft	26.27x10 ³ lb.ft	28.56x10 ³ lb.ft	426.5x10 ³ lb	158.7x10 ³ lb	100.4x10 ³ lb	84.9x10 ³ lb	104:1	≤0.1°	90kg
GWE19-600 (19 inch)	9.5KN.m	57KN.m	43KN.m	760KN	280KN	190KN	148KN	92:1	≤0.1°	110kg
GWE21-639 (21 inch)	7011 lb.ft	42.1x10 ³ lb.ft	31.7x10 ³ lb.ft	560.9x10 ³ lb	206.6x10 ³ lb	140.2x10 ³ lb	109.2x10 ³ lb	102:1	≤0.1°	195kg
GWE25-700 (25 inch)	10.8KN.m	75KN.m	48KN.m	960KN	360KN	230KN	200KN	102:1	≤0.1°	195kg
GWE14-435-2 (14 inch)	797x10 ³ lb.ft	55.4x10 ³ lb.ft	35.4x10 ³ lb.ft	708.5x10 ³ lb	265.7x10 ³ lb	169.7x10 ³ lb	147.6x10 ³ lb	150:1	≤0.15°	260kg
GWE17-523-2 (17 inch)	12.9KN.m	142.4KN.m	72.3KN.m	1166KN	435KN	280KN	231KN	150:1	≤0.15°	260kg
GWE21-639-2 (21 inch)	9.52 x10 ³ lb.ft	105x10 ³ lb.ft	53.4x10 ³ lb.ft	860.5x10 ³ lb	321x10 ³ lb	206.4x10 ³ lb	170.5x10 ³ lb	150:1	≤0.15°	260kg
GWE25-700-2 (25 inch)	25KN.m	203.4KN.m	80KN.m	1808KN	675KN	293KN	250KN	150:1	≤0.15°	260kg
GWE14-435-2 (14 inch)	18.5x10 ³ lb.ft	150.1x10 ³ lb.ft	59x10 ³ lb.ft	1334x10 ³ lb	498x10 ³ lb	216x10 ³ lb	184.5x10 ³ lb	150:1	≤0.15°	260kg
GWE17-523-2 (17 inch)	34.2KN.m	325KN.m	58.3KN.m	2360KN	945KN	590KN	470KN	150:1	≤0.15°	260kg
GWE21-639-2 (21 inch)	25.2x10 ³ lb.ft	239.8x10 ³ lb.ft	116.8x10 ³ lb.ft	1741.7x10 ³ lb	697.4x10 ³ lb	435.4x10 ³ lb	346.9x10 ³ lb	150:1	≤0.15°	260kg

GSGO系列-敞开式斜齿系列

GSGO Series - Open Style Helical Teeth Series

回转减速器性能参数表

Slewing Drive Performance Parameters



Reference	Output Torque	Tilting Moment Torque	Holding Torque	Static Axial Rating	Static Radial Rating	Dynamic Axial Rating	Dynamic Radial Rating	Gear Ratio	Tracking Precision	Weight
型号	输出力矩	倾覆力矩	保持力矩	轴向静载荷	径向静载荷	轴向动载荷	径向动载荷	减速比	精度等级	重量
GSGO14-435 (14 inch)	10.2KN.m	67.8KN.m	43.2KN.m	905KN	338KN	133KN	117KN	85:1	≤0.15°	49kg
GSGO17-523 (17 inch)	7.5x10 ³ lb.ft	50.04x10 ³ lb.ft	31.9x10 ³ lb	667.9x10 ³ lb	249.4x10 ³ lb	98.1x10 ³ lb	86.3x10 ³ lb	102:1	≤0.15°	78.6kg
GSGO21-639 (21 inch)	15.09KN.m	135.6KN.m	65.1KN	977KN	391KN	136KN	115KN.m	125:1	≤0.15°	129.7kg
GSGO25-760 (25 inch)	11.14x10 ³ lb.ft	100.1x10 ³ lb.ft	48.1x10 ³ lb	721x10 ³ lb	288.6x10 ³ lb	100.4x10 ³ lb	84.9x10 ³ lb	180:1	≤0.20°	101.2kg
GSGO33-920 (33 inch)	23.5KN.m	203.4KN.m	95.2KN	1598KN	640KN	384KN	336KN	150:1	≤0.15°	129.7kg
GSGO37-1050 (37 inch)	17.3x10 ³ lb.ft	150.1x10 ³ lb.ft	70.3x10 ³ lb	1179x10 ³ lb	472.3x10 ³ lb	283.4x10 ³ lb	248x10 ³ lb	150:1	≤0.15°	129.7kg
GSGO43-1250 (43 inch)	4.35KN.m	326KN.m	40KN	1710KN	222KN	312KN	202KN	180:1	≤0.20°	101.2kg
GSGO47-1350 (47 inch)	3.21x10 ³ lb.ft	240.6x10 ³ lb.ft	29.5x10 ³ lb	1261.9x10 ³ lb	163.8x10 ³ lb	230.3x10 ³ lb	149.1x10 ³ lb	180:1	≤0.20°	101.2kg

6B SPLINE OPTIONAL

6B花键可选

SPECIAL DESIGN BASE ON CUSTOMER'S REQUIREMENT

可根据顾客的要求进行非标设计

NOTICE 注意

- Please be sure to remain under the curve. 选型时请确保实际载荷在曲线范围内。
- This drawing is just for your refenece. 以上图纸仅供参考。
- This drawing is subject to change due to new design without prior notice. 本公司保留改进产品的权利而不再另行通知。
- Please contact the technical department for dimensions and performance parameters of the drives. 如果需要装置的外形尺寸和性能参考数，请与技术部门联系。