HXRT

HUAXIANG SHANGHAI
HUAXIANG THAILAND



上海华向橡胶履带有限公司

SHANGHAI HUAXIANG RUBBER TRACK CO., LTD.

HXRT
华向橡胶履带

Keep Improving

Company Introduction

Shanghai Huaxiang Rubber Track Co.,Ltd. is a specialized manufaturer to produce and sell rubber tracks and ruber pads who has top production equipment and advanced test facilities so that we can produce most varieties of tracks with endless steel cord. We are also one of the departments that draft the national standard <Rubber Track>.


Our products are exported to most of the developed countries in Europe, America, Oceania, and Asia. We are awarded ISO9001-2015 certificate of national quality assurance from UK and Hi-Tech Enterprise from Shanghai Tech-Committee.We try our best to meet all requirements from our customers by our innovative products and unique service.

Our main products are mini-excavator track, dumper and skid steer loader track, agricultural track, paver track, snow mobile track and other special track.

We warmly welcome your cooperation!



CARRIER TRACK

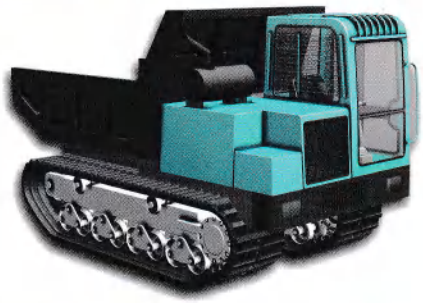

SKID STEER LOADER TRACK




EXCAVATOR TRACK





MULTI-TERRAIN LOADER TRACK



AGRICULTURAL TRACK

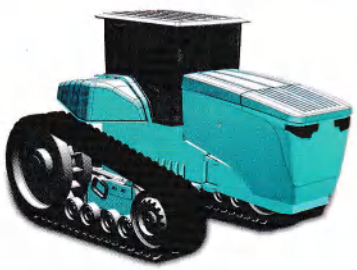


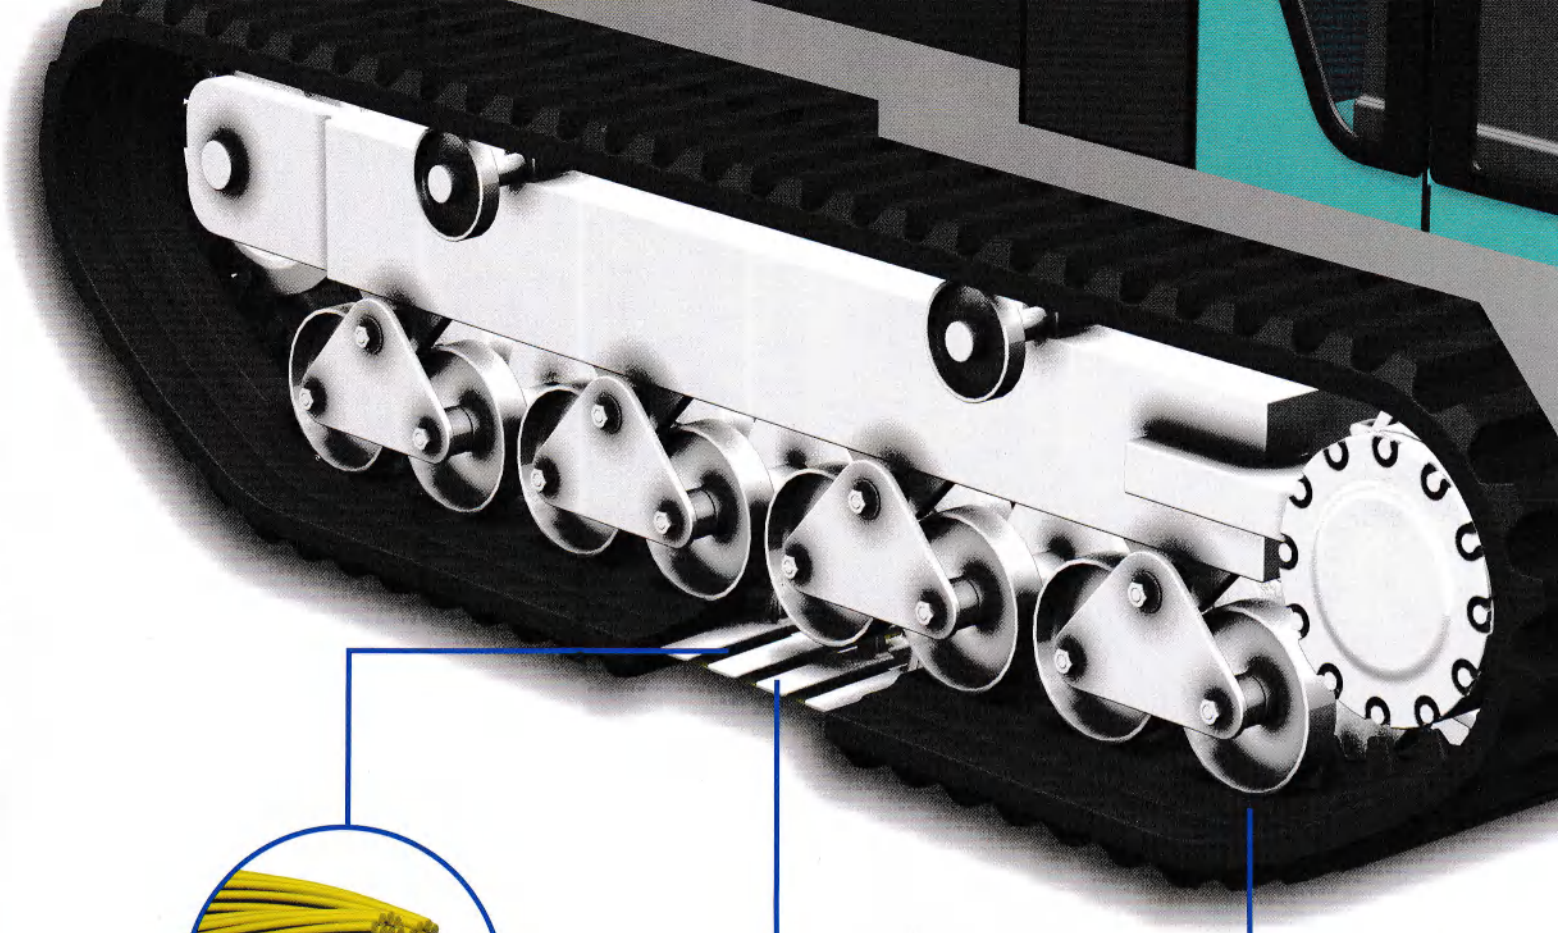




STEEL WIRE

High strength wire, provide strong tensile, wire coppering with specialized formula assure the good bond with rubber.



METAL INSERT

ONE-PIECE craft by forging, prevent the track not lateral deformation.





STRUCTURE


Design precisely based on undercarriage.

HXRT

DUMPER TRACK

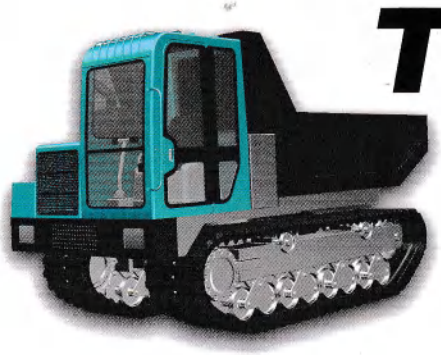

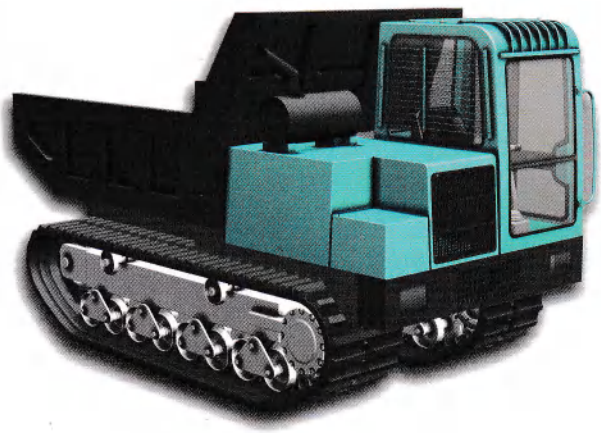

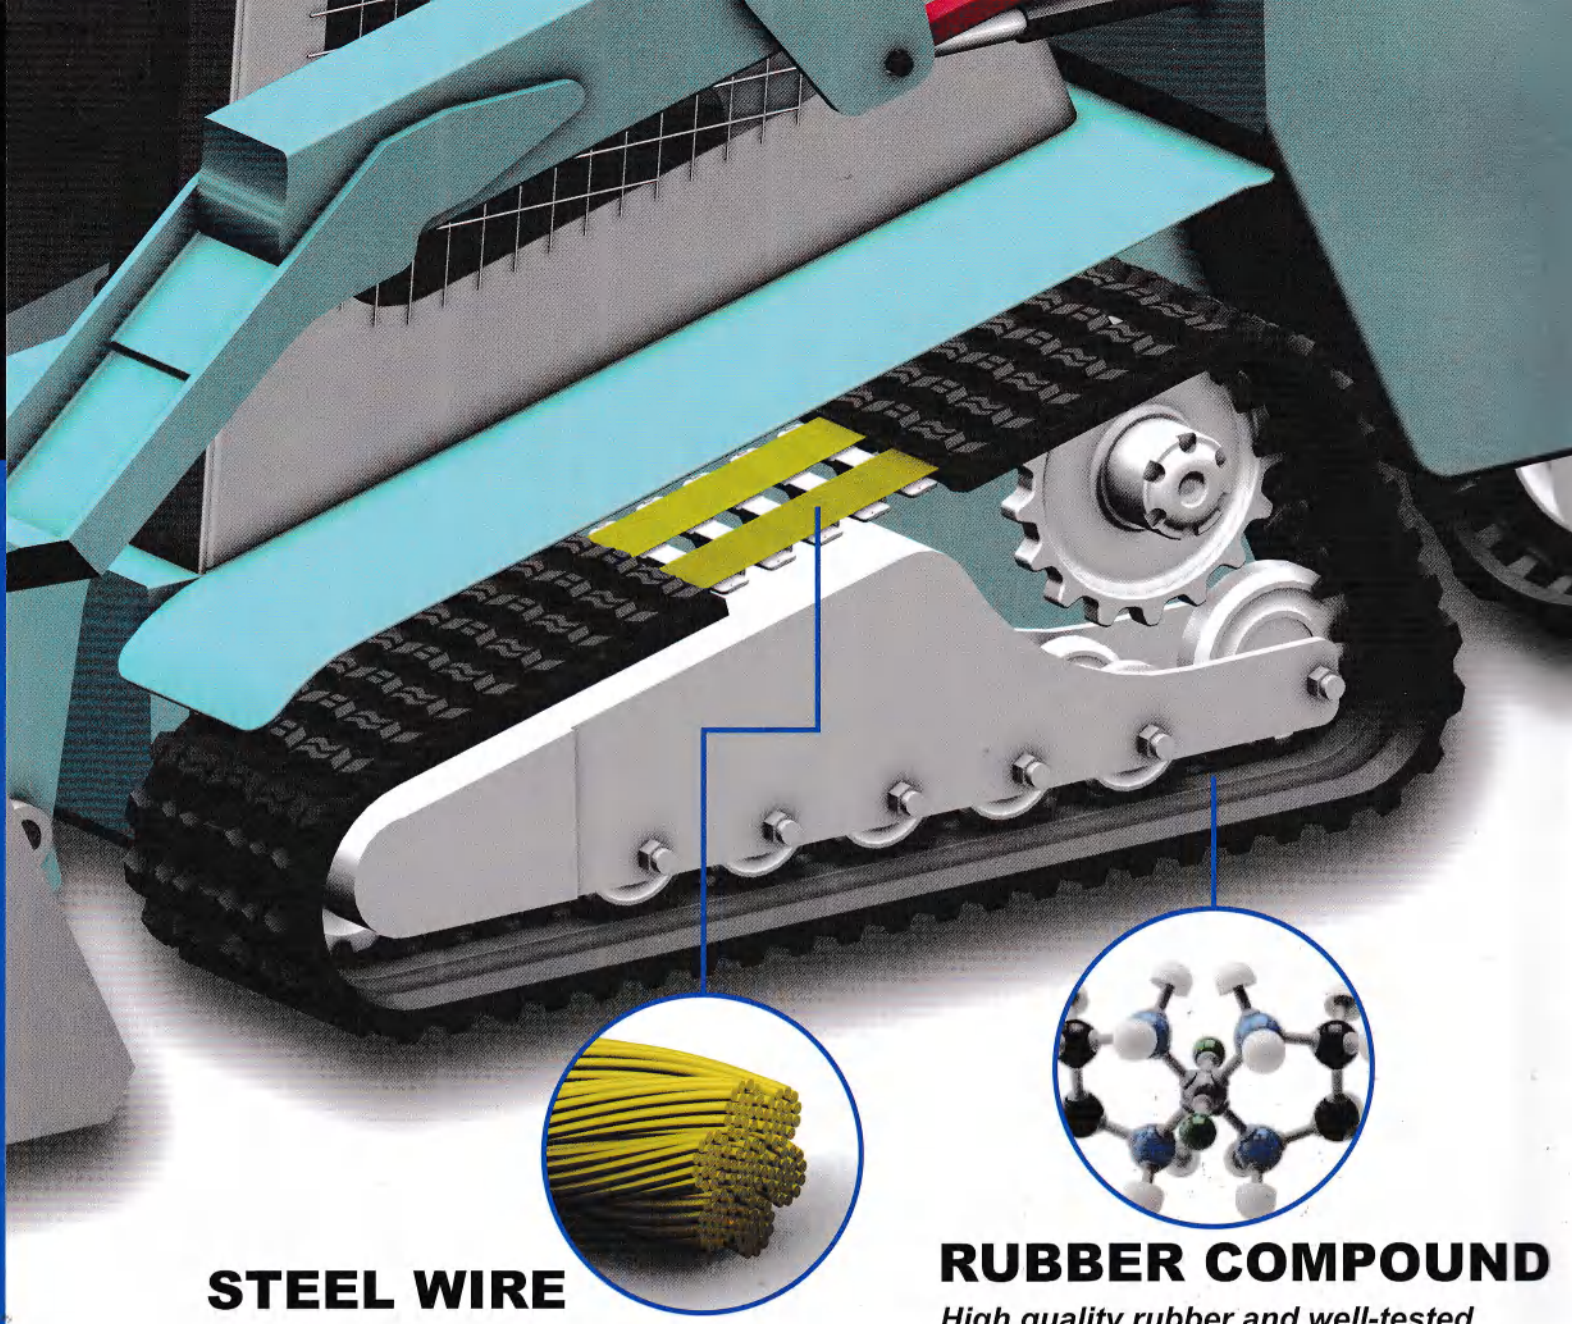

STEEL WIRE

High strength wire, provide strong tensile, wire coppering with specialized formula assure the good bond with rubber.


RUBBER COMPOUND


High quality rubber and well-tested formula, make sure track have good performance in complex and difficult environment.




HXRT

SKID STEER LOADER TRACK

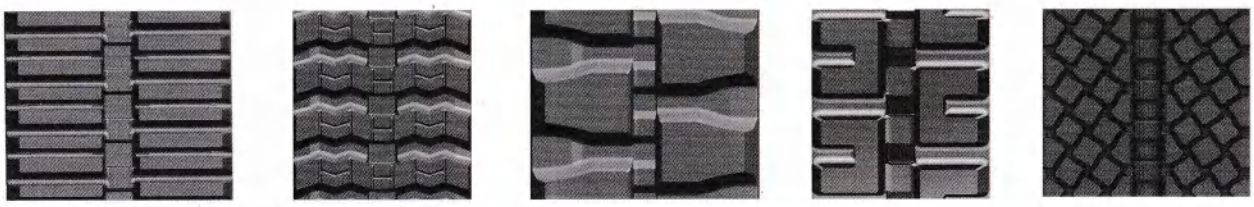


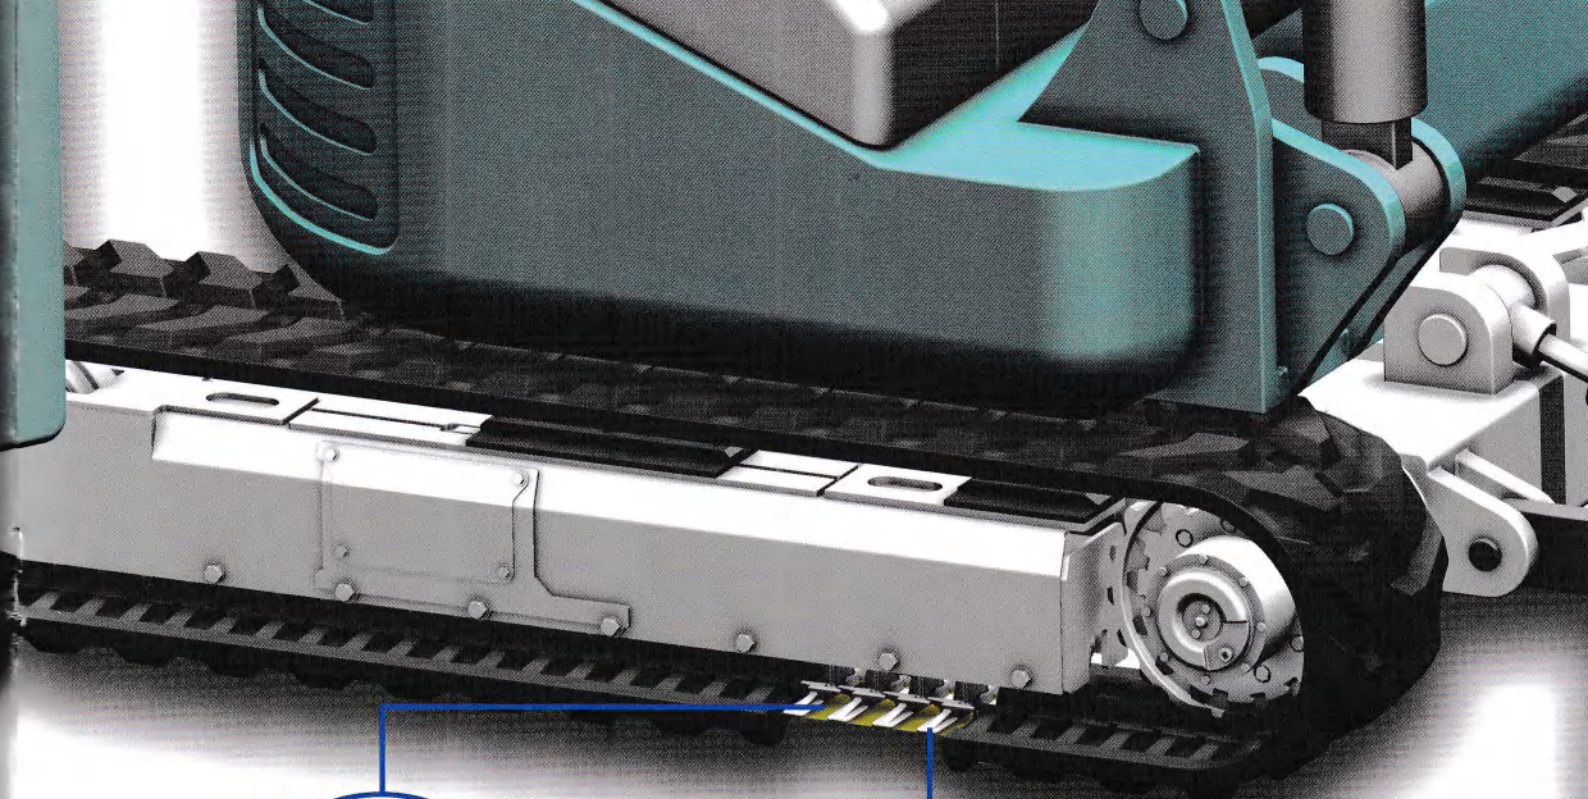



METAL INSERT

ONE-PIECE craft by forging, prevent the track not lateral deformation.




CONTINUOUS

HXRT


EXCAVATOR TRACK



AGRICULTURAL TRACK

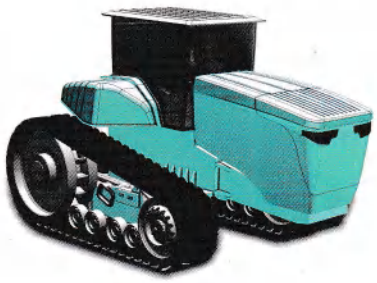



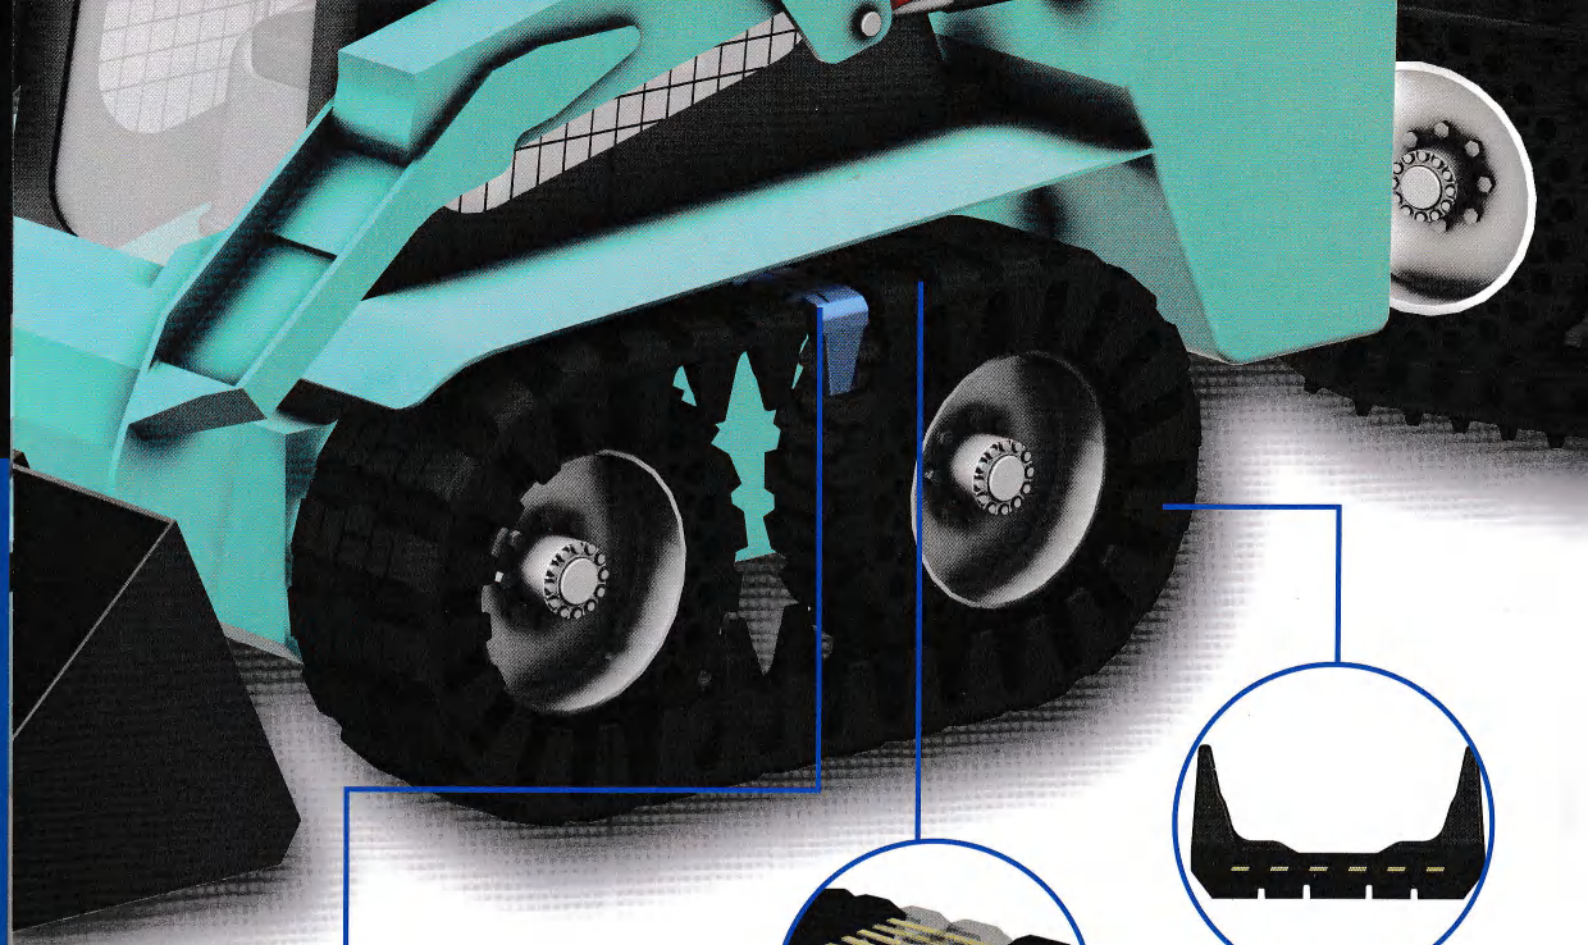



LENGTH ADJUSTABLE



STRUCTURE





HXRT

OTT CARRIER




Size	Alias
10-16.5	31x6x10
12-16.5	33x6x11
14-17.5	36x7x11
15-19.5	40x9x13

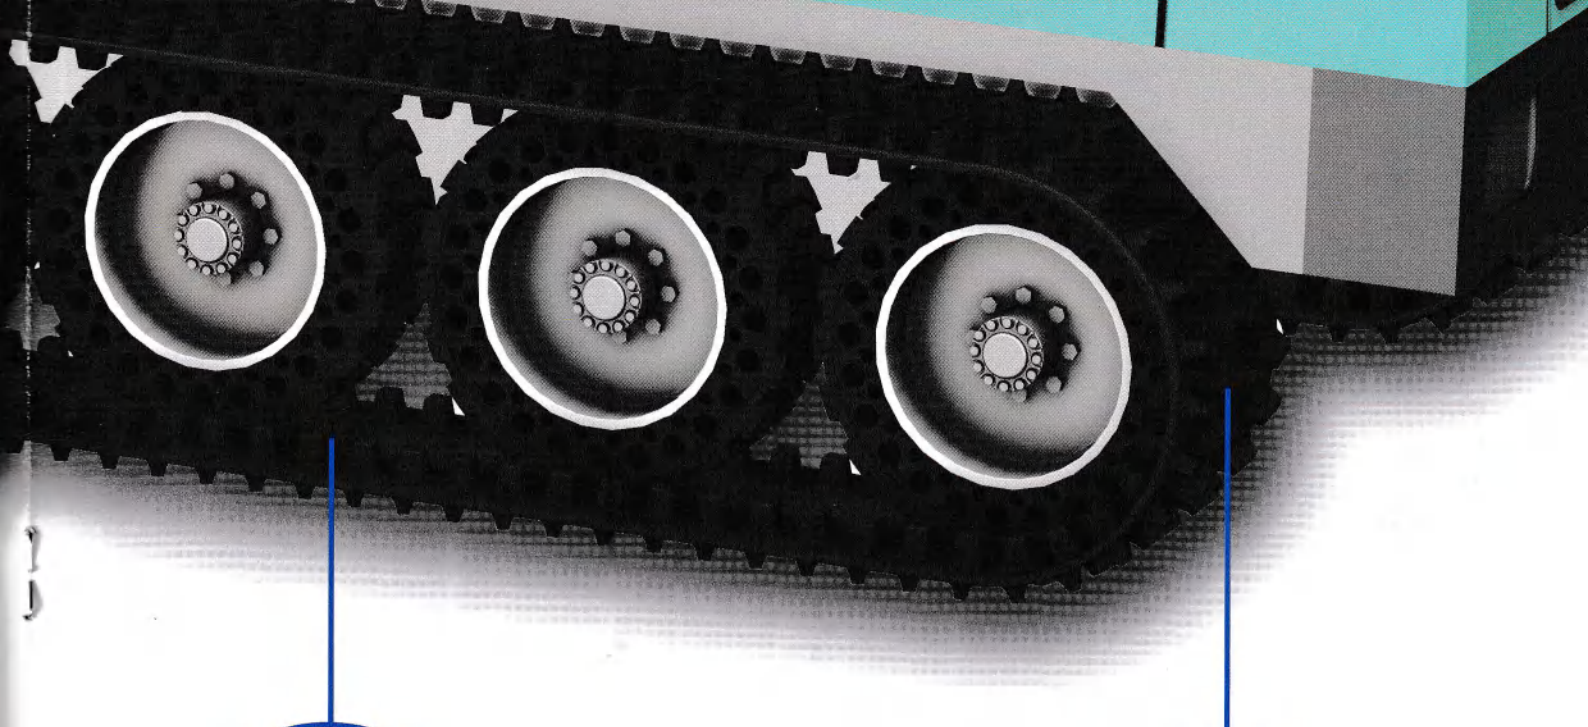



RUBBER LUG



BETTER ROAD HOLDING

HXRT


OTT DUMPER TRACK



Section width (mm)	Overall diameter (mm)	Load Index (kg)	Weight (kg)
251	787	3415	103
276	838	4075	125
276	914	5650	178
336	1016	7545	275



* please contact with us if you want to know any updates

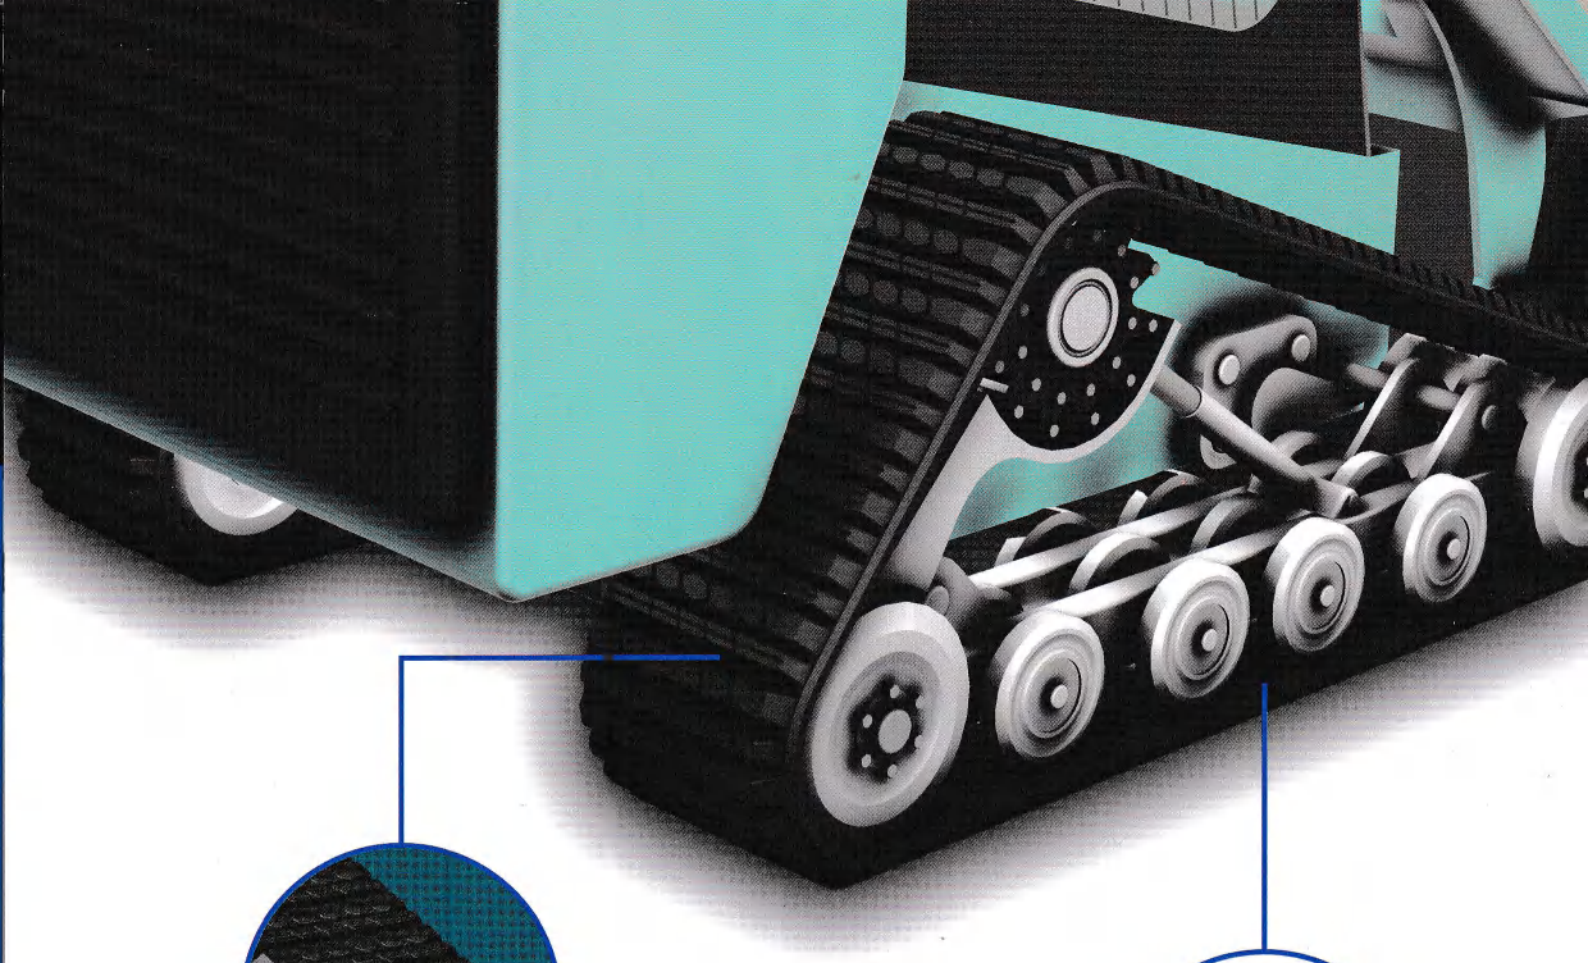






HXRT

ASV TRACK



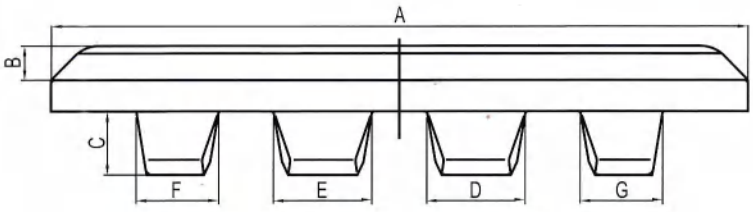



size width*pitch*link	A	B	C	D	E	F	G
11"*4"*37	280	26	46	100	0	0	0
15"*4"*42	380	24	45	100	64	0	0
15"*4*B*51	380	25	45.5	144	60	0	0
18"*4"*51	460	24	46	100	100	0	0
18"*4"*56	460	24	46	100	100	0	0
18"*4"B*51	460	27	46	10	10	0	0
18"*4"C*51	460	25	46	94.5	71.5	71.5	0
18"*4"*51D	460	26	47	143	60	0	0
20"*4"*51	508	25	46.5	94.5	71.75	71.75	60


HXRT

TREAD PATTERN


AA



AB


AC



AD



AE



AF1


AF3


AL



AM



AP


BA



BB1



BC



BD



BE


BF



BH2



BK


BM



BN



BO



BI



CA


CD



CE


CF



CG



CH


CI


ZZ


DA



DB


GL




HXRT


Guiding Rollers Configuration

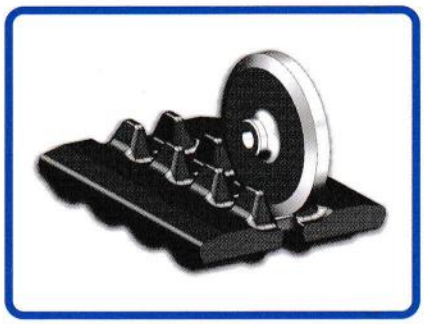


A1 Type

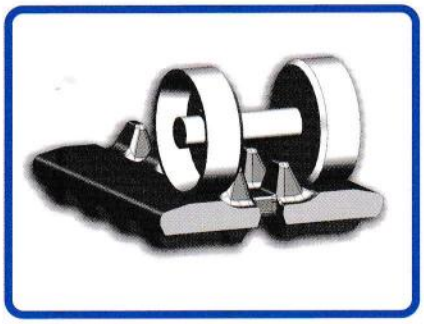


A2 Type

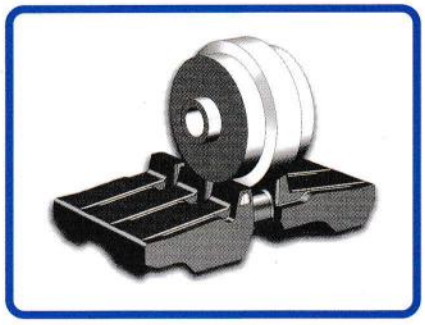


B1 Type

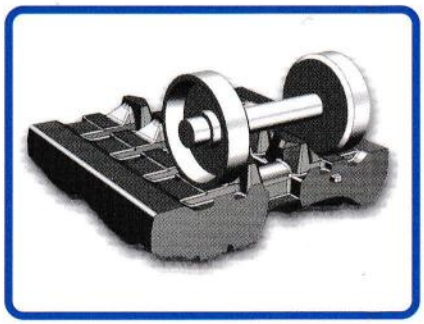

B2 Type

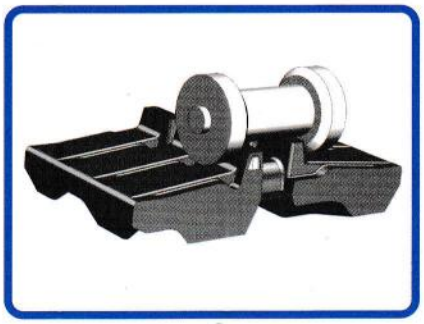


C1 Type

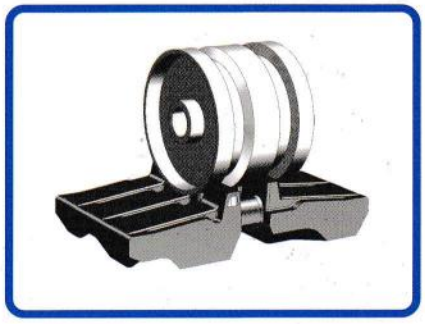


C2 Type

Track Size Identification


track width x pitch length x number of links

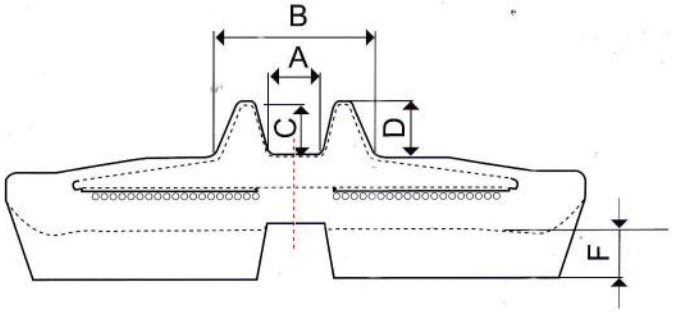


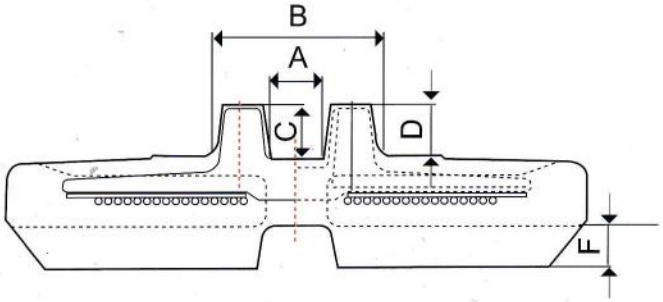

Excavator Track

HXRT
华向橡胶履带

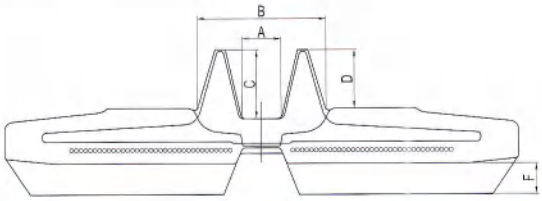

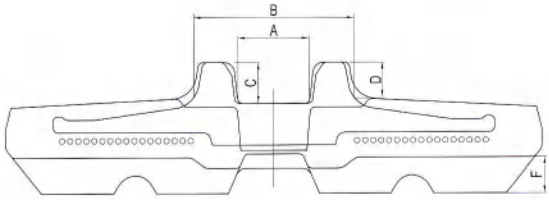

size width*pitch	link	A	B	C	D	F	pattern	guiding
130*40	54-60	20	42.5	20.5	18.5	12	AF1	A1
130*72	29-40	23	64.5	28	28	15	AF1	A2
150*48	60-70	29	77	22	23	14	CF	B1
150*60	32-40	22	64	22.5	24.5	15	AC	A2
150*72	29-40	23	64	23	23	15	AC	A2
170*60	30-40	19	57	22	22	13	CE	A1
180*60	30-40	23.5	64	21	21.5	15	AM	A1
180*72	31-43	25	68	29	29	15	BK	A2
180*72K	32-48	20	61	22	19.5	17	BB1	B2
180*72KM	30-46	23	64	29	31	15	BK	A2
180*72YM	30-46	22.5	65	29	29	14	BK	A2
B180*72	31-43	23	66	30	29	15	BB1	B2
H180*72	30-50	23	64	27	26	17	BK	A2
T180*72	30-50	23	64	29	28.5	15	AC	A2
V180*72K	30-50	20	61	22	19.5	17	BM	A2
190*60	30-40	23.5	64	21	21.5	14	AM	A1
190*72	31-41	21	68	27.5	26.5	15	BF	A2
200*48	60-84	31	68	23.5	21	8.5		B2
200*72	34-47	23	76	28.5	26.5	18	BB1	A2
200*72K	37-47	21	69	29.5	29	18	BM	A2
200*72A	40-52	24	64	28.5	28.5	18	AF1	A2
Y200*72	40-52	24	64	28.5	29.5	12	BK	A2
230*48	60-84	24	72	24	25	21	BI	B1
230*48A	60-84	26	69	22	24	17	BD	B1
230*48K	60-84	24	66	21	20	19	BI	B2
230*72	42-56	24	82	30	26	18	AF1	A2
B230*72K	34-60	25	64	30	30	18	AB	A2
230*72K	42-56	20	69	29.5	28	16	BD	A2
V230*72K	42-56	20	69	29.5	28	16	BM	A2
230*96	30-48	25	68	23.5	25.5	22	BE	B1
230*101	30-36	25	74	22.5	29	19	BO	B1
250*47K	84	23	70	24	20	22	BD	B2
T250*48	60-84	28	68	21	19	20	BI	B1
250*48.5K	80-88	24	66	21	20	19	CA	B2

Excavator Track

HXRT
华向橡胶履带

size width*pitch	link	A	B	C	D	F	pattern	guiding
250*52.5	72-78	29	72	23	25	21	BI	B1
250*52.5N	72-98	30	82	25	18	20	BI	B1
250*52.5K	72-78	26	81	23	25	25	BA	B2
250*72	47-57	24	82	30	26	18	AF1	A2
B250*72	34-60	23	64	29	22	10	CI	A2
B250*72B	34-60	23	78	29	26	16	AB	B2
250*96	35-38	25	70	20	19	22	BB1	B2
250*109	35-38	40	89	24.5	14	20	CG	B1
260*52.5	74-80	40	88	23	22	23	BI	B1
260*55.5K	74-80	31	80	21.5	27	24	CA	B2
Y260*96	38-41	25	68	23	25.5	22	AB	B1
V265*72	34-60	23	78	30	26	19.5	BM	A2
260*109	35-39	30	84	24	29	15	AB	B1
E280*52.5K	70-88	29	84	27	26	22	BI	B2
280*72	45-64	25	78	29.5	26	22	AL	A2
H280*72	45-64	23.5	74	23	22	40	CF	A2
V280*72	45-64	25	75	29.5	26	22	CF	A2
Y280*106K	35-42	30	80	27.5	28	20	AB	B2
300*52.5N	72-98	30	82	25	18	20	BI	B1
300*52.5W	72-92	43	96	22	23	22	BE	B1
300*52.5K	70-88	29	84	27	26	22	BI	B2
300*52.5KW	72-92	40	92	25	24	22	BI	C1
E300*52.5K	70-88	29	84	27	26	22	BI	B2
KB300*52.5	72-92	40	90	24.5	24.5	22	BI	C1
KB300*52.5N	72-98	30	82	23	20	25	BI	B1
JD300*52.5N	72-98	30	80	23.5	22	22	BI	B1
300*53K	80-96	31	88	25	19.5	21	BI	B2
300*55	70-88	29	86	25.5	27.5	23	BI	B1
300*55YM	70-88	30	92	21	27.5	25	BI	B2
300*55.5K	76-82	31	82	22	27	21.5	CA	B2
300*71K	72-76	42	106	23	24	40	BD	B2
300*72	36-40	23	75	40	34	18	BK	A2
BA300*72	36-46	26	76	29	27	19	AF1	A2
300*109N	35-42	29	82	27	28	25	BE	B1
300*109W	35-44	38	90	26	29	24	BB1	B1
K300*109	37-41	27	85	23.5	27.5	20	AB	B2
300*109WK	35-42	40	90	24.5	14	23	CG	B1
320*52.5	72-98	30	83	23.5	18	21	BI	B1
320*54	70-84	29	80	23	21	20	AB	B1
B320*55K	70-88	30	82	25	30	23	BE	B2
Y320*106K	39-43	31	80	26	27	24	AB	B2

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn

Excavator Track

HXRT
华向橡胶履带

size width*pitch	link	A	B	C	D	F	pattern	guiding
350*52.5	70-92	40	94	22.5	19	30.5	BE	B1
E350*52.5K	70-88	29	84	27	26	22	BI	B2
350*54.5K	80-86	40	92	23.5	22.5	23	AD	B2
B350*55K	70-88	30	82	25	30	23	BE	B2
350*56	80-86	39	89	25.5	16.5	20.5	BC	B1
350*72.5KM	62-76	40	93	23.5	25	19	BI	B2
350*73	64-78	48	109	23.5	24	25	BD	B2
350*75.5K	74	37	98	24.5	25	25	CA	C2
350*108	40-46	40	90	24.5	14	25	CG	B1
350*109	41-44	40	92	26	20	25	BO	B1
Y370*107K	39-41	38	94	25.5	28	23.5	AB	B2
400*72.5N	70-80	38	100	26	24	25	AF3	B1
400*72.5W	68-92	51	108	26	24	25	BI	B1
Y400*72.5K	72-74	28	86	30	24.5	25	AF3	C2
KB400*72.5K	68-76	37	94	24	26	23.5	BA	B2
400*72.5K	68-92	46	112	24	23.5	25	BI	B2
400*73	64-78	48	109	23.5	24	25	BD	B2
400*74	68-76	38	100	25.5	29.5	24	BH2	B1
400*84	32-46	25	75	30	27	40	AP	A2
400*75.5K	74	39	100	25	26	25	CA	C2
Y400*107K	46	38	89	27	25	25	AB	C2
K400*142	36-37	27	87	34	27	29	CF	C2
400*144	36-41	47	98	27	11	30	CF	B1
Y400*144K	36-41	35	126	29.5	26	25	BE	B2
450*71	76-88	42.5	115	29.5	17	30	BE	B1
DW450*71	76-88	44	114	31	27	25	BD	B1
450*73.5	76-84	42	118	31	34	28	CG	B1
450*76	80-84	48	122	30.5	31.5	26	BI	B1
450*81N	72-80	42	117	26	24	27	BE	B1
450*81W	72-78	58	140	29	32	30	BI	B1
KB450*81.5	72-80	42	110	31.5	27.5	26	BD	B1
KO450*81.5	72-80	42	110	29	24	25	BI	A1
K450*83.5	72-74	42	112	24.5	25	28	BI	B1
Y450*83.5K	72-74	38	113	24	27	26	CA	B2
K450*163	38	38	114	27	28	30	AB	B2
485*92W	74	62	142	34	33	30	BE	B2
K500*71	72-76	41	106	23	24	42	BE	B2
500*92	72-84	48	130	27	26	29	BI	B1
500*92W	78-84	64	155	32.5	35.5	33	BI	B1
K500*146	35	40	106	26.5	24.5	50	BB1	A2

Carrier Track

HXRT
华向橡胶履带

size width*pitch	link	A	B	C	D	F	pattern	guiding
280*90	50-64	37	87	47	33	40	AL	A2
320*90	52-56	32	86	50	35	28	AA	A2
320*100	38-54	29	74	30	25	23	BN	A2
320*100W	37-65	38	80	34	25	22	CD	A2
350*100	46-60	45	112	45	48	27	AA	A2
420*100	50-58	49	99	50.5	36	25	AA	A2
CMC450*90	64-80	39	85	44	30	30	AA	A2
450*100	62-76	45	112	57	54	45	AA	A2
450*110	74	45	120	64	55	21	AL	A2
500*90	76-82	42	94	51	36	30	AA	A2
500*100	68-80	45	112	57	54	45	AL	A2
V500*100	68-80	45	112	57	54	45	DA	A2
600*100	76-80	44	113	60	49	36	AL	A2
600*125	56-64	43	124	76	61	30	AL	A2
650*110YM	88	48	114	76	60	34	AL	A2
650*120	78	44	130	91	69	38	AL	A2
650*125	80	56	170	90	68	44	AL	A2
700*100	80-98	48	120	75	59	40	AL	A2
T700*100	80-98	48	120	75	56	40	AL	A2
700*125	56-64	55	144	68	56	32	AL	A2
750*150	66-86	62	176	94	68	38	AL	A2
800*125	80	62	175	95	88	32	AL	A2
800*150	66-86	62	167	92	62	45	AL	A2
800*150YM	67-70	76	158	98	68	40	BC	A2
M800*150	66-68	60	148	73	71	35	AL	A2
K800*150	67-70	80	189	108	78	35	AL	A2
900*150	68-80	80	200	101	66	48	AL	A2
1000*150	86	78	210	101	58	37	AL	A2


Combine-harvester Track

size width*pitch	link	A	B	C	D	F	pattern	guiding
300*84N	42-56	22	60	31.5	29	28	AP	A2
KU300*84	30-42	22.5	65	29.5	27	31	AP	A1
U320*90	56-76	37	85	47	32	29	AA	A2
330*79	28-46	22	80	29	29	34	AP	A2
KU330*79	34-46	27	76	29	29	34	AP	A1
330*84	32-46	24	70	29	19	40	AP	A1
350*90	42-56	24	76	41	40	25	AP	A2
U380*90	56-76	34	85	48	34	30	AA	A2
400*90	42-56	38	82	35	32	30	AP	A2
DC400*90	42-56	39	81	39.5	31	37	AP	A2
L400*90	42-56	40	81	35	28	35	AP	A2
450*90	58-76	36	83	46	32	30	AA	A2
450*90N	40-64	38	86	37	30.5	36.5	AP	A2
BS450*90	58-76	34	84	46	31.5	34	AA	A2
KU450*90	58-76	40	82	36	27.5	30	AP	A2
DC500*90	50-60	38	81	39.5	31	43	AP	A2
DC550*90	50-60	39	81	39.5	31	48	AP	A2

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn


Loader Track

HXRT
华向橡胶履带

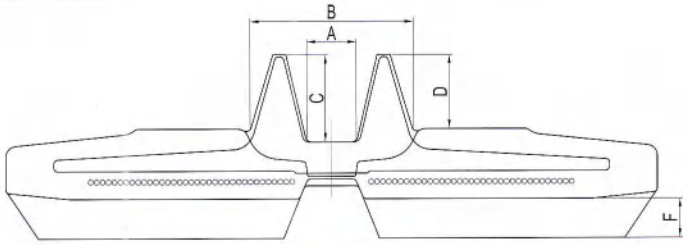

size width*pitch	link	A	B	C	D	F	pattern	guiding
B180*72A	31-43	23	63	29	22	10	AE	A2
VB180*72A	31-43	23	65	29	22	17	BM	A2
B250*72A	34-60	23	63	29	22	10	AE	A2
B250*72CT	34-60	29	76	38	30	21	CI	A2
BH250*72CT	34-60	29	76	38	30	38	DB	A2
E250*72	34-60	29	76	36	27	22.5	CH	A2
B300*84	48-52	48	95	48	36	25	AE	A2
T300*86K	48-52	36	84	43.5	31.5	22	AA	A2
B320*84	50-53	46	96	48	34	25	AE	A2
B320*86	46-52	48	95	48	36	25	AE	A2
BH320*86	48-52	48	95	48	36	42	DA	A2
T320*86K	48-52	36	84	43.5	31.5	25	CH	A2
KU380*86	50-60	48	95	58	37	26	AE	A2
B400*86	52-55	48	97	48	36	25	AE	A2
T400*86K	50-56	38	84	44	32.5	29	AE	A2
B450*84	53-56	48	97	48	36	25	AE	A2
B450*86	52-55	48	97	48	36	25	AE	A2
KU450*86	50-63	48	97	48	36	24	CI	A2
T450*100K	48-65	50	104	47	44	30	CH	A2

Snow Mobile Track

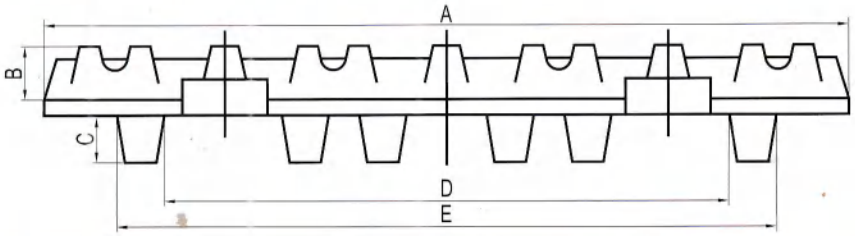


size width*pitch	A	B	C	D	E
256*65	256	17	15	180	210
381*64	381	22	16	273	307
WD200*72	200	14	29	22	51
WD230*72	230	17	30	22	68
WD300*72	300	19	32	24	68


Paver Track

HXRT
华向橡胶履带


size width*pitch*link	A	B	C	D
14"*6"*46	356	140	64	22
19"*6"*52	483	140	64	22
18"*9"*36	456	120	100	40

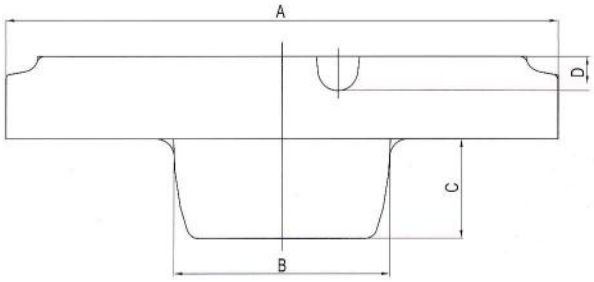

Metal Coreless Track

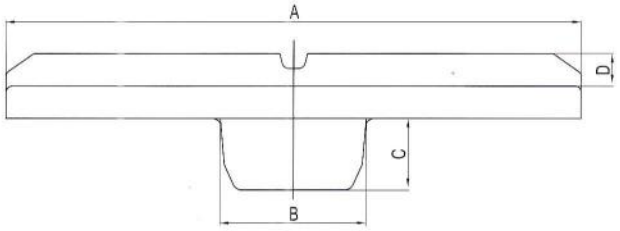

size width*pitch*link	A	B	C	D
6"*3.5"*28	149	63.5	31	14
10"*3.5"*28	250	63.5	31	14
L10"*3.5"*51	250	52	42	14
160*88	160	62	31	12

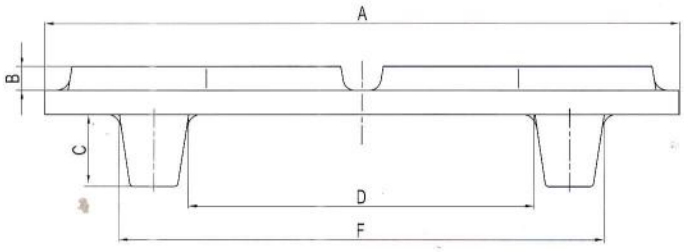


size width*pitch*link	A	B	C	D	E
340*152.4	340	29	124	224	340
500*110	500	15	75	246	370
550*105	550	20	60	300	420
600*110	600	15	120		

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn


ANTI-DETRACKING & ANTI-VIBRATION

HXRT
华向橡胶履带



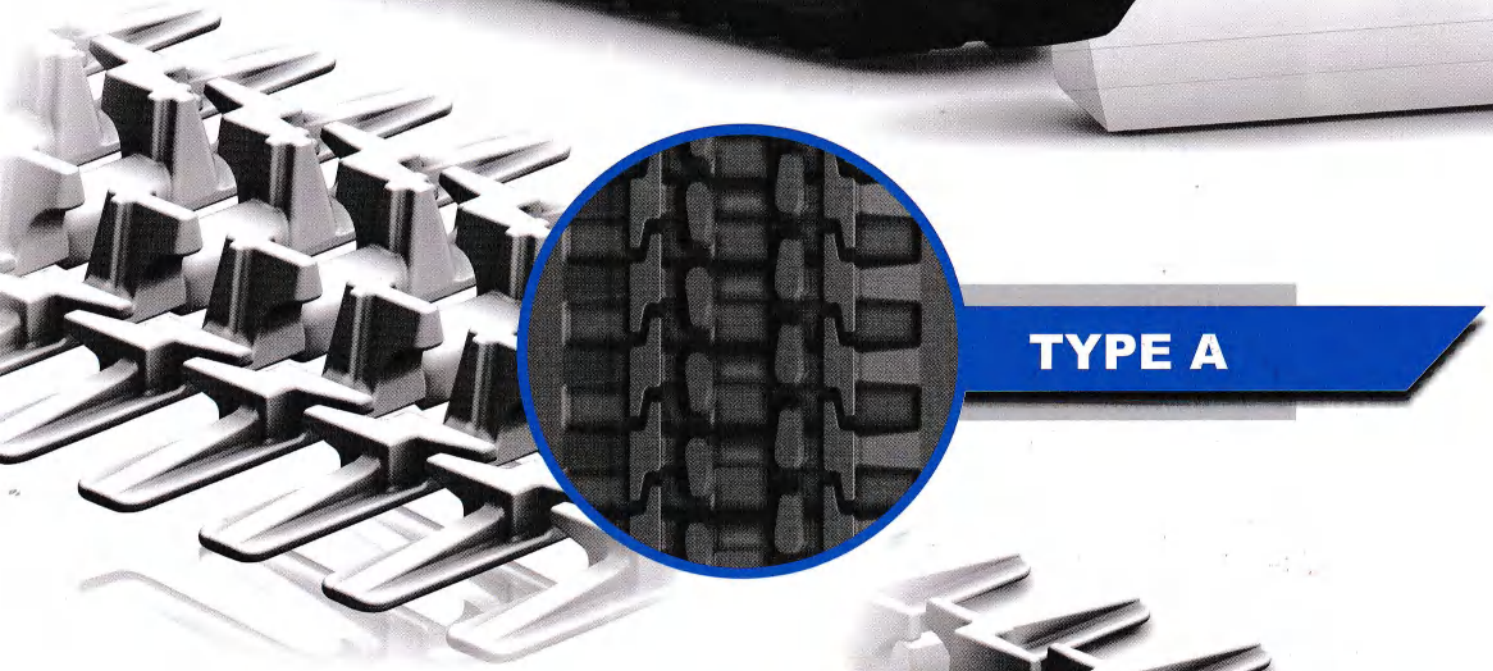


TYPE A

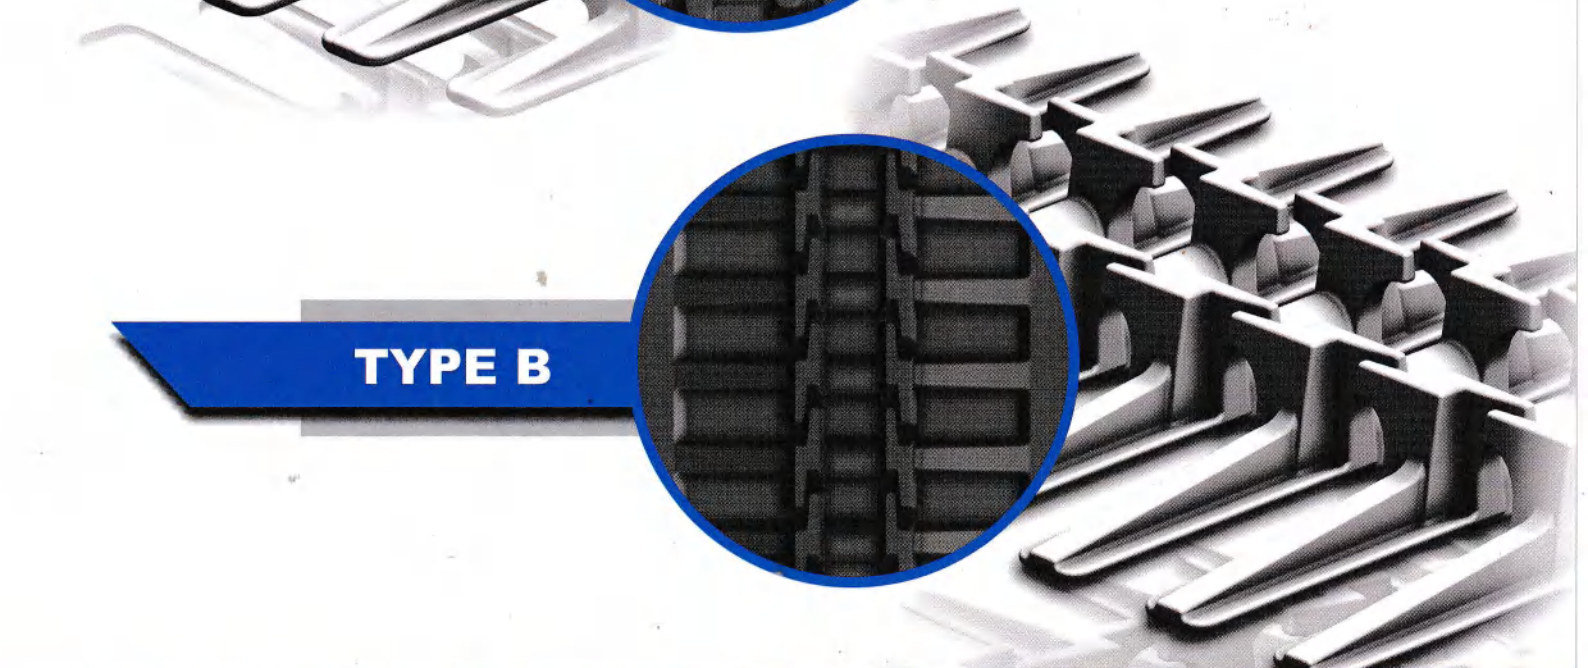

TYPE B

ANTI-DETRACKING & ANTI-VIBRATION

HXRT
华向橡胶履带

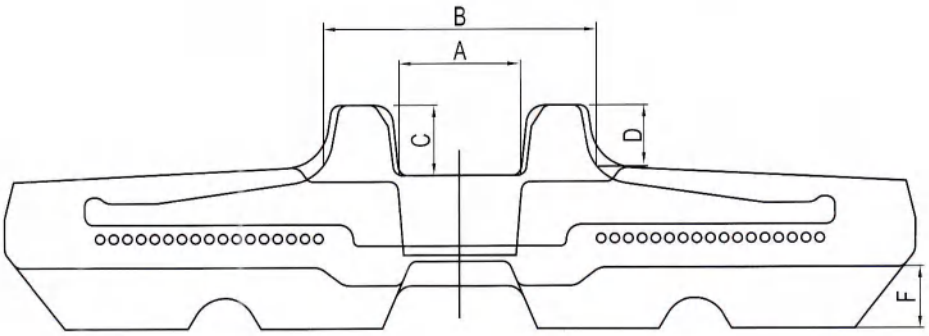

size width*pitch	link	A	B	C	D	F	pattern	guiding
A230*48	60-84	24	70	24	25	20	BI	B2
A230*48K	60-84	24	66	21	20	18	BI	B2
A250*52.5N	72-98	30	82	25	18	20	BI	B1
A250*55.5K	72-78	28	83	22.5	26.5	15	BI	B2
A300*52.5K	70-88	30	84	27	26	20	BI	B2
A300*52.5N	72-98	30	82	25	18	20	BI	B1
A300*52.5W	72-92	42	93	22	23	20	AD	B2
A300*53K	80-96	31	88	25	19.5	20	BI	B2
A300*55.5K	76-82	31	82	22	27	21.5	CA	B2
SV300*55.5	76-82	28	83	22.5	26.5	15	BI	B2
A350*75.5K	74	37	97	24.5	24.5	25	CA	B2
A400*72.5K	68-92	46	118	24	23.5	25	BI	B2
A400*72.5N	70-80	38	98	26	25	25	BI	B1
A400*72.5W	68-92	51	108	26	24	25	BI	B1
A400*75.5K	74	37	97	24.5	24.5	22.5	CA	B2
A450*71	76-88	51	112	28	22	25	AD	B1
A450*76	80-84	59	120	30.5	25	25	BI	B1
A450*81N	72-80	42	114	24	22	25	AE	B1
A450*81W	72-78	58	128	29	32	25	BI	B2
AK450*83.5	72-74	42	110	25	25.5	25	AE	B2
AKB450*81.5	72-80	42	110	31.5	27.5	25	BI	B1
AY450X83.5K	72-74	40	112	24	27	25	CA	B2

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn


Smart track

HXRT
华向橡胶履带

size width*pitch	link	A	B	C	D	F	pattern	guiding
S180*60	30-40	23.5	63	21	21.5	15	AM	A1
S180*72	31-43	23	64	29	28.5	15	AC	A2
S230*48	60-84	24	70	24	25	20	BI	B1
S230*48A	60-84	26	69	22	24	17	BI	B1
S230*72	42-56	24	80	29	25	18	AF1	A2
S230*96	30-48	25	62	23.5	25.5	18	BB1	B1
S300*52.5N	72-98	30	82	25	18	20	BI	B1
S300*52.5K	70-88	31	84	27	26	20	BI	B2
S300*52.5W	72-92	45	94	22	23	20	BE	B1
S300*53K	80-96	31	88	25	19.5	20	BI	B2
S400*72.5N	70-80	38	98	26	25	25	BE	B1
S400*72.5K	68-92	46	118	24	23.5	25	BI	B2
S400*72.5W	68-92	51	108	26	24	25	BI	B1
S450*71	76-88	42	112	28	22	25	AE	B1
S450*76	80-84	48	120	30.5	25	25	BI	B1
S450*81N	72-80	42	114	24	22	25	BE	B1
S450*81W	72-78	58	128	29	32	25	BD	B1
SKB450*81.5	72-80	42	110	31.5	27.5	25	BI	B1
SK450*83.5	72-74	42	110	25	25.5	25	BI	B2
SY450*83.5K	72-74	40	112	24	27	25	CA	B2

AG Track

size width*pitch*link	A	B	C	D
18"*6.75"	460	156	87	67
25"*6.75"	640	156	87	67
30"*6.75"	762	186	90	76
30"*6"	762	120	102	65
36"*6.75"	915	186	90	76

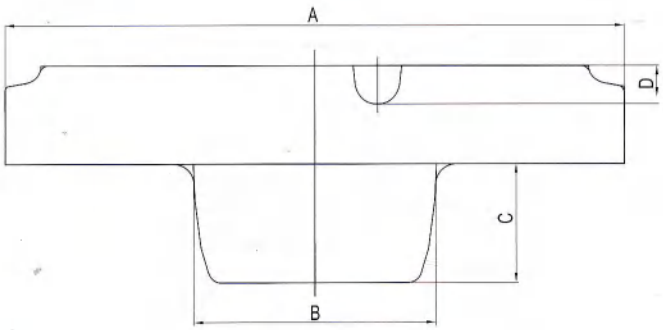


地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn

High Tread

HXRT
华向橡胶履带

size width*pitch	link	A	B	C	D	F	pattern	guiding
W200*72	34-47	23	76	28.5	26.5	30	DA	A2
W230*72	42-56	24	82	30	26	37	DA	A2
BH250*72CT	34-60	29	76	38	30	38	DA	A2
W250*72	47-57	24	82	30	26	37	DA	A2
W280*72	45-64	25	78	29.5	26	37	DA	A2
W300*72	36-40	23	75	40	34	37	DA	A2
BH320*86	48-52	48	95	48	36	42	DA	A2
H350*52.5	70-92	41	94	23	19	30	DB	A2

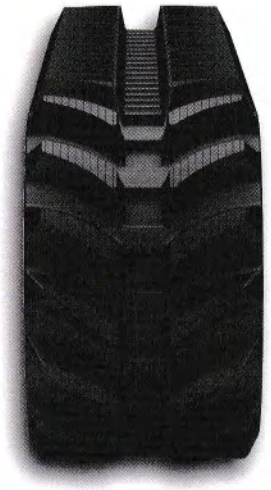


Golf Course Track




size width*pitch	link	A	B	C	D	F	pattern	guiding
180*60GL	30-40	23.5	63	21	21.5	15	GL	A1
180*72GL	31-43	25	68	29	29	15	GL	A1
200*72GL	34-47	23	76	28.5	26.5	15	GL	A1
230*72GL	42-56	24	80	29	25	15	GL	A1
B320*86GL	46-52	48	95	48	36	15	GL	A1
B400*86GL	52-55	48	97	48	36	15	GL	A1
B450*86GL	52-55	48	97	48	36	15	GL	A1

Bolt On Type



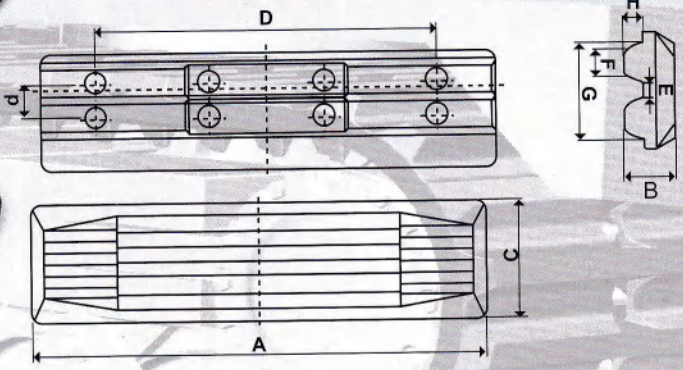


Clip On Type

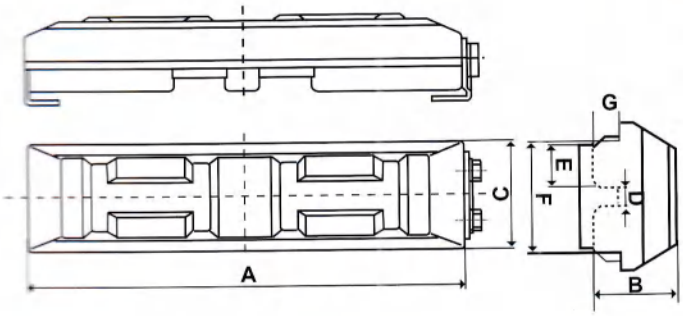



Chain On Type



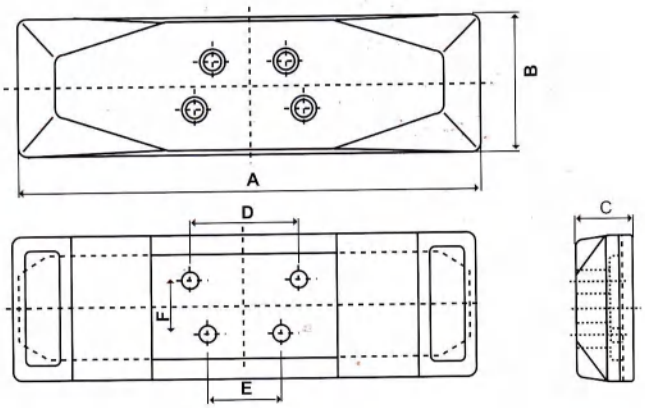


Keep improving our techology and make the quality of our products even better.


HXRT


华向橡胶履带

Clip On Type （端部固定履带块）

HXRT
华向橡胶履带



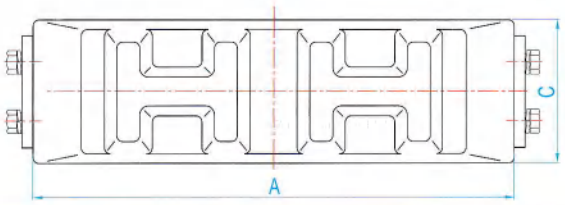



MODEL	A	B	C	D	E	F	G	是否单挂
HXP200F	206	50	70		46	50	17.5	0
HXP250F	256	50	70		46	49	17	0
HXP260F	260	50	70		46	49	17	
HXP270F	276	50	70		44	48	17	0
HXP280F	286	50	70		44	48	17	0
HXP280ZG	280	55	123	12	43	107	20	
HXP300F	306	50	70		42	49	18	0
HXP300FE	306	50	70		49	55	17	0
HXP300BD	300	54	100	10	33	90	10.5	
HXP300HD	306	55	108	13	33	81	18	0
HXP300HD-W	306	59	108	15	33	86	18	0
HXP320F	326	50	70		47	50	17	0
HXP350F	356	50	70		45	49	18	0
HXP350ZG	350	63	134	15	42	114	26	
HXP3811	380	60	108	15	29	80	18	
HXP400HD	406	55	108	14	32	82	19	0
HXP400HD-W	406	55	108	15	33	86	18	0
HXP400HK	400	70	130	12	33	104	26	
HXP400VA	400	62	118	18	33.5	97	18	
HXP450E	450	56	133	16	40.5	103	21	
HXP450G	450	74	142	18	33	104	23	
HXP450K	450	61	106	16	30	88	18.5	
HXP450HD	456	56	109	13	31	81.5	20	0
HXP450HD-W	457	55	108	15	33	86	18	0
HXP500A	500	70	135	15	35	104	20	
HXP500B	500	70	135	18	36	102	26	
HXP500G	502	74	142	16	35	104	23	
HXP500GH	502	82	142	19	33.5	104	25	
HXP500HD	504	67	130	12	33	104	26	
HXP500HD-W	506	59	108	15	33	86	18	0
HXP500K	504	88	162	19	43.5	120	26	
HXP550B	550	70	130	18	36	100	22	0
HXP550T	550	82	155	18	48	134	35	
HXP550H	550	85	150	18	42	116	26	
HXP550HD	550	68	115	15	30	85	18	0
HXP600A	600	85	153	16	47	122	26	
HXP600B	600	72	130	18	36	102	26	
HXP600C	600	91	172	21	38	131	32	
HXP600G	604	74	140	15	35	100	20	
HXP600HD	600	70	130	12	33	104	26	
HXP600K	600	85	164	19	40.5	113	26	
HXP600LN	600	67	114	12	29.5	80	20	
HXP600N	600	74	140	15	35	103	24.5	

Clip On Type （端部固定履带块）


HXRT
华向橡胶履带

MODEL	A	B	C	D	E	F	G	是否单挂
HHXP600BT	596	52	145	15	48	123	26	0
HHXP700BT	698	60	138	12	43	114	20	0
HXP700C	700	62	134	14	42	114	18	
HXP700D	700	85	152	25.5	38.5	102.5	25	
HXP700G	700	74	140	18.5	34	100	27	
HXP700N	700	74	142	16	47	119	26.5	
HXP700KPC	700	69	163	15	40.5	112	25	
HXP700W	700	92	163	15	38	112	33	
HXP700W5	702	74	137	12	35.5	104	20	
HXP700HD	700	70	130	12	33	104	26	
HXP750SD20	750	95	163	23	47	131	26	
HXP800SD10	800	85	142	17	38.5(43)	112.5	26	
HXP800SD20	800	95	163	23	47	131	36	
HXP800-336D	800	75	162	29	43	125	27.5	
HXP850SD20	850	95	163	23	47	131	26	
HXP900SD20	900	95	163	23	47	131	26	
300-101-CL	306	50	70		42	49	18	0
400-135-CL	398	55	108	8.7	36.5(36)	91.4	13(10)	0
400-140-CL	396	45	110	15	34.5	92	18.5	0
400-171-CL	400	69	140	14	38	102	24	0
600-175-CL	598	57	142	19	35	100	23	0
700-175-CL	700	69	140	14	41	108	19	0
400-160-CL	400	62	118	18	33.5	97	21	0
500-160-CL	500	62	118	18	33.5	97	21	0
450-154-CL	450	56	133	11	40	103	19	0
600-154-CL	600	56	133	11	40	103	19	0
HXP600-154-CL	600	56	133	11	40	103	19	0
500-171-CL	500	67	140	14	38	102	26	0
600-171-CL	600	67	140	14	38	102	26	0
700-171-CL	700	69	140	14	38	102	26	0
550-190-CL	550	70	160	14	41	110	26	0
600-190-CL	600	70	160	14	41	110	26	0
700-190-CL	700	70	160	14	41	110	26	0
800-190-CL	800	70	160	14	41	110	26	0
600-216-CL	600	76	162	20	50	136	36	0
700-216-CL	700	76	162	20	50	136	36	0
800-216-CL	800	76	162	20	50	136	36	0

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn

Bolt On Type （平面固定履带块）

HXRT
华向橡胶履带

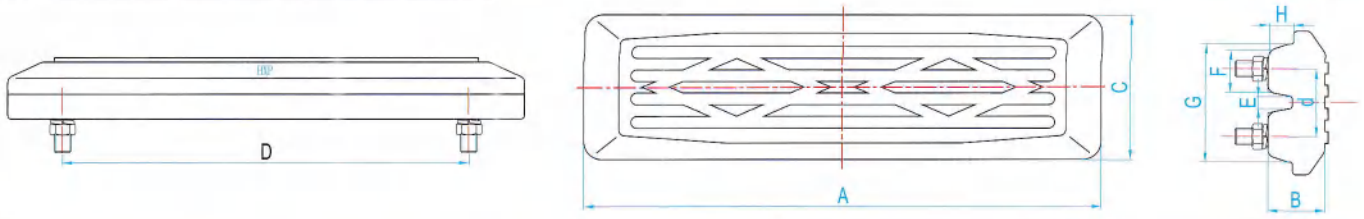

MODEL	A	B	C	D*d	E	F	G	H
HXP230W	225	38	70	150		50	56	16.5
HXP230SA	230	32	63	150		44	52	15
HXP230SB	230	32	70	150		50	55	16
HXP250W	245	38	70	200		50	56	16.5
HXP250S	250	34	70	200		50	56	16.5
260-110-40 Paver Pad	260	40	110	200*46	8	37.5(37)	92.4	14(11)
HXP300FH	300	42	68	199		48	56	16
HXP300SA	299	38	69	200		46	55	16
HXP300SB	302	31	64	200		48	53	14
HXP300W	295	38	70	200		50	56	16.5
HXP300S	300	34	70	200		50	56	16.5
320-150-50/2 Paver Pad	320	52	135	220*46		98	102	17
HXP350A	350	38	70	200		46	52	16
HXP350B	350	37	112	250*46	9	35.5	91	14(11)
HXP350SA	349	38	69	199		47	54	16
HXP350SB	350	40	73	250		47	54	16
HXP350SC	350	37	112	250*46	9	35.5	88	14
HXP350SL	340	42	105	290*46	8.5	34.5	88.5	14
HXP350SR	340	42	105	290*46	8.5	34.5	88.5	14
HXP350LR	350	36	105	290*46	8.5	34.5	88.5	14
HXP350SE	350	45	123	250*53	17	31	89	18
HXP400SA	400	46	104	300*46.5	8	31	83	17.5
HXP400SB	400	44	108	300*46	13	24	85	18
HXP400SC	400	41	105	300*45	9	35(34)	88.5	15(12)
HXP400SL	390	39	106	300*46	9	36.5	92	14
HXP400SR	390	39	106	300*46	9	36.5	92	14
HXP400LR	398	39	109	300*46	9	36.5	92	14(11)
HXP400W	390	40	110	300*46	8.7	36	91.4	15(11)
HXP400S	400	36	110	300*46	8.7	36	91.4	15(11)

Bolt On Type（平面固定履带块）


HXRT
华向橡胶履带


MODEL	A	B	C	D*d	E	F	G	H
HXP450SA	447	45	103	300*46	8	31	83	17
HXP450SB	445	50	124	350*58	10	36.5	91	21
HXP450SC	449	42	105	350*45	8.5	35(31)	90	14(12)
HXP450SD	444	46	123	350*58	11	38.5	103	19.5
HXP450SE	450	45	123	350*53	17	31	89	18
HXP450SF	450	46	107.5	350*52	15	33.75	92.5	18.5
HXP450SL	450	46	128	350*58	11.5	41(45)	107	20
HXP450SR	450	46	128	350*58	11.5	41(45)	107	20
HXP450LR	450	42	128	350*58	11.5	14(45)	107	20
HXP450W	440	54	127	350*58	10	42(44.5)	109	20
HXP450S	450	48	127	350*58	10	42(44.5)	109	19
HXP475	475	45	133	350*60	13	43	113	20
HXP500SA	492	60	120	400*58	11	34	103	26
HXP500SC	490	51	132	408*60	12	43.25	112	20.5
HXP500SD	490	57	135	400*60.3	13	44(45)	117	20
HXP500W	490	67	135	400*60.3	13	44(45)	117	20
HXP500S	500	52	135	400*58	16	42	112	20
HXP600B5	600	52	135	500*60	16	42	117	19
HXP600SA	594	57.5	124	400*57	14	38	102	24
HXP600SB	600	70	140	500*65	13	46(43.5)118	118	20
HXP600W	590	80	150	400*69	15	48	124	26
HXP600S	600	69	150	400*69	15	48	124	26
HXP700SA	694	57.5	124	500*57	14	38	102	24
300-101-B1	300	42	68	200		48	56	16
400-135-B1	400	40	110	300*46	8.7	36	102.3	13(10)
450-154-B2	445	50	124	350*58	10	36.5	102	21
500-171-B1	495	57.5	124	400*58	14	38	102	24
600-171-B1	594	57.5	124	400*58	14	38	102	24
700-171-B1	694	57.5	124	500*58	14	38	102	24
500-190-B1	490	70	150	400*69	15	48	124	26
600-190-B1	590	70	150	400*69	15	48	124	26
700-175-B1	700	69	140	600*60	14	41	108	19
800-216-B1	800	73	164	600*76	18	50.5	138	33
850-216-B1	850	73	164	600*76	18	50.5	138	33
800-216-B2	800	70	164	600*76	18	50.5	134	30

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn

Chain On Type（互换性履带块）

HXRT
华向橡胶履带




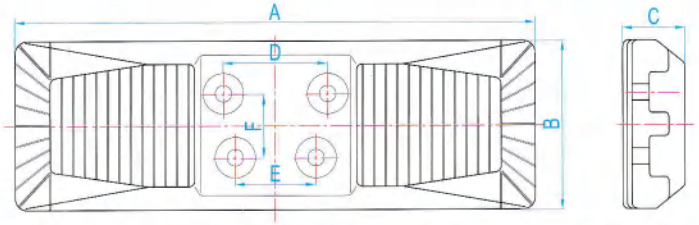


MODEL	A	B	C	Bolt	D	E	F
HXPCT230*	230	80	32	12	150		
HXPCT300	300	95	45	12	144	116	22
HXPCT380	380	125	52	12	100	73	43.5
HCPCT-360AN	360	178	55	16	108	108	60.5
HXPCT400	400	125	50	12	94	64	46
HXPCT400A*	400	125	52	12	100	73	43.5
HXPCT400B	400	125	52	12	104	80	46
HXPCT400C	398	124	69	12	94	64	46
HXPCT400D	400	125	66	12	110	80	46
HXPCT425*	425	148	80	16	108	108	61
HXPCT450	450	145	50	14	89	73	57
HXPCT450A	450	145	54	14	90	90	55
HXPCT450B	450	130	54	12	99	72	43.6
HXPCT450C	450	145	54	12	76	106	46
HXPCT450D	450	145	51	14	90	90	46.3
HXPCT450E*	450	146	56	14	73	73	57
HXPCT450F	450	145	77	14	89	73	57
HXP450FN	450	130	74	14	89	73	57
HXPCT450G	450	130	54	12	83	83	52
HXPCT450H	450	145	54	12	86	86	52
HXPCT450J	450	130	74	14	90	90	55
HXPCT500	500	165	63	16	102	86	57
HXPCT500A	500	165	69	16	108	108	60.5
HXPCT500AN	500	156	86	16	108	108	60.5
HXPCT500B	500	164	100	16	102	86	57
HXPCT500C	500	165	69	16	160	124	62
HXPCT500offset	500	165	63	16	102	86	57
HXPCT-550A	550	178	71	20	160	124	62
HXPCT600A	600	178	72	20	160	124	62
HXPCT600C	600	162	60	16	108	108	60
HXPCT600D	600	178	72	20	156	119	69
HXPCT600E	600	145	50	20	90	75	55
HXPCT600F	600	144	95	14	89	73	57
RP300-101-R1	300	95	45	12	144	116	22
RP400-135-R1	398	144	59	12	94	64	46
RP400-135-R2	398	144	59	12	104	80	46
RP400-135-R3	398	144	59	12	99	72	43.5
RP450-154-R2	450	150	74	14	90	90	55
RP450-154-R3	450	150	74	14	89	73	57
RP500-171-R2	500	178	86	16	108	108	60.5
RP500-175-R1	500	184	87	16	102	86	57
RP600-171-R2	600	178	86	16	108	108	60.5
RP600-190-R1	600	200	100	20	160	124	62
RP600-190-R2	600	200	100	20	156	119	69

Special Rubber Pads（特殊规格履带块）


HXRT
华向橡胶履带

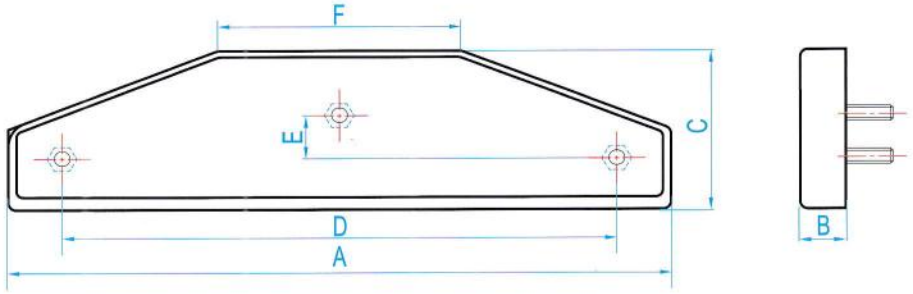

MODEL	A	B	C	D	E	F
HXP490T	490	34	128	410	35	180

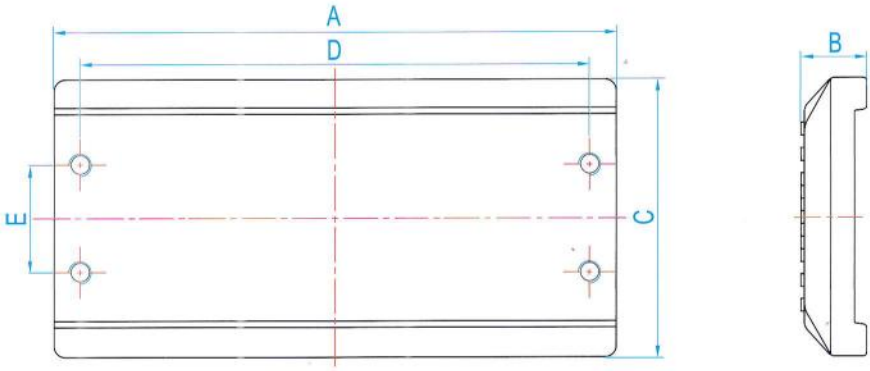


MODEL	A	B	C	D	E
HXP264ST	264	35	155	234	60
HXP315ST	315	35	155	285	60
HXP180ST	177	42	110	79	53
HXP355TB	355	31.2	130	237.5	

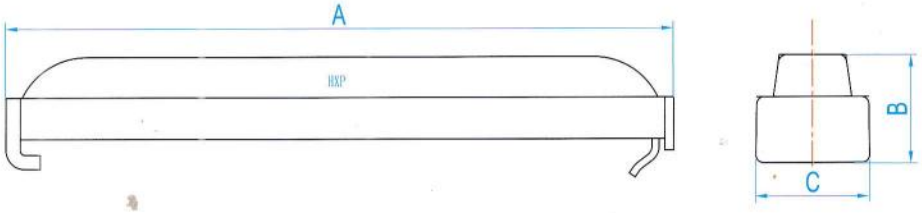

MODEL	A	B	C	D
HXP310SS	324	75	85	14
HXP350SS	364	75	85	14
HXP360SS	375	75	85	14
HXP400SS	414	75	85	14
HXP450SS	468	75	85	14

地址：上海市奉贤区青村镇奉柘公路2735号
ADD:No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China E-mail: hxrt@vip.163.com /sales@hxrt.com.cn

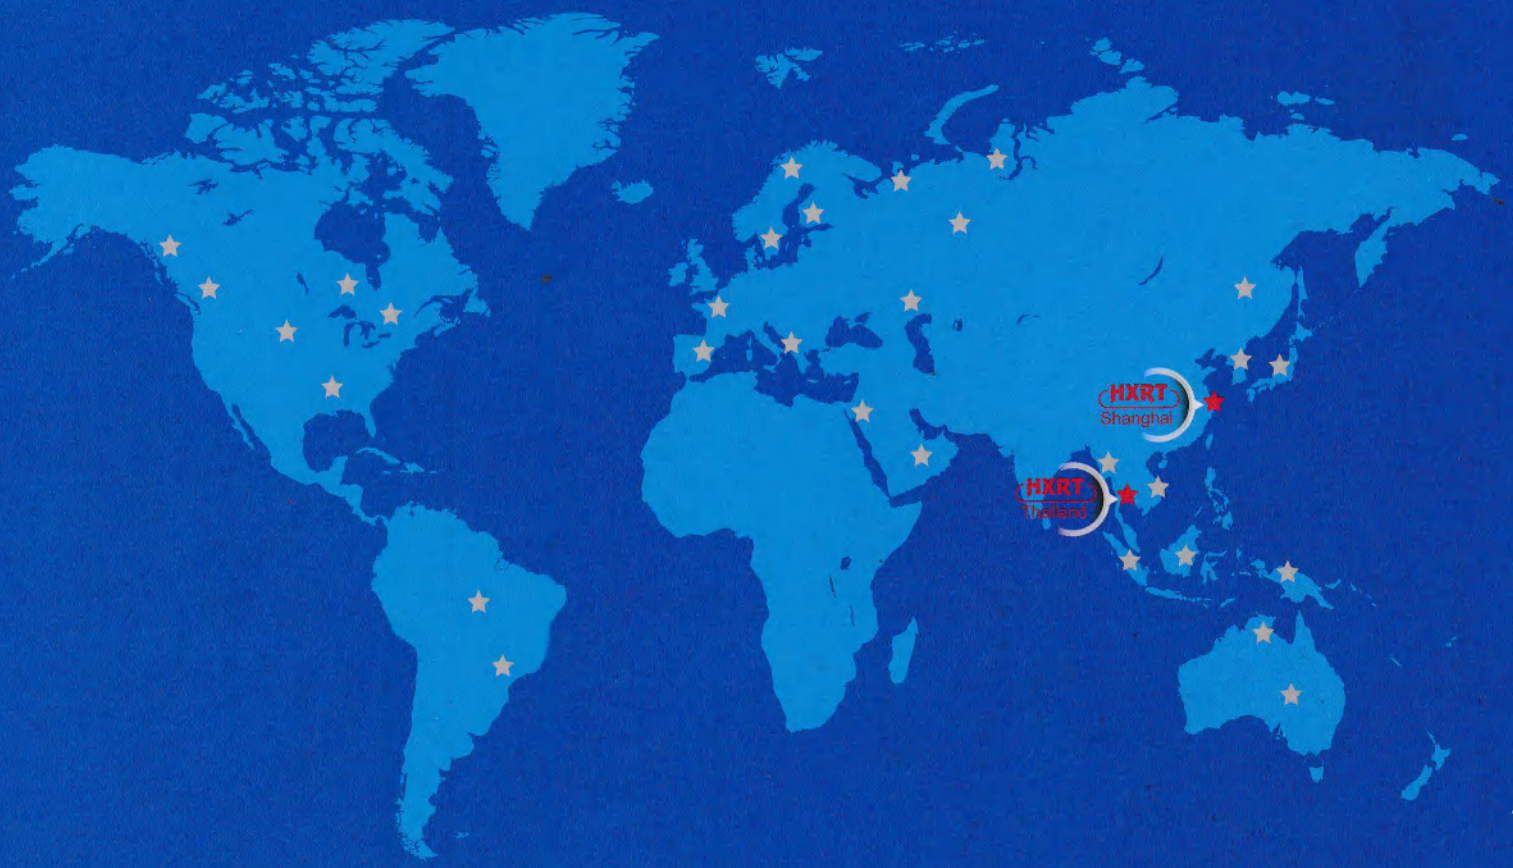

HXRT

Http://www.hxrt.com.cn

地址：上海市奉贤区青村镇奉柘公路2735号
ADD : No.2735, Fengzhe Rd,Feng Xian District, Shanghai, China
E-mail:hxrt@vip.163.com / sales@hxrt.com.cn