

属具 Attachments



可选配置表		
FR系列 1.0-4吨 柴油叉车	可选配置	驾驶室，双前轮，实心轮胎，高档座椅，高位排气，倾斜缸、起升缸护套，双空气滤清器，油滤式空气滤清器，灭火器，灭火罩，日本五十铃、洋马发动机，二级全自由门架，加高门架，三级全自由门架，加长货叉，石材专用货叉、加大散热器，加宽货叉架等
	可选属具	侧移器、调距叉、侧移调距叉、软包夹、纸卷夹、平包夹、纸箱夹、砖块夹、旋转器、旋转叉、倾翻叉、环卫叉、铲斗、载荷稳定器、单双托盘叉、圆木夹、轮胎夹、推拉器、化肥推出器、桶夹、串杆、起重臂等
FR系列 4.3-5吨 柴油叉车	可选配置	驾驶室，双前轮，实心轮胎，高档座椅，倾斜缸、起升缸护套，双空气滤清器，油滤式空气滤清器，灭火器，灭火罩，二级全自由门架，加高门架，三级全自由门架，加长货叉，石材专用货叉、加宽货叉架等
	可选属具	侧移器、调距叉、侧移调距叉、软包夹、纸卷夹、平包夹、旋转器、旋转叉、圆木夹、轮胎夹、桶夹、串杆等
FR系列 5-10吨 柴油叉车	可选配置	驾驶室，实心轮胎，高档座椅，倾斜缸、起升缸护套，双空气滤清器，油滤式空气滤清器，灭火器，灭火罩，五十铃柴油机、加高门架，三级全自由门架，加长货叉等
	可选属具	侧移器、软包夹、纸卷夹、旋转器、圆木夹、轮胎夹、串杆等

OPTIONAL CONFIGURATION LIST		
FR Series 1.0-4Tons Forklift Truck:	Optional Configuration	Closed cabin, Dual front wheel, Solid tire, Top-grade seat, Up exhaust, Protective sleeve of tilting and lifting cylinder, Dual air filter, Wet-type air filter, Fire extinguisher bottle, Fire shield, Japan ISUZU and YANMAR engine, 2-stage mast with full-free lift, Heightened mast, 3- stage mast with full-free lift, Optional extended forks, Special fork for stone factory, Special-big radiator, Widen fork arm carrier and so on.
	Optional Attachments	Side shifter, Fork positioner, Side shift and fork positioner, Bale clamps, Paper roll clamps, Flat bag clamps, Carton clamps, Block clamps, Rotators, Rotating forks, Hinged fork, Sanitation fork, Bucket, Load stabilizers, Single double pallets handlers, Log clamps, Tyre clamps, Push/Pull, Fertilizer pusher, Drum clamps, Carpet boom, Lifting arm and so on.
FR Series 4.3-5Tons Diesel Forklift Truck:	Optional Configuration	Closed cabin, Dual front wheel, Solid tires, Top-grade seat, Protective sleeve of tilting and lifting cylinder, Dual air filter, Wet-type air filter, Fire extinguisher bottle, Fire shield, 2-stage mast with full-free lift, Heightened mast, 3-stage mast with full-free lift, Optional extended forks, Special fork for stone factory, Widen fork arm carrier and so on.
	Optional Attachments	Side shifter, Fork positioner, Side shift and fork positioner, Bale clamps, Paper roll clamps, Flat bag clamps, Rotators, Rotating forks, Log clamps, Tyre clamps, Drum clamps, Carpet boom and so on.
FR Series 5-10Tons Diesel Forklift Truck:	Optional Configuration	Closed cabin, Solid tire, Top-grade seat, Protective sleeve of tilting and lifting cylinder, Dual air filter, Wet-type air filter, Fire extinguisher bottle, Fire shield, ISUZU diesel engine, Heightened mast, 3-stage mast with full-free lift, Optional extended forks and so on.
	Optional Attachments	Side shifter, Bale clamps, Paper roll clamps, Rotators, Log clamps, Tyre clamps, Carpet boom and so on.




山东威肯科技有限公司

SHANDONG WECAN TECHNOLOGY CO.,LTD
地址:中国菏泽曹县迎宾大道66号 邮编(P.C.):274400
Add:No. 66 Yingbin Avenue,Caoxian County,Heze City,Shandong Province,China
内销电话(Domestic Phone): +86-530-3893606 19953018868
传真(Fax): +86-530-3893666
外销电话(Export Phone): +86-530-3893601 19953018868
传真(Fax): +86-530-3893671
售后服务(After-sales Service): +86-530-3893616 19953018825
E-Mail:wecan@wecanforklift.com wecan@wecanfactory.com
Http://www.wecanfactory.com Http://www.wecanforklift.com

本公司保留技术参数变更的权力，并不另行通知客户。如需详细规格，请电洽。2024年10月



轻松工作 轻松生活
EASY WORK EASY LIFE

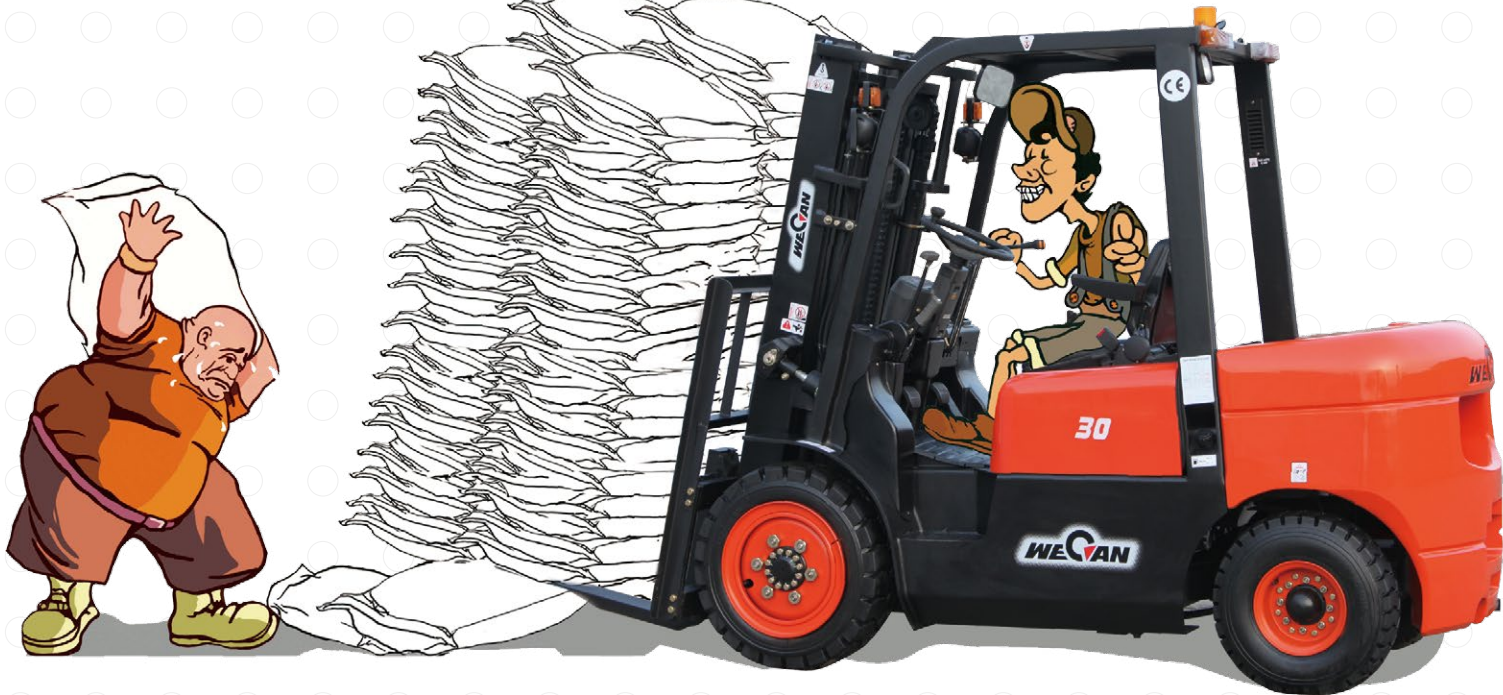

FR系列1.0-5T_{ON}

柴油平衡重式系列叉车

1.0-4T Counterbalanced Diesel Powered Forklift Truck

- 1.警示灯
Warning Light
- 2.可选配高档减震座椅
Optional top-grade damped seat
- 3.1.22米加长货叉
1.22m Extended Fork
- 4.宽视野门架
Wide view mast
- 5.大圆弧配重
Balance Weight with Great Circle




主要技术参数 Main Specification

型 号 MODEL		CPC10FR	CPC15FR	CPC20FR	CPC25FR	CPC30FR	CPC35FR	CPC40FR	CPC50	CPCD50
		CPCD10FR	CPCD15FR	CPCD20FR	CPCD25FR	CPCD30FR	CPCD35FR	CPCD40FR		
额定起重量	Load capacity	kg	1000	1500	2000	2500	3000	3500	5000	5000
载荷中心	Load center	mm	500	500	500	500	500	500	500	500
动力形式	Power type	柴油 Diesel								
最大起升速度（满载）	Max. lifting speeds(with load)	mm/s	500	500	400	400	400	375	380	450
最大行驶速度（满/空载）	Max.driving speeds(with/outload)	km/h	13.5/14	14.5/15	17/19	17/19	18/20	18/20	19/20	23/26
最大牵引力（满/空载）	Max.towing(with/outload)	kn	/	14/8	14/9	15/10	15.5/10.5	16/11	16.5/11.5	31/18
爬坡度（满/空载）	Gradeability(with/outload)	%	15/20	15/20	15/20	15/20	15/20	15/20	15/20	15/20
H1起升高度	Lifting height	mm	3000	3000	3000	3000	3000	3000	3000	3000
自由起升高度	Free lift	mm	/	/	60	60	80	80	85	150
门架倾角（α前/β后）	Tilting angles(forward-backward)	°	6/12	6/12	6/12	6/12	6/12	6/12	6/12	6/12
最小转弯半径	Min.turning radius	mm	2150	2200	2450	2450	2500	2500	2720	3000
最小直角通道宽	Min.right angle aisle width	mm	1750	1770	2050	2050	2110	2110	2320	2750
最小离地间隙	Minunder-clearance	mm	110	110	110	110	130	130	150	170
Dimensions 外形尺寸	A全长（含货叉）	Overall length(including fork)	mm	3210	3245	3670	3670	3985	4160	4510
	B全宽	Overall width	mm	1095	1085	1170	1170	1270	1270	1480
	H全高（门架缩进）	Overall height(mast lowered)	mm	2000	2000	2000	2000	2100	2120	2340
	H2作业高度（门架全伸出）	Overall height(mast extend)	mm	4035	4035	4080	4080	4270	4270	4260
H3至护顶架高度		Overall height to overhead guard	mm	2150	2070	2080	2080	2100	2120	2330
A1前悬距	Fork overhang	mm	400	415	455	455	480	480	505	580
A2轴距	Wheel base	mm	1420	1440	1640	1640	1750	1750	1900	2150
Tread 轮距	B1前轮	Front tread	mm	900	900	970	970	1000	1000	1180
	B2后轮	Rear tread	mm	920	920	970	970	970	970	1190
Tyre 轮胎	前轮	Front tyre	6.50-10	6.50-10	7.00-12	7.00-12	28"9-15	28"9-15	250-15	300-15
	后轮	Rear tyre	5.00-8	5.00-8	6.00-9	6.00-9	6.50-10	6.50-10	7.00-12	7.00-12
自重	Total weight	kg	2000	2650	3300	3600	4350	4580	4900	6900
B3货叉宽度	Fork width	mm	100	100	122	122	122	122	150	150
H4货叉厚度	Fork thickness	mm	35	35	40	40	45	45	45	50
挡货架高	Backrest height	mm	960	960	1000	1000	1200	1200	1200	1200
A3标准货叉长度	Fork length	mm	920	920	1070	1070	1220	1220	1220	1220
Engine 发动机	型号	Engine model	国IV China IV							
	额定功率	Rate power	kw	33	33	36.8	36.8	36.8	65	65
	额定功率时转速	Rotate speed at rate power	rpm	2600	2600	2500	2500	2500	2200	2200
	最大扭矩	Max.torque	nm	150	150	190	190	190	200	355
	最大扭矩转速	Ratate speed at max torque	rpm	1800	1800	1800	1800	1800	1600	1600
变速形式	Type of power shift	CPC-机械 Manual / CPCD-液力 Tor-con								

5-10T_{ON}

柴油平衡重式系列叉车

5-10T Counterbalanced Diesel Powered Forklift Truck

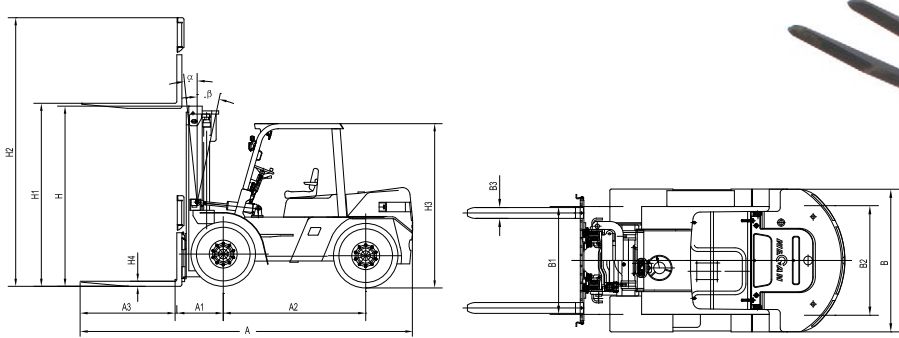

主要技术参数 Main Specification

型 号 MODEL			CPCD50FR	CPCD60FR	CPCD70FR	CPCD100FR	
额定起重量 Load capacity			kg	5000	6000	7000	10000
载荷中心 Load center			mm	600	600	600	600
动力形式 Power type			柴油 Diesel				
最大起升速度（满载） Max. lifting speeds(with load)			mm/s	380	350	350	220
最大行驶速度（满/空载） Max.driving speeds(with/outload)			km/h	21/23	21/23	21/23	17/19
最大牵引力（满/空载） Max.towing(with/outload)			kn	52	53	54	56
爬坡度（满/空载） Gradeability(with/outload)			%	15/20	15/20	15/20	15/20
H1起升高度 Lifting height			mm	3000	3000	3000	3000
自由起升高度 Free lift			mm	180	180	180	155
门架倾角（ α 前/β 后） Tilting angles(forward-backward)			°	6/12	6/12	6/12	6/12
最小转弯半径 Min.turning radius			mm	3430	3430	3450	4000
最小直角通道宽 Min.right angle aisle width			mm	3090	3090	3090	3540
最小离地间隙 Minunder-clearance			mm	230	230	230	250
Dimensions 外形尺寸	A全长（含货叉） Overall length(including fork)	mm	4760	4760	4830	5800	
	B全宽 Overall width	mm	1980	1980	1980	2270	
	H全高（门架缩进） Overall height(mast lowered)	mm	2500	2500	2500	2860	
	H2作业高度（门架全伸出） Overall height(mast extend)	mm	4400	4400	4400	4250	
H3至护顶架高度 Overall height to overhead guard			mm	2470	2470	2470	2600
A1前悬距 Fork overhang			mm	605	605	605	730
A2轴距 Wheel base			mm	2250	2250	2250	2800
Tread 轮距	B1前轮 Front tread	mm	1470	1470	1470	1600	
	B2后轮 Rear tread	mm	1700	1700	1700	1700	
Tyre 轮胎	前轮 Front tyre		8.25-15-14	8.25-15-14	8.25-15-14	9.00-20-14	
	后轮 Rear tyre		8.25-15-14	8.25-15-14	8.25-15-14	9.00-20-14	
自重 Total weight			kg	8200	8640	9500	12510
B3货叉宽度 Fork width			mm	150	150	150	160
H4货叉厚度 Fork thickness			mm	55	60	65	80
挡货架高 Backrest height			mm	1280	1280	1280	/
A3标准货叉长度 Fork length			mm	1220	1220	1220	1520
Engine 发动机	型号 Engine model	国IV China IV					
	额定功率 Rate power	kw	95.6	95.6	95.6	95.6	
	额定功率时转速 Rotate speed at rate power	rpm	2200	2200	2200	2200	
	最大扭矩 Max.torque	nm	540	540	540	540	
	最大扭矩转速 Ratate speed at max torque	rpm	1600	1600	1600	1600	
变速形式 Type of power shift			液力 Tor-con				



- 1.动力强劲
Powerful engine
可选配：日本五十铃发动机、玉柴发动机
Optional:Japanese Isuzu engine and Yuchai engine.
- 2.液力变速箱
Hydraulic Gear-box
- 3.双前轮
Double Front Wheel
- 4.液压转向桥
Hydraulic Steering Axle
- 5.后工作大灯
Rear working headlight
- 6.可选配高档减震座椅
Optional top-grade damped seat

FR系列1.5-4.0T_{ON}

双燃料平衡重式叉车

2.0-4.0T Counterbalanced Gasoline/LPG Powered Forklift Truck



- 1.安全的液化石油气装置
Safe LPG Unit
- 2.尼桑发动机
Nissan Engine
可选其它品牌的国产或进口发动机
Optional other brand China or imported engine
- 3.宽视野门架
Wide view mast
- 4.液力变速箱
Hydraulic Gear-box
- 5.可选配高档减震座椅
Optional top-grade damped seat
- 6.后工作大灯
Rear working headlight



主要技术参数 Main Specification

型 号	MODEL		CPQYD15FR	CPQYD18FR	CPQYD20FR	CPQYD25FR	CPQYD30FR	CPQYD35FR	CPQYD40FR
额定起重量	Load capacity	kg	1500	1800	2000	2500	3000	3500	4000
载荷中心	Load center	mm	500	500	500	500	500	500	500
动力形式	Power type		汽油/液化气 Gasoline/LPG						LPG
最大起升速度（满载）	Max. lifting speeds(with load)	mm/s	500	500	400	400	435	435	380
最大行驶速度（满/空载）	Max.driving speeds(with/outload)	km/h	14.5/15	14.5/15	17/19	17/19	19/22	19/22	14/15
最大牵引力（满/空载）	Max.towing(with/outload)	kn	14/8	14/8	14/9	15/10	16/11	17.5/12	16.5/11.5
爬坡度（满/空载）	Gradeability(with/outload)	%	15/20	15/20	15/20	15/20	15/20	15/20	15/20
H1起升高度	Lifting height	mm	3000	3000	3000	3000	3000	3000	3000
自由起升高度	Free lift	mm	/	/	60	60	80	80	85
门架倾角（α前/β后）	Tilting angles(forward-backward)	°	6/12	6/12	6/12	6/12	6/12	6/12	6/12
最小转弯半径	Min.turning radius	mm	2200	2200	2450	2450	2500	2500	2320
最小直角通道宽	Min.right angle aisle width	mm	1770	1770	2050	2050	2110	2110	2270
最小离地间隙	Minunder-clearance	mm	110	110	110	110	130	130	150
Dimensions 外形尺寸	A全长（含货叉）	Overall length(including fork)	mm	3245	3245	3670	3670	3985	4160
	B全宽	Overall width	mm	1085	1085	1170	1170	1270	1270
	H全高（门架缩进）	Overall height(mast lowered)	mm	2000	2000	2000	2000	2100	2120
	H2作业高度（门架全伸出）	Overall height(mast extend)	mm	4035	4035	4080	4080	4260	4270
H3至护顶架高度		Overall height to overhead guard	mm	2070	2070	2080	2080	2100	2120
A1前悬距		Fork overhang	mm	415	415	455	455	480	505
A2轴距		Wheel base	mm	1440	1440	1640	1640	1750	1900
Tread 轮距	B1前轮	Front tread	mm	900	900	970	970	1000	1060
	B2后轮	Rear tread	mm	920	920	970	970	970	970
Tyre 轮胎	前轮	Front tyre	6.50-10	6.50-10	7.00-12	7.00-12	28"9-15	28"9-15	250-15
	后轮	Rear tyre	5.00-8	5.00-8	6.00-9	6.00-9	6.50-10	6.50-10	6.50-10
自重		Total weight	kg	2650	2850	3000	3300	4070	4300
B3货叉宽度		Fork width	mm	100	100	122	122	122	150
H4货叉厚度		Fork thickness	mm	35	35	40	40	45	45
挡货架高		Backrest height	mm	960	960	1000	1000	1200	1200
A3标准货叉长度		Fork length	mm	920	920	1070	1070	1220	1220
Engine 发动机	型号	Engine model	尼桑K21/K25 Nissan K21/K25						China-LPG
	额定功率	Rate power	kw	31.2/37.4			37.4		41
	额定功率时转速	Rotate speed at rate power	rpm	2250/2300			2300		2500
	最大扭矩	Max.torque	nm	143.7/176.5			176.5		175
	最大扭矩转速	Ratate speed at max torque	rpm	1600					
变速形式		Type of power shift	液力 Tor-con						

