合力®
HELI

CHINA LEADING FLEXIBLE HOSE MANUFACTURER

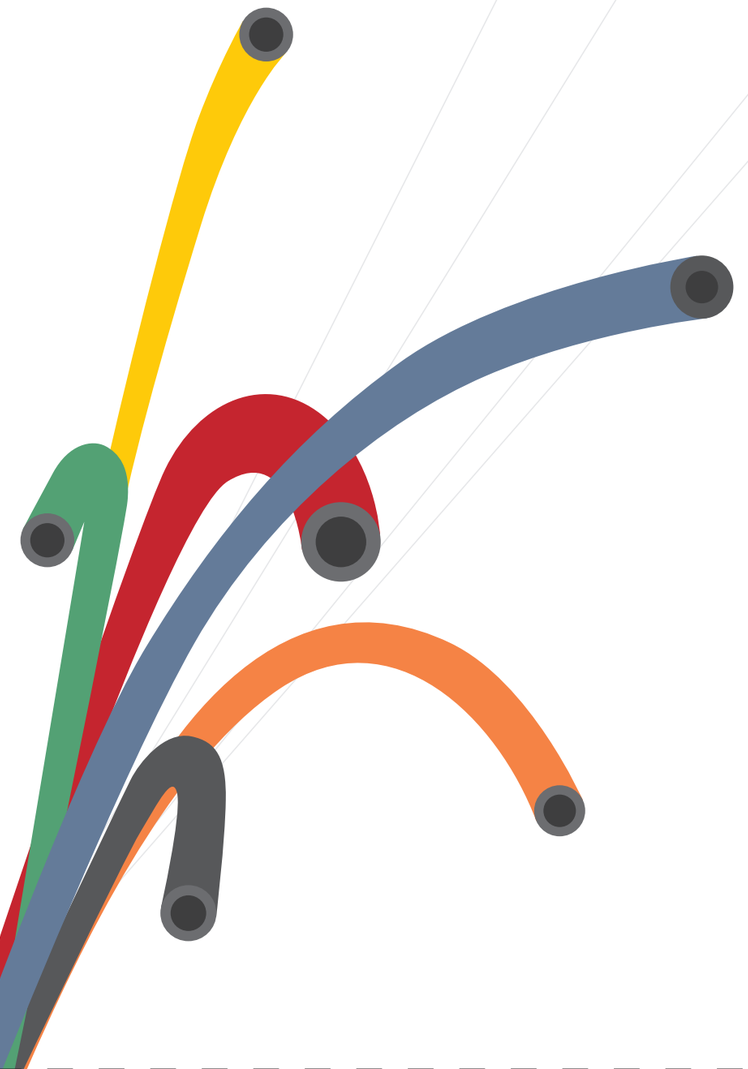

地址：广东省湛江市麻章经济开发区金园路19号
电话：0759-2728094 0759-2728093 0759-2728096
传真：0759-2728080
邮箱：export1@helihose.com gdzjhlco@helihose.com
邮编：524094
www.helihose.com
http://helihose.en.alibaba.com

合力®
HELI

广东合力塑胶有限公司
GUANGDONG HELI PLASTICS CO.,LTD
SINCE 1996

United director strive for excellence

合力®

美国 FDA　欧盟 ROHS 指令　EU REACH　USA UL

澳大利亚 AGA　中国高新技术企业　质量管理体系

广东合力塑胶有限公司成立于2006年4月，是一家专业研发 、生产 、销售塑胶产品的高科技企业； 注册资金2000万元，固定资产达6000万元，占地面积30000平方米，建筑面积25000平方米，主要生产为清洗机械配套的清洗机管、农业机械及园艺机械用高压软管、工业用系列气压软管、新型环保水带等各类塑胶软管,公司目前拥有员工210名。

公司于2007年通过了ISO9001-2000质量管理体系认证，拥有发明1项、外观10项、实用新型17项，一共28项专利，2017年发明专利“一种水带”获得湛江市专利金奖；2011年获得欧盟CE认证证书，产品获准在欧盟成员国范围内自由流通；2013年新产品新型高压油漆喷涂专用软管获得湛江市科技局科技研究成果登记证书，并获得科技一等奖荣誉称号；2014年油漆管获得美国UL认证证书;2015年公司的新型环保水带和高压油漆喷涂式清洗机软管被认定为广东省高新技术产品；“合力”商标在美国和德国获准注册。公司连续十四年被工商部门评为“守合同重信用企业”,近年获得“最具公信力品牌单位”，“湛江市优秀企业”“湛江市品牌价值50强企业”等多个荣誉称号。

公司拥有高素质科研人员、完善的检测仪器和专业的检测中心、一流的销售和管理团队、多种类的先进的软管生产线；公司于2011年同广东海洋大学签订产学研合作协议和技术开发合同，负责对公司新项目模具开发的指导和关键技术的引导和支持，与公司形成有效的互补，为新产品开发提供了技术保障。我们的产品畅销全球,20多年的行业经验和良好声誉让我们得到了世界一流企业的认可，目前已成为多个国际知名品牌如美国 TTI 、德国 KÄRCHER 、BS BRIGGS & STRATTON 、GOODYEAR 、Walmart 、Continental ContiTech 等指定供应商和战略合作伙伴，全心全意服务每一位客户成为世界一流软管制造商是我们一贯的宗旨。



目 录

清洗管 ---- 1
下水道管 ---- 4
喷涂管 ---- 5

空气管 ---- 7
焊接管 ---- 8
潜水管 ---- 9
导电管 ---- 10

水带 ---- 11
喷雾管 ---- 13

燃气管 ---- 16
花园管 ---- 17
单层PU管 ---- 19
透明管 ---- 20

清洗机管









材料结构

内　管：PVC/NBR改性材料
加强层：1-2层涤纶编织线
外　管：PU

耐温范围

-10℃ (+14 °F) ~ 60℃（+140 °F)

产品特征

- 出色的耐用性：新设计PU外皮和PVC内管使软管更轻更耐用，适应恶劣环境。升级改性材料更耐磨，使用寿命更长，安全性能更高
- 创新生产工艺：磨砂表面效果，手感舒适
- 抗扭结：具有更好灵活性的同时不会扭结
- 环保：材料符合RoHS标准，确保产品安全

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	伸长率(%)	长度(m)/卷
QX48U	4.8	80-250	240-800	<±3%	3/4/6/8/10/12
QX57U	5.7	80-250	240-800	<±3%	3/4/6/8/10/12
QX62U	6.2	80-250	240-800	<±3%	3/4/6/8/10/12
QX714U	7.14	80-200	240-800	<±3%	3/4/6/8/10/12
QX80U	8.0	80-200	240-600	<±3%	3/4/6/8/10/12
QX95U	9.5	80-200	240-600	<±3%	3/4/6/8/10/12

应用范围

高压清洗机管专为家庭清洁和商业用途而设计，适用于柴油发动机或电动高压清洗机。本产品广泛应用于清洁、除污、汽车清洗等行业领域。

清洗机管









材料结构

内　管：PE
加强层：1-2层涤纶编织线
外　管：PVC

耐温范围

-10℃ (+14 °F) ~ 60℃（+140 °F)

产品特征

- 卓越性能：PVC外皮确保清洗机管表面可以轻松去除污渍而不留下划痕
- 经久耐用：优质材料使软管具有耐用耐磨、抗裂的特点
- RoHS 标准：确保产品对消费者安全

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	伸长率(%)	长度(m)/卷
QX48E	3.2-4.0	80-280	240-840	<±3%	3/4/6/8/10/12
QX57E	5.7	80-280	240-840	<±3%	3/4/6/8/10/12
QX62E	6.2	80-280	240-840	<±3%	3/4/6/8/10/12
QX714E	7.14	80-220	240-840	<±3%	3/4/6/8/10/12
QX80E	8.0	80-206	240-620	<±3%	3/4/6/8/10/12
QX95E	9.5	80-206	240-620	<±3%	3/4/6/8/10/12

应用范围

高压清洗机管专为家庭清洁和商业用途而设计，适用于柴油发动机或电动高压清洗机。本产品广泛应用于清洁、除污、汽车清洗等行业领域。

www.helihose.com　www.helihose.en.alibaba.com

清洗机管









材料结构

内　管：PVC
加强层：1-2层涤纶编织线
外　管：PVC

耐温范围

-10°C (+14 °F) ~ 60°C（+140 °F)

产品特征

- 轻便易携：与传统软管相比至少轻50%，可轻松卷起，携带方便
- 抗扭结：具有更好灵活性的同时不会扭结
- RoHS 标准：确保产品对消费者安全

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	伸长率(%)	长度(m)/卷
QX48C	4.8	80-250	240-800	<±5%	3/4/6/8/10/12
QX57C	5.7	80-250	240-800	<±5%	3/4/6/8/10/12
QX62C	6.2	80-250	240-800	<±5%	3/4/6/8/10/12
QX714C	7.14	80-200	240-600	<±5%	3/4/6/8/10/12
QX80C	8.0	80-200	240-600	<±5%	3/4/6/8/10/12
QX95C	9.5	80-200	240-600	<±5%	3/4/6/8/10/12

应用范围

高压清洗机管专为家庭清洁和商业用途而设计，适用于柴油发动机或电动高压清洗机。本产品广泛应用于清洁、除污、汽车清洗等行业领域。

高压下水道管









材料结构

内　管：PA/PVC
加强层：1-2层涤纶编织线
外　管：PVC

耐温范围

-10°C (+14 °F) ~ 60°C（+140 °F)

产品特征

- 卓越性能：最大工作压力达 4000PSI。由优质、耐用、耐候且耐磨的材料制成，具有更强耐磨耐候性，高工作压力下不扭结
- 出色耐磨性能：超光滑的外皮材质，耐磨美观
- RoHS 标准：确保产品对消费者安全

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	伸长率(%)	长度(m)/卷
J64S	6.4	276	690	<±2%	30/60/90
J95S	9.5	276	690	<±2%	30/60/90
J13S	13	276	690	<±2%	30/60/90
J16S	16	200	600	<±2%	30/60/90
J19S	19	100	250	<±2%	30/60/90
J25S	25	100	250	<±2%	30/60/90

应用范围

高压下水道管专为下水道清洁而设计，可用于清洗多种类型的室内或室外排水管，可与各种电动和柴油发动机高压清洗机配合使用。 它可以轻松冲洗障碍物、清洗油污、清理各种堵塞的下水道。

喷 涂 管



材料结构

内　管:　尼龙 (PA)
加强层:　双层纤维编织+导电膜
外　管:　聚氨酯(TPU)

耐温范围

-40°C (-40 °F) ~ 100°C（+212 °F ）

产品特征

- 多层防护：聚氨酯，高强纤维编织，进口尼龙紧密结合，使用柔软
- 进口尼龙内管，柔韧性好，不易爆管，经久耐用，耐酸碱耐腐蚀
- 高硬度接头，耐腐蚀，防水防锈，密封性好
- UL认证(证书号: MH48618) 密度编制纤维内带导电夹层，安全系数更高



产品规格

参数 / 规格	尺寸(mm)	工作压力 (PSI)	爆破压力 (PSI)	长度(m)/卷
SPA631600M1	6.3*11.3	1600	6400	7/10/15
SPA633300M1	6.3*12.3	3300	13200	7/10/15
SPA633300M2	6.3*13.3	3300	13200	7/10/15
SPA801600M1	8.0*13.3	1600	6400	7/10/15
SPA952300M1	9.5*16.0	2300	9300	7/10/15
SPA953600M1	9.5*18.0	3600	14500	7/10/15

应用范围

适用高压无气喷涂系统，耐化学腐蚀，用于油漆，燃料，油，大多数其他溶剂喷涂。

喷 涂 管

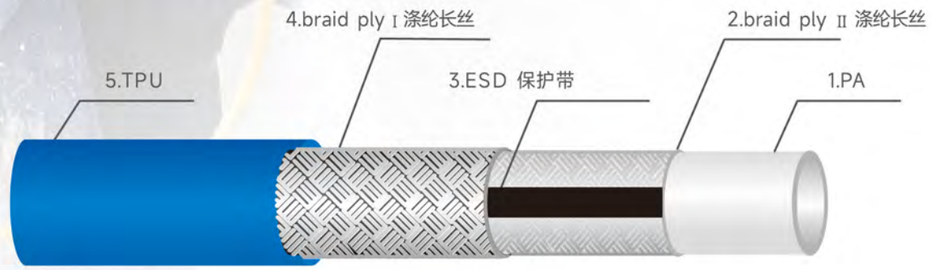

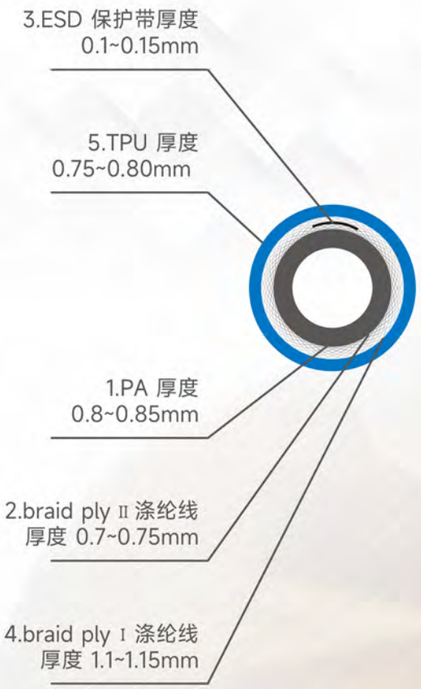

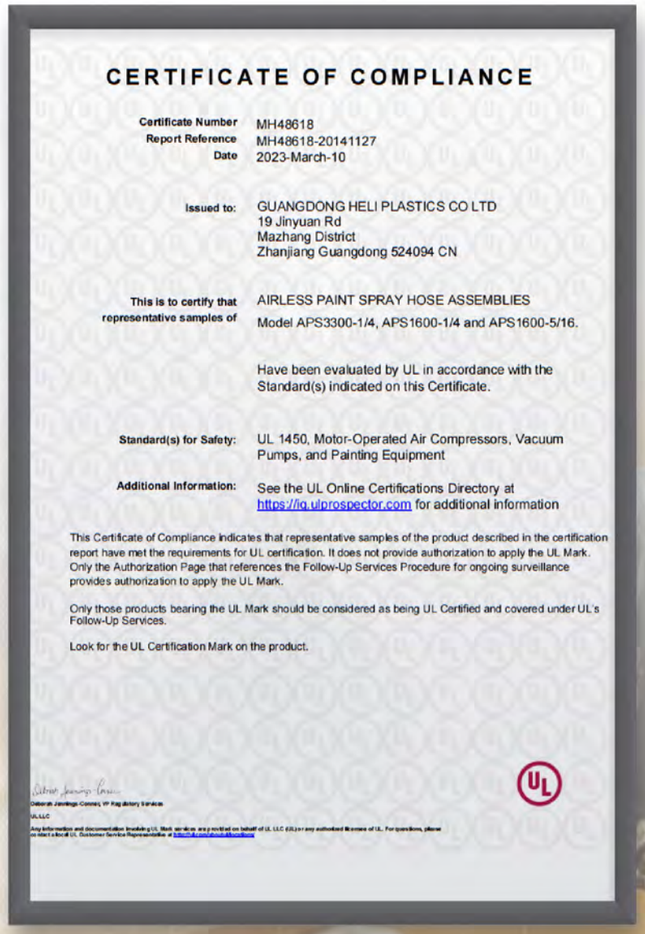

CERTIFICATE OF COMPLIANCE

Certificate Number　MH48618
Report Reference　MH48618-20141127
Date　2023-March-10

Issued to:　GUANGDONG HELI PLASTICS CO LTD
19 Jinyuan Rd
Mazhang District
Zhanjiang Guangdong 524094 CN

This is to certify that representative samples of　AIRLESS PAINT SPRAY HOSE ASSEMBLIES
Model APS3300-1/4, APS1600-1/4 and APS1600-5/16.

Have been evaluated by UL in accordance with the Standard(s) indicated on this Certificate.

Standard(s) for Safety:　UL 1450, Motor-Operated Air Compressors, Vacuum Pumps, and Painting Equipment

Additional Information:　See the UL Online Certifications Directory at https://iq.ulprospector.com for additional information

This Certificate of Compliance indicates that representative samples of the product described in the certification report have met the requirements for UL certification. It does not provide authorization to apply the UL Mark. Only the Authorization Page that references the Follow-Up Services Procedure for ongoing surveillance provides authorization to apply the UL Mark.

Only those products bearing the UL Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Certification Mark on the product.

Deborah Jennings-Conner, VP Regulatory Services
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at https://ul.com/aboutul/locations

www.helihose.com　www.helihose.en.alibaba.com

喷 涂 管



材料结构

内　管:　PA 或 PE
加强层:　双层纤维编织
外　管:　聚氨酯(TPU)

耐温范围

-40°C (-40 °F) ~ 100°C（+212 °F)

产品特征

- 真材实料，采用进口材质，耐腐蚀，全天耐候性好
- 标准无气喷涂机接口，标准高压管接头方便与不同喷枪连接，更换喷枪更方便
- 可承受 15000PSI 的压力



产品规格

参数 / 规格	尺寸(mm)	工作压力 (PSI)	爆破压力 (PSI)	长度(m)/卷
SP483190M1	4.8*10.3	3190	11650	7/10/15
SP631600M1	6.3*11.3	1600	6400	7/10/15
SP633300M1	6.3*12.3	3300	13200	7/10/15
SP633300M2	6.3*13.3	3300	13200	7/10/15
SP801600M1	8.0*13.3	1600	6400	7/10/15
SP952300M1	9.5*16.0	2300	9300	7/10/15
SP953600M1	9.5*18.0	3600	14500	7/10/15

应用范围

可用于机电，航天航空，汽车卡车，工程机械，数控机床等诸多行业喷漆喷砂。如汽车喷涂，木器喷涂，机械喷涂，家装喷涂，墙体屋顶喷涂等。

气 压 管



材料结构

内　管:　PVC
加强层:　1-2层高强涤纶编织线
外　管:　PVC，抗紫外线抗老化

耐温范围

-20°C (-4 °F) ~ 70°C（+158 °F)

产品特征

- 质地轻，使用方便
- 耐磨耐腐，四季柔软
- 耐寒防冻，使用寿命长



产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm^2)	爆破压力 (kgf/cm^2)	卷管尺寸 (cm)/100m
SA65	6.5	20-30	70-120	41*41*14
SA80	8.0	20-30	70-120	45*45*14
SA95	9.5	20-30	60-120	50*50*14
SA13	13	20-30	60-120	51*51*22
SA16	16	15-30	60-120	58*58*30
SA19	19	15-30	50-100	68*68*27
SA25	25	15-30	40-100	64*64*50

应用范围

本产品采用全新高品质PVC、复合材料及涤纶纤维精制而成，耐高压、耐腐蚀、耐老化、柔软性和弯曲性能好，外观鲜丽光滑。广泛应用于气动工具配套、工业气体输送等领域。

焊 接 管



材料结构

内　管：PVC
加强层：1-2层高强涤纶编织线
外　管：PVC，抗紫外线抗老化

耐温范围

-20℃ (-4 °F) ~ 70℃（+158 °F)







产品特征

- 质地轻，使用方便
- 耐磨耐腐、四季柔软
- 耐寒防冻、使用寿命长
- 铜接头，不易生锈
- 机器扣压接头、结实耐用

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	卷管尺寸 (cm)/100m
WT50	5.5+5.5	20	70	46*46*18
WT65	6.5+6.5	20	70	47*47*19
WT80	8.0+8.0	20	70	54*54*21
WT65/10	6.5+10.0	20	70	57*57*21
WTB50	5.5+5.5	30	90	46*46*18
WTB65	6.5+6.5	30	90	47*47*19
WTB80	8.0+8.0	30	90	54*54*21
WTB65/10	6.5+10.0	30	90	57*57*21

应用范围

本产品采用全新高品质PVC、复合材料及涤纶纤维精制作而成，内外层粘合牢固、具有耐高压、抗腐蚀、阻燃等特性、外观细致光滑。产品广泛应用于工业气体输送及气焊焊接焊割使用。

潜 水 管



材料结构

内　管：聚酯
加强层：高强涤纶编织线
外　管：聚醚，抗紫外线抗老化

耐温范围

-10℃ (+14°F) ~ 50℃（+122 °F)







产品特征

- 弯曲性好，不扭结
- 耐寒防冻、使用寿命长
- 耐磨耐腐、四季柔软

产品规格

参数 / 规格	尺寸(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	长度(m)/卷
D060	6.1X12.4	60	450	50/100
D080	8.0X17.5	60	450	50/100
D088	8.8X18.5	60	450	50/100
D012	12.2X22.6	60	450	50/100

应用范围

本产品采用全新高品质材料及高强度涤纶纤维精制作而成，内外层粘合牢固、具有耐高压、抗腐蚀、耐磨等特性、外观细致光滑。产品广泛应用于潜水捕捞，工程潜水，市政疏通等领域。

导 电 管









材料结构

内　管：PVC
加强层：高强度涤纶线
外　管：PVC，抗紫外线抗老化

耐温范围

-5℃ (+23 ℉) ~ 60℃（+140 ℉)

产品特征

- 抗静电，防火
- 标准AS 2660 A 级
- 标准AS/NZS 2554 A 级

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	弯曲半径 (mm)	长度(m)/卷
FT095	9.5	20	80	85	20/100
FT130	13	20	80	100	20/100
FT190	19	20	80	150	20/100
FT250	25	20	80	180	20/100
FT320	32	20	80	220	20/100
FT380	38	20	80	250	20/100
FT500	50	20	80	320	20/100

应用范围

专为采矿业设计的高科技防静电供气和供水软管。导电外带与导电内壁相连接。

轻型水带









材料结构

内层胶、缠绕涤纶长丝与外层胶同时在专用模具内一次成型

耐温范围

-15℃ (+5℉) ~ 60℃（+140 ℉)

产品特征

- 抗压防爆，防腐耐磨，环保无毒
- 产品质量轻，柔性好，色泽艳丽，有弹性
- 全新升级材质，管壁柔软平滑，不易腐蚀老化，四季柔软，使用时间长

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	长度(m)/卷
LFV1.5	38(1-1/2")	3-6	9-18	50/100
LFV2	50(2")	3-6	9-18	50/100
LFV2.5	65(2-1/2")	3-6	9-18	50/100
LFV3	75(3")	3-6	9-18	50/100
LFV4	100(4")	3-6	9-18	50/100
LFV5	125(5")	3-6	9-18	50
LFV6	150(6")	3-6	9-18	50
LFV8	200(8")	3-6	9-18	50

应用范围

抗旱排涝、农业灌溉、林业喷灌、建筑工程、工矿企业、市政维护、养殖送排清水等等。

重型水带



材料结构

内层胶、缠绕涤纶长丝与外层胶同时在专用模具内一次成型

耐温范围

-15℃ (+5℉) ~ 60℃ (+140 ℉)







产品特征

- 加厚耐磨，高强度，抗老化，抗高压
- 外形美观、选材优良、结实稳定、四季柔软、用途广泛等

产品规格

规格 \ 参数	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	长度(m)/卷
LFV1.25	32(1-1/4")	8-10	24-30	50/100
LFV1.5	38(1-1/2")	8-10	24-30	50/100
LFV2	50(2")	8-10	24-30	50/100
LFV2.5	65(2-1/2")	8-10	24-30	50/100
LFV3	75(3")	8-10	24-30	50/100
LFV4	100(4")	8-10	24-30	50/100
LFV6	150(6")	8-10	24-30	50
LFV8	200(8")	8-10	24-30	50

应用范围

抗旱排涝、农业灌溉、林业喷灌、建筑工程、工矿企业、市政维护、养殖送排清水等等。

高压喷雾管



材料结构

内　管:　PVC
加强层:　1-2层高强涤纶编织线
外　管:　PVC, 光滑或粗细纹

耐温范围

-10℃ (+14 ℉) ~ 65℃ (+149 ℉)







产品特征

- 采用环保无毒高品质PVC与高强涤纶纤维精制而成
- 编织线与内外管之间的附着力强
- 柔软、轻便、弯曲性好，不扭结
- 抗腐蚀、耐酸碱、耐老化 耐磨损

产品规格

规格 \ 参数	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	卷管尺寸 (cm)/100m
SYF65	6.5	40-50	120-160	41*14*41
SYF75	7.5	40-50	120-160	41*14*41
SYF80	8.0	40-50	120-160	46*46*15
SYF85	8.5	40-50	120-160	46*46*15
SYF10	10.0	40-50	120-160	52*14*52
SYF13	13.0	30-40	100-140	52*22*52

应用范围

广泛应用于农业及工业生产中输送液体，特别适合于农业、林业药物喷洒用高压喷雾机的使用，例如用于农业喷洒农药，杀虫剂、杀菌剂、施肥等。

高压喷雾管









材料结构

内　管：PVC
加强层：1-2层高强涤纶编织线
外　管：PVC，抗紫外线抗老化

耐温范围

-10℃（+14 ℉）~ 65℃（+149 ℉）

产品特征

- 高强涤纶编织线与内外管附着力强
- 抗老化，耐候性好 ，防冻防晒
- 轻量化，灵活，不扭结，操作方便

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	卷管尺寸 (cm)/100m
SYB65	6.5	60	200	41*14*41
SYB75	7.5	60	200	41*14*41
SYB80	8.0	60	200	45*14*45
SYB85	8.5	60	180	45*14*45
SYB10	10.0	60	180	50*14*50
SYB13	13.0	60	180	51*22*51

应用范围

主要用于农业喷洒农药，广泛应用于农业及工业生产中输送液体，也可用于清洗行业(仅限冷水）。

高压喷雾管









材料结构

内　管：PVC
加强层：多股高强涤纶编织线
外　管：PVC，抗紫外线抗老化

耐温范围

-10℃（+14 ℉）~ 65℃（+149 ℉）

产品特征

- 优质PVC安全环保，柔韧不打结，抗冻防晒
- 多股彩线编织美观结实，爆破耐压高达240Bar
- 铜质接头耐拧不咬齿，严密不漏水，连接稳固可靠
- 两端护套设计，有效防止水管磨损，耐高压

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	卷管尺寸 (cm)/100m
SYB65-S	6.5	80	240	41*41*14
SYB75-S	7.5	80	240	46*46*15
SYB80-S	8.0	80	240	48*48*17
SYB85-S	8.5	80	240	50*50*19
SYB10-S	10.0	80	200	52*52*21
SYB13-S	13.0	80	200	54*54*24

应用范围

可用于农田灌溉，农作物打药，洗车清洗，绿化清洗养护，一管多用，方便快捷，使用寿命长。

www.helihose.com　www.helihose.en.alibaba.com

燃 气 管



材料结构

内　管：PVC
加强层：1-2层高强涤纶编织线
外　管：PVC，抗紫外线抗老化

耐温范围

-40℃ (-40℉) ~ 60℃（+140 ℉)

产品特征

- UL认证标准/UL21/UL569
- 外管光滑亮光、高强度涤纶编织层
- 外管耐磨耐用、环保PVC材料
- 阻燃、不打结、防磨损防紫外线







产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	接头拉力(N)	包装尺寸 (cm)/100m
LP6320	6.3	20	80	>1760N	41*41*14
LP6330	6.3	30	120	>1760N	41*41*14
LP8010	8.0	10	35	>1760N	45*45*14
LP8030	8.0	30	120	>1760N	45*45*14
LP9510	9.5	10	35	>800N	50*50*14
LP9530	9.5	30	120	>1760N	51*51*23

应用范围

适用于输送液化石油气、天然气、丙烷、丁烷及用于气体调节器、烤架、火炉和熔炉等。

燃 气 管



CERTIFICATE OF COMPLIANCE

Certificate Number MH64845
Report Reference MH64845-2021-11-15
Date 2021-November-16

Issued to: GUANGDONG HELI PLASTICS CO LTD
19 Jinyuan Rd
Mazhang District
Zhanjiang Guangdong 524094 CN

This is to certify that representative samples of: HOSE FOR FLEXIBLE CONNECTORS, LP-GAS AND NATURAL GAS - COMPONENT
See Addendum Page for Product Designation(s).

Have been investigated by UL in accordance with the component requirements in the Standard(s) indicated on this Certificate. UL Recognized components are incomplete in certain constructional features or restricted in performance capabilities and are intended for installation in complete equipment submitted for investigation to UL LLC.

Standard(s) for Safety: UL 569 - Standard for Pigtails and Flexible Hose Connectors for LP-Gas

Additional Information: See the UL Online Certifications Directory at https://iq.ulprospector.com for additional information

This *Certificate of Compliance* does not provide authorization to apply the UL Recognized Component Mark. Only the UL Follow-Up Services Procedure provides authorization to apply the UL Mark.

Only those products bearing the UL Recognized Component Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Recognized Component Mark on the product.

Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at http://ul.com/aboutul/locations

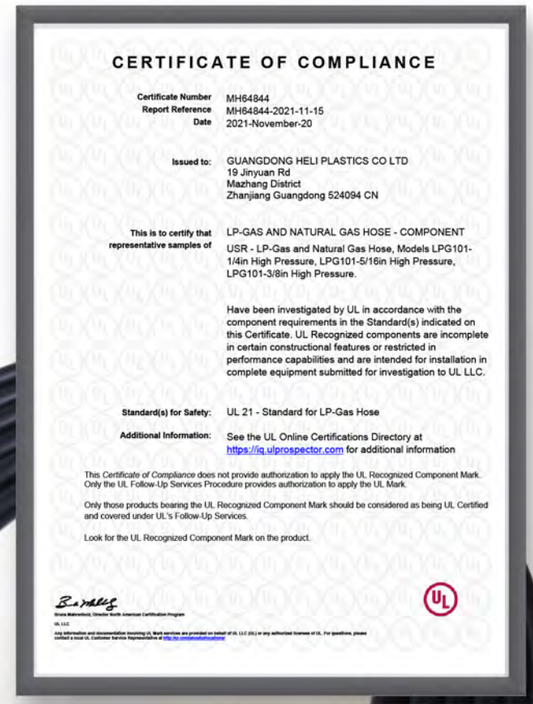

CERTIFICATE OF COMPLIANCE

Certificate Number MH64844
Report Reference MH64844-2021-11-15
Date 2021-November-20

Issued to: GUANGDONG HELI PLASTICS CO LTD
19 Jinyuan Rd
Mazhang District
Zhanjiang Guangdong 524094 CN

This is to certify that representative samples of: LP-GAS AND NATURAL GAS HOSE - COMPONENT
USR - LP-Gas and Natural Gas Hose, Models LPG101-1/4in High Pressure, LPG101-5/16in High Pressure, LPG101-3/8in High Pressure.

Have been investigated by UL in accordance with the component requirements in the Standard(s) indicated on this Certificate. UL Recognized components are incomplete in certain constructional features or restricted in performance capabilities and are intended for installation in complete equipment submitted for investigation to UL LLC.

Standard(s) for Safety: UL 21 - Standard for LP-Gas Hose

Additional Information: See the UL Online Certifications Directory at https://iq.ulprospector.com for additional information

This *Certificate of Compliance* does not provide authorization to apply the UL Recognized Component Mark. Only the UL Follow-Up Services Procedure provides authorization to apply the UL Mark.

Only those products bearing the UL Recognized Component Mark should be considered as being UL Certified and covered under UL's Follow-Up Services.

Look for the UL Recognized Component Mark on the product.

Bruce Mahrenholz, Director North American Certification Program
UL LLC

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL. For questions, please contact a local UL Customer Service Representative at http://ul.com/aboutul/locations



www.helihose.com　www.helihose.en.alibaba.com

花 园 管



材料结构

内　管:　PVC
加强层:　涤纶网纱，耐压防爆
外　管:　PVC 玻璃感表面，降低摩擦系数

耐温范围

-10°C (+14 °F) ~ 65°C（+149 °F)







产品特征

- 无毒，无异味
- 质轻耐压，耐候性好
- 耐磨，抗紫外线，使用寿命长
- 重量轻，灵活，易于卷绕

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm^2)	爆破压力 (kgf/cm^2)	卷管尺寸 (cm)/50m
YT95	9.5	5	20	31*31*32
YT13	13	5	20	33*33*34
YT16	16	4	16	35*35*36
YT19	19	4	16	38*38*39
YT25	25	4	16	42*42*43

应用范围

广泛用于园林浇水和公园、社区、工厂和家庭清洁，汽车清洗等。

花 园 管



材料结构

柔性混合聚合物设计

耐温范围

-10°C (+14 °F) ~ 65°C（+149 °F)







产品特征

- 全新配方混合聚合物，抗冻防晒
- 铜质接头严密不漏水
- 耐磨耐压，抗UV
- 极端全天候灵活性
- 压力下不扭结，轻便耐用

产品规格

参数 / 规格	内径(mm)	工作压力 (kgf/cm^2)	爆破压力 (kgf/cm^2)	卷管尺寸 (cm)/50m
YT95	9.5	5	20	31*31*32
YT13	13	5	20	33*33*34
YT16	16	4	16	35*35*36
YT19	19	4	16	38*38*39
YT25	25	4	16	42*42*43

应用范围

广泛用于园艺浇水，农业浇灌，汽车清洗，户外清洗清洁等。

www.helihose.com　　www.helihose.en.alibaba.com

PU管



材料结构

PU管，抗紫外线抗老化

耐温范围

-40°C (-40 °F) ~ 80°C（+176 °F)





产品特征

- 优选PU材质，管体色泽亮丽
- 光滑平整，无毛刺，耐磨耐腐蚀
- 韧性强，弹性好，能适应各种复杂的使用环境

产品规格

规格 \ 参数	尺寸(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	长度(m)/卷
T40H	4X6	5-10	15-30	200
T50H	5X8	5-10	15-30	200
T65H	6.5X10	5-10	15-30	200
T80H	8X12	5-10	15-30	200
T10H	10X14	5-8	15-24	200
T12H	12X16	5-8	15-24	200

应用范围

本产品采用全新高品质PU、复合材料精制而成，具有耐高压、耐腐蚀、耐老化、柔软性和弯曲性能好，外观鲜丽光滑。产品广泛应用于机械、电子、汽车、建筑等领域，可作液压和气动系统的管道，用作电线电缆的保护管套等。

透明输水管



材料结构

内外管: PVC (ROHS / 食品级)
加强层: 涤纶编织线

耐温范围

-10°C (+14 °F) ~ 65°C（+149 °F)







产品特征

- 具有耐中压，抗拉伸，耐酸碱，耐腐蚀
- 外形美观柔软轻便，经久耐用等优点

产品规格

规格 \ 参数	内径(mm)	工作压力 (kgf/cm²)	爆破压力 (kgf/cm²)	长度(m)/卷
T06	6	10	40	100
T08	8	10	40	100
T10	10	10	40	100
T13	13	8	30	100
T16	16	8	30	50
T20	20	6	25	50
T25	25	6	25	50
T32	32	4	15	50
T38	38	4	15	50
T50	50	3	9	50

应用范围

广泛应用于工业，农业，渔业，建筑业，家居等各种普通设备的排给供水，供气及粉料的输送。