



敢闯敢拼 追求卓越
Dare to risk Strive for excellence


常州杭钢卓信机械装备有限公司
Changzhou Hanggang Zhuoxin M&E Co., Ltd.

地址：中国江苏省常州市新北区新民东路7号
Add: No.7 Xinmin east road Xinbei district, Changzhou city,
Jiangsu Province, China
Tel: +86-0519-85125986
E-Mail: hgzx@hzsteel.com
Web: www.hgzx-track.com



SPECIALISING IN TRACK SHOES
FOR 20 YEARS

专业生产履带板 20年

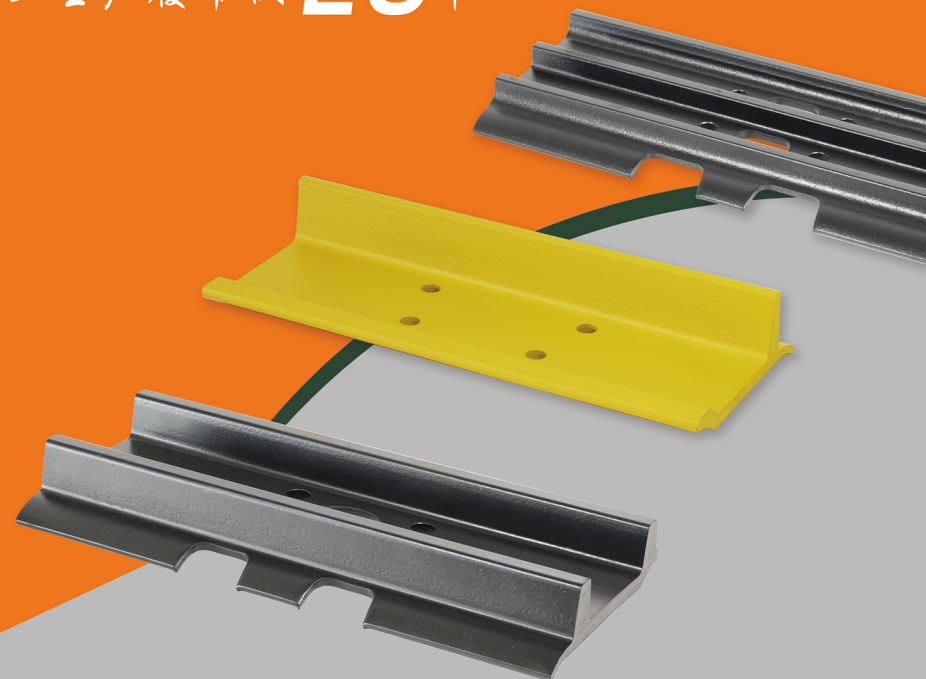

常州杭钢卓信机械装备有限公司
Changzhou Hanggang Zhuoxin M&E Co., Ltd.



企业简介 COMPANY PROFILE

常州杭钢卓信机械装备有限公司，坐落于江苏省常州市新北工业园区。公司专注于挖掘机、推土机等工程机械履带板产品的生产，深耕履带板20年，年产能约6万吨。公司建立了完善的质量保证体系，设有区级工程技术中心和独立理化实验室。

凭借优质产品和服务，公司长期为三一重工、徐工机械等主机厂供应履带板，为国际大型工程机械零部件销售商提供 OEM 定制服务，荣获三一重工“优秀供应商”称号，产品畅销欧、美、东南亚、中东、俄罗斯等地区。

作为世界 500 强杭钢集团的全资子公司，公司依托杭钢雄厚资源，实力强劲。杭钢集团创建于 1957 年，旗下有杭钢股份（600126）、菲达环保（600526）两家上市公司，在技术、人才、资金方面积累深厚，设有博士后工作站，拥有省级技术研究中心和国家级检测中心，全方位保障子公司发展，助力其在行业中稳健前行、创新突破。

Changzhou Hanggang Zhuoxin Machinery Equipment Co., Ltd. is located in Xinbei Industrial Park, Changzhou City, Jiangsu Province. Our company focuses on the production of track shoes for construction machinery such as excavators and bulldozers, with 20 years deep cultivation of track shoes and an annual production capacity of about 60000 tons. We have established a comprehensive quality assurance system, with a district level engineering technology center and independent physical and chemical laboratories.

With high-quality products and services, our company has been supplying track shoes to major manufacturers such as Sany Heavy Industry and XCMG Machinery for a long time, and providing OEM customization services for international large-scale engineering machinery parts distributors. It has been awarded the title of "Excellent Supplier" by Sany Heavy Industry and its products are sold well in Europe, America, Southeast Asia, the Middle East, Russia and other regions.

As a wholly-owned subsidiary of Hanggang Group, a Fortune 500 company, it is strong in strength, based on Hanggang Group's abundant resources. Hanggang Group was founded in 1957 and has two listed companies: Hanggang Corporation (600126) and Fida Environmental Protection (600526). It has accumulated rich experience in technology, talent, and funding, and has a postdoctoral workstation. It also has a provincial-level technical research center and a national level testing center, providing comprehensive support for the development of its subsidiaries and helping them steadily advance and innovate in the industry.



5大优势 Five major advantages

1. 专注履带板生产20年

Specialising in track shoes for 20 years

2. 世界500强杭钢集团全资子公司

A wholly-owned subsidiary of Hangzhou Iron and Steel Group, a Fortune Global 500 company

3. 产品优质，始终如一

Consistently providing high quality products

4. 超强的交货能力

Powerful supply capability

5. 常备万余吨履带板型材、成品及半成品库存


Standing inventory of over 10000 tons of track shoe profiles, finished products, and semi-finished products



Product Family
产品系列



车间设备 Workshop Equipment

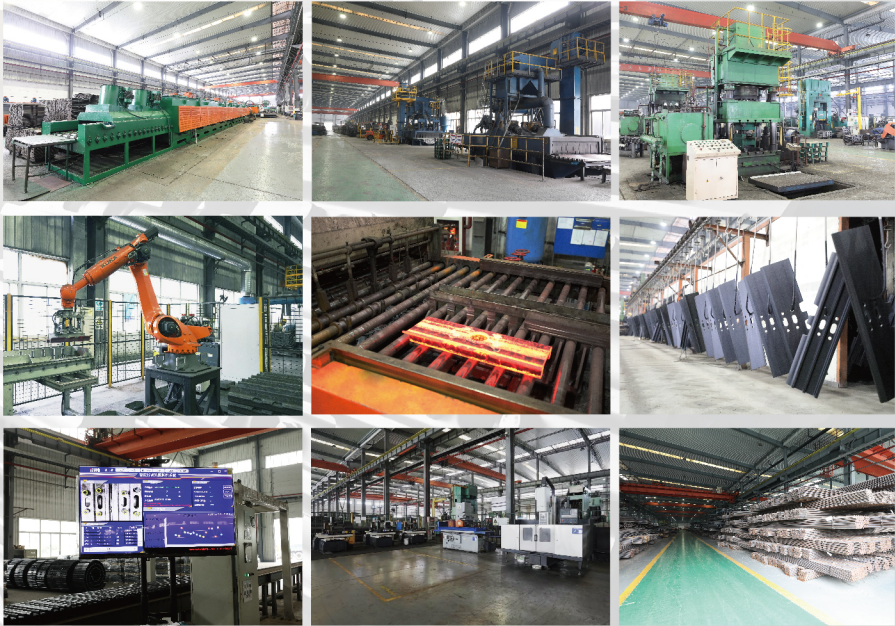

Serving the World 覆盖全球



创新合作 开发共赢

Innovative cooperation and development for mutual benefit



System Certification 体系认证

我公司已通过ISO9001质量体系认证,
ISO14001环境体系认证以及
ISO45001职业健康安全管理体系认证



Our company has been awarded with ISO9001 quality system certification,
ISO14001 environmental system certification and
ISO45001 occupational health and safety management system certification.



专业研发
Professional R&D

实力保证
Strength guarantee


卓越团队
Excellent Team






Specification parameters of Single Grouser Track Shoes
推土机履带板参数

型号 Parts.NO	节距 Pitch	安装尺寸 (mm) Dimensions				型钢参数(mm) Steel parameters			适用机型 Model
	A	B	C	E	F	K	M	N	
T135-8-L	135	12.5	43.4	72	99	36	138	7.5	PC60-3/5
T139C-8-L	139	12.4	52	86	86	43	159	8	/
T139N-8-L	139	12.4	52	94	94	43	159	8	/
T171-11.5-L	171	16.3	57	86.4	102.4	49.5	199	11.5	3171
T190-12-L	188	20.5	69	119.6	155.6	57	225	12/13	CAT320
T203A-L	203	19.5/20.5	72.2	138.4	178.4	65	232.5	12	D60、D65
T203B-L	203	20.5	72.2	138.4	178.4	65	232.5	12	TY130、T150、TY160、 TBY160
T203C-L	203	20.5	72	146	184	65	232.5	12	T120、T140
T203D-L	203	19.5	76.2	133.3	171.3	65	232.5	12	D6C
T203E-L	203	20.5	68	137.3	185.3	65	232.5	12	D6H 、D6D
T203F-L	203	20.5	44.45	134.7	158.75	65	232.5	12	T203GA
T216-14-L	215	22.4	76.2	140.4	178.4	72	250	14.3	PC300-6
T216-14-L	215	20.5	76.2	146	184	72	250	14.3	PC400-1

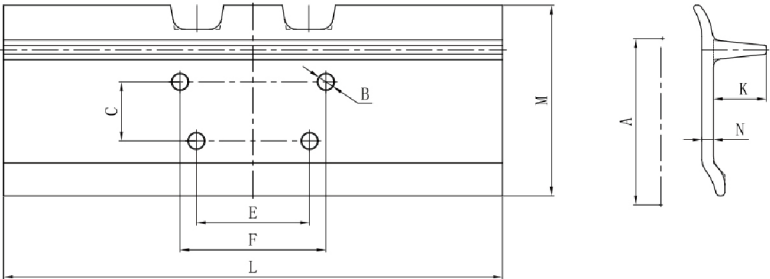

Specification parameters of Double Grouser Track Shoes
双筋履带板规格参数

型号 Parts.NO	节距 Pitch	安装尺寸 (mm) Dimensions				型钢参数 (mm) Steel parameters			适用机型 Model
	A	B	C	E	F	K	M	N	
D90A-L	90	8.3	20	46.5	46.5	16.5	90	5.5	W90
D101A-L	101	10.5	22	55	55	16.5	110	6	W101A
D155A-L	155	13	57	89	89	18.5	170	7	W155A
D190A-L	190	20.5	62	120.4	160.4	35	217	13	PC200-5/6/7、PC220、 R2225、R215-7、EC210
D190B-L	190	20.4/21	69	119.57	155.57	35	217	13	CAT320、E200、SK250 、住友SH200
D216A-L	216	22.5/24.3	76.2	140.4	178.4	49	251	15/15.5	PC300-6/7、EX300-5、 EX330-5、R335-7
D216B-L	216	24.5	76.2	144	184	49	251	15/15.5	PC400-6
D216C-L	216	22.5/24.5	76.2	146	184	49	251	15/15.5	PC400-5、228、R485-9 、R455-7、EC460
D216D-L	216	22.5/23 /24.5	76.2	140	190	49	251	15/15.5	CAT330
D228A-L	216	26/28	76.2	169	219.8	49	251	19.5	228MG
D260A-L	260	27.5/30.5	76.2	184.15	234.95	50	302	21/23.5	DB260
D260B-L	260	34	79.5	183	256.6	50	302	23.5	DB280

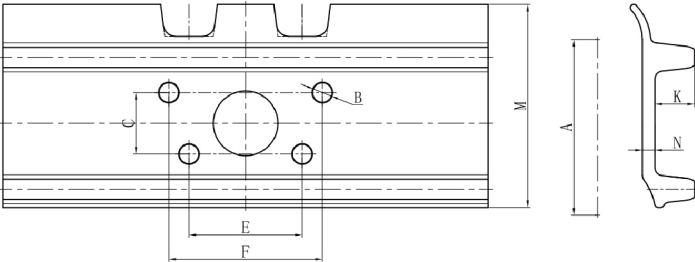



Specification parameters of Triple Grouser Track Shoes
三筋履带板规格参数

型号 Parts.NO	节距 Pitch	安装尺寸 (mm) Dimensions								型钢参数(mm) Steel parameters			适用机型 Model
		A	B	C	D	E	F	C1	B1	K	M	N	
W135A-L	135	12.5	46	300	80	104	46	14	14	14	154	6	CAT305T、EX40、R55、R60-7
W135B-L	135	12.5	43.2	300	72	99	46	14	14	14	154	6	PC60-3/5、DH55、EC55
W135C-L	135	12.5	46	300	64	94	46	14	14	14	154	6	PC50UU、PC40-7
W135D-L	135	12.4/13.4	46	300	66	90	46	14	14	14	154	6	SK60-10、SK60-8
W135E-L	135	12.5	46	300	61	85	46	14	14	14	154	6	ZG135C
W135F-L	135	12.5	45	300	64	91	46	14	14	14	154	6	PC56-7
W140A-L	140	12.5	52	350	86	86	52	14	18	18	163	8.5	YC85
W140B-L	140	14.5	57	350	82.4	112.4	58	16	18	18	163	8.5	PC100-3
W150A-L	150	13.3	57.15	228	88.9	88.9	57.15	14	19	19	172.7	7.9	DB150
W154A-L	154	14.5	57	350	82.4	112.4	58	16	20	20	165	6/8	PC100-3
W154B-L	154	14.5	57	350	73	89	58	16	20	20	165	6/8	PC60-6、PC60-7、3154、R80-7
W154C-L	154	14.4	55	350	90	90	57	16	20	20	165	6/8	EX60-3
W158A-L	158	14.8	57.2	/	88.9	88.9	/	/	18	18	187	8	DB158
W171A-L	171.5	18.5	57	/	122.4	158.4	/	/	20	20	190	8/9.5	HD700、HD820、HD770
W171B-L	171.5	16.3	57	400	86.4	102.4	60	18	20	20	190	8/9.5	PC100-5/6、PC120-5、PC130-6
W171C-L	171.5	16.3	60.33	400	108	108	60	18	20	20	190	8/9.5	HD450、EX100-1/2/3/5、EX120-1/3、R110、R150、EC140
W171D-L	171.5	18.5	58.7	/	125.4	144.5	/	/	20	20	190	8/9.5	EX200-1
W171E-L	171.5	16.3	58.7	/	125.4	144.5	/	/	20	20	190	8/9.5	R200
W175A-L	170.7	18.5	57	/	122.4	158.4	/	/	25	25	198.9	8/9.5	HD700、HD820、HD770
W175B-L	170.7	16.3	57	400	86.4	102.4	60	18	25	25	198.9	8/9.5/12	PC100-5/6、PC120-5、PC130-6
W175C-L	170.7	16.3	60.33	400	108	108	60	18	25	25	198.9	8/9.5/12	HD450、EX100-1/2/3/5、EX120-1/3、R110、R150、EC140

Specification parameters of Triple Grouser Track Shoes
三筋履带板规格参数

型号 Parts.NO	节距 Pitch	安装尺寸 (mm) Dimensions								型钢参数(mm) Steel parameters			适用机型 Model
		A	B	C	D	E	F	C1	B1	K	M	N	
W175D-L	170.7	18.5	58.7	/	125.4	144.5	/	/	25	25	198.9	8/9.5/12	EX200-1
W175E-L	170.7	16.3	58.7	/	125.4	144.5	/	/	25	25	198.9	8/9.5/12	R200
W190A-L	190	20.5/21	69	400	119.57	155.57	69	21	26	26	219	8/8.5/10/12	CAT320、E200、SK250、住友SH200
W190B-L	190	20.5	62	400	124.4	160.4	69	21	26	26	219	8/8.5/10/12	PC200-5/6/7、PC220、R2225、R215-7、EC210
W190C-L	190	18.5	62	/	124.4	160.4	/	/	26	26	219	8/8.5/10/12	EX200-2/3/5、EX160、EX220
W203A-L	203	20.5/22.5	72	/	138.4	178.4	/	/	28	28	236	11/13	PC300-1、EC290、W203A
W203B-L	203	21	72	/	129	179	/	/	28	28	236	11/13	W203B、CAT325
W203C-L	203	20.6	76.2	/	146	184	/	/	28	28	236	11/13	PC400-1
W216A-L	216	22.5/23/24.3	76.2	/	140.4	178.4	/	/	30/36	30/36	247/250	11/13/14/16	PC300-6/7、EX300-5、EX330-5、R335-7
W216B-L	216	22.5/23	76.2	/	146	184	/	/	30/36	30/36	247/250	11/13/14/16	PC400-1、EX400、EC360-11
W216C-L	216	22.5/23/24.3	76.2	/	140	190	/	/	30/36	30/36	247/250	11/13/14/16	CAT330
W216D-L	216	24.6	76.2	/	144	184	/	/	30/36	30/36	247/250	11/13/14/16	PC400-6
W216E-L	216	24.5	76.2	/	146	184	/	/	30/36	30/36	247/250	11/13/14/16	PC400-5、228、R485-9、R455-7、EC460
W228A-L	216	28	76.2	/	168.8	219.5	/	/	36	36	247	18	DB228

