



众合鲁东
ZHONGHELUDONG



**ZHONGHELUDONG
MACHINERY**

中国 · 青岛众合鲁东机械有限公司
CHINA · QINGDAO ZHONGHE LUDONG MACHINERY CO. LTD

诚信赢天下



目录

+

CONTENTS

公司简介
COMPANY PROFILE 01

自上料搅拌车系列
AUTOMATIC FEEDING MIXER 03

平口自上料搅拌车系列
AUTOMATIC FEEDING MIXER 11

越野叉车系列
4WD OFF-ROAD FORKLIFT 15

装载机系列
LOADER 21

翻斗自卸车系列
TIPPING DUMP TRUCK 25

压路机系列
ROAD ROLLER 29



公司简介 Company Profile



青岛众合鲁东机械有限公司位于环境优美、交通便利的青岛、烟台、潍坊的三地交界处，占地面积 25000 平方米，固定生产投资 500 余万元，现有职工 200 余人，其中专业工程技术人员 20 多人，从事研发、生产和销售工程机械 30 多年。主要生产“众和盛”、“鲁东”、“众合鲁东”三大品牌的自上料搅拌车、装载机、压路机、越野叉车、四驱翻斗车等产品的专业生产厂家。公司产品工艺精良，检测手段完善、售后服务到位，产品主要销往全国二十多个省、市、自治区，部分产品出口到东南亚、非洲以及南美等多个国家和地区，深受新、老客户的信赖。



Qingdao Zhongheludong Agricultural Machinery Co. Ltd. is located in convenient transportation and beautiful environment of the Jiaodong Bay - Qingdao, Yantai, Weifang junction of three, is the professional manufacturer of automatic feeding mixer and loaders in China.

The company covers an area of 25000m², fixed production investment of more than 20 million rmb, and more than 200 employees in our factory , including 20 professional engineering and technical personnel. More than 30 years have been engaged in the development and production of machinery. "Zhonghesheng" "LuDong" "ZhongheLuDong" brand, widely used in road construction, rural construction, construction engineering are sold all over the country. Because of advanced technology, excellent technology, perfect testing means and service in place, it is deeply trusted by old and new customers.

自上料搅拌车

AUTOMATIC FEEDING MIXER



► 整机性能可靠 生产效率高

Reliable overall performance and high production efficiency

专属定制品牌发动机，动力强劲 油耗低

结合先进的动力匹配和控制技术，性能得到极大的优化

Exclusive customized brand engine with strong power and low fuel consumption

By combining advanced power matching and control technology, performance has been greatly optimized

► 高出勤率

High attendance rate

10万小时可靠性验证，关键部件零故障

优化整机动力匹配，满足不同工况下使用

100000 hours of reliability verification, zero failure of key components

Optimize the overall power matching to meet different operating conditions

► 整体布局优化 保证承载能力

Overall layout optimization to ensure carrying capacity

采用高强度锰钢车架，确保安全可靠

长期高负荷运行及复杂路面行驶车架不变形

Adopting high-strength steel frame to ensure safety and reliability
Long term high load operation and complex road driving without deformation of the frame



众合鲁东自上料搅拌车，实现从上料、加水，搅拌、卸料以及运输等混凝土生产全过程自动化，真正实现一机多用。具有操作简单、生产效率高等优点，特别适合中小型建筑工程。可根据用户需求加装冷暖空调、电子秤、高压洗车、双向驾驶等.....

Zhonghe Ludong self-loading mixer truck realizes the automation of the whole process of concrete production from loading, adding water, mixing, unloading and transportation, and truly realizes the multi-purpose of one machine. It has the advantages of simple operation and high production efficiency, especially suitable for small and medium-sized construction projects. According to the user's needs, it can be equipped with air conditioning, electronic scales, high-pressure car washing, two-way driving, etc.....




产品优势 Product advantages




众合鲁东自上料搅拌车可分为前置驾驶室、后置驾驶室两款。前置驾驶室与动臂、搅拌筒同时左右旋转，后置驾驶室款，动臂与搅拌筒同时左右旋转，且具备双向驾驶功能。单杆式操控大臂升降、铲斗收翻，简捷操作、上料速度更快。

The Zhonghe Ludong self loading mixer truck can be divided into two types: front cab and rear cab. The front cab rotates left and right simultaneously with the boom and mixing cylinder, while the rear cab version rotates left and right simultaneously with the boom and mixing cylinder, and has bidirectional driving function. Single lever control for boom lifting and bucket folding, simple operation and faster loading speed.

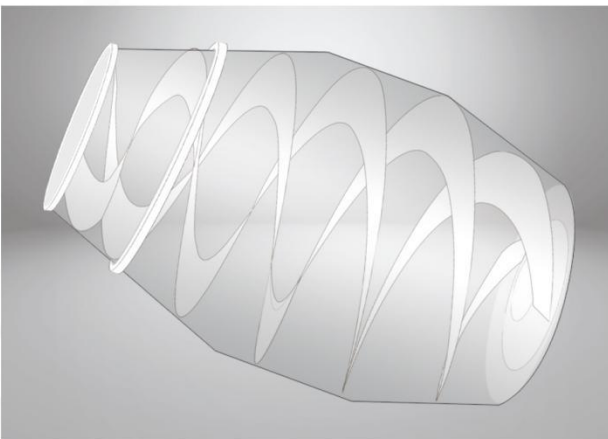

采用国际标准15-16度，增加内置叶片实现半强制性搅拌，混凝土搅拌更均匀，搅拌罐可前倾，卸料速度更快；

Adopting international standards of 15-16 degrees and adding built-in blades for semi mandatory mixing, Concrete mixing is more uniform, the mixing tank can be tilted forward, and the unloading speed is faster;

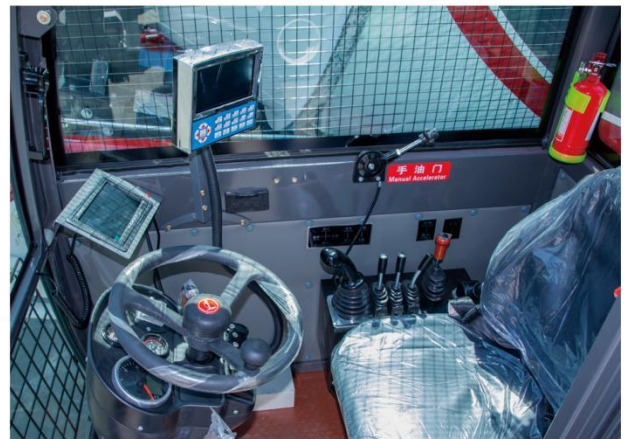

自带精准电子秤、自动加水功能，
数据显示精确，坐在驾驶室内即可调整比例。

Equipped with precise electronic scale and automatic water adding function,
The data display is accurate, and the proportion can be adjusted by sitting in the driver's cab.



真空钢丝轮胎，防扎、防爆，
承载力更强，
国标车桥，双刹车钳，
断气刹驻车，制动性能优异；

Vacuum steel wire tire,
anti puncturing, explosion-proof,
Stronger bearing capacity,
National standard axle,
dual brake calipers,
Parking with air brake,
excellent braking performance;



自带液压外吸水泵，
可实现自动加水、遥控加水，
搅拌车水箱加水方便、快捷；

Equipped with hydraulic external
suction pump, It can achieve auto-
matic and remote water addition,
The water tank of the mixing
truck is convenient and fast to add
water;



整车搭配双油箱、双散热，
连续工作不高温，
定制变量泵，罐体旋转速度可控，
混凝土质量更出色；

The entire vehicle is equipped
with dual fuel tanks and dual heat
dissipation, Continuous operation
without high temperature, Cus-
tomized variable displacement
pump, controllable rotation speed
of the tank body, Better concrete
quality;




油缸、罐体、车架、整体结构件、机架等大部分配件，
均系本公司自产，用料扎实，机械手臂焊接，专业制造，质量有保障；

Most accessories such as oil cylinders, tanks, frames, integral structural components, and frames,
All are produced by our company, with solid materials, welded by Robotic arm, professional manufacturing and
guaranteed quality;

1000型 自上料搅拌车


AUTOMATIC FEEDING MIXER

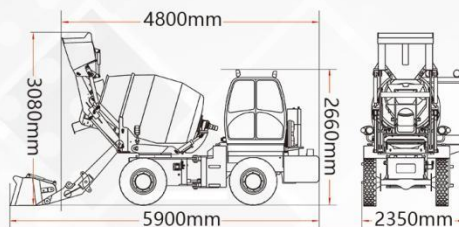

整机尺寸(L×W×H) Machine size	4800×2350×3080 mm	轮胎 Tires	20.5-16
轴距 Wheelbase	2100 mm	铲斗容量 Bucket capacity	0.15 m ³
整机质量 Total weight	3500 kg	搅拌容量 Mixing capacity	≥0.6 m ³
发动机 Engine	云内490/锡柴490 Yunnei490/Xichai490	减速比 Reduction ratio	1:24
功率 Power	42/33 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	240—体 integral	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	五十铃 Isuzu Bridge	轴数牵引类型 Axle number traction type	4×4

1500型 自上料搅拌车


AUTOMATIC FEEDING MIXER

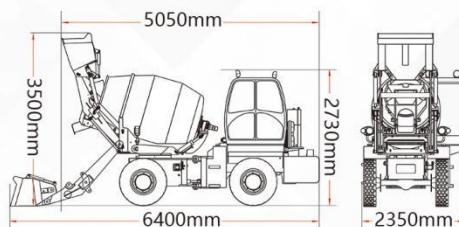

整机尺寸(L×W×H) Machine size	5050×2350×3500 mm	轮胎 Tires	20.5-16
轴距 Wheelbase	2180 mm	铲斗容量 Bucket capacity	0.35 m ³
整机质量 Total weight	4500 kg	搅拌容量 Mixing capacity	≥0.9 m ³
发动机 Engine	云内490 Yunnei490 supercharged	减速比 Reduction ratio	1:24
功率 Power	55 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	265—体 integral	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	1.8T轮边减速桥 1.8T wheel side deceleration Bridge	轴数牵引类型 Axle number traction type	4×4


2500型 自上料搅拌车

AUTOMATIC FEEDING MIXER

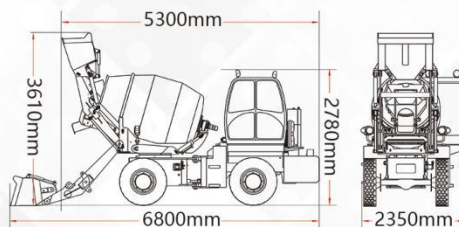


整机尺寸(L×W×H) Machine size	5300×2350×3610 mm	轮胎 Tires	20.5-16
轴距 Wheelbase	2300 mm	铲斗容量 Bucket capacity	0.4 m ³
整机质量 Total weight	6200 kg	搅拌容量 Mixing capacity	≥1.3 m ³
发动机 Engine	玉柴4100增压 Yuchai 4100 supercharged	减速比 Reduction ratio	1:28
功率 Power	73 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	265—体 integral	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	1.8T轮边减速桥 1.8T wheel side deceleration Bridge	轴数牵引类型 Axle number traction type	4×4

3200型 自上料搅拌车 AUTOMATIC FEEDING MIXER

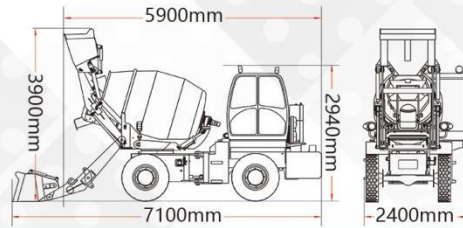


整机尺寸(L×W×H) Machine size	5900×2400×3900 mm	轮胎 Tires	16/70 R22.5
轴距 Wheelbase	2300 mm	铲斗容量 Bucket capacity	0.5 m³
整机质量 Total weight	7500 kg	搅拌容量 Mixing capacity	≥1.8 m³
发动机 Engine	玉柴4102增压 Yuchai4102 supercharged	减速比 Reduction ratio	1:28
功率 Power	78 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	280—体 integral	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	2.0T轮边减速桥	轴数牵引类型 Axle number traction type	4×4

3200型 自上料搅拌车 AUTOMATIC FEEDING MIXER

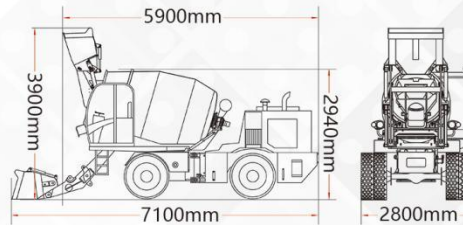

整机尺寸(L×W×H) Machine size	5900×2800×3900 mm	轮胎 Tires	16/70 R22.5
轴距 Wheelbase	2300 mm	铲斗容量 Bucket capacity	0.5 m³
整机质量 Total weight	7700 kg	搅拌容量 Mixing capacity	≥1.8 m³
发动机 Engine	玉柴4102增压 Yuchai4102 supercharged	减速比 Reduction ratio	1:28
功率 Power	78 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	280—体 integral	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	2.0T轮边减速桥	轴数牵引类型 Axle number traction type	4×4

4000型 自上料搅拌车 AUTOMATIC FEEDING MIXER

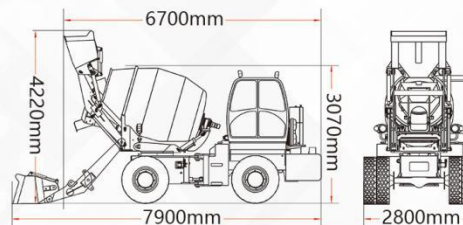


整机尺寸(L×W×H) Machine size	6700×2800×4220 mm	轮胎 Tires	16/70-R 22.5双轮胎 Double tire
轴距 Wheelbase	3200 mm	铲斗容量 Bucket capacity	0.65 m³
整机质量 Total weight	9000 kg	搅拌容量 Mixing capacity	≥2.8 m³
发动机 Engine	4105 国II / 4102增压 国III 4105 country II / 4102 supercharged country III	减速比 Reduction ratio	1:28
功率 Power	85/90 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	280分体 Separated type	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	2.5T轮边减速桥	轴数牵引类型 Axle number traction type	4×4

5500型

自上料搅拌车

AUTOMATIC FEEDING MIXER

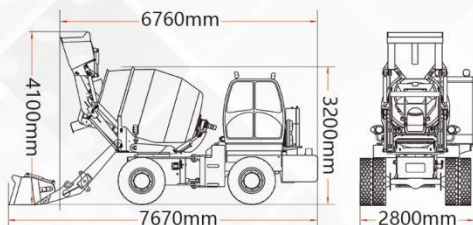


整机尺寸(L×W×H) Machine size	6760×2800×4100 mm	轮胎 Tires	16/70 R22.5双轮胎 Double tire
轴距 Wheelbase	3200 mm	铲斗容量 Bucket capacity	0.65 m³
整机质量 Total weight	9500 kg	搅拌容量 Mixing capacity	≥3.3 m³
发动机 Engine	4108增压 4108 supercharged	减速比 Reduction ratio	1:28
功率 Power	91 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	315分体 Separated type	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	2.5T轮边减速桥 2.5T wheel side deceleration Bridge	轴数牵引类型 Axle number traction type	4×4

5500型

自上料搅拌车


AUTOMATIC FEEDING MIXER

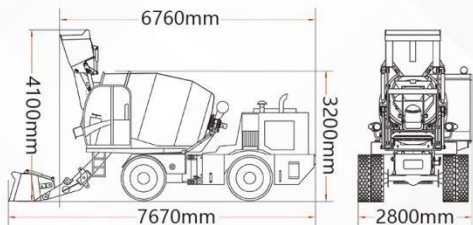

整机尺寸(L×W×H) Machine size	6760×2800×4100 mm	轮胎 Tires	16/70 R22.5双轮胎 Double tire
轴距 Wheelbase	3200 mm	铲斗容量 Bucket capacity	0.65 m³
整机质量 Total weight	9500 kg	搅拌容量 Mixing capacity	≥3.3 m³
发动机 Engine	4108增压 4108 supercharged	减速比 Reduction ratio	1:28
功率 Power	91 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	315分体 Separated type	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	2.5T轮边减速桥 2.5T wheel side deceleration Bridge	轴数牵引类型 Axle number traction type	4×4

可选配置

Optional configuration

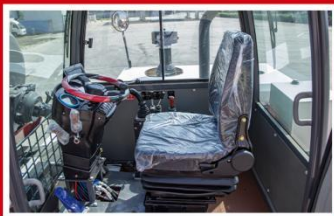

双向驾驶

The cab is Two-way



水泥料斗


Cement hopper



冷


Air co

6500型 自上料搅拌车 AUTOMATIC FEEDING MIXER

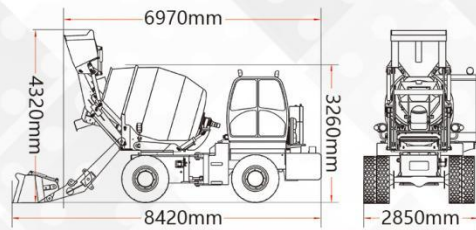

整机尺寸(L×W×H) Machine size	6970×2850×4320 mm	轮胎 Tires	16/70 R22.5双轮胎 Double tire
轴距 Wheelbase	3200 mm	铲斗容量 Bucket capacity	0.65 m ³
整机质量 Total weight	11000 kg	搅拌容量 Mixing capacity	≥3.8 m ³
发动机 Engine	玉柴6105增压 国II Yuchai6105 supercharged country II	减速比 Reduction ratio	1:103
功率 Power	92 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	315分体 Separated type	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	3.0T轮边减速桥	轴数牵引类型 Axle number traction type	4×4

7500型 自上料搅拌车 AUTOMATIC FEEDING MIXER

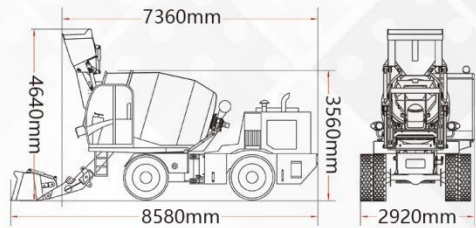

整机尺寸(L×W×H) Machine size	7360×2920×4640 mm	轮胎 Tires	16/70 R22.5双轮胎 Double tire
轴距 Wheelbase	3200 mm	铲斗容量 Bucket capacity	0.7 m ³
整机质量 Total weight	12500 kg	搅拌容量 Mixing capacity	≥4.5 m ³
发动机 Engine	玉柴6105增压 Yuchai6105 supercharged	减速比 Reduction ratio	1:103
功率 Power	92 kw	转速 Rotating speed	≥15圈/分钟 laps/minute
变速箱 Gearbox	315分体 Separated type	行驶速度 Travel speed	25 km/h
驱动桥 Drive axle	前桥30S湿式车桥/后桥30 front bridge 30S wet axle/rear axle 30	轴数牵引类型 Axle number traction type	4×4



冷暖空调
Conditioning



高压洗车
High pressure car wash



电子秤
electronic balance



黄油机
Automatic lubrication
grease system

平口自上料搅拌车

AUTOMATIC FEEDING MIXER



► 性能可靠 使用寿命更长

Reliable performance and longer service life

加宽、加重驱动桥

整车采用国内一线大品牌液压系统

Widening and weighting the drive axle

The entire vehicle adopts a domestic top tier brand hydraulic system

► 出料速度大幅度提高

Significant increase in discharge speed

上料斗优化升级 多出料口设计

进、出料速度提高 30%，生产效率更高；

Optimization and upgrading of feeding hopper with multiple discharge ports design

Increase the feeding and discharging speed by 30%, resulting in higher production efficiency;

► 搅拌性能更强

Stronger stirring performance

大扭矩减速器，结构紧凑，回程间隙小

可实现边搅拌边行走，混凝土质量更高；

High torque reducer with compact structure and small return clearance

It can achieve walking while mixing, resulting in higher concrete quality;

► 可选配置 Optional configuration



水泥料斗
Cement hopper



冷暖空调
Air conditioning



高压洗车
High pressure car wash



电子秤
electronic balance



黄油机
Automatic lubrication
grease system



众合鲁东平口自上料搅拌车，拥有核心专利技术，加粗搅拌轴，配备润滑脂加注口，耐用性提升数倍。独有的张紧型多向搅拌齿，可以有效减缓冲击力、更坚固、更耐用，搅拌更均匀。

Zhonghe Ludong Pingkou self loading mixer truck, with core patented technology, has a thickened mixing shaft, and is equipped with a grease filler, improving durability several times. The unique tension type multidirectional mixing teeth can effectively reduce the impact force, become stronger, more durable, and mix more evenly.

1500型 平口自上料搅拌机

FLAT MOUTH AUTOMATIC FEEDING MIXER



主要技术参数 SPECIFICATIONS

外形尺寸(L×W×H) (mm) Overall dimensions (mm)	5100×1900×3100
轴距 (mm) Wheel Base (mm)	2600
整车质量 (kg) Total weight (kg)	4500
驱动形式 Drive model	轮式四驱 Four-wheel drive
轮胎 Tyre	前进20.5-16 Forward gears 20.5-16
驱动桥 Drive axle	小轮边 Small wheel side axle
发动机型号 Engine Model	华东4102增压 East China 4102 turbo charger
发动机功率 (kw) Engine power (kw)	76
变速箱型号 Gearbox Mode	265
最高车速 (km/h) Maximum speed (km/h)	30
最大爬坡度 (°) Maximum climbing slope (°)	30
最小转弯半径 (mm) Minimum turning radius (mm)	4000
搅拌罐容量 (m³) Mixing tank capacity (m³)	1.5
铲斗容量 (m³) Bucket capacity (m³)	0.4
水箱容量 (L) Water tank capacity (L)	500
最小离地间隙 (mm) Minimum ground clearance (mm)	300

2000型 平口自上料搅拌机

FLAT MOUTH AUTOMATIC FEEDING MIXER



主要技术参数 SPECIFICATIONS

外形尺寸(L×W×H) (mm) Overall dimensions (mm)	5350×2150×3280
轴距 (mm) Wheel Base (mm)	2850
整车质量 (kg) Total weight (kg)	6000
驱动形式 Drive model	轮式四驱 Four-wheel drive
轮胎 Tyre	前进20.5-16 Forward gears 20.5-16
驱动桥 Drive axle	小轮边 Small wheel side axle
发动机型号 Engine Model	4102增压 YCD4R22T-105 4102 turbo charger YCD4R22T-105
发动机功率 (kw) Engine power (kw)	73
变速箱型号 Gearbox Mode	265
最高车速 (km/h) Maximum speed (km/h)	30
最大爬坡度 (°) Maximum climbing slope (°)	30
最小转弯半径 (mm) Minimum turning radius (mm)	5800
搅拌罐容量 (m³) Mixing tank capacity (m³)	2
铲斗容量 (m³) Bucket capacity (m³)	0.5
水箱容量 (L) Water tank capacity (L)	500
最小离地间隙 (mm) Minimum ground clearance (mm)	350

2000A型 平口自上料搅拌机 FLAT MOUTH AUTOMATIC FEEDING MIXER



主要技术参数 SPECIFICATIONS

外形尺寸(L×W×H) (mm) Overall dimensions (mm)	5350×2150×3380
轴距 (mm) Wheel Base (mm)	2850
整车质量 (kg) Total weight (kg)	6000
驱动形式 Drive model	轮式四驱 Four-wheel drive
轮胎 Tyre	16/70 R22.5
驱动桥 Drive axle	大轮边减速桥 big wheel side axle
发动机型号 Engine Model	玉柴4102增压 YUCHAI 4102 turbo charger
发动机功率 (kw) Engine power (kw)	78
变速箱型号 Gearbox Mode	280
最高车速 (km/h) Maximum speed (km/h)	30
最大爬坡度 (°) Maximum climbing slope (°)	30
最小转弯半径 (mm) Minimum turning radius (mm)	5800
搅拌罐容量 (m³) Mixing tank capacity (m³)	2
铲斗容量 (m³) Bucket capacity (m³)	0.5
水箱容量 (L) Water tank capacity (L)	500
最小离地间隙 (mm) Minimum ground clearance (mm)	350

3000型 平口自上料搅拌机 FLAT MOUTH AUTOMATIC FEEDING MIXER



主要技术参数 SPECIFICATIONS

外形尺寸(L×W×H) (mm) Overall dimensions (mm)	5950×2400×3350
轴距 (mm) Wheel Base (mm)	2900
整车质量 (kg) Total weight (kg)	6500
驱动形式 Drive model	轮式四驱 Four-wheel drive
轮胎 Tyre	16/70 R22.5
驱动桥 Drive axle	2.0T轮边减速桥 2.0T wheel side axle
发动机型号 Engine Model	玉柴4105增压 YUCHAI 4105 turbo charger
发动机功率 (kw) Engine power (kw)	85
变速箱型号 Gearbox Mode	280
最高车速 (km/h) Maximum speed (km/h)	30
最大爬坡度 (°) Maximum climbing slope (°)	30
最小转弯半径 (mm) Minimum turning radius (mm)	5800
搅拌罐容量 (m³) Mixing tank capacity (m³)	3
铲斗容量 (m³) Bucket capacity (m³)	0.5
水箱容量 (L) Water tank capacity (L)	500
最小离地间隙 (mm) Minimum ground clearance (mm)	350

四驱越野叉车

4WD OFF-ROAD FORKLIFT



品牌发动机



越野轮胎



加厚钢架



承重力强



低耗省油



安全性高

► 强劲的动力系统

Powerful power system

采用一线大品牌发动机

平均燃油消耗低 25%~30%，

动力强劲，经济耐用、节能环保

Adopting top tier brand engines

The average fuel consumption is 25%~30% lower,
Powerful, economical, durable, energy-saving
and environmentally friendly

► 可靠的液压系统

Reliable hydraulic system

液压先导操作，整车采用国内一线品牌胶管、液压泵、
液压缸、液压油，使用寿命更长。

Hydraulic pilot operation, the entire vehicle adopts
domestic first-class brand rubber hoses, hydraulic
pumps, hydraulic cylinders, and hydraulic oil, with a
longer service life.

► 人性化设计

user-friendly design

框架式结构驾驶室，降噪、隔音、减振

视野开阔、驾乘舒适

集人性化设计于一身，安全可靠

Frame structure cab, noise reduction,
sound insulation, and vibration reduction

Wide field of vision, comfortable driving and riding

Integrating humanized design, safe and reliable

>>>> 精于专业，诚于服务
Is professional and sincere service





3T 越野叉车

CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	4000 kg	轮胎规格 Tyre	大 23.5/70-16 big 23.5/70-16
长×宽×高 Dimension(L×W×H)	3850×1850×2600 mm	最小弯半径 Mini Turning Radius	3500 mm
桥 Axle	小轮边 Small Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	3000 kg	轴距 Wheel base	2250 mm
发动机型号 Engine	云内490 国二 Yunnei490 National-2	门架离地间隙 gantry ground clearance	240 mm
发动机功率 Engine Power	37 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	300 mm



3.5T 越野叉车

CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	4500 kg	轮胎规格 Tyre	大 23.5/70-16 big 23.5/70-16
长×宽×高 Dimension(L×W×H)	3850×1850×2600 mm	最小弯半径 Mini Turning Radius	3500 mm
桥 Axle	小轮边 Small Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	3500 kg	轴距 Wheel base	2250 mm
发动机型号 Engine	锡柴490 国三 Xichai490 National-3	门架离地间隙 gantry ground clearance	240 mm
发动机功率 Engine Power	36.8 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	300 mm



3.5T 超矮款越野叉车

ULTRA LOW CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	4500 kg	轮胎规格 Tyre	大 23.5/70-16 big 23.5/70-16
长×宽×高 Dimension(L×W×H)	3850×1850×2200 mm	最小弯半径 Mini Turning Radius	3500 mm
桥 Axle	小轮边 Small Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	4500 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	3500 kg	轴距 Wheel base	2250 mm
发动机型号 Engine	锡柴490 国三 Xichai490 National-3	门架离地间隙 gantry ground clearance	240 mm
发动机功率 Engine Power	36.8 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	300 mm



3.5T 标准款越野叉车 STANDARD OFF-ROAD FORKLIFT

整车质量 Overall Weight	4500 kg	轮胎规格 Tyre	大 23.5/70-16 big 23.5/70-16
长×宽×高 Dimension(L×W×H)	3850×1850×2600 mm	最小转弯半径 Mini Turning Radius	3500 mm
桥 Axle	小轮边 Small Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	3500 kg	轴距 Wheel base	2250 mm
发动机型号 Engine	锡柴490 国三 Xichai490 National-3	门架离地间隙 gantry ground clearance	240 mm
发动机功率 Engine Power	36.8 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	300 mm



3.5T 后铰接款越野叉车 REAR HINGE CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	4500 kg	轮胎规格 Tyre	23.5/70-16
长×宽×高 Dimension(L×W×H)	3620×1860×2330 mm	最小转弯半径 Mini Turning Radius	3500 mm
桥 Axle	小轮边 Small Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	3500 kg	轴距 Wheel base	2470 mm
发动机型号 Engine	锡柴490 国三 Xichai490 National-3	门架离地间隙 gantry ground clearance	240 mm
发动机功率 Engine Power	36.8 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	330 mm



4T 越野叉车 CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	5500 kg	轮胎规格 Tyre	16/70-20
长×宽×高 Dimension(L×W×H)	4000×1970×2700 mm	最小转弯半径 Mini Turning Radius	3500 mm
桥 Axle	中轮边 Middle Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	4000 kg	轴距 Wheel base	2150 mm
发动机型号 Engine	4102 增压 4102 supercharged	门架离地间隙 gantry ground clearance	240 mm
发动机功率 Engine Power	76 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	350 mm



5T 越野叉车

CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	6000 kg	轮胎规格 Tyre	16/70 R22.5
长×宽×高 Dimension(L×W×H)	4350×2000×2900 mm	最小弯半径 Mini Turning Radius	4000 mm
桥 Axle	加重轮边桥 aggravate Hub Reduction	驱动模式 Drving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	5000 kg	轴距 Wheel base	2450 mm
发动机型号 Engine	云内4102 增压 Yunnei4102 supercharged	门架离地间隙 gantry ground clearance	350 mm
发动机功率 Engine Power	76 kw	载荷中心距 loading center distance	500 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	350 mm



6T 越野叉车

CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	7000 kg	轮胎规格 Tyre	16/70-R22.5 双轮胎 16/70-R22.5 Double tire
长×宽×高 Dimension(L×W×H)	4350×2000×2900 mm	最小弯半径 Mini Turning Radius	4500 mm
桥 Axle	加重轮边桥 aggravate Hub Reduction	驱动模式 Drving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	6000 kg	轴距 Wheel base	2450 mm
发动机型号 Engine	玉柴4102 增压 Yunchai4102 supercharged	门架离地间隙 gantry ground clearance	350 mm
发动机功率 Engine Power	78 kw	载荷中心距 loading center distance	600 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	350 mm

可选配属具

Optional accessories



快换铲斗



倾翻抓



倾翻器



侧移器



软包推出器



调距叉



7T 越野叉车 CROSS-COUNTRY FORKLIFT

整车质量 Overall Weight	8000 kg	轮胎规格 Tyre	16/70-R22.5 双轮胎 16/70-R22.5 Double tire
长×宽×高 Dimension(L×W×H)	4350×2000×2900 mm	最小转弯半径 Mini Turning Radius	4500 mm
桥 Axle	加重轮边桥 aggravate Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	3000 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	7000 kg	轴距 Wheel base	2450 mm
发动机型号 Engine	玉柴4102 增压 Yunchai4102 supercharged	门架离地间隙 gantry ground clearance	350 mm
发动机功率 Engine Power	78 kw	载荷中心距 loading center distance	600 mm
门架静止高度 Gantry Height	2250 - 2930 mm	轴距中心离地间隙 Wheel base ground clearance	350 mm



10T 越野叉车 CROSS-COUNTRY FORKLIFT


整车质量 Overall Weight	11850 kg	轮胎规格 Tyre	16/70-R22.5 双轮胎 16/70-R22.5 Double tire
长×宽×高 Dimension(L×W×H)	5320×2520×2900 mm	最小转弯半径 Mini Turning Radius	5650 mm
桥 Axle	加重轮边桥 aggravate Hub Reduction	驱动模式 Driving Mode	四轮驱动 4×4 wheel driving
卸载高度 Lifting Height	4500 - 6000 mm 可定制 Customizable	最大爬坡度 Max Gradeability	≤25°
额定载重 Rated Load	10000 kg	轴距 Wheel base	2680 mm
发动机型号 Engine	玉柴6105 增压 Yuchai 6105 supercharged	门架离地间隙 gantry ground clearance	270 mm
发动机功率 Engine Power	92 kw	载荷中心距 loading center distance	600 mm
门架静止高度 Gantry Height	2250 - 3030 mm	轴距中心离地间隙 Wheel base ground clearance	350 mm



平抱夹



圆抱夹



玉米抱夹



钢管夹



直臂吊



飞臂吊





扫雪机



带爪铲斗

装载机

Loader



全液压制动
动力强劲
安全可靠
爆发力强

**定制加重型驱动桥，全面提升承载能力；
双管路全液压制动，可靠性强，保养更容易；**

Customized heavy-duty drive axle to comprehensively enhance load-bearing capacity;
Split calipers with dual hydraulic braking, strong reliability and easier maintenance;

**全景式玻璃，视野更开阔；
舒适的驾驶环境和操控性；
更人性化的驾驶体验；**

Panoramic glass for more spacious videos;
Comfortable driving environment and handling,
a more user-friendly driving experience;

**专属定制一线品牌发动机；
平均燃油消耗低 25%~30%，
动力强劲，节能环保；**

Exclusive customization of first tier brand engines, with average fuel consumption reduced by 25% to 30%, strong power, energy-saving and environmentally friendly.

众合鲁东系列装载机，是公司倾力打造的一款中小型装载机产品，以提高客户投资回报为目标。具有“高效节能、耐久可靠、维护成本低”等特点。适应于中小型工程、城镇改造、房屋建造、农田、水利等中小型土石方工程，自上市以来，整机性能优异，质量稳定，深受客户欢迎。

Zhonghe Ludong series loaders are a small and medium-sized loader product that the company strives to create, with the goal of improving customer investment returns. It has the characteristics of "high efficiency, energy conservation, durability, reliability, and low maintenance cost". Suitable for small and medium-sized engineering, urban renovation, housing construction, farmland, water conservancy and other small and medium-sized earthwork projects, since its launch, the machine has excellent performance and stable quality, and is deeply welcomed by customers.





众合鲁东
ZHONGHE LUDONG

920型装载机 Loader



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	5600×1840×2760 mm
整车质量 Total weight	3200 kg
发动机型号 Engine	YN27
发动机功率 Engine Power	42 kw
驱动桥 Drive axle	五十铃桥 Isuzu Bridge
轴距 Wheelbase	2130 mm
轮距 Tread	1490 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	前进 20.5-16 Forward gears 20.5-16
变速箱 Gearbox	265 一体 265 integral
行驶速度 Travel speed	25 km/h
最大爬坡度 Max Gradeability	30°
最小转弯半径 Mini Turning Radius	4000 mm
斗容量 dipper capacity	0.8 m³
卸载高度 Unloading height	3200 mm
卸载距离 Unloading distance	840 mm
动臂提升时间 Boom lifting time	5 s
动臂下降时间 Boom lowering time	4 s

926型装载机 Loader



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	5500×1850×2750 mm
整车质量 Total weight	3500 kg
发动机型号 Engine	YN27GBZ / YN4H055-30VE
发动机功率 Engine Power	55 / 37 kw
驱动桥 Drive axle	小轮边桥 Small Hub Reduction
轴距 Wheelbase	2130 mm
轮距 Tread	1490 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	前进 20.5-16 Forward gears 20.5-16
变速箱 Gearbox	265 一体 265 integral
行驶速度 Travel speed	25 km/h
最大爬坡度 Max Gradeability	30°
最小转弯半径 Mini Turning Radius	4000 mm
斗容量 dipper capacity	0.8 m³
卸载高度 Unloading height	3200 mm
卸载距离 Unloading distance	840 mm
动臂提升时间 Boom lifting time	5 s
动臂下降时间 Boom lowering time	4 s

936型装载机 Loader



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	6040×2030×2950 mm
整车质量 Total weight	4500 kg
发动机型号 Engine	YN38GBZ
发动机功率 Engine Power	76 kw
驱动桥 Drive axle	2.0T轮边减速桥 2.0T wheel side deceleration Bridge
轴距 Wheelbase	2450 mm
轮距 Tread	1565 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	16/70-20
变速箱 Gearbox	265 一体 265 integral
行驶速度 Travel speed	25 km/h
最大爬坡度 Max Gradeability	30°
最小转弯半径 Mini Turning Radius	4500 mm
斗容量 dipper capacity	1 m ³
卸载高度 Unloading height	3600 mm
卸载距离 Unloading distance	970 mm
动臂提升时间 Boom lifting time	5 s
动臂下降时间 Boom lowering time	4 s

948型装载机 Loader



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	6540×2150×3100 mm
整车质量 Total weight	7200 kg
发动机型号 Engine	玉柴6105增压 Yuchai6105 supercharged
发动机功率 Engine Power	92 kw
驱动桥 Drive axle	2.8T轮边减速桥 2.8T wheel side deceleration Bridge
轴距 Wheelbase	2710 mm
轮距 Tread	1680 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	17.5-25
变速箱 Gearbox	300 一体 300 integral
行驶速度 Travel speed	25 km/h
最大爬坡度 Max Gradeability	30°
最小转弯半径 Mini Turning Radius	5500 mm
斗容量 dipper capacity	1.3 m ³
卸载高度 Unloading height	4000 mm
卸载距离 Unloading distance	1000 mm
动臂提升时间 Boom lifting time	6.5 s
动臂下降时间 Boom lowering time	5.5 s

翻斗自卸车

Tipping dump truck



料斗

国标锰钢加厚材质料斗，单杆式操作，可实现 $\pm 90^\circ$ 旋转，全角度下翻卸料无死角。

National standard manganese steel thickened material hopper, single rod operation, can achieve $\pm 90^\circ$ rotation, full angle downward tipping and unloading without dead corners.

驾驶室

框架结构驾驶室，搭配航空座椅，视野开阔、驾乘舒适、防翻滚，可最大限度满足驾驶人员个性化需求。

The frame structure cab, paired with aviation seats, has a wide view, comfortable driving and riding, and anti roll, which can maximize the personalized needs of drivers.

液压系统

液压先导操作，整车采用国内一线品牌胶管、液压泵、液压缸、液压油，使用寿命更长。

Hydraulic pilot operation, the entire vehicle adopts domestic first-class brand rubber hoses, hydraulic pumps, hydraulic cylinders, and hydraulic oil, with a longer service life.



众合鲁东翻斗自卸车，是通过液压举升而自行卸载货物的车辆，在中小型土木工程中经常与挖掘机、装载机、带式输送机等工程机械联合作业，构成装、运、卸生产线，进行土方、砂石、散料的装卸运输工作。

Zhonghe Ludong tipper dump truck is a vehicle that unloads goods on its own through hydraulic lifting. In small and medium-sized civil engineering projects, it often works in conjunction with excavators, loaders, belt conveyors, and other construction machinery to form a loading, transportation, and unloading production line for the loading and unloading of earthwork, sand, and bulk materials.



ZHS25D型 自卸翻斗车

Dump truck



主要技术参数

SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	4400×1850×2700 mm
整车质量 Total weight	3100 kg
发动机型号 Engine	YN25GB
发动机功率 Engine Power	37 kw
驱动桥 Drive axle	小轮边 Small Hub Reduction
轴距 Wheelbase	2500 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	20.5-16
变速箱 Gearbox	265双高速 265 Double High Speed
行驶速度 Travel speed	30 km/h
最大爬坡度 Max Gradeability	≤30°
最小转弯半径 Mini Turning Radius	4500 mm
最小离地间隙 Minimum ground clearance	250 mm
斗容量 dipper capacity	1.2 m³
翻斗旋转角度 Tipping bucket rotation angle	±90°
额定载重 Rated load	2500 kg

ZHS35D型 自卸翻斗车

Dump truck



主要技术参数

SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	4900×1850×2700 mm
整车质量 Total weight	3300 kg
发动机型号 Engine	YN25GBZ
发动机功率 Engine Power	55 kw
驱动桥 Drive axle	小轮边 Small Hub Reduction
轴距 Wheelbase	2500 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	20.5-16
变速箱 Gearbox	265双高速 265 Double High Speed
行驶速度 Travel speed	30 km/h
最大爬坡度 Max Gradeability	≤30°
最小转弯半径 Mini Turning Radius	4500 mm
最小离地间隙 Minimum ground clearance	250 mm
斗容量 dipper capacity	1.6 m³
翻斗旋转角度 Tipping bucket rotation angle	±90°
额定载重 Rated load	3500 kg

ZHS50D型 自卸翻斗车 Dump truck



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	5260×1910×2850 mm
整车质量 Total weight	3500 kg
发动机型号 Engine	YN38GBZ
发动机功率 Engine Power	76 kw
驱动桥 Drive axle	中轮边 Middle wheel side Axle
轴距 Wheelbase	2530 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	16/70-20
变速箱 Gearbox	265双高速 265 Double High Speed
行驶速度 Travel speed	30 km/h
最大爬坡度 Max Gradeability	≤30°
最小转弯半径 Mini Turning Radius	4850 mm
最小离地间隙 Minimum ground clearance	320 mm
斗容量 dipper capacity	2.5 m³
翻斗旋转角度 Tipping bucket rotation angle	±90°
额定载重 Rated load	5000 kg

ZHS70D型 自卸翻斗车 Dump truck



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H) vehicle size	6000×2350×2950 mm
整车质量 Total weight	6000 kg
发动机型号 Engine	YCD4J22T-115
发动机功率 Engine Power	85 kw
驱动桥 Drive axle	大轮边 Bigger Wheel Side Axle
轴距 Wheelbase	3200 mm
驱动形式 Driving form	轮式四驱 4-wheel drive
轮胎 Tires	16//70-24
变速箱 Gearbox	280双高速 280 Double High Speed
行驶速度 Travel speed	30 km/h
最大爬坡度 Max Gradeability	≤30°
最小转弯半径 Mini Turning Radius	4850 mm
最小离地间隙 Minimum ground clearance	320 mm
斗容量 dipper capacity	3.5 m³
翻斗旋转角度 Tipping bucket rotation angle	±90°
额定载重 Rated load	7000 kg

压路机

road roller



众合鲁东翻斗自卸车，是通过液压举升而自行卸载货物的车辆，在中小型土木工程中经常与挖掘机、装载机、带式输送机等工程机械联合作业，构成装、运、卸生产线，进行土方、砂石、散料的装卸运输工作。

Zhonghe Ludong tipper dump truck is a vehicle that unloads goods on its own through hydraulic lifting. In small and medium-sized civil engineering projects, it often works in conjunction with excavators, loaders, belt conveyors, and other construction machinery to form a loading, transportation, and unloading production line for the loading and unloading of earthwork, sand, and bulk materials.

► 卓越的压实能力

Excellent compaction ability

可满足各种路面压实需要
Can meet various road compaction needs

► 全液压驱动系统

Fully hydraulic drive system

无级变速，起停平稳，减小了对路面的冲击
操作简单，上手快，劳动强度小
Continuously variable transmission, smooth starting and stopping, reducing impact on the road surface.
Easy to operate, quick to get started, and low labor intensity.

► 人性化设计

user-friendly design

框架式结构驾驶室，降噪、隔音、减振
视野开阔、驾乘舒适
集人性化设计于一身，安全可靠
Frame structure cab, noise reduction, sound insulation, and vibration reduction
Wide field of vision, comfortable driving and riding
Integrating humanized design, safe and reliable



>>>> 精于专业，诚于服务
Is professional and sincere service



LD4.0型 压路机 Road roller



主要技术参数

SPECIFICATIONS

整车尺寸 (L×W×H)	vehicle size	4500×1800×2550 mm	爬坡能力	Grade ability	30%
整车质量	Total weight	4000 kg	转弯角度	Steering angle	±25°
发动机型号	Engine	YN27	电气电压	Electrical voltage	24 V
发动机功率	Engine Power	42 Kw	转弯半径	Turning Radius	6500 mm
振动频率	Vibrating frequency	45 Hz	离地间隙	ground clearance	300 mm
振幅	Vibrating amplitude	0.4 mm	摆动角度	Vertical oscillation	19°
激振力	Centrifugal force	60 KN	轮胎规格	Tyre size	20.5/70-16
行驶速度	Travel speed	2.2-13 Km/h	振动轮宽度	Drum width	1630 mm

LD6.0型 压路机 Road roller



主要技术参数 SPECIFICATIONS

整车尺寸 (L×W×H)	vehicle size	4500×1800×2550 mm	爬坡能力	Grade ability	30%
整车质量	Total weight	6000 kg	转弯角度	Steering angle	±25°
发动机型号	Engine	CF4B68G-Z	电气电压	Electrical voltage	24 V
发动机功率	Engine Power	60 Kw	转弯半径	Turning Radius	6500 mm
振动频率	Vibrating frequency	45 Hz	离地间隙	ground clearance	300 mm
振幅	Vibrating amplitude	0.4 mm	摆动角度	Vertical oscillation	19°
激振力	Centrifugal force	80 KN	轮胎规格	Tyre size	20.5/70-16
行驶速度	Travel speed	2.2-13 Km/h	振动轮宽度	Drum width	1630 mm



中国 · 青岛众合鲁东机械有限公司

CHINA · QINGDAO ZHONGHE LUDONG MACHINERY CO. LTD

地址：山东省青岛平度市新河镇灰埠工业园

Address: xinhe huibu town, pingdu city, Qingdao city ShanDong province .

电话/Tel: 0532-86391168

传真/Fax: 0532-86393678

销售电话/Sales call: 18300277758

邮编/P.C.: 266715

因产品技术不断更新改良,本资料仅供参考,以实物为准!本公司将在法律允许范围内保留最终解释权。
The specifications may be different from pictures. They are subject change without notice.