

# MOCAP®

**Solutions that Fit®**

MOCAP offers more Caps, Plugs, Grips, Tapes, Tubing and Netting to satisfy your Product Protection, Masking and Finishing needs.

For over 40 years, MOCAP has been the Industry Leader in manufacturing quality Dip Molded Vinyl, Injection Molded Plastic and Injection Molded Rubber Caps and products for virtually every market.

**Manufacturer of Quality Plastic & Rubber Products**

高品质的橡塑产品制造商



**MOCAP® China 茂凯**

中山茂凯工业有限公司

广东省中山市小榄镇工业大道北三号A栋之一

电话：+86-760-22836188

传真：+86-760-22836177

企业微信号：13802665016

网址：www.mocap.com.cn

邮箱：sales@mocap.com.cn



mocap.com.cn

# MOCAP®

**Solutions that Fit®**

MOCAP Solutions that Fit.



Caps, Plugs, Grips & Tapes  
for  
Product Protection, Masking & Finishing

塑料盖帽 · 塑料堵头 · 手柄套 · 遮蔽胶带  
遮蔽 | 保护 | 修饰

2025



**MOCAP** Farmington, MO • US

**MOCAP** Park Hills, MO • US

**MOCAP** Monterrey, NL • MX

## World Headquarters:

### **MOCAP**®

409 Parkway Drive  
Park Hills, MO 63601 • USA  
314.543.4000  
314.543.4111 (fax)  
(Sales & Manufacturing Location)

www.mocap.com  
800.633.6775  
sales@mocap.com  
customerservice@mocap.com



902 Progress Drive  
Farmington, MO 63640  
314.543.4000  
314.543.4111 (fax)  
(Warehouse Location)

**MOCAP**® Canada  
Tel: 800.633.6775  
Fax: 314.543.4111  
en.mocap-canada.com (English)  
fr.mocap-canada.com (French)  
sales@mocap.com

## International Offices:

### **MOCAP**® China 茂凯

中山茂凯工业有限公司

广东省中山市小榄镇工业大道北三号A栋之一  
电话：+86-760-22836188  
传真：+86-760-22836177  
网址：www.mocap.com.cn  
邮箱：sales@mocap.com.cn



### **MOCAP**® Mexico

Burocratas 410, Cumbres 2nd. Sector  
Monterrey, NL 64610  
México  
Tel: +52 (81) 8344-1843  
Fax: + 52 (81) 8340-0984  
www.mocap.com.mx  
ventas@mocap.com  
(Sales Location)

### **MOCAP**® United Kingdom

MOCAP LTD  
Hortonwood 35  
Telford, Shropshire TF1 7YW  
Great Britain

Tel: +44 1952 670247  
Fax: +44 1952 670241  
www.mocap.co.uk  
sales@mocap.co.uk  
(Sales & Manufacturing Location)



### **MOCAP**® United Kingdom

MOCAP LTD  
Unit 9 Tinsley Industrial Park  
Shepcote Way  
Sheffield, South Yorkshire S9 1TH

Tel: +44 1952 670247  
Fax: +44 1952 670241  
(Manufacturing Location)

### **MOCAP**® Poland

MOCAP SP. Z O.O.  
BGO Park Poznań  
Składowa 6  
62-023 Żerniki  
Poland  
(Sales & Warehouse Location)

### **MOCAP**® France

Tel: +33 182 88 58 31  
Fax: +33 176 75 33 34  
www.mocap-france.com  
info@mocap-france.com

### **MOCAP**® Italy

Tel: +39 035 0460169  
Fax: +39 035 0460170  
mocap.it  
info@mocap.it

### **MOCAP**® Spain

Tel: +34 868 48 01 13  
Fax: +34 868 48 01 14  
mocap.com.es  
ventas@mocap.com.es

### **MOCAP**® Germany

Tel: +49 231 4461693  
Fax: +49 231 4461694  
mocap-deutschland.de  
info@mocap-deutschland.de

### **MOCAP**® Poland

Tel: +48 22 397 15 80  
Fax: +48 22 397 17 89  
mocap.com.pl  
info@mocap.com.pl

**MOCAP** has steadily grown from a small dip molding operation into several divisions with multiple facilities totaling more than 400,000 square feet. Our manufacturing capabilities include Vinyl Dip Molding, Plastic & Rubber Injection Molding, Clear Plastic & Rubber Extrusion and Blow Molding.

**MOCAP** has sales offices in the United States, United Kingdom, China and Mexico serving thousands of customers globally with our Product Protection, Masking, Finishing and Packaging products.

自1982年在美国成立以来，**MOCAP** 茂凯一直专注于塑胶产品的研发和生产，为各行业的客户在产品防护，密封，遮蔽及美化方面提供专业化，多元化的解决方案。

中山茂凯是美国茂凯在中国的全资工厂，拥有现代化的制模设备及注塑、浸塑生产车间，生产的产品丰富多样，包括保护管材、接头、线端等的塑胶盖帽，塑料堵头，塑料管塞；起遮蔽作用的耐高温硅橡胶帽，硅胶堵头，高温胶带；保护各类工具的塑料手柄套，网套等，广泛应用于汽车零部件，液压气动，电子电器，机电机械、采暖通风、家具配套等行业。

茂凯所有产品均按照国际标准生产，符合Rohs指令和REACH法规，并紧随国际潮流而更新。优质的产品，充足的库存，高效的服务造就了今天茂凯在业界的领先地位和良好的口碑，也是全球数百万客户包括多家500强企业选择茂凯的原因！

千种产品，万种规格，一家满足你所有需求的“超市”工厂！

## **MOCAP**

has manufacturing and sales facilities located around the world so we may provide our customers with the best products, service and prices available.

We have continually expanded our product line by adding additional series of Polyethylene Plastic Caps and Plugs including Tapered Plug Caps, Outside Pull Tapered Plugs, Barrel Plugs with Flanges, Flanged Caps, Straight Caps, as well as Domed, Angled and Pyramid Top Tubing Plugs.

**MOCAP**'s extensive line of protective caps and plugs are stocked for immediate shipment, and if we don't stock exactly what you are looking for, we offer the ability to buy a customized plastic part directly from our online store as well! Contact us for your Free Sample today!

样品免费 库存充足 当天发货

**MOCAP**




# Contents

Products by Page Number

## Friction Fit Caps & Plugs

### 适度摩擦型保护盖&塞

Non-Threaded Design Allows for Easy Placement and Removal to Protect Threads and Fittings



RVC - pg. 13




FVG - pg. 111




VHC - pg. 15



FPT - pg. 16



SVC - pg. 17



VHX - pg. 18



MCP - pg. 19



VHC - pg. 20



S - pg. 21 & 27



SK - pg. 24 & 29



FC - pg. 31



FCSL - pg. 34



TC - pg. 35



BPF - pg. 39



KTP/LMP - pg. 41



GKP - pg. 43



SMRS - pg. 44



SMF - pg. 45



BNCD - pg. 47



RFC - pg. 48

## Tubing Plugs

### 管塞

LDPE Plastic Tube Plugs are designed to fit multiple tube gauges and provide a secure fit.



RNPP - pg. 49



RNF - pg. 50



RND - pg. 52



RNA - pg. 54




OV - pg. 56



OVD - pg. 58




OVA - pg. 59



SQF - pg. 60



SQD - pg. 62



SQP - pg. 64



SQA - pg. 66



RCF - pg. 68



RCP - pg. 71



RCA - pg. 73

## Tapered Caps & Plugs

### 锥形保护盖&塞

Designed with Slight Taper to Secure Tightly to Protect Threads and Fittings



OP - pg. 74



T - pg. 75



WF - pg. 77



TWF - pg. 79



XW - pg. 81



CPW - pg. 82



CP - pg. 83

## Threaded Caps & Plugs

### 带螺纹保护盖&塞

Designed to Fit a Variety of Standard and Metric Threads, Threaded Ports, Fittings and Assemblies



BGC/CMT/FJC  
pg. 85-87



SPU - pg. 88



SPM - pg. 89



SPB - pg. 90



U - pg. 91



FJP - pg. 92



IFP - pg. 93



TNP - pg. 94



FOP - pg. 95



GPB/GPM - pg. 96



GPU - pg. 98




OPP - pg. 99



SFPN - pg. 100



SPN - pg. 101



HSPN - pg. 102



PIP - pg. 103

# MOCAP

mocap.com.cn | 4006-4006-49 | 微信号 13802665016

Free Samples



## Pipe & Flange Protection

### 管件&法兰保护

Caps, Plugs and Push-In Flange Protectors for Use with Pipe, Tubing and Flanges



SHF - pg. 104



PC - pg. 105



PP - pg. 107



MPI - pg. 108



MOF - pg. 109



MBH - pg. 110

## Grips

### 塑料手柄套

Round, Flat and Finger Nub Styles for Improved Appearance, Durability and Comfort



RVG - pg. 111



FVG - pg. 113



MFG - pg. 114



Textured  
pg. 114



Double Dipped  
pg. 114

## Masking

### 遮蔽产品

Caps, Plugs, Tapes and Discs in a Variety of Materials, Shapes, Sizes and Temperature Requirements



RVC-T - pg. 115



FPT-T - pg. 117



MCP-T - pg. 118



TP-T - pg. 119



MSC - pg. 120




MSP - pg. 121



MSPP - pg. 122



MSWP - pg. 123



SRT - pg. 124



MEC - pg. 125



MEP - pg. 126



MEPP - pg. 127



MEWP - pg. 128



MCT620  
pg. 129



MCD-PE  
pg. 130



MCT800  
pg. 131




MCD-PI  
pg. 132

## Mesh Netting

### 网套

Flexible Mesh Plastic Netting for Superior Protection



MCN - pg. 133

## Secondary Operations

### 后加工工序

Printing, Assembly, Packaging, Punching and Slicing, Customized to Fit Your Specifications



Printing  
pg. 134



Punching & Slicing  
pg. 134

## Application Advisors

### 使用建议

To assist you in selecting the best product for your requirements, we have included Application Advisors for many of our products. Please note the part number in the Application Advisor when ordering.

产品使用建议将更好地协助您选到最适配产品，订购时可参考相关型号进行选型。

pg. 1 - Pipe & Flange Protection

pg. 4 - Threaded Caps & Plugs

pg. 7 - Friction Fit Caps & Plugs

# Application Advisor - Pipe & Flange Protection

Use this guide to help select the right product for your application

**MOCAP** 茂凯致力于提供多种保护管螺纹，管件，法兰的解决方案，避免产品在使用、运输及存储过程中受潮或污染。

BPF Series - Barrel Plugs with Flange

BPF系列- 凸缘鼓形塞



PP Series - Pipe Plugs

PP系列- 管塞



Pipe Plugs are designed for maximum flexibility to fit many different threaded and non-threaded pipes and tubing.

适用于不同标准，  
不同尺寸的螺纹及非螺纹管端口，  
实现最大的灵活性。

Application Advisor is offered as a guideline.  
Please request samples to test within your application  
at [sales@mocap.com.cn](mailto:sales@mocap.com.cn)

## For SCHEDULE 40 Pipe

|                  | 管帽         | 管塞         | 管塞         | 锥形塞          | 凸缘鼓形塞        |
|------------------|------------|------------|------------|--------------|--------------|
|                  |            |            |            |              |              |
| To Fit Pipe Size | Black LDPE | Black LDPE | Black LDPE | Red LDPE     | Natural LDPE |
| 1/2"             | PC114      | PP114      | RNPP.5     | T.532/.608   | BPF200       |
| 3/4"             | PC117      | PP117      | RNPP.75    | T.725/.823   | BPF280       |
| 1"               | PC121      | PP121      | RNPP1      | T1.22/1.35   | BPF380       |
| 1-1/4"           | PC126      | PP126      | RNPP1.25   | T1.23/1.36   | BPF440       |
| 1-1/2"           | PC128      | PP128      | RNPP1.5    | T1.44/1.60   | BPF500       |
| 2"               | PC135      | PP135      | RNPP2      | T1.90/2.07   | BPF540       |
| 2-1/2"           | PC140      | PP140      | RNPP2.5    | T2.298/2.464 | BPF581       |
| 3"               | PC144      | PP144      | RNPP3      | T2.975/3.103 | ---          |
| 3-1/2"           | PC147      | PP147      | RNPP3.5    | T3.270/3.562 | ---          |
| 4"               | PC150      | PP150      | RNPP4      | T3.929/4.07  | ---          |
| 5"               | PC155      | PP156      | RNPP5      | T4.91/5.09   | ---          |
| 6"               | PC161      | PP161      | ---        | T6.01/6.18   | ---          |

8"-24" Schedule 40 Pipe Caps can be found on our website, [www.mocap.com.cn](http://www.mocap.com.cn)

T系列锥形塞/盖 — 盖塞皆可



用于盖子，提供工件外径尺寸



用于塞子，提供工件内径尺寸

## For SCHEDULE 80 Pipe

|                  | 管帽         | 管塞         | 锥形塞          | 凸缘鼓形塞        |
|------------------|------------|------------|--------------|--------------|
|                  |            |            |              |              |
| To Fit Pipe Size | Black LDPE | Black LDPE | Red LDPE     | Natural LDPE |
| 1/2"             | PC114      | PP114      | T.471/.547   | BPF150       |
| 3/4"             | PC117      | PP117      | T.640/.727   | BPF250       |
| 1"               | PC121      | PP116      | T.866/.975   | BPF340       |
| 1-1/4"           | PC126      | PP121      | T1.17/1.28   | BPF420       |
| 1-1/2"           | PC128      | PP124      | T1.31/1.46   | BPF470       |
| 2"               | PC135      | PP128      | T1.78/1.95   | BPF531       |
| 2-1/2"           | PC140      | PP134      | T2.13/2.31   | ---          |
| 3"               | PC144      | PP140      | T2.760/2.990 | ---          |
| 3-1/2"           | PC147      | PP144      | T3.090/3.370 | ---          |
| 4"               | PC150      | PP147      | T3.68/3.80   | ---          |
| 5"               | PC155      | PP151      | T4.64/4.85   | ---          |
| 6"               | PC161      | PP156      | T5.57/5.75   | ---          |
| 8"               | PC167      | ---        | T7.34/7.65   | ---          |
| 10"              | PC173      | ---        | ---          | ---          |
| 12"              | PC178      | ---        | T11.11/11.46 | ---          |

14"-24" Schedule 80 Pipe Caps can be found on our website, [www.mocap.com.cn](http://www.mocap.com.cn)

Application Advisor is offered as a guideline.  
Please request samples to test within your application  
at [sales@mocap.com.cn](mailto:sales@mocap.com.cn)

**MOCAP**

# Pipe & Flange Protection - Application Advisor

For NPT & BSP Pipe Threads

Use this guide to help select the right product for your application

|            |            | 锥形盖                                                                               | 管帽                                                                                | 凸缘盖                                                                               | 带耳易拉盖                                                                             | 厚宽型锥形塞                                                                             | 管塞                                                                                  | 凸缘鼓形塞                                                                               | 锥形塞                                                                                 |
|------------|------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|            |            |  |  |  |  |  |  |  |  |
| To Fit NPT | To Fit BSP | Red LDPE                                                                          | Black LDPE                                                                        | Natural LDPE                                                                      | Red LDPE                                                                          | Yellow LDPE                                                                        | Black LDPE                                                                          | Natural LDPE                                                                        | Red LDPE                                                                            |
| 1/8"       | 1/8"       | T.419/.485                                                                        | PC102                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | BPF80<br>BPF90                                                                      | ---                                                                                 |
| 1/8"       | ---        | T.419/.485                                                                        | ---                                                                               | FCN0125                                                                           | TCNPT0125                                                                         | ---                                                                                | ---                                                                                 | BPF70                                                                               | T.330/.396                                                                          |
| ---        | 1/8"       | T.390/.456                                                                        | ---                                                                               | FCB0125                                                                           | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T.299/.365                                                                          |
| 1/4"       | 1/4"       | T.532/.608                                                                        | PC105                                                                             | FCBN0250                                                                          | ---                                                                               | ---                                                                                | ---                                                                                 | BPF130                                                                              | T.419/.485                                                                          |
| 1/4"       | ---        | T.532/.608                                                                        | ---                                                                               | ---                                                                               | TCNPT0250                                                                         | ---                                                                                | ---                                                                                 | ---                                                                                 | T.419/.485                                                                          |
| ---        | 1/4"       | T.500/.576                                                                        | ---                                                                               | ---                                                                               | TCBSP0250                                                                         | ---                                                                                | ---                                                                                 | BPF140                                                                              | T.390/.456                                                                          |
| 3/8"       | 3/8"       | T.675/.755                                                                        | PC109                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T.550/.631                                                                          |
| 3/8"       | ---        | T.675/.755                                                                        | ---                                                                               | FCN0375                                                                           | TCNPT0375                                                                         | ---                                                                                | ---                                                                                 | BPF190<br>BPF180                                                                    | T.550/.631                                                                          |
| ---        | 3/8"       | T.690/.788                                                                        | ---                                                                               | FCB0375                                                                           | TCBSP0375                                                                         | ---                                                                                | ---                                                                                 | BPF200                                                                              | T.532/.608                                                                          |
| 1/2"       | 1/2"       | T.802/.911                                                                        | PC114                                                                             | FCBN0500                                                                          | ---                                                                               | ---                                                                                | PP114                                                                               | BPF251                                                                              | T.690/.788                                                                          |
| 1/2"       | ---        | T.802/.911                                                                        | ---                                                                               | ---                                                                               | TCNPT0500                                                                         | ---                                                                                | ---                                                                                 | BPF250                                                                              | T.690/.788                                                                          |
| ---        | 1/2"       | T.815/.930                                                                        | ---                                                                               | ---                                                                               | TCBSP0500                                                                         | XW.867/.975                                                                        | ---                                                                                 | BPF260                                                                              | T.675/.755<br>T.725/.823                                                            |
| 3/4"       | 3/4"       | T.995/1.14                                                                        | PC117                                                                             | FCBN0750                                                                          | ---                                                                               | ---                                                                                | PP117                                                                               | BPF360                                                                              | T.915/1.04                                                                          |
| 3/4"       | ---        | T.995/1.14                                                                        | ---                                                                               | ---                                                                               | TCNPT0750                                                                         | ---                                                                                | ---                                                                                 | BPF350                                                                              | T.915/1.04                                                                          |
| ---        | 3/4"       | T.995/1.14                                                                        | ---                                                                               | ---                                                                               | TCBSP0750                                                                         | ---                                                                                | ---                                                                                 | ---                                                                                 | T.915/1.04                                                                          |
| 1"         | 1"         | ---                                                                               | PC121                                                                             | FCBN1000                                                                          | ---                                                                               | ---                                                                                | PP121                                                                               | BPF400                                                                              | T1.17/1.28                                                                          |
| 1"         | ---        | T1.23/1.36                                                                        | ---                                                                               | ---                                                                               | TCNPT1000                                                                         | XW1.11/1.25                                                                        | ---                                                                                 | BPF391                                                                              | T1.17/1.28                                                                          |
| ---        | 1"         | T1.31/1.46                                                                        | ---                                                                               | ---                                                                               | TCBSP1000                                                                         | XW1.31/1.46                                                                        | ---                                                                                 | BPF410                                                                              | T1.09/1.21                                                                          |
| 1-1/4"     | 1-1/4"     | ---                                                                               | PC126                                                                             | FCBN1250                                                                          | ---                                                                               | ---                                                                                | PP126                                                                               | BPF481                                                                              | T1.44/1.60                                                                          |
| 1-1/4"     | ---        | T1.56/1.68                                                                        | ---                                                                               | ---                                                                               | TCNPT1250                                                                         | XW1.45/1.60                                                                        | ---                                                                                 | BPF480                                                                              | T1.44/1.60                                                                          |
| ---        | 1-1/4"     | T1.63/1.75                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T1.44/1.60                                                                          |
| 1-1/2"     | 1-1/2"     | ---                                                                               | PC128                                                                             | FCBN1500                                                                          | ---                                                                               | ---                                                                                | PP128                                                                               | BPF511                                                                              | T1.75/1.88                                                                          |
| 1-1/2"     | ---        | T1.78/1.95                                                                        | ---                                                                               | ---                                                                               | TCNPT1500                                                                         | XW1.73/1.90                                                                        | ---                                                                                 | BPF520                                                                              | T1.75/1.88                                                                          |
| ---        | 1-1/2"     | T1.90/2.07                                                                        | ---                                                                               | FCB1500                                                                           | ---                                                                               | XW1.92/2.05                                                                        | ---                                                                                 | ---                                                                                 | T1.75/1.88                                                                          |
| 2"         | 2"         | T2.298/2.464                                                                      | PC135                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP135                                                                               | BPF561                                                                              | ---                                                                                 |
| 2"         | ---        | T2.298/2.464                                                                      | ---                                                                               | FCN2000                                                                           | TCNPT2000                                                                         | XW2.12/2.29                                                                        | ---                                                                                 | ---                                                                                 | T2.230/2.260                                                                        |
| ---        | 2"         | T2.307/2.650                                                                      | ---                                                                               | FCB2000                                                                           | ---                                                                               | XW2.39/2.60                                                                        | ---                                                                                 | ---                                                                                 | T2.06/2.24<br>T2.125/2.406<br>T2.13/2.31                                            |
| 2-1/2"     | ---        | T2.760/2.990                                                                      | PC140                                                                             | ---                                                                               | TCNPT2500                                                                         | XW2.63/2.79                                                                        | PP140                                                                               | ---                                                                                 | T2.641/2.790                                                                        |
| ---        | 2-1/2"     | T2.975/3.103<br>T2.982/3.245                                                      | PC141                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP141                                                                               | ---                                                                                 | T2.760/2.990                                                                        |
| 3"         | 3"         | T3.470/3.600                                                                      | PC144                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP144                                                                               | ---                                                                                 | ---                                                                                 |
| 3"         | ---        | T3.470/3.600                                                                      | ---                                                                               | ---                                                                               | TCNPT3000                                                                         | ---                                                                                | ---                                                                                 | ---                                                                                 | T3.325/3.457                                                                        |
| ---        | 3"         | T3.470/3.600                                                                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T3.090/3.370<br>T3.270/3.562                                                        |
| 3-1/2"     | ---        | T3.79/3.52                                                                        | PC147                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP147                                                                               | ---                                                                                 | T3.79/3.92                                                                          |
| 4"         | 4"         | T4.37/4.62                                                                        | PC150                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP150                                                                               | ---                                                                                 | T4.27/4.43                                                                          |
| ---        | 4-1/2"     | T4.91/5.09                                                                        | PC152                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP152                                                                               | ---                                                                                 | T4.64/4.85<br>T4.79/4.97                                                            |
| 5"         | 5"         | ---                                                                               | PC155                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| 5"         | ---        | T5.57/5.75                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T5.33/5.49                                                                          |
| ---        | 5"         | T5.33/5.49                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T5.18/5.36                                                                          |
| ---        | 5-1/2"     | T6.01/6.18                                                                        | PC157                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP157                                                                               | ---                                                                                 | T5.70/5.87                                                                          |
| 6"         | 6"         | ---                                                                               | PC161                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | PP161                                                                               | ---                                                                                 | ---                                                                                 |
| 6"         | ---        | T6.61/6.71                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T6.40/6.56                                                                          |
| ---        | 6"         | T6.40/6.56                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T6.18/6.35                                                                          |
| 8"         | 8"         | ---                                                                               | PC167                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| 8"         | ---        | T8.67/8.73                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T8.40/8.60                                                                          |
| ---        | 8"         | T8.40/8.60                                                                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | T8.15/8.35                                                                          |
| 10"        | 10"        | ---                                                                               | PC173                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| 10"        | ---        | T10.79/11.10                                                                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| 12"        | 12"        | ---                                                                               | PC178                                                                             | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| 12"        | ---        | T12.79/13.14                                                                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                | ---                                                                                 | ---                                                                                 | ---                                                                                 |

14"-40" NPT & BSP Pipe Caps can be found on our website, [www.mocap.com.cn](http://www.mocap.com.cn)

Application Advisor is offered as a guideline.

Please request samples to test within your application  
at [sales@mocap.com.cn](mailto:sales@mocap.com.cn)

Free Samples

微信号 13802665016 | 4006-4006-49 | [www.mocap.com.cn](http://www.mocap.com.cn)

**MOCAP**



# Application Advisor - Pipe & Flange Protection

Use this guide to help select the right product for your application



**MOCAP** manufactures plugs designed specifically for Type K, L & Type M copper tubing.

K型, L及M型铜管  
锥状塑料堵头

## For Copper Tubing

|                         | K型铜管锥状<br>塑料堵头                                                                    | L及M型铜管锥状<br>塑料堵头                                                                    | L及M型铜管通用<br>塑料堵头                                                                    |
|-------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                         |  |  |  |
| To Fit Copper Tube Size | Red LDPE                                                                          | Red LDPE                                                                            | Red LDPE                                                                            |
| 3/16"                   | ---                                                                               | ---                                                                                 | GKP0188                                                                             |
| 1/4"                    | ---                                                                               | ---                                                                                 | GKP0250                                                                             |
| 5/16"                   | ---                                                                               | ---                                                                                 | GKP0313                                                                             |
| 3/8"                    | KTP0375                                                                           | LMP0375                                                                             | GKP0375                                                                             |
| 1/2"                    | KTP0500                                                                           | LMP0500                                                                             | GKP0500                                                                             |
| 5/8"                    | KTP0625                                                                           | LMP0625                                                                             | GKP0625                                                                             |
| 3/4"                    | KTP0750                                                                           | LMP0750                                                                             | GKP0750                                                                             |
| 7/8"                    | KTP0875                                                                           | LMP0875                                                                             | ---                                                                                 |
| 1-1/8"                  | KTP1125                                                                           | LMP1125                                                                             | ---                                                                                 |
| 1-3/8"                  | KTP1375                                                                           | LMP1375                                                                             | ---                                                                                 |
| 1-5/8"                  | KTP1625                                                                           | LMP1625                                                                             | ---                                                                                 |
| 2-1/8"                  | KTP2125                                                                           | LMP2125                                                                             | ---                                                                                 |
| 2-5/8"                  | KTP2625                                                                           | LMP2625                                                                             | ---                                                                                 |
| 3-1/8"                  | KTP3125                                                                           | LMP3125                                                                             | ---                                                                                 |
| 3-5/8"                  | ---                                                                               | LMP3625                                                                             | ---                                                                                 |
| 4-1/8"                  | ---                                                                               | LMP4125                                                                             | ---                                                                                 |

**MOCAP** offers a variety of solutions to protect flange bolt holes, faces and edges from damage and debris.

茂凯为保护法兰螺栓孔、法兰表面及  
端口提供各种保护方案，  
以免其受损坏和污染。



**MOCAP** stocks all part sizes for immediate shipment.

## For Pipe Flanges

|                    |     |         | 四孔法兰防尘盖                                                                               | 法兰外保护盖                                                                                | 多功能<br>法兰保护套                                                                          |
|--------------------|-----|---------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                    |     |         |  |  |  |
| Nominal Pipe Sizes | DIN | 压力范围    | Black or Blue LDPE                                                                    | Yellow LDPE                                                                           | Yellow LDPE                                                                           |
| 1/2"               | 15  | 125-150 | MBH150500                                                                             | MOF150500                                                                             | MPI500                                                                                |
| 1/2"               | 15  | 300-600 | MBH300500                                                                             | MOF300500                                                                             | MPI500                                                                                |
| 3/4"               | 20  | 125-150 | MBH150750                                                                             | MOF150750                                                                             | MPI750                                                                                |
| 3/4"               | 20  | 300-600 | MBH300750                                                                             | MOF300750                                                                             | MPI750                                                                                |
| 1"                 | 25  | 125-150 | MBH1501000                                                                            | MOF1501000                                                                            | MPI1000                                                                               |
| 1"                 | 25  | 300-600 | MBH3001000                                                                            | MOF3001000                                                                            | MPI1000                                                                               |
| 1-1/4"             | 32  | 125-150 | MBH1501250                                                                            | ---                                                                                   | MPI1250                                                                               |
| 1-1/4"             | 32  | 300-600 | MBH3001250                                                                            | ---                                                                                   | MPI1250                                                                               |
| 1-1/2"             | 40  | 125-150 | MBH1501500                                                                            | MOF1501500                                                                            | MPI1500                                                                               |
| 1-1/2"             | 40  | 300-600 | MBH3001500                                                                            | ---                                                                                   | MPI1500                                                                               |
| 2"                 | 50  | 125-150 | MBH1502000                                                                            | MOF1502000                                                                            | MPI2000                                                                               |
| 2"                 | 50  | 300     | MBH3002000                                                                            | MOF3002000                                                                            | MPI2000                                                                               |
| 2-1/2"             | 65  | 125-150 | MBH1502500                                                                            | ---                                                                                   | MPI2500                                                                               |
| 2-1/2"             | 65  | 300     | MBH3002500                                                                            | ---                                                                                   | MPI2500                                                                               |
| 3"                 | 80  | 125-150 | MBH1503000                                                                            | MOF1503000                                                                            | MPI3000                                                                               |
| 3"                 | 80  | 300     | MBH3003000                                                                            | ---                                                                                   | MPI3000                                                                               |
| 4"                 | 100 | 125-150 | MBH1504000                                                                            | MOF1504000                                                                            | MPI4000                                                                               |
| 4"                 | 100 | 300     | MBH3004000                                                                            | ---                                                                                   | MPI4000                                                                               |
| 5"                 | 125 | 125-150 | MBH1505000                                                                            | ---                                                                                   | MPI5000                                                                               |
| 5"                 | 125 | 300     | MBH3005000                                                                            | ---                                                                                   | MPI5000                                                                               |
| 6"                 | 150 | 125-150 | MBH1506000                                                                            | MOF1506000                                                                            | MPI6000                                                                               |
| 6"                 | 150 | 300     | MBH3006000                                                                            | ---                                                                                   | MPI6000                                                                               |
| 8"                 | 200 | 125-150 | MBH1508000                                                                            | ---                                                                                   | MPI8000                                                                               |
| 8"                 | 200 | 300     | MBH3008000                                                                            | ---                                                                                   | MPI8000                                                                               |
| 10"                | 250 | 125-150 | MBH15010000                                                                           | MOF15010000                                                                           | MPI10000                                                                              |
| 10"                | 250 | 300     | MBH30010000                                                                           | ---                                                                                   | MPI10000                                                                              |
| 12"                | 300 | 125-150 | MBH15012000                                                                           | ---                                                                                   | MPI12000                                                                              |
| 12"                | 300 | 300     | MBH30012000                                                                           | ---                                                                                   | MPI12000                                                                              |

Application Advisor is offered as a guideline.  
Please request samples to test within your application  
at sales@mocap.com.cn

**MOCAP**

# Threaded Caps and Plugs - Application Advisor

Use this guide to help select the right product for your application

**MOCAP** 茂凯带螺纹塑料盖/塑料堵头专用于BSP管螺纹、公制螺纹、标准螺纹、扩口式JIC管件和NPT螺纹。所有盖子/塞子款式多样，材料多种，且均设有最小包装，满足客户的不同需求。

## For STANDARD Threads

密封堵头可加专配的  
O型氟丁橡胶垫圈

|                               | 配平面O型<br>管件堵头                                                                     | 配反扩口式<br>接头堵头                                                                     | 配直螺纹O型<br>圈端口堵头                                                                   | 配MS-21921<br>非扩口式管件堵头                                                             | 通用型堵头                                                                             | 密封堵头                                                                                | 密封堵头                                                                                | 按压式堵头                                                                               | 通用塑料堵头                                                                              |
|-------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                               |  |  |  |  |  |  |  |  |  |
| To Fit<br>Standard<br>Threads | Red LDPE                                                                          | Red LDPE                                                                          | Red<br>Polypropylene                                                              | Red LDPE                                                                          | Red<br>Polypropylene                                                              | Red<br>Polypropylene                                                                | Yellow<br>Nylon                                                                     | Red LDPE                                                                            | Red LDPE                                                                            |
| 1/4                           | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0250                                                                             | ---                                                                                 |
| 5/16-28                       | ---                                                                               | IFP300                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0313                                                                             | ---                                                                                 |
| 3/8-24                        | ---                                                                               | IFP310                                                                            | ---                                                                               | TNP0375                                                                           | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0375                                                                             | ---                                                                                 |
| 7/16-20                       | ---                                                                               | ---                                                                               | OPP0438                                                                           | TNP0438                                                                           | GPU0437-20                                                                        | SPU0437-20                                                                          | SPU0437-20                                                                          | PIP0438                                                                             | U100                                                                                |
| 7/16-24                       | ---                                                                               | IFP320                                                                            | ---                                                                               | ---                                                                               | GPU0437-24                                                                        | ---                                                                                 | ---                                                                                 | PIP0438                                                                             | U100                                                                                |
| 1/2-14                        | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0500                                                                             | U105                                                                                |
| 1/2-20                        | ---                                                                               | IFP330                                                                            | OPP0500                                                                           | TNP0500                                                                           | GPU0500-20                                                                        | SPU0500-20                                                                          | SPU0500-20                                                                          | PIP0500                                                                             | U105                                                                                |
| 9/16-18                       | ---                                                                               | ---                                                                               | OPP0562                                                                           | TNP0562                                                                           | GPU0562-18                                                                        | SPU0562-18                                                                          | SPU0562-18                                                                          | PIP0563                                                                             | U110                                                                                |
| 5/8-18                        | ---                                                                               | IFP340 • IFP350                                                                   | ---                                                                               | ---                                                                               | GPU0625-18                                                                        | SPU0625-18                                                                          | SPU0625-18                                                                          | PIP0625                                                                             | ---                                                                                 |
| 1-11/16-18                    | FOP200                                                                            | IFP360                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0688                                                                             | ---                                                                                 |
| 3/4-16                        | ---                                                                               | ---                                                                               | OPP0750                                                                           | TNP0750                                                                           | GPU0750-16                                                                        | SPU0750-16                                                                          | SPU0750-16                                                                          | PIP0750                                                                             | U115                                                                                |
| 3/4-18                        | ---                                                                               | IFP370                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0750                                                                             | U115                                                                                |
| 13/16-16                      | FOP210                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP0813                                                                             | ---                                                                                 |
| 7/8-14                        | ---                                                                               | ---                                                                               | OPP0875                                                                           | TNP0875                                                                           | GPU0875-14                                                                        | SPU0875-14                                                                          | SPU0875-14                                                                          | PIP0875                                                                             | ---                                                                                 |
| 1-14                          | FOP220                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | GPU1000-14                                                                        | ---                                                                                 | ---                                                                                 | PIP1000                                                                             | U120                                                                                |
| 1-1/16-12                     | ---                                                                               | ---                                                                               | OPP1062                                                                           | TNP1063                                                                           | GPU1062-12                                                                        | SPU1062-12                                                                          | SPU1062-12                                                                          | PIP1062                                                                             | ---                                                                                 |
| 1-1/16-14                     | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP1062                                                                             | ---                                                                                 |
| 1-1/16-16                     | ---                                                                               | IFP380                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP1062                                                                             | ---                                                                                 |
| 1-3/16-12                     | FOP230                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | GPU1187-12                                                                        | ---                                                                                 | ---                                                                                 | PIP1188                                                                             | U125                                                                                |
| 1-1/4-12                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP1250                                                                             | ---                                                                                 |
| 1-5/16-12                     | ---                                                                               | ---                                                                               | OPP1312                                                                           | TNP1313                                                                           | GPU1313-12                                                                        | SPU1313-12                                                                          | SPU1313-12                                                                          | PIP1313                                                                             | ---                                                                                 |
| 1-7/16-12                     | FOP240                                                                            | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP1438                                                                             | U130                                                                                |
| 1-1/2-12                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP1500                                                                             | ---                                                                                 |
| 1-5/8-12                      | ---                                                                               | ---                                                                               | OPP1625                                                                           | ---                                                                               | GPU1625-12                                                                        | SPU1625-12                                                                          | SPU1625-12                                                                          | PIP1625                                                                             | ---                                                                                 |
| 1-3/4-12                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                                 | ---                                                                                 | PIP1750                                                                             | ---                                                                                 |
| 1-7/8-12                      | ---                                                                               | ---                                                                               | ---                                                                               | ---                                                                               | GPU1875-12                                                                        | ---                                                                                 | ---                                                                                 | PIP1875                                                                             | ---                                                                                 |

### Maximum Temperature Specifications

LDPE

175° F / 79° C

Polypropylene  
Nylon

250° F / 121° C

**MOCAP** stocks all part sizes  
for immediate shipment.

**MOCAP** now offers Micro-Pack and Mini-Pack quantities  
when less than case quantities are what you really need.

Application Advisor is offered as a guideline.  
Please request samples to test within your application  
at [sales@mocap.com.cn](mailto:sales@mocap.com.cn)

Free Samples

微信号 13802665016 | 4006-4006-49 | [www.mocap.com.cn](http://www.mocap.com.cn)

**MOCAP**

Threaded Cap  
螺纹塑料盖

# Application Advisor - Threaded Caps and Plugs

Use this guide to help select the right product for your application

General Purpose Plug

通用型堵头



## Maximum Temperature Specifications

LDPE

175° F / 79° C

Polypropylene  
Nylon

250° F / 121° C

Sealing Plug

(shown with O-ring)

密封堵头



Universal Plug

通用塑料堵头



Universal Plugs are designed for maximum flexibility to fit many different thread types and sizes with a simple push-in and turn to lock-in-place.

## Maximum Temperature Specifications

LDPE

175° F / 79° C

Polypropylene  
Nylon

250° F / 121° C

## For BSP Threads

密封堵头可加专配的  
O型氯丁橡胶垫圈

|                       | 螺纹盖                                                                               | 通用型堵头                                                                             | 密封堵头                                                                                | 密封堵头                                                                                | 通用塑料堵头                                                                              |
|-----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                       |  |  |  |  |  |
| To Fit<br>BSP Threads | Red LDPE                                                                          | Red<br>Polypropylene                                                              | Red<br>Polypropylene                                                                | Yellow<br>Nylon                                                                     | Red LDPE                                                                            |
| G 1/8                 | BGC0125                                                                           | GPB0125                                                                           | ---                                                                                 | ---                                                                                 | U100                                                                                |
| G 1/4                 | BGC0250                                                                           | GPB0250                                                                           | SPB0250                                                                             | SPB0250                                                                             | U105 • U110                                                                         |
| G 3/8                 | BGC0375                                                                           | GPB0375                                                                           | SPB0375                                                                             | SPB0375                                                                             | U115                                                                                |
| G 1/2                 | BGC0500                                                                           | GPB0500                                                                           | SPB0500                                                                             | SPB0500                                                                             | U120                                                                                |
| G 5/8                 | BGC0625                                                                           | GPB0625                                                                           | ---                                                                                 | ---                                                                                 | U120                                                                                |
| G 3/4                 | BGC0750                                                                           | GPB0750                                                                           | SPB0750                                                                             | SPB0750                                                                             | U125                                                                                |
| G 7/8                 | BGC0875                                                                           | GPB0875                                                                           | ---                                                                                 | ---                                                                                 | U125 • U130                                                                         |
| G 1                   | BGC1000                                                                           | GPB1000                                                                           | SPB1000                                                                             | SPB1000                                                                             | U130                                                                                |
| G 1-1/4               | BGC1250                                                                           | GPB1250                                                                           | SPB1250                                                                             | SPB1250                                                                             | ---                                                                                 |
| G 1-1/2               | BGC1500                                                                           | GPB1500                                                                           | SPB1500                                                                             | SPB1500                                                                             | ---                                                                                 |
| G 2                   | BGC2000                                                                           | GPB2000                                                                           | SPB2000                                                                             | SPB2000                                                                             | ---                                                                                 |
| G 2-1/4               | BGC2250                                                                           | ---                                                                               | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| G 2-1/2               | BGC2500                                                                           | ---                                                                               | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| G 3                   | ---                                                                               | GPB3000                                                                           | ---                                                                                 | ---                                                                                 | ---                                                                                 |

## For METRIC Threads

密封堵头可加专配的  
O型氯丁橡胶垫圈

|                             | 螺纹盖                                                                                 | 通用型堵头                                                                                | 密封堵头                                                                                  | 密封堵头                                                                                  | 通用塑料堵头                                                                                |
|-----------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                             |  |  |  |  |  |
| To Fit<br>METRIC<br>Threads | Red LDPE                                                                            | Red<br>Polypropylene                                                                 | Red<br>Polypropylene                                                                  | Yellow<br>Nylon                                                                       | Red LDPE                                                                              |
| M8x1.0                      | CMT0810                                                                             | GPM0810                                                                              | ---                                                                                   | ---                                                                                   | ---                                                                                   |
| M10x1.0                     | CMT1010                                                                             | GPM1010                                                                              | SPM1010                                                                               | SPM1010                                                                               | U100                                                                                  |
| M12x1.0                     | CMT1210                                                                             | GPM1210                                                                              | ---                                                                                   | ---                                                                                   | U105                                                                                  |
| M12x1.5                     | CMT1215                                                                             | GPM1215                                                                              | SPM1215                                                                               | SPM1215                                                                               | U105                                                                                  |
| M14x1.5                     | CMT1415                                                                             | GPM1415                                                                              | SPM1415                                                                               | SPM1415                                                                               | U110                                                                                  |
| M16x1.5                     | CMT1615                                                                             | GPM1615                                                                              | SPM1615                                                                               | SPM1615                                                                               | U115                                                                                  |
| M18x1.5                     | CMT1815                                                                             | GPM1815                                                                              | SPM1815                                                                               | SPM1815                                                                               | U115                                                                                  |
| M20x1.5                     | CMT2015                                                                             | GPM2015                                                                              | SPM2015                                                                               | SPM2015                                                                               | U115                                                                                  |
| M22x1.5                     | CMT2215                                                                             | GPM2215                                                                              | SPM2215                                                                               | SPM2215                                                                               | U120                                                                                  |
| M24x1.5                     | CMT2415                                                                             | GPM2415                                                                              | SPM2415                                                                               | SPM2415                                                                               | U120                                                                                  |
| M25x1.5                     | CMT2515                                                                             | GPM2515                                                                              | ---                                                                                   | ---                                                                                   | U120                                                                                  |
| M26x1.5                     | CMT2615                                                                             | GPM2615                                                                              | SPM2615                                                                               | SPM2615                                                                               | ---                                                                                   |
| M27x2.0                     | ---                                                                                 | ---                                                                                  | SPM2720                                                                               | SPM2720                                                                               | ---                                                                                   |
| M28x1.5                     | CMT2815                                                                             | ---                                                                                  | ---                                                                                   | ---                                                                                   | ---                                                                                   |
| M30x2.0                     | CMT3020                                                                             | ---                                                                                  | ---                                                                                   | ---                                                                                   | U125                                                                                  |
| M33x2.0                     | ---                                                                                 | ---                                                                                  | SPM3320                                                                               | SPM3320                                                                               | ---                                                                                   |
| M36x2.0                     | CMT3620                                                                             | ---                                                                                  | ---                                                                                   | ---                                                                                   | U130                                                                                  |
| M42x2.0                     | CMT4220                                                                             | ---                                                                                  | ---                                                                                   | ---                                                                                   | ---                                                                                   |
| M52x2.0                     | CMT5220                                                                             | GPM5220                                                                              | ---                                                                                   | ---                                                                                   | ---                                                                                   |

Application Advisor is offered as a guideline.  
Please request samples to test within your application  
at sales@mocap.com.cn

**MOCAP**


# Threaded Caps and Plugs - Application Advisor

Use this guide to help select the right product for your application

## For JIC Fittings

|                        |                          | 带螺纹塑料盖<br>(配扩口式JIC管件)    | 带螺纹塑料堵头<br>(配扩口式JIC管件) |
|------------------------|--------------------------|--------------------------|------------------------|
| To Fit<br>JIC Fittings | JIC Fitting<br>Dash Size | Red LDPE                 | Red LDPE               |
| 5/16-24                | 2                        | ---                      | FJP20                  |
| 3/8-24                 | 3                        | FJC110                   | FJP30                  |
| 7/16-20                | 4                        | FJC120                   | FJP40                  |
| 7/16-24                | 4                        | FJC140                   | ---                    |
| 1/2-20                 | 5                        | FJC130 • FJC150 • FJC160 | FJP50                  |
| 9/16-18                | 6                        | FJC180                   | FJP60                  |
| 5/8-18                 | ---                      | FJC170 • FJC190 • FJC200 | FJP65                  |
| 5/8-24                 | ---                      | FJC210                   | ---                    |
| 3/4-16                 | 8                        | FJC220 • FJC230 • FJC240 | FJP80                  |
| 3/4-18                 | 8                        | FJC250                   | ---                    |
| 3/4-20                 | 8                        | FJC260                   | ---                    |
| 7/8-14                 | 10                       | FJC270                   | FJP100                 |
| 7/8-18                 | 10                       | FJC280 • FJC290          | ---                    |
| 7/8-20                 | 10                       | FJC300                   | ---                    |
| 1-14                   | ---                      | FJC310                   | ---                    |
| 1-20                   | ---                      | FJC320                   | ---                    |
| 1-1/16-12              | 12                       | FJC330                   | FJP110                 |
| 1-1/16-14              | 12                       | FJC340                   | FJP120 • FJP140        |
| 1-3/16-12              | 14                       | ---                      | FJP150                 |
| 1-1/8-18               | ---                      | FJC350                   | ---                    |
| 1-3/16-12              | 14                       | FJC360                   | ---                    |
| 1-1/4-18               | ---                      | FJC370                   | ---                    |
| 1-5/16-12              | 16                       | FJC380                   | FJP160                 |
| 1-3/8-18               | ---                      | FJC390                   | ---                    |
| 1-1/2-12               | ---                      | FJC400                   | FJP180                 |
| 1-5/8-12               | 20                       | FJC410                   | FJP190                 |
| 1-3/4-12               | ---                      | FJC420                   | FJP200                 |
| 1-7/8-12               | 24                       | FJC430                   | FJP240 • FJP280        |
| 2-1/4-12               | ---                      | ---                      | FJP300                 |
| 2-1/2-12               | 32                       | ---                      | FJP320                 |

**Flared JIC Plug**  
配扩口式JIC管件螺纹堵头




**Flared JIC Cap**  
配扩口式JIC管件螺纹盖



### Maximum Temperature Specifications

| LDPE           | Polypropylene<br>Nylon |
|----------------|------------------------|
| 175° F / 79° C | 250° F / 121° C        |

## For NPT Threads

|                          | 内六角头<br>螺纹堵头                                                                        | 方头<br>螺纹堵头                                                                          | 方头带帽檐<br>螺纹堵头                                                                       | 按压式<br>塑料堵头                                                                         | 通用塑料堵头                                                                              |
|--------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                          |  |  |  |  |  |
| To Fit<br>NPT<br>Threads | Red<br>Polypropylene                                                                | Red<br>Polypropylene                                                                | Red<br>Polypropylene                                                                | Red LDPE                                                                            | Red LDPE                                                                            |
| 1/8"                     | ---                                                                                 | SPN0125                                                                             | SFPN0125                                                                            | PIPL0375 • PIP0375                                                                  | U100                                                                                |
| 1/4"                     | HSPN0250                                                                            | SPN0250                                                                             | SFPN0250                                                                            | PIP0500                                                                             | U110                                                                                |
| 3/8"                     | HSPN0375                                                                            | SPN0375                                                                             | SFPN0375                                                                            | PIP0625                                                                             | ---                                                                                 |
| 1/2"                     | HSPN0500                                                                            | SPN0500                                                                             | SFPN0500                                                                            | PIP0813                                                                             | ---                                                                                 |
| 3/4"                     | HSPN0750                                                                            | SPN0750                                                                             | SFPN0750                                                                            | PIP1000                                                                             | U125                                                                                |
| 1"                       | HSPN1000                                                                            | SPN1000                                                                             | ---                                                                                 | PIP1313                                                                             | ---                                                                                 |
| 1-1/4"                   | ---                                                                                 | SPN1250                                                                             | ---                                                                                 | ---                                                                                 | ---                                                                                 |
| 1-1/2"                   | ---                                                                                 | SPN1500                                                                             | ---                                                                                 | ---                                                                                 | ---                                                                                 |

**Universal Plug**  
通用塑料堵头



**General Purpose Plug**  
通用堵头

**Hex Socket Plug**  
内六角头螺纹堵头

### Maximum Temperature Specifications

| LDPE           | Polypropylene<br>Nylon |
|----------------|------------------------|
| 175° F / 79° C | 250° F / 121° C        |

**MOCAP** now offers Micro-Pack and Mini-Pack quantities when less than case quantities are what you really need.

Application Advisor is offered as a guideline.  
Please request samples to test within your application  
at sales@mocap.com.cn

**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn



# Application Advisor - Friction Fit Tubing Plugs

Use this guide to help select the right product for your application

**MOCAP** 茂凯的塑料管塞适用于多种管径，且能与之有效配合，经济耐用。该管塞有多层水平加强筋，易于安装，配合紧密。非常适用于办公家具、户外家具、管架、家电、运动器材或任何要求产品表面平整，外形美观的地方。

适配于圆形，方形，矩形截面的英制和公制管。

大部分尺寸的管塞设有库存，发货快速。

除常规箱装包装外，另设有最小包装和微包装。

## RNS Series

Plugs for Round Standard Tubes

标准管圆形管塞



- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，经久耐用



| 管外径尺寸 | 管壁厚                     | 平面                                                                                 | 圆顶                                                                                  | 斜顶                                                                                  | 斜顶                                                                                  |
|-------|-------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 英寸    |                         |  |  |  |  |
| 0.500 | 16-20ga (.065" - .035") | RN.5A                                                                              |                                                                                     |                                                                                     |                                                                                     |
| 0.500 | 13-17ga (.095" - .058") | RN.5T                                                                              |                                                                                     |                                                                                     |                                                                                     |
| 0.625 | 14-20ga (.083" - .035") | RN.625C                                                                            | RNDS.625C                                                                           |                                                                                     |                                                                                     |
| 0.625 | 10-14ga (.134" - .083") | RN.625D                                                                            | RNDS.625D                                                                           |                                                                                     |                                                                                     |
| 0.750 | 14-20ga (.083" - .035") | RN.75C                                                                             | RNDS.75C                                                                            | RNAS.75C25.5                                                                        | RNAS.75C15                                                                          |
| 0.875 | 14-20ga (.083" - .035") | RN.875C                                                                            | RNDS.875C                                                                           | RNAS.875C19                                                                         |                                                                                     |
| 0.875 | 10-14ga (.134" - .083") | RN.875D                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 1.000 | 14-20ga (.083" - .035") | RN1C                                                                               | RNDS1C                                                                              | RNAS1C12                                                                            | RNAS1C19                                                                            |
| 1.000 | 10-14ga (.134" - .083") | RN1D                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 1.125 | 14-20ga (.083" - .035") | RN1.125C                                                                           | RNDS1.125C                                                                          | RNAS1.125C15                                                                        |                                                                                     |
| 1.250 | 14-20ga (.083" - .035") | RN1.25C                                                                            | RNDS1.25C                                                                           | RNAS1.25C7                                                                          | RNAS1.25C15                                                                         |
| 1.250 | 10-14ga (.134" - .083") | RN1.25D                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 1.375 | 14-20ga (.083" - .035") | RN1.375C                                                                           | RNDS1.375C                                                                          |                                                                                     |                                                                                     |
| 1.500 | 14-20ga (.083" - .035") | RN1.5C                                                                             | RNDS1.5C                                                                            | RNAS1.5C19                                                                          |                                                                                     |
| 1.500 | 10-14ga (.134" - .083") | RN1.5D                                                                             | RNDS1.5D                                                                            |                                                                                     |                                                                                     |
| 1.500 | 8-12ga (.165" - .109")  | RN1.5Q                                                                             | RNDS1.5Q                                                                            |                                                                                     |                                                                                     |
| 1.625 | 14-20ga (.083" - .035") | RN1.625C                                                                           |                                                                                     |                                                                                     |                                                                                     |
| 1.625 | 10-14ga (.134" - .083") | RN1.625D                                                                           |                                                                                     |                                                                                     |                                                                                     |
| 1.750 | 14-20ga (.083" - .035") | RN1.75C                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 1.750 | 10-14ga (.134" - .083") | RN1.75D                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 1.875 | 14-20ga (.083" - .035") | RN1.875C                                                                           |                                                                                     |                                                                                     |                                                                                     |
| 2.000 | 14-20ga (.083" - .035") | RN2C                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 2.000 | 10-14ga (.134" - .083") | RN2D                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 2.125 | 10-16ga (.134" - .065") | RN2.125E                                                                           |                                                                                     |                                                                                     |                                                                                     |
| 2.250 | 14-20ga (.083" - .035") | RN2.25C                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 2.250 | 10-14ga (.134" - .083") | RN2.25D                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 2.375 | 10-14ga (.134" - .083") | RN2.375D                                                                           |                                                                                     |                                                                                     |                                                                                     |
| 2.500 | 14-20ga (.083" - .035") | RN2.5C                                                                             |                                                                                     |                                                                                     |                                                                                     |
| 2.500 | 8-12ga (.165" - .109")  | RN2.5Q                                                                             |                                                                                     |                                                                                     |                                                                                     |
| 2.750 | 7-14ga (.180" - .083")  | RN2.75S                                                                            |                                                                                     |                                                                                     |                                                                                     |
| 3.000 | 3-10ga (.259"-.134")    | RN3P                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 3.000 | 8-12ga (.165" - .109")  | RN3Q                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 3.000 | 13-17ga (.095" - .058") | RN3T                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 3.500 | 6-13ga (.203" - .095")  | RN3.5U                                                                             |                                                                                     |                                                                                     |                                                                                     |
| 4.000 | 10-16ga (.134" - .065") | RN4E                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 4.000 | 4-8ga (.238" - .165")   | RN4G                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 4.000 | 3-10ga (.259"-.134")    | RN4P                                                                               |                                                                                     |                                                                                     |                                                                                     |
| 4.750 | 8-14ga (.165" - .083")  | RN4.75J                                                                            |                                                                                     |                                                                                     |                                                                                     |

Tubing Plugs are available in a range of colors.

可定制各种颜色



\* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information

**MOCAP**

# Friction Fit Tubing Plugs - Application Advisor

Use this guide to help select the right product for your application

| 管外径尺寸 | 管壁厚   | 平面                                                                                | 圆顶                                                                                | 斜顶                                                                                |
|-------|-------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| 毫米    |       |  |  |  |
| 10.0  | 1-2mm | RN10MA                                                                            |                                                                                   |                                                                                   |
| 12.0  | 1-2mm | RN12MA                                                                            |                                                                                   |                                                                                   |
| 13.0  | 1-2mm | RN13MA                                                                            |                                                                                   |                                                                                   |
| 14.0  | 1-2mm | RN14MA                                                                            |                                                                                   |                                                                                   |
| 15.0  | 1-2mm | RN15MA                                                                            |                                                                                   |                                                                                   |
| 16.0  | 1-2mm | RN16MA                                                                            | RNDM16MA                                                                          |                                                                                   |
| 18.0  | 1-2mm | RN18MA                                                                            | RNDM18MA                                                                          | RNAM18MA15                                                                        |
| 20.0  | 1-2mm | RN20MA                                                                            | RNDM20MA                                                                          | RNAM20MA15                                                                        |
| 22.0  | 1-2mm | RN22MA                                                                            | RNDM22MA                                                                          | RNAM22MA15                                                                        |
| 25.0  | 1-2mm | RN25MA                                                                            | RNDM25MA                                                                          | RNAM25MA15                                                                        |
| 27.0  | 1-2mm | RN27MA                                                                            |                                                                                   |                                                                                   |
| 28.0  | 1-2mm | RN28MA                                                                            | RNDM28MA                                                                          |                                                                                   |
| 30.0  | 1-2mm | RN30MA                                                                            | RNDM30MA                                                                          |                                                                                   |
| 30.0  | 3-4mm | RN30MG                                                                            |                                                                                   |                                                                                   |
| 32.0  | 1-2mm | RN32MA                                                                            | RNDM32MA                                                                          |                                                                                   |
| 34.0  | 1-2mm | RN34MA                                                                            |                                                                                   |                                                                                   |
| 35.0  | 1-2mm | RN35MA                                                                            | RNDM35MA                                                                          |                                                                                   |
| 36.0  | 1-2mm | RN36MA                                                                            |                                                                                   |                                                                                   |
| 38.0  | 1-2mm | RN38MA                                                                            |                                                                                   |                                                                                   |
| 40.0  | 1-2mm | RN40MA                                                                            | RNDM40MA                                                                          |                                                                                   |
| 42.0  | 1-2mm | RN42MA                                                                            |                                                                                   |                                                                                   |
| 45.0  | 1-2mm | RN45MA                                                                            |                                                                                   |                                                                                   |
| 48.0  | 1-2mm | RN48MA                                                                            |                                                                                   |                                                                                   |
| 48.0  | 3-4mm | RN48MG                                                                            |                                                                                   |                                                                                   |
| 50.0  | 1-2mm | RN50MA                                                                            |                                                                                   |                                                                                   |
| 55.0  | 1-2mm | RN55MA                                                                            |                                                                                   |                                                                                   |
| 55.0  | 3-4mm | RN55MG                                                                            |                                                                                   |                                                                                   |
| 60.0  | 1-2mm | RN60MA                                                                            |                                                                                   |                                                                                   |
| 60.0  | 2-3mm | RN60MF                                                                            |                                                                                   |                                                                                   |
| 70.0  | 2-3mm | RN70MF                                                                            |                                                                                   |                                                                                   |
| 70.0  | 3-4mm | RN70MG                                                                            |                                                                                   |                                                                                   |
| 76.0  | 2-3mm | RN76MF                                                                            |                                                                                   |                                                                                   |
| 76.0  | 3-4mm | RN76MG                                                                            |                                                                                   |                                                                                   |
| 80.0  | 2-3mm | RN80MF                                                                            |                                                                                   |                                                                                   |
| 90.0  | 2-3mm | RN90MF                                                                            |                                                                                   |                                                                                   |
| 90.0  | 3-4mm | RN90MG                                                                            |                                                                                   |                                                                                   |
| 102.0 | 2-3mm | RN102MF                                                                           |                                                                                   |                                                                                   |
| 102.0 | 3-4mm | RN102MG                                                                           |                                                                                   |                                                                                   |
| 110.0 | 4-5mm | RN110MH                                                                           |                                                                                   |                                                                                   |

## RNM Series

Plugs for Round Metric Tubes  
公制管圆形管塞



- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，经久耐用



Tubing Plugs are available in a range of colors.  
可定制各种颜色



\* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information

| 标准管尺寸 | 管外径尺寸 | 管壁厚    | 平面                                                                                  |
|-------|-------|--------|-------------------------------------------------------------------------------------|
| 英寸    |       |        |  |
| 1.000 | 1.315 | 0.133" | RNPP1                                                                               |
| 1.250 | 1.660 | 0.140" | RNPP1-1/4                                                                           |
| 1.500 | 1.900 | 0.145" | RNPP1-1/2                                                                           |
| 2.000 | 2.375 | 0.154" | RNPP2                                                                               |
| 2.500 | 2.875 | 0.203" | RNPP2-1/2                                                                           |
| 3.000 | 3.500 | 0.216" | RNPP3                                                                               |
| 3.500 | 4.000 | 0.226" | RNPP3-1/2                                                                           |
| 4.000 | 4.500 | 0.237" | RNPP4                                                                               |

## RNPP Series

Plugs for Schedule 40 Pipe & Tubing



# MOCAP

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn

# Application Advisor - Friction Fit Tubing Plugs


Use this guide to help select the right product for your application

## SQS Series

Plugs for Square  
Standard Tubes  
标准管方形管塞



- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability  
and Abrasion Resistance  
顶部厚实，经久耐用



| 管外径尺寸 | 管壁厚                     | 平面                                                                                | 金字塔顶                                                                                | 圆顶                                                                                  | 斜顶                                                                                  | 斜顶                                                                                  |
|-------|-------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 英寸    |                         |  |  |  |  |  |
| 0.500 | 16-18ga (.065" - .049") | SQ.5B                                                                             |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 0.625 | 14-20ga (.083" - .035") | SQ.625C                                                                           | SQPS.625C                                                                           |                                                                                     |                                                                                     |                                                                                     |
| 0.750 | 14-20ga (.083" - .035") | SQ.75C                                                                            | SQPS.750C                                                                           | SQDS.75C                                                                            | SQAS.75C5                                                                           | SQAS.75C25                                                                          |
| 0.750 | 10-14ga (.134" - .083") | SQ.75D                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 0.875 | 14-20ga (.083" - .035") | SQ.875C                                                                           | SQPS.875C                                                                           | SQDS.875C                                                                           | SQAS.875C25                                                                         |                                                                                     |
| 1.000 | 14-20ga (.083" - .035") | SQ1C                                                                              | SQPS1C                                                                              | SQDS1C                                                                              | SQAS1C15                                                                            |                                                                                     |
| 1.000 | 10-14ga (.134" - .083") | SQ1D                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.125 | 14-20ga (.083" - .035") | SQ1.125C                                                                          |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.250 | 14-20ga (.083" - .035") | SQ1.25C                                                                           | SQPS1.25C                                                                           | SQDS1.25C                                                                           |                                                                                     |                                                                                     |
| 1.250 | 10-14ga (.134" - .083") | SQ1.25D                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.375 | 14-20ga (.083" - .035") | SQ1.375C                                                                          |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.375 | 10-14ga (.134" - .083") | SQ1.375D                                                                          |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.500 | 14-20ga (.083" - .035") | SQ1.5C                                                                            | SQPS1.5C                                                                            | SQDS1.5C                                                                            |                                                                                     |                                                                                     |
| 1.500 | 10-14ga (.134" - .083") | SQ1.5D                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.500 | 3-6ga (.203" - .259")   | SQ1.5W                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.750 | 14-20ga (.083" - .035") | SQ1.75C                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 1.750 | 10-14ga (.134" - .083") | SQ1.75D                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.000 | 14-20ga (.083" - .035") | SQ2C                                                                              | SQPS2C                                                                              |                                                                                     |                                                                                     |                                                                                     |
| 2.000 | 10-14ga (.134" - .083") | SQ2D                                                                              | SQPS2D                                                                              |                                                                                     |                                                                                     |                                                                                     |
| 2.000 | 4-8ga (.238" - .165")   | SQ2G                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.250 | 10-14ga (.134" - .083") | SQ2.25D                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.500 | 10-14ga (.134" - .083") | SQ2.5D                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.500 | 6-10ga (.203" - .134")  | SQ2.5H                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.500 | 16-23ga (.065" - .025") | SQ2.5I                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.750 | 14-20ga (.083" - .035") | SQ2.75C                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 2.750 | 8-14ga (.165" - .083")  | SQ2.75J                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.000 | 3-7ga (.259" - .180")   | SQ3K                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.000 | 8-12ga (.165" - .109")  | SQ3Q                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.125 | 6-11ga (.203" - .120")  | SQ3.125O                                                                          |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.500 | 14-20ga (.083" - .035") | SQ3.5C                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.500 | 6ga (.203")             | SQ3.5L                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.500 | 6-14ga (.203" - .083")  | SQ3.5M                                                                            |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 3.875 | 4-8ga (.238" - .165")   | SQ3.875G                                                                          |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 4.000 | 3-7ga (.259" - .180")   | SQ4K                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 4.000 | 4-11ga (.238" - .120")  | SQ4N                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 4.750 | 6-11ga (.203" - .120")  | SQ4.75O                                                                           |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 5.000 | 3-10ga (.259" - .134")  | SQ5P                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 6.000 | 10-14ga (.134" - .083") | SQ6D                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 6.000 | 3-10ga (.259" - .134")  | SQ6P                                                                              |                                                                                     |                                                                                     |                                                                                     |                                                                                     |



Tubing Plugs are available in a range of colors.

可定制各种颜色



\* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information



# Friction Fit Tubing Plugs - Application Advisor

Use this guide to help select the right product for your application

## SQM Series

Plugs for Square  
Metric Tubes  
公制管方形管塞



- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，经久耐用



| 管外径尺寸 | 管壁厚       | 平面      | 金字塔顶     | 圆顶       | 斜顶         | 斜顶         |
|-------|-----------|---------|----------|----------|------------|------------|
| 毫米    |           |         |          |          |            |            |
| 10.0  | 1.5 - 2mm | SQ10MB  |          |          |            |            |
| 12.0  | 1.5 - 2mm | SQ12MB  | SQPM12MB |          |            |            |
| 15.0  | 1.5 - 2mm | SQ15MB  | SQPM15MB |          |            |            |
| 16.0  | 1-2mm     | SQ16MA  | SQPM16MA |          |            |            |
| 18.0  | 1.5 - 2mm | SQ18MB  | SQPM18MB |          | SQAM18MB10 |            |
| 20.0  | 1.5 - 2mm | SQ20MB  | SQPM20MB | SQDM20MB | SQAM20MB10 | SQAM20MB25 |
| 22.0  | 1-2mm     | SQ22MA  |          |          |            |            |
| 25.0  | 1-2mm     | SQ25MA  | SQPM25MA |          | SQAM25MA15 |            |
| 25.0  | 2-3mm     | SQ25MF  |          |          |            |            |
| 30.0  | 1.5 - 2mm | SQ30MB  | SQPM30MB |          |            |            |
| 30.0  | 3mm       | SQ30MC  |          |          |            |            |
| 34.0  | 1.5 - 2mm | SQ34MB  | SQPM34MB |          |            |            |
| 34.0  | 3mm       | SQ34MC  |          |          |            |            |
| 35.0  | 1-2mm     | SQ35MA  |          |          |            |            |
| 35.0  | 2-3mm     | SQ35MF  |          |          |            |            |
| 40.0  | 1.5 - 2mm | SQ40MB  | SQPM40MB |          |            |            |
| 40.0  | 3mm       | SQ40MC  |          |          |            |            |
| 40.0  | 4mm       | SQ40MD  |          |          |            |            |
| 40.0  | 5mm       | SQ40ME  |          |          |            |            |
| 45.0  | 1.5 - 2mm | SQ45MB  |          |          |            |            |
| 50.0  | 1.5 - 2mm | SQ50MB  |          |          |            |            |
| 50.0  | 3mm       | SQ50MC  |          |          |            |            |
| 50.0  | 5mm       | SQ50ME  |          |          |            |            |
| 60.0  | 1.5 - 2mm | SQ60MB  |          |          |            |            |
| 60.0  | 3mm       | SQ60MC  |          |          |            |            |
| 60.0  | 4mm       | SQ60MD  |          |          |            |            |
| 60.0  | 5mm       | SQ60ME  |          |          |            |            |
| 70.0  | 3mm       | SQ70MC  |          |          |            |            |
| 70.0  | 4mm       | SQ70MD  |          |          |            |            |
| 80.0  | 3mm       | SQ80MC  |          |          |            |            |
| 90.0  | 1.5 - 2mm | SQ90MB  |          |          |            |            |
| 90.0  | 5mm       | SQ90ME  |          |          |            |            |
| 100.0 | 3mm       | SQ100MC |          |          |            |            |
| 100.0 | 5mm       | SQ100ME |          |          |            |            |
| 120.0 | 5mm       | SQ120ME |          |          |            |            |



**Smaller Quantity Micro-Packs Now Available!**  
Offering the Lowest Minimum Order Quantity with the Highest Stocking Levels in the Industry  
Same Day Shipping

**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 10



# Application Advisor - Friction Fit Tubing Plugs

Use this guide to help select the right product for your application

## RCS Series

Plugs for Rectangular Standard Tubes

标准管矩形管塞




- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，经久耐用

| 配管外宽  | 配管外长  | 管壁厚                     | 平顶                                                                                  | 金字塔顶                                                                                |
|-------|-------|-------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 英寸    | 英寸    |                         |  |  |
| 0.500 | 1.000 | 16-18ga (.065" - .049") | RC.5X1B                                                                             |                                                                                     |
| 0.500 | 1.500 | 14-20ga (.083" - .035") | RC.5X1.5C                                                                           |                                                                                     |
| 0.625 | 1.375 | 14-20ga (.083" - .035") | RC.625X1.375C                                                                       |                                                                                     |
| 0.750 | 1.500 | 14-20ga (.083" - .035") | RC.75X1.5C                                                                          | RCPS.75X1.5C                                                                        |
| 1.000 | 1.250 | 14-20ga (.083" - .035") | RC1X1.25C                                                                           |                                                                                     |
| 1.000 | 1.500 | 14-20ga (.083" - .035") | RC1X1.5C                                                                            |                                                                                     |
| 1.000 | 1.500 | 10-14ga (.134" - .083") | RC1X1.5D                                                                            |                                                                                     |
| 1.000 | 2.000 | 14-20ga (.083" - .035") | RC1X2C                                                                              | RCPS1X2C                                                                            |
| 1.000 | 2.000 | 10-14ga (.134" - .083") | RC1X2D                                                                              | RCPS1X2D                                                                            |
| 1.000 | 2.500 | 14-20ga (.083" - .035") | RC1X2.5C                                                                            |                                                                                     |
| 1.000 | 3.000 | 14-20ga (.083" - .035") | RC1X3C                                                                              |                                                                                     |
| 1.000 | 3.000 | 10-14ga (.134" - .083") | RC1X3D                                                                              |                                                                                     |
| 1.500 | 2.000 | 10-14ga (.134" - .083") | RC1.5X2D                                                                            |                                                                                     |
| 1.500 | 2.500 | 12-16ga (.109" - .065") | RC1.5X2.5E                                                                          |                                                                                     |
| 1.500 | 2.500 | 8-12ga (.165" - .109")  | RC1.5X2.5Q                                                                          |                                                                                     |
| 1.500 | 3.000 | 10-14ga (.134" - .083") | RC1.5X3D                                                                            |                                                                                     |
| 1.500 | 3.500 | 10-14ga (.134" - .083") | RC1.5X3.5D                                                                          |                                                                                     |
| 2.000 | 2.500 | 10-14ga (.134" - .083") | RC2X2.5D                                                                            |                                                                                     |
| 2.000 | 3.000 | 14-20ga (.083" - .035") | RC2X3C                                                                              |                                                                                     |
| 2.000 | 3.000 | 10-14ga (.134" - .083") | RC2X3D                                                                              |                                                                                     |
| 2.000 | 3.000 | 6-8ga (.203" - .165")   | RC2X3V                                                                              |                                                                                     |
| 2.000 | 4.000 | 14-20ga (.083" - .035") | RC2X4C                                                                              |                                                                                     |
| 2.000 | 4.000 | 10-14ga (.134" - .083") | RC2X4D                                                                              |                                                                                     |
| 2.000 | 5.000 | 10-14ga (.134" - .083") | RC2X5D                                                                              |                                                                                     |
| 2.000 | 5.000 | 8ga (.165")             | RC2X5F                                                                              |                                                                                     |
| 2.000 | 6.000 | 6-8ga (.203" - .165")   | RC2X6V                                                                              |                                                                                     |
| 3.000 | 4.000 | 6-8ga (.203" - .165")   | RC3X4V                                                                              |                                                                                     |
| 4.000 | 6.000 | 6-8ga (.203" - .165")   | RC4X6V                                                                              |                                                                                     |

## RCM Series

Plugs for Rectangular Metric Tubes

公制管矩形管塞



- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，经久耐用

| 配管外长 | 配管外宽 | 管壁厚       | 平顶                                                                                    | 金字塔顶                                                                                  | 斜顶                                                                                    |
|------|------|-----------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 毫米   | 毫米   |           |  |  |  |
| 20.0 | 10.0 | 1.5 - 2mm | RC2010MB                                                                              | RCPM2010MB                                                                            |                                                                                       |
| 20.0 | 15.0 | 1.5 - 2mm | RC2015MB                                                                              | RCPM2015MB                                                                            | RCAM2015MB10                                                                          |
| 25.0 | 10.0 | 1.5 - 2mm | RC2510MB                                                                              |                                                                                       |                                                                                       |
| 25.0 | 12.0 | 1.5 - 2mm | RC2512MB                                                                              |                                                                                       |                                                                                       |
| 25.0 | 15.0 | 1.5 - 2mm | RC2515MB                                                                              | RCPM2515MB                                                                            | RCAM2515MB10                                                                          |
| 25.0 | 20.0 | 1.5 - 2mm | RC2520MB                                                                              |                                                                                       |                                                                                       |
| 30.0 | 10.0 | 1.5 - 2mm | RC3010MB                                                                              |                                                                                       |                                                                                       |
| 30.0 | 15.0 | 1.5 - 2mm | RC3015MB                                                                              | RCPM3015MB                                                                            | RCAM3015MB10                                                                          |
| 30.0 | 20.0 | 1.5 - 2mm | RC3020MB                                                                              | RCPM3020MB                                                                            | RCAM3020MB15                                                                          |
| 30.0 | 20.0 | 3mm       | RC3020MC                                                                              |                                                                                       |                                                                                       |
| 30.0 | 25.0 | 1.5 - 2mm | RC3025MB                                                                              |                                                                                       |                                                                                       |
| 35.0 | 20.0 | 1.5 - 2mm | RC3520MB                                                                              |                                                                                       |                                                                                       |
| 35.0 | 25.0 | 1.5 - 2mm | RC3525MB                                                                              |                                                                                       |                                                                                       |
| 35.0 | 30.0 | 1.5 - 2mm | RC3530MB                                                                              |                                                                                       |                                                                                       |
| 40.0 | 10.0 | 1.5 - 2mm | RC4010MB                                                                              | RCPM4010MB                                                                            |                                                                                       |
| 40.0 | 15.0 | 1.5 - 2mm | RC4015MB                                                                              | RCPM4015MB                                                                            |                                                                                       |
| 40.0 | 20.0 | 1.5 - 2mm | RC4020MB                                                                              | RCPM4020MB                                                                            | RCAM4020MB20                                                                          |
| 40.0 | 20.0 | 3mm       | RC4020MC                                                                              |                                                                                       |                                                                                       |
| 40.0 | 25.0 | 1.5 - 2mm | RC4025MB                                                                              | RCPM4025MB                                                                            |                                                                                       |
| 40.0 | 30.0 | 1.5 - 2mm | RC4030MB                                                                              | RCPM4030MB                                                                            |                                                                                       |

**MOCAP**

# Friction Fit Tubing Plugs - Application Advisor

Use this guide to help select the right product for your application

## RCM Series [continued]

Plugs for Rectangular Metric Tubes

公制管矩形管塞

| 配管外长  | 配管外宽  | 管壁厚       | 平顶         | 金字塔顶       | 斜顶 |
|-------|-------|-----------|------------|------------|----|
| 毫米    | 毫米    |           |            |            |    |
| 40.0  | 30.0  | 3mm       | RC4030MC   |            |    |
| 45.0  | 15.0  | 1.5 - 2mm | RC4515MB   |            |    |
| 45.0  | 20.0  | 1.5 - 2mm | RC4520MB   |            |    |
| 45.0  | 25.0  | 1.5 - 2mm | RC4525MB   |            |    |
| 48.0  | 38.0  | 1.5 - 2mm | RC4838MB   |            |    |
| 50.0  | 20.0  | 1.5 - 2mm | RC5020MB   |            |    |
| 50.0  | 25.0  | 1.5 - 2mm | RC5025MB   | RCPM5025MB |    |
| 50.0  | 30.0  | 1.5 - 2mm | RC5030MB   | RCPM5030MB |    |
| 50.0  | 30.0  | 3mm       | RC5030MC   |            |    |
| 50.0  | 34.0  | 1.5 - 2mm | RC5034MB   |            |    |
| 50.0  | 40.0  | 1.5 - 2mm | RC5040MB   |            |    |
| 55.0  | 35.0  | 1.5 - 2mm | RC5535MB   |            |    |
| 60.0  | 20.0  | 1.5 - 2mm | RC6020MB   |            |    |
| 60.0  | 30.0  | 1.5 - 2mm | RC6030MB   |            |    |
| 60.0  | 30.0  | 3mm       | RC6030MC   |            |    |
| 60.0  | 40.0  | 3mm       | RC6040MC   |            |    |
| 60.0  | 40.0  | 1.5 - 2mm | RC6040MB   |            |    |
| 60.0  | 40.0  | 4mm       | RC6040MD   |            |    |
| 60.0  | 40.0  | 5mm       | RC6040ME   |            |    |
| 70.0  | 30.0  | 1.5 - 2mm | RC7030MB   |            |    |
| 70.0  | 40.0  | 1.5 - 2mm | RC7040MB   |            |    |
| 70.0  | 40.0  | 4mm       | RC7040MD   |            |    |
| 70.0  | 50.0  | 1.5-2mm   | RC7050MB   |            |    |
| 70.0  | 50.0  | 3mm       | RC7050MC   |            |    |
| 80.0  | 20.0  | 1.5 - 2mm | RC8020MB   |            |    |
| 80.0  | 30.0  | 1.5 - 2mm | RC8030MB   |            |    |
| 80.0  | 40.0  | 1.5 - 2mm | RC8040MB   |            |    |
| 80.0  | 40.0  | 4mm       | RC8040MD   |            |    |
| 80.0  | 40.0  | 5mm       | RC8040ME   |            |    |
| 80.0  | 50.0  | 1.5 - 2mm | RC8050MB   |            |    |
| 80.0  | 50.0  | 4mm       | RC8050MD   |            |    |
| 80.0  | 60.0  | 3mm       | RC8060MC   |            |    |
| 80.0  | 60.0  | 5mm       | RC8060ME   |            |    |
| 100.0 | 20.0  | 1.5-2mm   | RC10020MB  |            |    |
| 100.0 | 25.0  | 1.5-2mm   | RC10025MB  |            |    |
| 100.0 | 30.0  | 1.5-2mm   | RC10030MB  |            |    |
| 100.0 | 40.0  | 1.5 - 2mm | RC10040MB  |            |    |
| 100.0 | 40.0  | 3mm       | RC10040MC  |            |    |
| 100.0 | 50.0  | 3mm       | RC10050MC  |            |    |
| 100.0 | 50.0  | 4mm       | RC10050MD  |            |    |
| 100.0 | 50.0  | 5mm       | RC10050ME  |            |    |
| 120.0 | 40.0  | 3mm       | RC12040MC  |            |    |
| 120.0 | 50.0  | 1.5-2mm   | RC12050MB  |            |    |
| 120.0 | 60.0  | 3mm       | RC12060MC  |            |    |
| 120.0 | 60.0  | 4mm       | RC12060MD  |            |    |
| 120.0 | 60.0  | 5mm       | RC12060ME  |            |    |
| 120.0 | 80.0  | 1.5 - 2mm | RC12080MB  |            |    |
| 140.0 | 50.0  | 1.5-2mm   | RC14050MB  |            |    |
| 140.0 | 50.0  | 3-4mm     | RC14050MG  |            |    |
| 140.0 | 50.0  | 4-5mm     | RC14050MH  |            |    |
| 140.0 | 80.0  | 4mm       | RC14080MD  |            |    |
| 150.0 | 25.0  | 1.5-2mm   | RC15025MB  |            |    |
| 150.0 | 50.0  | 1.5-2mm   | RC15050MB  |            |    |
| 150.0 | 50.0  | 3-4mm     | RC15050MG  |            |    |
| 150.0 | 50.0  | 4-5mm     | RC15050MH  |            |    |
| 150.0 | 100.0 | 4-5mm     | RC150100MH |            |    |



- Material: LDPE  
材质：低密度聚乙烯
- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，经久耐用



Tubing Plugs are available in a range of colors.

可定制各种颜色



\* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information



**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 12


# RVC Series - Round Vinyl Caps

## RVC 系列 - 圆形浸塑盖

### Friction Fit Caps & Plugs



- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings  
配标准螺纹, 公制螺纹, BSP&NPT螺纹
- Use as Thread Protector or End Cap  
可用作螺纹保护帽或端盖
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用, 不会断裂、撕裂或产生碎屑
- Printable\*  
可印刷
- Available in High-Temp Formula *refer to page 115*  
可适用于高温测试请参考第115页
- Stocked Material: Black Vinyl  
材质: 黑色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色



| 模具编号    | 配标准<br>螺纹 | 配公制<br>螺纹 | 配NPT<br>螺纹 | (A) 内直径 |     | (B) 最小内长 |     | (C) 最大内长 |      | (D) 壁厚 |     | 库存长度                   |
|---------|-----------|-----------|------------|---------|-----|----------|-----|----------|------|--------|-----|------------------------|
|         |           |           |            | 英寸      | 毫米  | 英寸       | 毫米  | 英寸       | 毫米   | 英寸     | 毫米  |                        |
| RVC9001 | 1         | ---       | ---        | 0.062   | 1.6 | 0.188    | 4.8 | 0.500    | 12.7 | 0.022  | 0.6 | 0.5                    |
| RVC9002 | 1 or 2    | ---       | ---        | 0.070   | 1.8 | 0.188    | 4.8 | 0.500    | 12.7 | 0.022  | 0.6 | 0.5                    |
| RVC9003 | 2 or 3    | ---       | ---        | 0.080   | 2.0 | 0.188    | 4.8 | 0.625    | 15.9 | 0.028  | 0.7 | 0.5                    |
| RVC9004 | 3 or 4    | ---       | ---        | 0.093   | 2.4 | 0.188    | 4.8 | 0.750    | 19.1 | 0.028  | 0.7 | 0.5                    |
| RVC9005 | 4 or 5    | ---       | ---        | 0.112   | 2.8 | 0.188    | 4.8 | 1.000    | 25.4 | 0.033  | 0.8 | 0.5 · 1                |
| RVC9006 | 5 or 6    | ---       | ---        | 0.125   | 3.2 | 0.188    | 4.8 | 1.500    | 38.1 | 0.033  | 0.8 | 0.5 · 1 · 1.5          |
| RVC9007 | ---       | M4        | ---        | 0.137   | 3.5 | 0.188    | 4.8 | 1.500    | 38.1 | 0.033  | 0.8 | 0.5 · 1 · 1.5          |
| RVC9008 | 8         | M4        | ---        | 0.156   | 4.0 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9009 | 10        | M5        | ---        | 0.172   | 4.4 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9010 | ---       | M5        | ---        | 0.187   | 4.7 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9011 | 12        | ---       | ---        | 0.207   | 5.3 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9012 | ---       | ---       | ---        | 0.218   | 5.5 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9440 | 1/4 - 20  | M6        | ---        | 0.234   | 5.9 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 0.75 · 1.5 · 0.5 |
| RVC9013 | 1/4 - 20  | ---       | ---        | 0.250   | 6.4 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9014 | ---       | ---       | ---        | 0.281   | 7.1 | 0.188    | 4.8 | 2.250    | 57.2 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9278 | 5/16 - 24 | M8        | ---        | 0.300   | 7.6 | 0.188    | 4.8 | 2.250    | 57.2 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9015 | 5/16 - 24 | M8        | ---        | 0.313   | 8.0 | 0.188    | 4.8 | 2.250    | 57.2 | 0.038  | 1.0 | 0.5 · 1 · 1.5 · 0.5    |
| RVC9016 | ---       | ---       | ---        | 0.320   | 8.1 | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 | ---                    |
| RVC9017 | ---       | ---       | ---        | 0.343   | 8.7 | 0.188    | 4.8 | 2.250    | 57.2 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |
| RVC9018 | 3/8 - 24  | ---       | ---        | 0.364   | 9.2 | 0.188    | 4.8 | 1.750    | 44.5 | 0.038  | 1.0 | 0.5 · 1 · 1.5          |

Stocked Parts are in General Purpose 9500-002 Black Material, with some available in our General Purpose 9500-011 Red Material. See the size chart for stock offerings.

\*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color



| 模具编号    | 配标准<br>螺纹    | 配公制<br>螺纹 | 配NPT<br>螺纹 | (A) 内直径 |       | (B) 最小内长 |     | (C) 最大内长 |       | (D) 壁厚 |     | 库存长度                        |
|---------|--------------|-----------|------------|---------|-------|----------|-----|----------|-------|--------|-----|-----------------------------|
|         |              |           |            | 英寸      | 毫米    | 英寸       | 毫米  | 英寸       | 毫米    | 英寸     | 毫米  |                             |
| RVC9019 | 3/8 - 24     | M10       | ---        | 0.375   | 9.5   | 0.188    | 4.8 | 2.250    | 57.2  | 0.038  | 1.0 | 0.5 · 0.75 · 1 · 1.5        |
| RVC9542 | ---          | M10       | ---        | 0.390   | 9.9   | 0.188    | 4.8 | 2.250    | 57.2  | 0.055  | 1.4 | 0.5 · 1 · 1.5               |
| RVC9021 | 7/16 - 20    | ---       | ---        | 0.406   | 10.3  | 0.188    | 4.8 | 1.500    | 38.1  | 0.055  | 1.4 | 0.5 · 0.5                   |
| RVC9022 | 7/16 - 20    | M12       | ---        | 0.437   | 11.1  | 0.188    | 4.8 | 1.500    | 38.1  | 0.055  | 1.4 | 0.5 · 1 · 1.5               |
| RVC9096 | ---          | ---       | ---        | 0.468   | 11.9  | 0.188    | 4.8 | 2.500    | 63.5  | 0.055  | 1.4 | 0.5 · 1 · 1.5               |
| RVC9023 | ---          | ---       | 1/4        | 0.500   | 12.7  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5               |
| RVC9024 | 9/16 - 18    | M14       | 1/4        | 0.531   | 13.5  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1.5 · 0.5             |
| RVC9025 | 9/16 - 18    | ---       | ---        | 0.562   | 14.3  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5               |
| RVC9306 | 5/8 - 18     | M16       | ---        | 0.610   | 15.5  | 0.188    | 4.8 | 1.000    | 25.4  | 0.060  | 1.5 | 0.5 · 1                     |
| RVC9034 | 11/16 - 16   | M16       | 3/8        | 0.625   | 15.9  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5 · 0.5         |
| RVC9035 | 3/4 - 16     | M18       | ---        | 0.687   | 17.4  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 0.75 · 1 · 1.5 · 0.75 |
| RVC9036 | 13/16 - 16   | M20       | ---        | 0.750   | 19.1  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5               |
| RVC9037 | 13/16 - 16   | ---       | 1/2        | 0.812   | 20.6  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5 · 1           |
| RVC9038 | 7/8 - 14     | M22       | ---        | 0.843   | 21.4  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 1 · 1.5                     |
| RVC9039 | 7/8 - 14     | ---       | ---        | 0.875   | 22.2  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 1 · 1.5 · 1                 |
| RVC9040 | 1 - 16       | M24       | ---        | 0.937   | 23.8  | 0.188    | 4.8 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5 · 1           |
| RVC9041 | 1-1/16 - 12  | M26       | 3/4        | 1.000   | 25.4  | 0.250    | 6.4 | 1.500    | 38.1  | 0.060  | 1.5 | 0.5 · 1 · 1.5 · 1           |
| RVC9397 | 1-1/16 - 12  | M27       | ---        | 1.062   | 27.0  | 0.250    | 6.4 | 3.250    | 82.6  | 0.060  | 1.5 | 1 · 1.5 · 1                 |
| RVC9273 | 1-3/16 - 12  | M30       | ---        | 1.125   | 28.6  | 0.250    | 6.4 | 2.250    | 57.2  | 0.060  | 1.5 | 1 · 1                       |
| RVC9042 | 1-3/16 - 12  | ---       | ---        | 1.187   | 30.1  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | 1 · 1.5 · 1                 |
| RVC9043 | 1-5/16 - 12  | M32       | 1          | 1.250   | 31.8  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | 0.5 · 1 · 1.5               |
| RVC9320 | ---          | ---       | ---        | 1.313   | 33.4  | 0.250    | 6.4 | 7.000    | 177.8 | 0.065  | 1.7 | ---                         |
| RVC9118 | ---          | ---       | ---        | 1.375   | 34.9  | 0.250    | 6.4 | 3.250    | 82.6  | 0.065  | 1.7 | 1.5 · 1.5                   |
| RVC9044 | 1-5/8 - 12   | M39 - M40 | ---        | 1.500   | 38.1  | 0.250    | 6.4 | 3.250    | 82.6  | 0.060  | 1.5 | 0.5 · 1 · 1.5 · 1.5         |
| RVC9045 | 1-11/16 - 12 | M42       | 1-1/4      | 1.625   | 41.3  | 0.250    | 6.4 | 1.500    | 38.1  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9119 | ---          | ---       | ---        | 1.687   | 42.8  | 0.250    | 6.4 | 1.750    | 44.5  | 0.065  | 1.7 | 1.5 · 1.5                   |
| RVC9120 | ---          | ---       | ---        | 1.750   | 44.5  | 0.250    | 6.4 | 3.250    | 82.6  | 0.065  | 1.7 | 1.5 · 1.5                   |
| RVC9046 | 1-7/8 - 12   | M48       | 1-1/2      | 1.875   | 47.6  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | ---                         |
| RVC9324 | 1-7/8 - 12   | ---       | ---        | 1.937   | 49.2  | 0.250    | 6.4 | 2.250    | 57.2  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9047 | 2            | M52       | ---        | 2.000   | 50.8  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9048 | 2-1/4 - 12   | M52       | ---        | 2.125   | 54.0  | 0.250    | 6.4 | 2.000    | 50.8  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9049 | 2-1/4 - 12   | M58 - M60 | 2          | 2.250   | 57.2  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9050 | 2-1/2 - 12   | ---       | 2          | 2.375   | 60.3  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | ---                         |
| RVC9051 | 2-1/2 - 12   | M64       | ---        | 2.500   | 63.5  | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9052 | ---          | M68       | ---        | 2.625   | 66.7  | 0.250    | 6.4 | 2.250    | 57.2  | 0.060  | 1.5 | ---                         |
| RVC9053 | ---          | M72       | 2-1/2      | 2.750   | 69.9  | 0.250    | 6.4 | 3.500    | 88.9  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9054 | ---          | M80       | ---        | 3.000   | 76.2  | 0.250    | 6.4 | 2.250    | 57.2  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9579 | ---          | M85       | ---        | 3.250   | 82.6  | 0.250    | 6.4 | 2.000    | 50.8  | 0.060  | 1.5 | ---                         |
| RVC9055 | ---          | M90       | 3          | 3.500   | 88.9  | 0.250    | 6.4 | 2.250    | 57.2  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9490 | ---          | M105      | 3-1/2      | 4.000   | 101.6 | 0.250    | 6.4 | 3.500    | 88.9  | 0.060  | 1.5 | 1.5 · 1.5                   |
| RVC9121 | ---          | ---       | ---        | 4.530   | 115.1 | 0.250    | 6.4 | 1.500    | 38.1  | 0.065  | 1.7 | ---                         |
| RVC9123 | ---          | ---       | ---        | 4.625   | 117.5 | 0.250    | 6.4 | 1.500    | 38.1  | 0.065  | 1.7 | ---                         |
| RVC9056 | ---          | ---       | ---        | 6.000   | 152.4 | 0.250    | 6.4 | 1.750    | 44.5  | 0.060  | 1.5 | ---                         |

As a Guide for Part Selection, an Application Advisor is Available On Our Website.




# VHC Series - Vinyl Hanger Caps

## VHC 系列 - 带挂孔圆形浸塑盖

Friction Fit Caps & Plugs



- Stretches for a Snug Fit, but Won't Split, Tear or Shred  
弹性好，装配后贴合紧密，不会破损或撕裂
- Durable  
持久耐用
- Stocked Material: Black Vinyl  
材质：黑色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色




| 模具编号    | ( A ) 内直径 |      | ( B ) 最小内长 |      | ( C ) 最大内长 |      | ( D ) 壁厚 |     | 库存长度 |
|---------|-----------|------|------------|------|------------|------|----------|-----|------|
|         | 英寸        | 毫米   | 英寸         | 毫米   | 英寸         | 毫米   | 英寸       | 毫米  | 英寸   |
| VHC9501 | 0.531     | 13.5 | 0.500      | 12.7 | 2.000      | 50.8 | 0.060    | 1.5 | 0.5  |
| VHC9500 | 0.812     | 20.6 | 0.500      | 12.7 | 2.000      | 50.8 | 0.060    | 1.5 | 1    |
| VHC9502 | 1.062     | 27.0 | 0.500      | 12.7 | 2.000      | 50.8 | 0.060    | 1.5 | 1    |
| VHC9505 | 1.375     | 34.9 | 0.500      | 12.7 | 2.000      | 50.8 | 0.060    | 1.5 | 1    |
| VHC9503 | 1.625     | 41.3 | 0.500      | 12.7 | 2.000      | 50.8 | 0.060    | 1.5 | 1    |
| VHC9398 | 1.750     | 44.5 | 0.500      | 12.7 | 0.750      | 19.1 | 0.060    | 1.5 | 0.75 |
| VHC9504 | 2.000     | 50.8 | 0.500      | 12.7 | 2.000      | 50.8 | 0.060    | 1.5 | 1    |



# Pull Tab Vinyl Caps - FPT Series

易拔除浸塑盖 - FPT 系列

Friction Fit Caps & Plugs



- Flat / Ergonomic Tab for Easy Removal  
符合人体工学的拉手设计，移除方便
- Stretches for a Snug Fit, but Won't Split, Tear or Shred  
弹性好，装配后贴合紧密，不会破损或撕裂
- Available in High-Temp Formula *refer to page 117*  
可适用于高温测试请参考第117页
- Stocked Material: Black Vinyl  
材质：黑色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色



| 模具编号    | (A) 内直径 |      | (B) 最小内长 |     | (C) 最大内长 |      | (D) 壁厚 |     | (E) 把柄高度 |      | 库存长度 |
|---------|---------|------|----------|-----|----------|------|--------|-----|----------|------|------|
|         | 英寸      | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸     | 毫米  | 英寸       | 毫米   |      |
| FPT9617 | 0.187   | 4.7  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 | -    |
| FPT9618 | 0.215   | 5.5  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 | -    |
| FPT9619 | 0.236   | 6.0  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 | 1    |
| FPT9620 | 0.250   | 6.4  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 | 1    |
| FPT9406 | 0.313   | 8.0  | 0.250    | 6.4 | 1.500    | 38.1 | 0.038  | 1.0 | 0.655    | 16.6 | 1    |
| FPT9507 | 0.343   | 8.7  | 0.250    | 6.4 | 1.500    | 50.8 | 0.038  | 1.0 | 0.695    | 17.7 | 1    |
| FPT9430 | 0.375   | 9.5  | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.695    | 17.7 | 1    |
| FPT9422 | 0.406   | 10.3 | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.709    | 18.0 | 1    |
| FPT9431 | 0.437   | 11.1 | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.725    | 18.4 | 1    |
| FPT9435 | 0.460   | 11.7 | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.750    | 19.1 | 1    |
| FPT9432 | 0.500   | 12.7 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.752    | 19.1 | 1    |
| FPT9433 | 0.531   | 13.5 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.764    | 19.4 | 1    |
| FPT9362 | 0.562   | 14.3 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.613    | 15.6 | 1    |
| FPT9429 | 0.625   | 15.9 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.709    | 18.0 | 1    |
| FPT9621 | 0.655   | 16.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.812    | 20.6 | 1    |
| FPT9436 | 0.687   | 17.4 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.812    | 20.6 | 1    |
| FPT9622 | 0.750   | 19.1 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.826    | 21.0 | 1    |
| FPT9623 | 0.812   | 20.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.837    | 21.3 | 1    |
| FPT9624 | 0.843   | 21.4 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.846    | 21.5 | 1    |
| FPT9434 | 0.875   | 22.2 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.846    | 21.5 | 1    |
| FPT9438 | 0.937   | 23.8 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.853    | 21.7 | 1    |
| FPT9439 | 1.000   | 25.4 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 | 1    |
| FPT9625 | 1.062   | 27.0 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 | 1    |
| FPT9626 | 1.125   | 28.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 | 1    |
| FPT9627 | 1.250   | 31.8 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 | 1    |



**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 16


# SVC Series - Square Vinyl Caps

SVC 系列 - 方形浸塑盖


Friction Fit Caps & Plugs



- Stretches for a Snug Fit, but Won't Split, Tear or Shred  
弹性好，装配后贴合紧密，不会破损或撕裂
- Durable  
持久耐用
- Available Colors: ○●●●●●●●●●●  
可定制颜色




| 模具编号    | ( A ) 内宽 |      | ( B ) 最小内长 |     | ( C ) 最大内长 |      | ( D ) 壁厚 |     |
|---------|----------|------|------------|-----|------------|------|----------|-----|
|         | 英寸       | 毫米   | 英寸         | 毫米  | 英寸         | 毫米   | 英寸       | 毫米  |
| SVC9172 | 0.420    | 10.7 | 0.250      | 6.4 | 0.563      | 14.3 | 0.060    | 1.5 |
| SVC9413 | 0.500    | 12.7 | 0.250      | 6.4 | 3.500      | 88.9 | 0.060    | 1.5 |
| SVC9405 | 0.615    | 15.6 | 0.250      | 6.4 | 1.500      | 38.1 | 0.060    | 1.5 |
| SVC9241 | 0.687    | 17.4 | 0.250      | 6.4 | 0.875      | 22.2 | 0.060    | 1.5 |
| SVC9414 | 0.750    | 19.1 | 0.250      | 6.4 | 3.500      | 88.9 | 0.060    | 1.5 |
| SVC9585 | 0.875    | 22.2 | 0.250      | 6.4 | 3.500      | 88.9 | 0.060    | 1.5 |
| SVC9411 | 1.000    | 25.4 | 0.250      | 6.4 | 3.500      | 88.9 | 0.060    | 1.5 |
| SVC9415 | 1.250    | 31.8 | 0.250      | 6.4 | 3.500      | 88.9 | 0.065    | 1.7 |
| SVC9416 | 1.500    | 38.1 | 0.250      | 6.4 | 3.500      | 88.9 | 0.065    | 1.7 |
| SVC9412 | 2.000    | 50.8 | 0.250      | 6.4 | 3.500      | 88.9 | 0.065    | 1.7 |

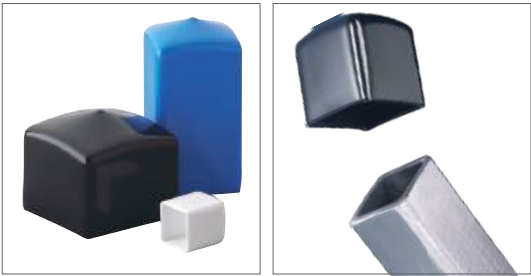


# Vinyl Hex Caps - VHX Series

六角形浸塑盖 - VHX 系列

Friction Fit Caps & Plugs



- Use as Thread Protector or End Cap  
可用作螺纹保护盖或端盖
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Available Colors: ○●●●●●●●●●●  
可定制颜色



| 模具编号    | 配六角尺寸 |      | (A) 内直径 |      | (B) 最小内长 |     | (C) 最大内长 |      | (D) 壁厚 |     |
|---------|-------|------|---------|------|----------|-----|----------|------|--------|-----|
|         | 英寸    | 毫米   | 英寸      | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸     | 毫米  |
| VHX9184 | 7/16  | 11.0 | 0.438   | 11.1 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| VHX9186 | 5/8   | 16.0 | 0.625   | 15.9 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| VHX9187 | 3/4   | 19.0 | 0.750   | 19.1 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |




# MCP Series - Vinyl Insertion Plugs

## MCP 系列 - 浸塑塞

Friction Fit Caps & Plugs



- Wide Flange for Easy Removal  
宽缘易于拔除
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Available in High Temp Formula *refer to page 118*  
可适用于高温测试请参考第118页
- Stocked Material: Red Vinyl  
材质：红色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色



| 模具编号    | 配公制螺纹    | 配标准螺纹                  | 配NPT螺纹 | ( A ) 帽檐外径 |      |
|---------|----------|------------------------|--------|------------|------|
|         |          |                        |        | 英寸         | 毫米   |
| MCP9252 | M6       | 1/4                    | ---    | 0.400      | 10.2 |
| MCP9253 | M8       | 5/16                   | ---    | 0.460      | 11.7 |
| MCP9254 | M10      | 3/8                    | 1/8    | 0.495      | 12.6 |
| MCP9255 | M12      | 7/16                   | ---    | 0.550      | 14.0 |
| MCP9256 | M14      | 1/2                    | 1/4    | 0.620      | 15.7 |
| MCP9257 | M16      | 9/16                   | ---    | 0.683      | 17.3 |
| MCP9258 | M18      | 5/8                    | 3/8    | 0.807      | 20.5 |
| MCP9259 | M20      | 3/4                    | 1/2    | 0.961      | 24.4 |
| MCP9260 | M22, M24 | 7/8                    | ---    | 1.058      | 26.9 |
| MCP9261 | M26, M28 | 1-1/16                 | 3/4    | 1.245      | 31.6 |
| MCP9262 | M32, M43 | 1-1/8 - 1-3/16 - 1-1/4 | 1      | 1.495      | 38.0 |

材料规格请参考第139页  
耐高温应用请参考第118页






# Vinyl Corner Covers - VCC Series

浸塑尖角保护盖 -VCC 系列


Friction Fit Caps & Plugs



- Prevents Chipping & Breakage During Transport & Storage  
防止存储及运输途中破损破裂
- Snug Fit, but Easily Removed  
紧密贴合，易拔除
- Stocked Material: See Chart Below for Stocked Vinyl Colors  
材质：黑色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色



| 模具型号    | 配玻璃厚度 |       | (A) 内宽 |      | (B) 最小边长 |      | (C) 最大边长 |      | (D) 壁厚 |     | 库存颜色   | 库存长度 |
|---------|-------|-------|--------|------|----------|------|----------|------|--------|-----|--------|------|
|         | 英寸    | 毫米    | 英寸     | 毫米   | 英寸       | 毫米   | 英寸       | 毫米   | 英寸     | 毫米  |        |      |
| VCC9340 | 1/16  | 1.59  | 0.062  | 1.6  | 0.500    | 12.7 | 1.500    | 38.1 | 0.055  | 1.4 | ---    | ---  |
| VCC9482 | 1/8   | 3.18  | 0.125  | 3.2  | 0.500    | 12.7 | 1.750    | 44.5 | 0.060  | 1.5 | YELLOW | 1.5  |
| VCC9483 | 1/4   | 6.35  | 0.250  | 6.4  | 0.500    | 12.7 | 2.000    | 50.8 | 0.060  | 1.5 | BLACK  | 2    |
| VCC9460 | 3/8   | 9.53  | 0.375  | 9.5  | 0.500    | 12.7 | 2.500    | 63.5 | 0.075  | 1.9 | BLUE   | 2    |
| VCC9459 | 1/2   | 12.7  | 0.500  | 12.7 | 0.500    | 12.7 | 2.500    | 63.5 | 0.075  | 1.9 | RED    | 2    |
| VCC9489 | 3/4   | 19.05 | 0.750  | 19.1 | 0.500    | 12.7 | 2.500    | 63.5 | 0.060  | 1.5 | BLACK  | 2    |




**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 20

### Friction Fit Caps & Plugs



- 可定制颜色


**MOCAP**

| 产品型号       | 匹配外径       | (B) 内长 |      |
|------------|------------|--------|------|
|            |            | 英寸     | 毫米   |
| S.687-12S  | 11/16      | 0.750  | 19.1 |
| S.687-14S  | 11/16      | 0.875  | 22.2 |
| S.720-14S  | 23/32      | 0.875  | 22.2 |
| S.720-16S  | 23/32      | 1.000  | 25.4 |
| S.720-22S  | 23/32      | 1.375  | 34.9 |
| S.750-6S   | 3/4        | 0.375  | 9.5  |
| S.750-14S  | 3/4        | 0.875  | 22.2 |
| S.750-16S  | 3/4        | 1.000  | 25.4 |
| S.750-40S  | 3/4        | 2.500  | 63.5 |
| S.787-16S  | M20        | 1.000  | 25.4 |
| S.813-6S   | 13/16      | 0.375  | 9.5  |
| S.813-10S  | 13/16      | 0.625  | 15.9 |
| S.813-14S  | 13/16      | 0.875  | 22.2 |
| S.866-12S  | M22        | 0.750  | 19.1 |
| S.875-8S   | 7/8        | 0.500  | 12.7 |
| S.875-14S  | 7/8        | 0.875  | 22.2 |
| S.875-28S  | 7/8        | 1.750  | 44.5 |
| S.906-12S  | 29/32, M23 | 0.750  | 19.1 |
| S.906-14S  | 29/32, M23 | 0.875  | 22.2 |
| S.937-16S  | 15/16      | 1.000  | 25.4 |
| S.937-24S  | 15/16      | 1.500  | 38.1 |
| S1.000-6S  | 1          | 0.375  | 9.5  |
| S1.000-8S  | 1          | 0.500  | 12.7 |
| S1.000-10S | 1          | 0.625  | 15.9 |
| S1.000-12S | 1          | 0.750  | 19.1 |
| S1.000-16S | 1          | 1.000  | 25.4 |
| S1.000-28S | 1          | 1.750  | 44.5 |
| S1.063-14S | 1-1/16     | 0.875  | 22.2 |
| S1.063-16S | 1-1/16     | 1.000  | 25.4 |
| S1.125-14S | 1-1/8      | 0.875  | 22.2 |
| S1.125-16S | 1-1/8      | 1.000  | 25.4 |
| S1.125-21S | 1-1/8      | 1.313  | 33.4 |
| S1.187-16S | 1-3/16     | 1.000  | 25.4 |
| S1.250-8S  | 1-1/4      | 0.500  | 12.7 |
| S1.250-10S | 1-1/4      | 0.625  | 15.9 |
| S1.250-14S | 1-1/4      | 0.875  | 22.2 |
| S1.250-16S | 1-1/4      | 1.000  | 25.4 |
| S1.250-24S | 1-1/4      | 1.500  | 38.1 |
| S1.250-28S | 1-1/4      | 1.750  | 44.5 |
| S1.313-12S | 1-5/16     | 0.750  | 19.1 |
| S1.313-14S | 1-5/16     | 0.875  | 22.2 |
| S1.313-16S | 1-5/16     | 1.000  | 25.4 |
| S1.375-10S | 1-3/8      | 0.625  | 15.9 |
| S1.375-14S | 1-3/8      | 0.875  | 22.2 |
| S1.375-16S | 1-3/8      | 1.000  | 25.4 |
| S1.375-24S | 1-3/8      | 1.500  | 38.1 |
| S1.375-28S | 1-3/8      | 1.750  | 44.5 |
| S1.437-14S | 1-7/16     | 0.875  | 22.2 |
| S1.500-14S | 1-1/2      | 0.875  | 22.2 |
| S1.500-16S | 1-1/2      | 1.000  | 25.4 |
| S1.500-28S | 1-1/2      | 1.750  | 44.5 |
| S1.563-16S | 1-9/16     | 1.000  | 25.4 |
| S1.625-16S | 1-5/8      | 1.000  | 25.4 |
| S1.625-20S | 1-5/8      | 1.250  | 31.8 |
| S1.719-16S | 1-23/32    | 1.000  | 25.4 |
| S1.750-14S | 1-3/4      | 0.875  | 22.2 |
| S1.750-16S | 1-3/4      | 1.000  | 25.4 |
| S1.844-20S | 1-27/32    | 1.250  | 31.8 |




**MOCAP**

### Friction Fit Caps & Plugs



- Designed to Cap Outside Diameters  
用于遮盖保护产品外边缘
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings  
紧密贴合螺纹及非螺纹管子、轴承和接头
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色




| 产品型号       | 匹配外径    | (B) 内长 |      |
|------------|---------|--------|------|
|            |         | 英寸     | 毫米   |
| S1.875-14S | 1-7/8   | 0.875  | 22.2 |
| S1.875-16S | 1-7/8   | 1.000  | 25.4 |
| S2.000-14S | 2       | 0.875  | 22.2 |
| S2.000-16S | 2       | 1.000  | 25.4 |
| S2.000-24S | 2       | 1.500  | 38.1 |
| S2.125-8S  | 2-1/8   | 0.500  | 12.7 |
| S2.125-14S | 2-1/8   | 0.875  | 22.2 |
| S2.125-16S | 2-1/8   | 1.000  | 25.4 |
| S2.250-14S | 2-1/4   | 0.875  | 22.2 |
| S2.250-16S | 2-1/4   | 1.000  | 25.4 |
| S2.250-20S | 2-1/4   | 1.250  | 31.8 |
| S2.375-14S | 2-3/8   | 0.875  | 22.2 |
| S2.500-14S | 2-1/2   | 0.875  | 22.2 |
| S2.563-6S  | 2-9/16  | 0.375  | 9.5  |
| S2.563-16S | 2-9/16  | 1.000  | 25.4 |
| S2.609-16S | 2-39/64 | 1.000  | 25.4 |
| S2.625-16S | 2-5/8   | 1.000  | 25.4 |
| S2.750-16S | 2-3/4   | 1.000  | 25.4 |
| S3.000-16S | 3       | 1.000  | 25.4 |
| S3.062-32S | 3-1/16  | 2.000  | 50.8 |
| S3.125-22S | 3-1/8   | 1.375  | 34.9 |
| S3.250-16S | 3-1/4   | 1.000  | 25.4 |
| S3.250-30S | 3-1/4   | 1.875  | 47.6 |
| S3.313-16S | 3-5/16  | 1.000  | 25.4 |
| S3.437-16S | 3-7/16  | 1.000  | 25.4 |
| S3.500-16S | 3-1/2   | 1.000  | 25.4 |
| S3.500-22S | 3-1/2   | 1.375  | 34.9 |
| S3.531-32S | 3-1/16  | 2.000  | 50.8 |
| S3.625-22S | 3-5/8   | 1.375  | 34.9 |
| S3.740-16S | M95     | 1.000  | 25.4 |
| S3.750-22S | 3-3/4   | 1.375  | 34.9 |
| S3.990-16S | 3.99    | 1.000  | 25.4 |
| S4.000-18S | 4       | 1.125  | 28.6 |
| S4.000-22S | 4       | 1.375  | 34.9 |
| S4.115-16S | 4.115   | 1.000  | 25.4 |
| S4.125-24S | 4-1/8   | 1.500  | 38.1 |
| S4.331-22S | M110    | 1.375  | 34.9 |
| S4.500-23S | 4-1/2   | 1.437  | 36.5 |
| S4.813-10S | 4-13/16 | 0.625  | 15.9 |
| S4.875-16S | 4-7/8   | 1.000  | 25.4 |
| S5.125-26S | 5-1/8   | 1.625  | 41.3 |
| S5.250-29S | 5-1/4   | 1.812  | 46.0 |



# Knurled Straight Caps for Imperial Parts - SK Series

英制螺纹带滚花边直身盖 - SK 系列

Friction Fit Caps & Plugs



- Designed to Cap Outside Diameters  
用于遮盖保护产品外边缘
- Knurled Flange for Additional Grip  
滚花法兰边，方便抓握
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings  
紧密贴合螺纹及非螺纹管子、轴承和接头
- Stocked Material: Natural Low-Density Polyethylene (LDPE),  
and Yellow Thermoplastic Elastomer (TPE)  
材质：透明色低密度聚乙烯及黄色TPE材质
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号      | 匹配外径     | (B) 内长 |      |
|-----------|----------|--------|------|
|           |          | 英寸     | 毫米   |
| S.078-8K  | 5/64, M2 | 0.500  | 12.7 |
| S.094-10K | 3/32     | 0.625  | 15.9 |
| S.125-10K | 1/8      | 0.625  | 15.9 |
| S.125-12K | 1/8      | 0.750  | 19.1 |
| S.156-10K | 5/32, M4 | 0.625  | 15.9 |
| S.172-10K | 11/64    | 0.625  | 15.9 |
| S.187-6K  | 3/16     | 0.375  | 9.5  |
| S.187-8K  | 3/16     | 0.500  | 12.7 |
| S.187-10K | 3/16     | 0.625  | 15.9 |
| S.187-16K | 3/16     | 1.000  | 25.4 |
| S.203-10K | 13/64    | 0.625  | 15.9 |
| S.219-12K | 7/32     | 0.750  | 19.1 |
| S.250-4K  | 1/4      | 0.250  | 6.4  |
| S.250-6K  | 1/4      | 0.375  | 9.5  |
| S.250-8K  | 1/4      | 0.500  | 12.7 |
| S.250-14K | 1/4      | 0.875  | 22.2 |
| S.250-16K | 1/4      | 1.000  | 25.4 |
| S.281-8K  | 9/32     | 0.500  | 12.7 |
| S.281-14K | 9/32     | 0.875  | 22.2 |
| S.295-14K | M7.5     | 0.875  | 22.2 |
| S.313-6K  | 5/16     | 0.375  | 9.5  |
| S.313-14K | 5/16     | 0.875  | 22.2 |
| S.375-8K  | 3/8      | 0.500  | 12.7 |
| S.375-12K | 3/8      | 0.750  | 19.1 |
| S.375-14K | 3/8      | 0.875  | 22.2 |
| S.375-28K | 3/8      | 1.750  | 44.5 |
| S.422-20K | 27/64    | 1.250  | 31.8 |
| S.437-4K  | 7/16     | 0.250  | 6.4  |
| S.437-8K  | 7/16     | 0.500  | 12.7 |
| S.437-10K | 7/16     | 0.625  | 15.9 |
| S.437-14K | 7/16     | 0.875  | 22.2 |
| S.437-24K | 7/16     | 1.500  | 38.1 |
| S.469-12K | 15/32    | 0.750  | 19.1 |
| S.500-7K  | 1/2      | 0.437  | 11.1 |
| S.500-8K  | 1/2      | 0.500  | 12.7 |
| S.500-14K | 1/2      | 0.875  | 22.2 |
| S.500-16K | 1/2      | 1.000  | 25.4 |
| S.563-7K  | 9/16     | 0.437  | 11.1 |
| S.563-9K  | 9/16     | 0.562  | 14.3 |
| S.563-10K | 9/16     | 0.625  | 15.9 |
| S.563-14K | 9/16     | 0.875  | 22.2 |





**MOCAP**


Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 24



## Friction Fit Caps & Plugs

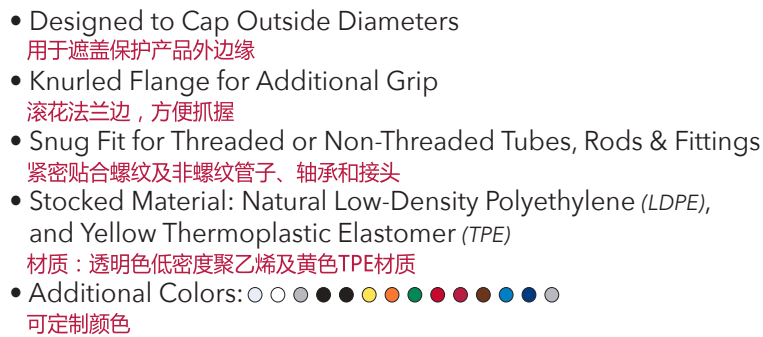



- Designed to Cap Outside Diameters  
用于遮盖保护产品外边缘
- Knurled Flange for Additional Grip  
滚花法兰边，方便抓握
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings  
紧密贴合螺纹及非螺纹管子、轴承和接头
- Stocked Material: Natural Low-Density Polyethylene (LDPE),  
and Yellow Thermoplastic Elastomer (TPE)  
材质：透明色低密度聚乙烯及黄色TPE材质
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色




| 产品型号       | 匹配外径    | ( B ) 内长 |      |
|------------|---------|----------|------|
|            |         | 英寸       | 毫米   |
| S1.125-14K | 1-1/8   | 0.875    | 22.2 |
| S1.125-16K | 1-1/8   | 1.000    | 25.4 |
| S1.125-21K | 1-1/8   | 1.313    | 33.4 |
| S1.187-16K | 1-3/16  | 1.000    | 25.4 |
| S1.250-8K  | 1-1/4   | 0.500    | 12.7 |
| S1.250-10K | 1-1/4   | 0.625    | 15.9 |
| S1.250-14K | 1-1/4   | 0.875    | 22.2 |
| S1.250-16K | 1-1/4   | 1.000    | 25.4 |
| S1.250-24K | 1-1/4   | 1.500    | 38.1 |
| S1.250-28K | 1-1/4   | 1.750    | 44.5 |
| S1.313-12K | 1-5/16  | 0.750    | 19.1 |
| S1.313-14K | 1-5/16  | 0.875    | 22.2 |
| S1.313-16K | 1-5/16  | 1.000    | 25.4 |
| S1.375-10K | 1-3/8   | 0.625    | 15.9 |
| S1.375-14K | 1-3/8   | 0.875    | 22.2 |
| S1.375-16K | 1-3/8   | 1.000    | 25.4 |
| S1.375-24K | 1-3/8   | 1.500    | 38.1 |
| S1.375-28K | 1-3/8   | 1.750    | 44.5 |
| S1.437-14K | 1-7/16  | 0.875    | 22.2 |
| S1.500-14K | 1-1/2   | 0.875    | 22.2 |
| S1.500-16K | 1-1/2   | 1.000    | 25.4 |
| S1.500-28K | 1-1/2   | 1.750    | 44.5 |
| S1.563-16K | 1-9/16  | 1.000    | 25.4 |
| S1.625-16K | 1-5/8   | 1.000    | 25.4 |
| S1.625-20K | 1-5/8   | 1.250    | 31.8 |
| S1.719-16K | 1-23/32 | 1.000    | 25.4 |
| S1.750-14K | 1-3/4   | 0.875    | 22.2 |
| S1.750-16K | 1-3/4   | 1.000    | 25.4 |
| S1.844-20K | 1-27/32 | 1.250    | 31.8 |
| S1.875-14K | 1-7/8   | 0.875    | 22.2 |
| S1.875-16K | 1-7/8   | 1.000    | 25.4 |
| S2.000-14K | 2       | 0.875    | 22.2 |
| S2.000-16K | 2       | 1.000    | 25.4 |
| S2.000-24K | 2       | 1.500    | 38.1 |




### Friction Fit Caps & Plugs






- Designed to Cap Outside Diameters  
用于遮盖保护产品外边缘
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings  
紧密贴合螺纹及非螺纹管子、轴承和接头
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号     | 匹配外径 | (B) 内长 |      |
|----------|------|--------|------|
|          |      | 英寸     | 毫米   |
| SM16X08S | M16  | 0.315  | 8.0  |
| SM16X15S | M16  | 0.591  | 15.0 |
| SM16X20S | M16  | 0.787  | 20.0 |
| SM16X25S | M16  | 0.984  | 25.0 |
| SM18X15S | M18  | 0.591  | 15.0 |
| SM18X20S | M18  | 0.787  | 20.0 |
| SM18X26S | M18  | 1.024  | 26.0 |
| SM20X14S | M20  | 0.551  | 14.0 |
| SM20X20S | M20  | 0.787  | 20.0 |
| SM22X18S | M22  | 0.709  | 18.0 |
| SM22X30S | M22  | 1.181  | 30.0 |
| SM24X18S | M24  | 0.709  | 18.0 |
| SM27X20S | M27  | 0.787  | 20.0 |
| SM28X20S | M28  | 0.787  | 20.0 |
| SM30X22S | M30  | 0.866  | 22.0 |
| SM32X22S | M32  | 0.866  | 22.0 |
| SM33X25S | M33  | 0.984  | 25.0 |
| SM35X25S | M35  | 0.984  | 25.0 |
| SM36X25S | M36  | 0.984  | 25.0 |
| SM38X25S | M38  | 0.984  | 25.0 |
| SM39X27S | M39  | 1.063  | 27.0 |
| SM40X27S | M40  | 1.063  | 27.0 |
| SM42X27S | M42  | 1.063  | 27.0 |
| SM45X30S | M45  | 1.181  | 30.0 |
| SM48X30S | M48  | 1.181  | 30.0 |
| SM50X30S | M50  | 1.181  | 30.0 |



## Friction Fit Caps & Plugs





- 可定制颜色




### Friction Fit Caps & Plugs



### Friction Fit Caps & Plugs




| 产品型号     | 配公制螺纹 | ( A ) 内径 |      | ( B ) 内长 |      | ( C ) 帽檐直径 |      |
|----------|-------|----------|------|----------|------|------------|------|
|          |       | 英寸       | 毫米   | 英寸       | 毫米   | 英寸         | 毫米   |
| FCM-5    | M5    | 0.193    | 4.9  | 0.591    | 15.0 | 0.492      | 12.5 |
| FCM-6    | M6    | 0.232    | 5.9  | 0.787    | 20.0 | 0.532      | 13.5 |
| FCM-8    | M8    | 0.309    | 7.8  | 0.787    | 20.0 | 0.610      | 15.5 |
| FCM-10   | M10   | 0.384    | 9.8  | 0.323    | 8.2  | 0.689      | 17.5 |
| FCM-12   | M12   | 0.463    | 11.8 | 0.470    | 11.9 | 0.768      | 19.5 |
| FCM-14   | M14   | 0.540    | 13.7 | 0.470    | 11.9 | 0.846      | 21.5 |
| FCM-16   | M16   | 0.617    | 15.7 | 0.470    | 11.9 | 0.925      | 23.5 |
| FCM-18   | M18   | 0.696    | 17.7 | 0.470    | 11.9 | 1.004      | 25.5 |
| FCM-20   | M20   | 0.774    | 19.7 | 0.553    | 14.1 | 1.083      | 27.5 |
| FCM-22   | M22   | 0.855    | 21.7 | 0.553    | 14.1 | 1.161      | 29.5 |
| FCS1.062 | M27   | 1.051    | 26.7 | 0.750    | 19.1 | 1.310      | 33.3 |
| FCS1.187 | M30   | 1.175    | 29.8 | 0.750    | 19.1 | 1.440      | 36.6 |
| FCM-33   | M33   | 1.285    | 32.6 | 0.689    | 17.5 | 1.594      | 40.5 |



## FCBN 系列 - BSP & NPT 螺纹凸缘盖

### Friction Fit Caps & Plugs

- Flanged for Easy Removal  
翻边设计，方便移除
- Use as Thread Protector or End Cap  
可用作螺纹保护帽或端盖
- Stocked Material: Natural Low-Density Polyethylene (LDPE)  
库存材质：透明色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号     | 配NPT<br>螺纹 | 配英制<br>螺纹 | ( A ) 大内径 |      | ( B ) 小内径 |      | ( C ) 内长 |      | ( D ) 帽檐直径 |      |
|----------|------------|-----------|-----------|------|-----------|------|----------|------|------------|------|
|          |            |           | 英寸        | 毫米   | 英寸        | 毫米   | 英寸       | 毫米   | 英寸         | 毫米   |
| FCB0125  | ---        | 1/8       | 0.389     | 9.9  | 0.344     | 8.7  | 0.380    | 9.7  | 0.650      | 16.5 |
| FCN0125  | 1/8        | ---       | 0.399     | 10.1 | 0.383     | 9.7  | 0.380    | 9.7  | 0.660      | 16.8 |
| FCBN0250 | 1/4        | 1/4       | 0.533     | 13.5 | 0.510     | 12.9 | 0.530    | 13.5 | 0.810      | 20.6 |
| FCB0375  | ---        | 3/8       | 0.661     | 16.8 | 0.616     | 15.6 | 0.530    | 13.5 | 0.930      | 23.6 |
| FCN0375  | 3/8        | ---       | 0.669     | 17.0 | 0.644     | 16.4 | 0.530    | 13.5 | 0.940      | 23.9 |
| FCBN0500 | 1/2        | 1/2       | 0.833     | 21.2 | 0.800     | 20.3 | 0.720    | 18.3 | 1.090      | 27.7 |
| FCBN0750 | 3/4        | 3/4       | 1.045     | 26.5 | 1.011     | 25.7 | 0.750    | 19.1 | 1.310      | 33.3 |
| FCBN1000 | 1          | 1         | 1.310     | 33.3 | 1.267     | 32.2 | 0.930    | 23.6 | 1.560      | 39.6 |
| FCBN1250 | 1-1/4      | 1-1/4     | 1.655     | 42.0 | 1.611     | 40.9 | 0.970    | 24.6 | 1.940      | 49.3 |
| FCB1500  | ---        | 1-1/2     | 1.884     | 47.9 | 1.839     | 46.7 | 0.970    | 24.6 | 2.150      | 54.6 |
| FCBN1500 | 1-1/2      | 1-1/2     | 1.893     | 48.1 | 1.848     | 46.9 | 0.970    | 24.6 | 2.160      | 54.9 |
| FCB2000  | ---        | 2         | 2.350     | 59.7 | 2.305     | 58.5 | 1.030    | 26.2 | 2.610      | 66.3 |
| FCN2000  | 2          | ---       | 2.370     | 60.2 | 2.323     | 59.0 | 1.030    | 26.2 | 2.620      | 66.5 |



### Friction Fit Caps & Plugs




- Protect Straight Threads with or without O-Rings  
保护带和不带O型圈的直螺纹
- Flanged for Easy Removal  
翻边设计，方便移除
- Use as Thread Protector or End Cap  
可用作螺纹保护帽或端盖
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色

## TCS 系列 - 英制直螺纹带耳易拉盖

### Friction Fit Caps & Plugs



- Secure Fit Until Removed by Pulling Tab and Breaking Seal  
贴合紧密，需移除时手持拉环，一拉即开
- Use as Shipping Cap, End Cap or Thread Protector  
用作运输保护帽、管端盖帽或螺纹保护帽
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色




| 产品型号    | 配标准螺纹       | ( A ) 内径 |      | ( B ) 内长 |      |
|---------|-------------|----------|------|----------|------|
|         |             | 英寸       | 毫米   | 英寸       | 毫米   |
| TCS0375 | 3/8 - 24    | 0.371    | 9.4  | 0.440    | 11.2 |
| TCS0437 | 7/16 - 20   | 0.428    | 10.9 | 0.440    | 11.2 |
| TCS0500 | 1/2 - 20    | 0.495    | 12.6 | 0.460    | 11.7 |
| TCS0562 | 9/16 - 20   | 0.559    | 14.2 | 0.480    | 12.2 |
| TCS0625 | 5/8 - 18    | 0.615    | 15.6 | 0.480    | 12.2 |
| TCS0687 | 11/16 - 16  | 0.680    | 17.3 | 0.480    | 12.2 |
| TCS0750 | 3/4 - 16    | 0.740    | 18.8 | 0.560    | 14.2 |
| TCS0812 | 13/16 - 12  | 0.803    | 20.4 | 0.640    | 16.3 |
| TCS0875 | 7/8 - 14    | 0.865    | 22.0 | 0.700    | 17.8 |
| TCS1000 | 1 - 14      | 0.993    | 25.2 | 0.650    | 16.5 |
| TCS1062 | 1-1/16 - 12 | 1.053    | 26.7 | 0.830    | 21.1 |
| TCS1187 | 1-3/16 - 12 | 1.180    | 30.0 | 0.750    | 19.1 |
| TCS1312 | 1-5/16 - 12 | 1.305    | 33.1 | 0.750    | 19.1 |
| TCS1437 | 1-7/16 - 12 | 1.430    | 36.3 | 0.750    | 19.1 |



### Friction Fit Caps & Plugs




| 产品型号  | 配公制螺纹 | ( A ) 内径 |      | ( B ) 内长 |      |
|-------|-------|----------|------|----------|------|
|       |       | 英寸       | 毫米   | 英寸       | 毫米   |
| TCM12 | M12   | 0.472    | 12.0 | 0.472    | 12.0 |
| TCM14 | M14   | 0.551    | 14.0 | 0.551    | 14.0 |
| TCM16 | M16   | 0.630    | 16.0 | 0.638    | 16.2 |
| TCM18 | M18   | 0.709    | 18.0 | 0.732    | 18.6 |
| TCM20 | M20   | 0.787    | 20.0 | 0.787    | 20.0 |
| TCM22 | M22   | 0.866    | 22.0 | 0.528    | 13.4 |





### Friction Fit Caps & Plugs



### Friction Fit Caps & Plugs



- 可定制颜色




- Additional Colors: 

## KTP 系列 - K 型铜管锥状塑料堵头

### Friction Fit Caps & Plugs



- Reinforced Cross Bracing for Secure Fit  
加固交叉连接，安装牢固
- Features Durable Pull-Tab for Easy Removal  
拉持持久耐用，移除方便
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号    | 配管尺寸  | 配管外径  | (A)小外径 |      | (B)大外径 |      | (C)厚度 |      | (D)帽檐直径 |        | (E)手柄宽度 |      |
|---------|-------|-------|--------|------|--------|------|-------|------|---------|--------|---------|------|
|         |       |       | 英寸     | 毫米   | 英寸     | 毫米   | 英寸    | 毫米   | 英寸      | 毫米     | 英寸      | 毫米   |
| KTP0375 | 1/4   | 3/8   | 0.302  | 7.7  | 0.312  | 7.9  | 0.380 | 9.7  | 0.380   | 9.700  | 0.190   | 4.8  |
| KTP0500 | 3/8   | 1/2   | 0.394  | 10.0 | 0.414  | 10.5 | 0.380 | 9.7  | 0.500   | 12.700 | 0.250   | 6.4  |
| KTP0625 | 1/2   | 5/8   | 0.523  | 13.3 | 0.543  | 13.8 | 0.500 | 12.7 | 0.630   | 16.000 | 0.380   | 9.7  |
| KTP0750 | 5/8   | 3/4   | 0.646  | 16.4 | 0.676  | 17.2 | 0.620 | 15.7 | 0.750   | 19.100 | 0.500   | 12.7 |
| KTP0875 | 3/4   | 7/8   | 0.740  | 18.8 | 0.770  | 19.6 | 0.750 | 19.1 | 0.880   | 22.400 | 0.500   | 12.7 |
| KTP1125 | 1     | 1-1/8 | 0.990  | 25.1 | 1.020  | 25.9 | 0.880 | 22.4 | 1.120   | 28.400 | 0.730   | 18.5 |
| KTP1375 | 1-1/4 | 1-3/8 | 1.240  | 31.5 | 1.280  | 32.5 | 1.000 | 25.4 | 1.380   | 35.100 | 1.000   | 25.4 |
| KTP1625 | 1-1/2 | 1-5/8 | 1.477  | 37.5 | 1.517  | 38.5 | 1.000 | 25.4 | 1.620   | 41.100 | 1.000   | 25.4 |
| KTP2125 | 2     | 2-1/8 | 1.960  | 49.8 | 2.010  | 51.1 | 1.000 | 25.4 | 2.130   | 54.100 | 1.450   | 36.8 |
| KTP2625 | 2-1/2 | 2-5/8 | 2.420  | 61.5 | 2.470  | 62.7 | 1.000 | 25.4 | 2.630   | 66.800 | 1.450   | 36.8 |
| KTP3125 | 3     | 3-1/8 | 2.892  | 73.5 | 2.952  | 75.0 | 1.000 | 25.4 | 3.130   | 79.500 | 1.450   | 36.8 |



### Friction Fit Caps & Plugs



- 可定制颜色






## GKP 系列 - L 及 M 型铜管通用塑料堵头

### Friction Fit Caps & Plugs



- Designed for Flange to Fit Flush with Outside Wall of Tube  
凸缘设计保持与管外壁齐平无缝
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号    |     | 配管尺寸 | 配管外径  | (A)小外径 |       | (B)大外径 |       | (C)外直径 |       | (D)厚度 |       | (E)高度 |       | (F)内径 |    |
|---------|-----|------|-------|--------|-------|--------|-------|--------|-------|-------|-------|-------|-------|-------|----|
|         |     |      |       | 英寸     | 毫米    | 英寸     | 毫米    | 英寸     | 毫米    | 英寸    | 毫米    | 英寸    | 毫米    | 英寸    | 毫米 |
| GKP0188 | --- | 3/16 | 0.105 | 2.7    | 0.138 | 3.5    | 0.190 | 4.8    | 0.190 | 4.8   | 0.310 | 7.9   | 0.042 | 1.1   |    |
| GKP0250 | --- | 1/4  | 0.160 | 4.1    | 0.202 | 5.1    | 0.240 | 6.1    | 0.140 | 3.6   | 0.380 | 9.7   | 0.097 | 2.5   |    |
| GKP0313 | --- | 5/16 | 0.227 | 5.8    | 0.272 | 6.9    | 0.310 | 7.9    | 0.140 | 3.6   | 0.380 | 9.7   | 0.164 | 4.2   |    |
| GKP0375 | 1/4 | 3/8  | 0.290 | 7.4    | 0.340 | 8.6    | 0.370 | 9.4    | 0.160 | 4.1   | 0.380 | 9.7   | 0.227 | 5.8   |    |
| GKP0500 | 3/8 | 1/2  | 0.411 | 10.4   | 0.466 | 11.8   | 0.500 | 12.7   | 0.160 | 4.1   | 0.380 | 9.7   | 0.348 | 8.8   |    |
| GKP0625 | 1/2 | 5/8  | 0.530 | 13.5   | 0.587 | 14.9   | 0.620 | 15.7   | 0.190 | 4.8   | 0.560 | 14.2  | 0.467 | 11.9  |    |
| GKP0750 | 5/8 | 3/4  | 0.650 | 16.5   | 0.712 | 18.1   | 0.750 | 19.1   | 0.190 | 4.8   | 0.560 | 14.2  | 0.587 | 14.9  |    |



### Friction Fit Caps & Plugs



- 可定制颜色





### Friction Fit Caps & Plugs




- 可定制颜色

### Friction Fit Caps & Plugs

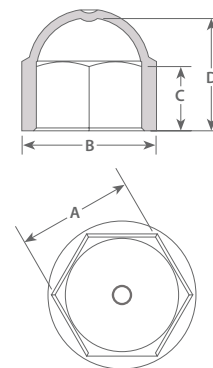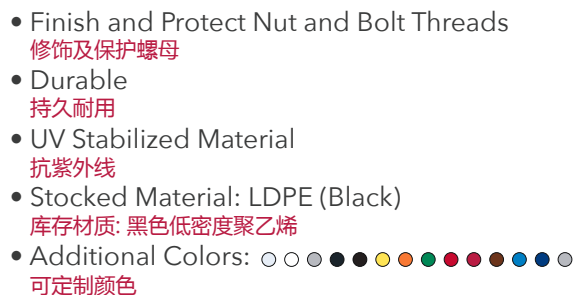

### Friction Fit Caps & Plugs



- General Purpose Outside Fitting Caps  
用于遮盖保护产品外边缘
- Durable  
持久耐用
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实，耐磨损，经久耐用
- Stocked Material: LDPE (Black)  
库存材质: 黑色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号        | 匹配外径  | 英制或公制 | 顶部形状 | ( A ) 内径 |      | ( B ) 内长 |      |
|-------------|-------|-------|------|----------|------|----------|------|
|             |       |       |      | 英寸       | 毫米   | 英寸       | 毫米   |
| RFC.187-7   | 3/16  | 英制    | 圆头   | 0.182    | 4.6  | 0.437    | 11.1 |
| RFC.250-7   | 1/4   | 英制    | 圆头   | 0.245    | 6.2  | 0.437    | 11.1 |
| RFC.313-7   | 5/16  | 英制    | 圆头   | 0.308    | 7.8  | 0.437    | 11.1 |
| RFC.375-7   | 3/8   | 英制    | 圆头   | 0.37     | 9.4  | 0.437    | 11.1 |
| RFC.437-8   | 7/16  | 英制    | 圆头   | 0.431    | 10.9 | 0.500    | 12.7 |
| RFC.500-8   | 1/2   | 英制    | 圆头   | 0.494    | 12.5 | 0.500    | 12.7 |
| RFC.625-8   | 5/8   | 英制    | 圆头   | 0.618    | 15.7 | 0.500    | 12.7 |
| RFC.750-8   | 3/4   | 英制    | 平头   | 0.742    | 18.8 | 0.500    | 12.7 |
| RFC.750-11  | 3/4   | 英制    | 平头   | 0.742    | 18.8 | 0.687    | 17.4 |
| RFC.875-8   | 7/8   | 英制    | 平头   | 0.865    | 22.0 | 0.500    | 12.7 |
| RFC.875-11  | 7/8   | 英制    | 平头   | 0.865    | 22.0 | 0.687    | 17.4 |
| RFC1.000-8  | 1     | 英制    | 平头   | 0.988    | 25.1 | 0.500    | 12.7 |
| RFC1.000-12 | 1     | 英制    | 平头   | 0.988    | 25.1 | 0.750    | 19.1 |
| RFC1.125-10 | 1-1/8 | 英制    | 平头   | 1.113    | 28.3 | 0.625    | 15.9 |
| RFC1.125-15 | 1-1/8 | 英制    | 平头   | 1.113    | 28.3 | 0.937    | 23.8 |
| RFC1.250-10 | 1-1/4 | 英制    | 平头   | 1.238    | 31.4 | 0.625    | 15.9 |
| RFC1.250-15 | 1-1/4 | 英制    | 平头   | 1.238    | 31.4 | 0.937    | 23.8 |
| RFC1.500-15 | 1-1/2 | 英制    | 平头   | 1.485    | 37.7 | 0.937    | 23.8 |
| RFC1.750-16 | 1-3/4 | 英制    | 平头   | 1.735    | 44.1 | 1.000    | 25.4 |



**MOCAP**

### Friction Fit Caps & Plugs





### Friction Fit Caps & Plugs



- 可定制颜色

A close-up photograph showing a vertical metal post connected to a horizontal rail of a chain-link fence. The connection is made using a metal sleeve or coupling. The chain-link mesh is visible on both sides of the post.




微信号 13802665016 | 4006-4006-49 | [www.mocap.com.cn](http://www.mocap.com.cn) 50


### Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability & Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号    |       | ( A ) 配管外径 |  | 配管壁厚 | ( B ) 高度 |      |
|---------|-------|------------|--|------|----------|------|
| 英寸      | 毫米    |            |  | 毫米   | 英寸       | 毫米   |
| RN10MA  | 0.394 | 10.0       |  | 1-2  | 0.433    | 11.0 |
| RN12MA  | 0.472 | 12.0       |  | 1-2  | 0.433    | 11.0 |
| RN13MA  | 0.512 | 13.0       |  | 1-2  | 0.433    | 11.0 |
| RN14MA  | 0.551 | 14.0       |  | 1-2  | 0.433    | 11.0 |
| RN15MA  | 0.591 | 15.0       |  | 1-2  | 0.433    | 11.0 |
| RN16MA  | 0.630 | 16.0       |  | 1-2  | 0.425    | 10.8 |
| RN18MA  | 0.709 | 18.0       |  | 1-2  | 0.433    | 11.0 |
| RN20MA  | 0.787 | 20.0       |  | 1-2  | 0.433    | 11.0 |
| RN22MA  | 0.866 | 22.0       |  | 1-2  | 0.551    | 14.0 |
| RN25MA  | 0.984 | 25.0       |  | 1-2  | 0.450    | 11.4 |
| RN27MA  | 1.063 | 27.0       |  | 1-2  | 0.551    | 14.0 |
| RN28MA  | 1.102 | 28.0       |  | 1-2  | 0.551    | 14.0 |
| RN30MA  | 1.181 | 30.0       |  | 1-2  | 0.551    | 14.0 |
| RN30MG  | 1.181 | 30.0       |  | 3-4  | 0.669    | 17.0 |
| RN32MA  | 1.260 | 32.0       |  | 1-2  | 0.510    | 13.0 |
| RN34MA  | 1.339 | 34.0       |  | 1-2  | 0.551    | 14.0 |
| RN35MA  | 1.378 | 35.0       |  | 1-2  | 0.551    | 14.0 |
| RN36MA  | 1.417 | 36.0       |  | 1-2  | 0.551    | 14.0 |
| RN38MA  | 1.496 | 38.0       |  | 1-2  | 0.510    | 13.0 |
| RN40MA  | 1.575 | 40.0       |  | 1-2  | 0.551    | 14.0 |
| RN42MA  | 1.654 | 42.0       |  | 1-2  | 0.551    | 14.0 |
| RN45MA  | 1.772 | 45.0       |  | 1-2  | 0.551    | 14.0 |
| RN48MA  | 1.890 | 48.0       |  | 1-2  | 0.551    | 14.0 |
| RN48MG  | 1.890 | 48.0       |  | 3-4  | 0.551    | 17.0 |
| RN50MA  | 1.969 | 50.0       |  | 1-2  | 0.669    | 17.0 |
| RN55MA  | 2.165 | 55.0       |  | 1-2  | 0.669    | 17.0 |
| RN55MG  | 2.165 | 55.0       |  | 3-4  | 0.669    | 17.0 |
| RN60MA  | 2.362 | 60.0       |  | 1-2  | 0.669    | 17.0 |
| RN60MF  | 2.362 | 60.0       |  | 2-3  | 0.669    | 17.0 |
| RN70MF  | 2.756 | 70.0       |  | 2-3  | 0.669    | 17.0 |
| RN70MG  | 2.756 | 70.0       |  | 3-4  | 0.669    | 17.0 |
| RN76MF  | 2.992 | 76.0       |  | 2-3  | 0.669    | 17.0 |
| RN76MG  | 2.992 | 76.0       |  | 3-4  | 0.669    | 17.0 |
| RN80MF  | 3.150 | 80.0       |  | 2-3  | 0.669    | 17.0 |
| RN90MF  | 3.543 | 90.0       |  | 2-3  | 0.669    | 17.0 |
| RN90MG  | 3.543 | 90.0       |  | 3-4  | 0.669    | 17.0 |
| RN102MF | 4.016 | 102.0      |  | 2-3  | 0.669    | 17.0 |
| RN102MG | 4.016 | 102.0      |  | 3-4  | 0.669    | 17.0 |
| RN110MH | 4.331 | 110.0      |  | 4-5  | 0.669    | 17.0 |



### Friction Fit Caps & Plugs





- 可定制颜色

## RND 系列 - 公制圆顶圆形管塞

### Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability & Abrasion Resistance  
顶部厚实、经久耐用
- Provides an Enhanced Aesthetic Appearance  
整体装饰、造型美观
- Accomodates Any Degree of Leg Angle  
适配于任意角度的管脚
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Customizable Colors:   
可定制颜色



| 产品型号     | ( A ) 配管外径 |      | 配管壁厚 | ( L ) 高度 |      |
|----------|------------|------|------|----------|------|
|          | 英寸         | 毫米   |      | 英寸       | 毫米   |
| RNDM16MA | 0.630      | 16.0 | 1-2  | 0.433    | 11.0 |
| RNDM18MA | 0.709      | 18.0 | 1-2  | 0.433    | 11.0 |
| RNDM20MA | 0.787      | 20.0 | 1-2  | 0.433    | 11.0 |
| RNDM22MA | 0.866      | 22.0 | 1-2  | 0.551    | 14.0 |
| RNDM25MA | 0.984      | 25.0 | 1-2  | 0.450    | 11.4 |
| RNDM28MA | 1.102      | 28.0 | 1-2  | 0.551    | 14.0 |
| RNDM30MA | 1.181      | 30.0 | 1-2  | 0.551    | 14.0 |
| RNDM32MA | 1.260      | 32.0 | 1-2  | 0.510    | 13.0 |
| RNDM35MA | 1.378      | 35.0 | 1-2  | 0.551    | 14.0 |
| RNDM40MA | 1.575      | 40.0 | 1-2  | 0.551    | 14.0 |



### Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Ideal for Applications With Fixed Leg Angles  
固定支撑管脚的理想选择
- Provides an Enhanced Aesthetic Appearance  
整体装饰、造型美观
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号       | ( A ) 配管外径 |      | 配管壁厚                 | ( L ) 高度 |      | 斜度        |
|------------|------------|------|----------------------|----------|------|-----------|
|            | 英寸         | 毫米   |                      | 英寸       | 毫米   |           |
| RNAS.75C   | 0.750      | 19.1 | .035-.083" (20-14ga) | 0.446    | 11.3 | 15° • 25° |
| RNAS.875C  | 0.875      | 22.2 | .035-.083" (20-14ga) | 0.448    | 11.4 | 19°       |
| RNAS1C     | 1.000      | 25.4 | .035-.083" (20-14ga) | 0.450    | 11.4 | 12° • 19° |
| RNAS1.125C | 1.125      | 28.6 | .035-.083" (20-14ga) | 0.460    | 11.7 | 15°       |
| RNAS1.25C  | 1.250      | 31.8 | .035-.083" (20-14ga) | 0.510    | 13.0 | 7° • 15°  |
| RNAS1.5C   | 1.500      | 38.1 | .035-.083" (20-14ga) | 0.510    | 13.0 | 19°       |




### Friction Fit Caps & Plugs



### Friction Fit Caps & Plugs




| 产品型号         | ( A ) 配管外长 |      | ( B ) 配管外宽 |      | 配管壁厚                 | ( L ) 高度 |      |
|--------------|------------|------|------------|------|----------------------|----------|------|
|              | 英寸         | 毫米   | 英寸         | 毫米   |                      | 英寸       | 毫米   |
| OV.625X1.25C | 1.250      | 31.8 | 0.625      | 15.9 | .035-.083" (20-14ga) | 0.453    | 11.5 |
| OV.75X1.5I   | 1.500      | 38.1 | 0.750      | 19.1 | .025-.065" (23-16ga) | 0.453    | 11.5 |






### Friction Fit Caps & Plugs

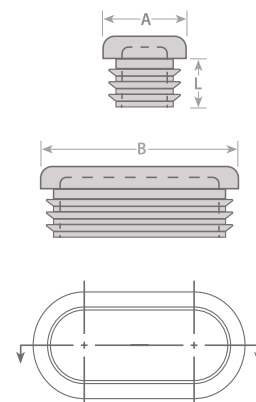

| 产品型号     | ( A ) 配管外长 |      | ( B ) 配管外宽 |      | 配管壁厚    | ( L ) 高度 |      |
|----------|------------|------|------------|------|---------|----------|------|
|          | 英寸         | 毫米   | 英寸         | 毫米   | 毫米      | 英寸       | 毫米   |
| OV2010MI | 0.787      | 20.0 | 0.394      | 10.0 | .75 - 2 | 0.453    | 11.5 |
| OV2510MI | 0.984      | 25.0 | 0.394      | 10.0 | .75 - 2 | 0.453    | 11.5 |
| OV3010MI | 1.181      | 30.0 | 0.394      | 10.0 | .75 - 2 | 0.453    | 11.5 |
| OV3015MF | 1.181      | 30.0 | 0.591      | 15.0 | 2 - 3   | 0.453    | 11.5 |
| OV3015MA | 1.181      | 30.0 | 0.591      | 15.0 | 1 - 2   | 0.453    | 11.5 |
| OV3515MF | 1.378      | 35.0 | 0.591      | 15.0 | 2 - 3   | 0.453    | 11.5 |
| OV3515MI | 1.378      | 35.0 | 0.591      | 15.0 | .75 - 2 | 0.453    | 11.5 |
| OV3520MA | 1.378      | 35.0 | 0.787      | 20.0 | 1 - 2   | 0.453    | 11.5 |
| OV3520MF | 1.378      | 35.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV3820MF | 1.496      | 38.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV3820MA | 1.496      | 38.0 | 0.787      | 20.0 | 1 - 2   | 0.453    | 11.5 |
| OV4020MF | 1.575      | 40.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV4020MI | 1.575      | 40.0 | 0.787      | 20.0 | .75 - 2 | 0.453    | 11.5 |
| OV4025MA | 1.575      | 40.0 | 0.984      | 25.0 | 1 - 2   | 0.453    | 11.5 |
| OV4025MF | 1.575      | 40.0 | 0.984      | 25.0 | 2 - 3   | 0.453    | 11.5 |
| OV4518MA | 1.772      | 45.0 | 0.709      | 18.0 | 1 - 2   | 0.453    | 11.5 |
| OV4518MF | 1.772      | 45.0 | 0.709      | 18.0 | 2 - 3   | 0.453    | 11.5 |
| OV4520MA | 1.772      | 45.0 | 0.787      | 20.0 | 1 - 2   | 0.453    | 11.5 |
| OV4520MF | 1.772      | 45.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV4820MF | 1.890      | 48.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV4820MA | 1.890      | 48.0 | 0.787      | 20.0 | 1 - 2   | 0.453    | 11.5 |
| OV5015MA | 1.969      | 50.0 | 0.591      | 15.0 | 1 - 2   | 0.453    | 11.5 |
| OV5015MF | 1.969      | 50.0 | 0.591      | 15.0 | 2 - 3   | 0.453    | 11.5 |
| OV5020MA | 1.969      | 50.0 | 0.787      | 20.0 | 1 - 2   | 0.453    | 11.5 |
| OV5020MF | 1.969      | 50.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV5025MA | 1.969      | 50.0 | 0.984      | 25.0 | 1 - 2   | 0.453    | 11.5 |
| OV5025MF | 1.969      | 50.0 | 0.984      | 25.0 | 2 - 3   | 0.453    | 11.5 |
| OV5030MA | 1.969      | 50.0 | 1.181      | 30.0 | 1 - 2   | 0.453    | 11.5 |
| OV5030MF | 1.969      | 50.0 | 1.181      | 30.0 | 2 - 3   | 0.453    | 11.5 |
| OV6020MF | 2.362      | 60.0 | 0.787      | 20.0 | 2 - 3   | 0.453    | 11.5 |
| OV6020MI | 2.362      | 60.0 | 0.787      | 20.0 | .75 - 2 | 0.453    | 11.5 |
| OV6025MA | 2.362      | 60.0 | 0.984      | 25.0 | 1 - 2   | 0.571    | 14.5 |
| OV6025MF | 2.362      | 60.0 | 0.984      | 25.0 | 2 - 3   | 0.571    | 14.5 |
| OV6030MA | 2.362      | 60.0 | 1.181      | 30.0 | 1 - 2   | 0.571    | 14.5 |
| OV7040MA | 2.756      | 70.0 | 1.575      | 40.0 | 1 - 2   | 0.571    | 14.5 |
| OV7040MF | 2.756      | 70.0 | 1.575      | 40.0 | 2 - 3   | 0.571    | 14.5 |
| OV8025MA | 3.150      | 80.0 | 0.984      | 25.0 | 1 - 2   | 0.571    | 14.5 |
| OV8025MF | 3.150      | 80.0 | 0.984      | 25.0 | 2 - 3   | 0.571    | 14.5 |
| OV8040MA | 3.150      | 80.0 | 1.575      | 40.0 | 1 - 2   | 0.571    | 14.5 |
| OV8040MF | 3.150      | 80.0 | 1.575      | 40.0 | 2 - 3   | 0.571    | 14.5 |



### Friction Fit Caps & Plugs

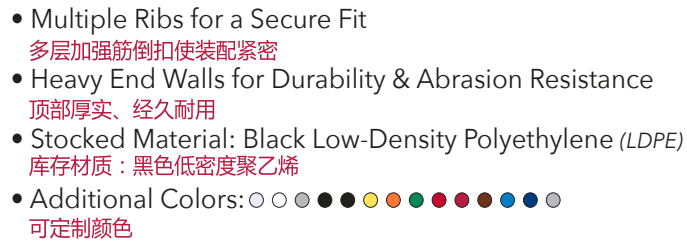


## OVA 系列 - 公制斜顶椭圆形管塞

### Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability & Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)  
库存材质：黑色低密度聚乙烯
- Additional Colors:   
可定制颜色

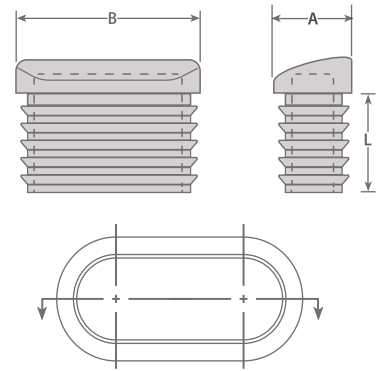


| 产品型号       | (A) 配管外长 |      | (B) 配管外宽 |      | 配管壁厚    | (L) 高度 |      | 斜度       |
|------------|----------|------|----------|------|---------|--------|------|----------|
|            | 英寸       | 毫米   | 英寸       | 毫米   |         | 英寸     | 毫米   |          |
| OVAM3015MA | 1.181    | 30.0 | 0.591    | 15.0 | 1 - 2   | 0.984  | 25.0 | 0° - 21° |
| OVAM3820MA | 1.496    | 38.0 | 0.787    | 20.0 | 1 - 2   | 0.984  | 25.0 | 0° - 21° |
| OVAM4020MI | 1.575    | 40.0 | 0.787    | 20.0 | .75 - 2 | 0.984  | 25.0 | 0° - 21° |
| OVAM4820MA | 1.890    | 48.0 | 0.787    | 20.0 | 1 - 2   | 0.984  | 25.0 | 0° - 21° |




# Square Tubing Plugs with Flat Tops for Imperial sizes - SQF Series

英制平顶方形管塞 - SQF 系列

Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability & Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号     | (A) 配管外径 |       | 配管壁厚                 | (B) 高度 |      |
|----------|----------|-------|----------------------|--------|------|
|          | 英寸       | 毫米    |                      | 英寸     | 毫米   |
| SQ.5B    | 0.500    | 12.7  | .049-.065" (18-16ga) | 0.470  | 11.9 |
| SQ.625C  | 0.625    | 15.9  | .035-.083" (20-14ga) | 0.470  | 11.9 |
| SQ.75C   | 0.750    | 19.1  | .035-.083" (20-14ga) | 0.445  | 11.3 |
| SQ.75D   | 0.750    | 19.1  | .083-.134" (14-10ga) | 0.430  | 10.9 |
| SQ.875C  | 0.875    | 22.2  | .035-.083" (20-14ga) | 0.445  | 11.3 |
| SQ1C     | 1.000    | 25.4  | .035-.083" (20-14ga) | 0.444  | 11.3 |
| SQ1D     | 1.000    | 25.4  | .083-.134" (14-10ga) | 0.444  | 11.3 |
| SQ1.125C | 1.125    | 28.6  | .035-.083" (20-14ga) | 0.445  | 11.3 |
| SQ1.25C  | 1.250    | 31.8  | .035-.083" (20-14ga) | 0.445  | 11.3 |
| SQ1.25D  | 1.250    | 31.8  | .083-.134" (14-10ga) | 0.445  | 11.3 |
| SQ1.375C | 1.375    | 34.9  | .035-.083" (20-14ga) | 0.520  | 13.2 |
| SQ1.375D | 1.375    | 34.9  | .083-.134" (14-10ga) | 0.520  | 13.2 |
| SQ1.5C   | 1.500    | 38.1  | .035-.083" (20-14ga) | 0.577  | 14.7 |
| SQ1.5D   | 1.500    | 38.1  | .083-.134" (14-10ga) | 0.577  | 14.7 |
| SQ1.5W   | 1.500    | 38.1  | .203-.259" (6-3ga)   | 0.445  | 11.3 |
| SQ1.75C  | 1.750    | 44.5  | .035-.083" (20-14ga) | 0.577  | 14.7 |
| SQ1.75D  | 1.750    | 44.5  | .083-.134" (14-10ga) | 0.520  | 13.2 |
| SQ2C     | 2.000    | 50.8  | .035-.083" (20-14ga) | 0.576  | 14.6 |
| SQ2D     | 2.000    | 50.8  | .083-.134" (14-10ga) | 0.576  | 14.6 |
| SQ2G     | 2.000    | 50.8  | .165-.238" (8-4ga)   | 0.520  | 13.2 |
| SQ2.25D  | 2.250    | 57.2  | .083-.134" (14-10ga) | 0.574  | 14.6 |
| SQ2.5D   | 2.500    | 63.5  | .083-.134" (14-10ga) | 0.560  | 14.2 |
| SQ2.5H   | 2.500    | 63.5  | .134-.203" (10-6ga)  | 0.560  | 14.2 |
| SQ2.5I   | 2.500    | 63.5  | .025-.065" (23-16ga) | 0.560  | 14.2 |
| SQ2.75C  | 2.750    | 69.9  | .035-.083" (20-14ga) | 0.650  | 16.5 |
| SQ2.75J  | 2.750    | 69.9  | .083-.165" (14-8ga)  | 0.730  | 18.5 |
| SQ3K     | 3.000    | 76.2  | .180-.259" (7-3ga)   | 0.520  | 13.2 |
| SQ3Q     | 3.000    | 76.2  | .109-.165" (12-8ga)  | 0.900  | 22.9 |
| SQ3.125O | 3.125    | 79.4  | .120-.203" (11-6ga)  | 0.970  | 24.6 |
| SQ3.5C   | 3.500    | 88.9  | .035-.083" (20-14ga) | 0.690  | 17.5 |
| SQ3.5L   | 3.500    | 88.9  | .203" (6ga)          | 0.690  | 17.5 |
| SQ3.5M   | 3.500    | 88.9  | .083-.203" (14-6ga)  | 0.690  | 17.5 |
| SQ3.875G | 3.875    | 98.4  | .165-.238" (8-4ga)   | 1.000  | 25.4 |
| SQ4K     | 4.000    | 101.6 | .180-.259" (7-3ga)   | 0.910  | 23.1 |
| SQ4N     | 4.000    | 101.6 | .120-.238" (11-4ga)  | 0.910  | 23.1 |
| SQ4.75O  | 4.750    | 120.7 | .120-.203" (11-6ga)  | 1.000  | 25.4 |
| SQ5P     | 5.000    | 127.0 | .134-.259" (10-3ga)  | 0.980  | 24.9 |
| SQ6D     | 6.000    | 152.4 | .083-.134" (14-10ga) | 0.980  | 24.9 |
| SQ6P     | 6.000    | 152.4 | .134-.259" (10-3ga)  | 0.980  | 24.9 |




**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 60

### Friction Fit Caps & Plugs





| 产品型号    | ( A ) 配管外径 |       | 配管壁厚    | ( B ) 高度 |      |
|---------|------------|-------|---------|----------|------|
|         | 英寸         | 毫米    |         | 英寸       | 毫米   |
| SQ10MB  | 0.394      | 10.0  | 1.5 - 2 | 0.433    | 11.0 |
| SQ12MB  | 0.472      | 12.0  | 1.5 - 2 | 0.433    | 11.0 |
| SQ15MB  | 0.591      | 15.0  | 1.5 - 2 | 0.433    | 11.0 |
| SQ16MA  | 0.630      | 16.0  | 1 - 2   | 0.470    | 11.9 |
| SQ18MB  | 0.709      | 18.0  | 1.5 - 2 | 0.433    | 11.0 |
| SQ20MB  | 0.787      | 20.0  | 1.5 - 2 | 0.433    | 11.0 |
| SQ22MA  | 0.866      | 22.0  | 1 - 2   | 0.445    | 11.3 |
| SQ25MA  | 0.984      | 25.0  | 1 - 2   | 0.444    | 11.3 |
| SQ25MF  | 0.984      | 25.0  | 2 - 3   | 0.444    | 11.3 |
| SQ30MB  | 1.181      | 30.0  | 1.5 - 2 | 0.551    | 14.0 |
| SQ30MC  | 1.181      | 30.0  | 3       | 0.551    | 14.0 |
| SQ34MB  | 1.339      | 34.0  | 1.5 - 2 | 0.551    | 14.0 |
| SQ34MC  | 1.339      | 34.0  | 3       | 0.551    | 14.0 |
| SQ35MA  | 1.378      | 35.0  | 1 - 2   | 0.520    | 13.2 |
| SQ35MF  | 1.378      | 35.0  | 2 - 3   | 0.520    | 13.2 |
| SQ40MB  | 1.575      | 40.0  | 1.5 - 2 | 0.551    | 14.0 |
| SQ40MC  | 1.575      | 40.0  | 3       | 0.551    | 14.0 |
| SQ40MD  | 1.575      | 40.0  | 4       | 0.551    | 14.0 |
| SQ40ME  | 1.575      | 40.0  | 5       | 0.551    | 14.0 |
| SQ45MB  | 1.772      | 45.0  | 1.5 - 2 | 0.551    | 14.0 |
| SQ50MB  | 1.969      | 50.0  | 1.5 - 2 | 0.551    | 14.0 |
| SQ50MC  | 1.969      | 50.0  | 3       | 0.551    | 14.0 |
| SQ50ME  | 1.969      | 50.0  | 5       | 0.551    | 14.0 |
| SQ60MB  | 2.362      | 60.0  | 1.5 - 2 | 0.551    | 14.0 |
| SQ60MC  | 2.362      | 60.0  | 3       | 0.551    | 14.0 |
| SQ60MD  | 2.362      | 60.0  | 4       | 0.551    | 14.0 |
| SQ60ME  | 2.362      | 60.0  | 5       | 0.551    | 14.0 |
| SQ70MC  | 2.756      | 70.0  | 3       | 0.669    | 17.0 |
| SQ70MD  | 2.756      | 70.0  | 4       | 0.669    | 17.0 |
| SQ75MB  | 2.953      | 75.0  | 1.5 - 2 | 0.669    | 17.0 |
| SQ80MB  | 3.150      | 80.0  | 1.5 - 2 | 0.669    | 17.0 |
| SQ80MC  | 3.150      | 80.0  | 3       | 0.669    | 17.0 |
| SQ90MB  | 3.543      | 90.0  | 1.5 - 2 | 0.669    | 17.0 |
| SQ90ME  | 3.543      | 90.0  | 5       | 0.669    | 17.0 |
| SQ100MC | 3.937      | 100.0 | 3       | 0.669    | 17.0 |
| SQ100ME | 3.937      | 100.0 | 5       | 0.669    | 17.0 |
| SQ120ME | 4.724      | 120.0 | 5       | 0.669    | 17.0 |




# Square Imperial Tubing Plugs with Domed Top - SQD Series

英制圆顶方形管塞 - SQD 系列

Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Accommodates Any Degree of Leg Angle  
适配于任意角度的管脚
- Provides an Enhanced Aesthetic Appearance  
整体装饰、造型美观
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号      | ( A ) 配管外径 |      | 配管壁厚                 | ( L ) 高度 |      |
|-----------|------------|------|----------------------|----------|------|
|           | 英寸         | 毫米   |                      | 英寸       | 毫米   |
| SQDS.75C  | 0.750      | 19.1 | .035-.083" (20-14ga) | 0.445    | 11.3 |
| SQDS.875C | 0.875      | 22.2 | .035-.083" (20-14ga) | 0.445    | 11.3 |
| SQDS1C    | 1.000      | 25.4 | .035-.083" (20-14ga) | 0.444    | 11.3 |
| SQDS1.25C | 1.250      | 31.8 | .035-.083" (20-14ga) | 0.445    | 11.3 |
| SQDS1.5C  | 1.500      | 38.1 | .035-.083" (20-14ga) | 0.577    | 14.7 |



### Friction Fit Caps & Plugs






Figure 1 consists of two schematic diagrams. Diagram (a) shows a single-layered curved structure with a dark grey, semi-circular top and a light blue base. Diagram (b) shows a multi-layered curved structure with a blue, semi-circular top and a light blue base.


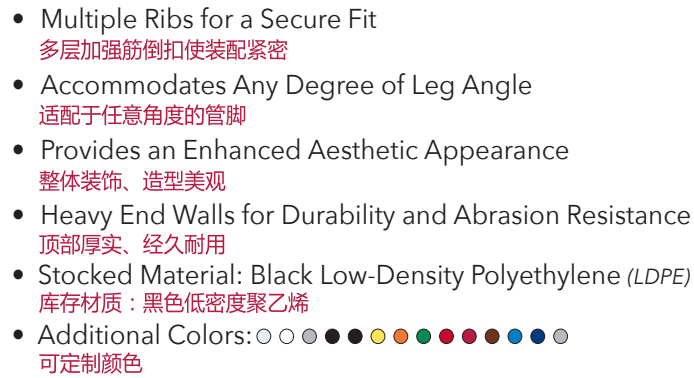


### Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Provides an Enhanced Aesthetic Appearance  
整体装饰、造型美观
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors:   
可定制颜色

### Friction Fit Caps & Plugs


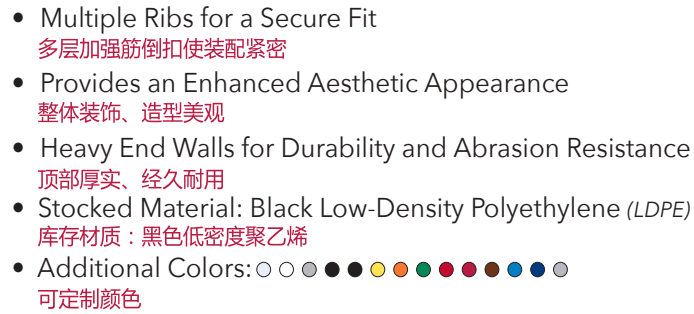


### Friction Fit Caps & Plugs



- 可定制颜色

### Friction Fit Caps & Plugs

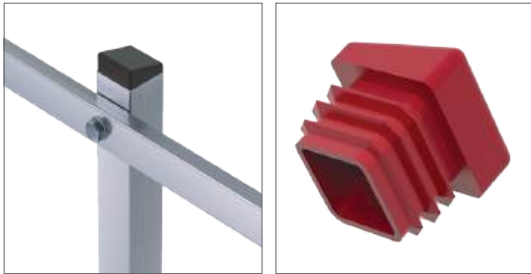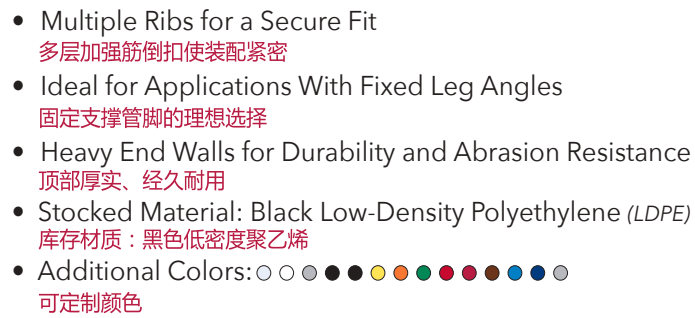





# RCF Series - Rectangular Tubing Plugs with Flat Tops *(continued)*

## RCF 系列 - 平顶矩形管塞

Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Heavy End Walls for Durability & Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors: ○ ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号      | (A) 配管外宽 |      | (B) 配管外长 |       | 配管壁厚    | (L) 高度 |      |
|-----------|----------|------|----------|-------|---------|--------|------|
|           | 英寸       | 毫米   | 英寸       | 毫米    |         | 英寸     | 毫米   |
| RC2010MB  | 0.394    | 10.0 | 0.787    | 20.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC2510MB  | 0.394    | 10.0 | 0.984    | 25.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC3010MB  | 0.394    | 10.0 | 1.181    | 30.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC4010MB  | 0.394    | 10.0 | 1.575    | 40.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC2512MB  | 0.472    | 12.0 | 0.984    | 25.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC2015MB  | 0.591    | 15.0 | 0.787    | 20.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC2515MB  | 0.591    | 15.0 | 0.984    | 25.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC3015MB  | 0.591    | 15.0 | 1.181    | 30.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC4015MB  | 0.591    | 15.0 | 1.575    | 40.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4515MB  | 0.591    | 15.0 | 1.772    | 45.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC2520MB  | 0.787    | 20.0 | 0.984    | 25.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC3020MB  | 0.787    | 20.0 | 1.181    | 30.0  | 1.5 - 2 | 0.433  | 11.0 |
| RC3020MC  | 0.787    | 20.0 | 1.181    | 30.0  | 3       | 0.433  | 11.0 |
| RC3520MB  | 0.787    | 20.0 | 1.378    | 35.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4020MB  | 0.787    | 20.0 | 1.575    | 40.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4020MC  | 0.787    | 20.0 | 1.575    | 40.0  | 3       | 0.551  | 14.0 |
| RC4520MB  | 0.787    | 20.0 | 1.772    | 45.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC5020MB  | 0.787    | 20.0 | 1.969    | 50.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC6020MB  | 0.787    | 20.0 | 2.362    | 60.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC8020MB  | 0.787    | 20.0 | 3.150    | 80.0  | 1.5 - 2 | 0.669  | 17.0 |
| RC10020MB | 0.787    | 20.0 | 3.937    | 100.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC3025MB  | 0.984    | 25.0 | 1.181    | 30.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC3525MB  | 0.984    | 25.0 | 1.378    | 35.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4025MB  | 0.984    | 25.0 | 1.575    | 40.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4525MB  | 0.984    | 25.0 | 1.772    | 45.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC5025MB  | 0.984    | 25.0 | 1.969    | 50.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC10025MB | 0.984    | 25.0 | 3.937    | 100.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC15025MB | 0.984    | 25.0 | 5.906    | 150.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC3530MB  | 1.181    | 30.0 | 1.378    | 35.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4030MB  | 1.181    | 30.0 | 1.575    | 40.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4030MC  | 1.181    | 30.0 | 1.575    | 40.0  | 3       | 0.551  | 14.0 |
| RC5030MB  | 1.181    | 30.0 | 1.969    | 50.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC5030MC  | 1.181    | 30.0 | 1.969    | 50.0  | 3       | 0.551  | 14.0 |
| RC6030MB  | 1.181    | 30.0 | 2.362    | 60.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC6030MC  | 1.181    | 30.0 | 2.362    | 60.0  | 3       | 0.551  | 14.0 |
| RC7030MB  | 1.181    | 30.0 | 2.756    | 70.0  | 1.5 - 2 | 0.669  | 17.0 |
| RC8030MB  | 1.181    | 30.0 | 3.150    | 80.0  | 1.5 - 2 | 0.669  | 17.0 |



**MOCAP**



- 

| 产品型号       | (A) 配管外宽 |       | (B) 配管外长 |       | 配管壁厚    | (L) 高度 |      |
|------------|----------|-------|----------|-------|---------|--------|------|
|            | 英寸       | 毫米    | 英寸       | 毫米    | 毫米      | 英寸     | 毫米   |
| RC10030MB  | 1.181    | 30.0  | 3.937    | 100.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC5034MB   | 1.339    | 34.0  | 1.969    | 50.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC5535MB   | 1.378    | 35.0  | 2.165    | 55.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC4838MB   | 1.496    | 38.0  | 1.890    | 48.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC5040MB   | 1.575    | 40.0  | 1.969    | 50.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC6040MB   | 1.575    | 40.0  | 2.362    | 60.0  | 1.5 - 2 | 0.551  | 14.0 |
| RC6040MC   | 1.575    | 40.0  | 2.362    | 60.0  | 3       | 0.551  | 14.0 |
| RC6040MD   | 1.575    | 40.0  | 2.362    | 60.0  | 4       | 0.551  | 14.0 |
| RC6040ME   | 1.575    | 40.0  | 2.362    | 60.0  | 5       | 0.551  | 14.0 |
| RC7040MB   | 1.575    | 40.0  | 2.756    | 70.0  | 1.5 - 2 | 0.669  | 17.0 |
| RC7040MD   | 1.575    | 40.0  | 2.756    | 70.0  | 4       | 0.669  | 17.0 |
| RC8040MB   | 1.575    | 40.0  | 3.150    | 80.0  | 1.5 - 2 | 0.669  | 17.0 |
| RC8040MD   | 1.575    | 40.0  | 3.150    | 80.0  | 4       | 0.669  | 17.0 |
| RC8040ME   | 1.575    | 40.0  | 3.150    | 80.0  | 5       | 0.669  | 17.0 |
| RC10040MB  | 1.575    | 40.0  | 3.937    | 100.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC10040MC  | 1.575    | 40.0  | 3.937    | 100.0 | 3       | 0.669  | 17.0 |
| RC12040MC  | 1.575    | 40.0  | 4.724    | 120.0 | 3       | 0.669  | 17.0 |
| RC7050MB   | 1.969    | 50.0  | 2.756    | 70.0  | 1.5 - 2 | 0.669  | 17.0 |
| RC7050MC   | 1.969    | 50.0  | 2.756    | 70.0  | 3       | 0.669  | 17.0 |
| RC8050MB   | 1.969    | 50.0  | 3.150    | 80.0  | 1.5 - 2 | 0.669  | 17.0 |
| RC8050MD   | 1.969    | 50.0  | 3.150    | 80.0  | 4       | 0.669  | 17.0 |
| RC10050MC  | 1.969    | 50.0  | 3.937    | 100.0 | 3       | 0.669  | 17.0 |
| RC10050MD  | 1.969    | 50.0  | 3.937    | 100.0 | 4       | 0.669  | 17.0 |
| RC10050ME  | 1.969    | 50.0  | 3.937    | 100.0 | 5       | 0.669  | 17.0 |
| RC12050MB  | 1.969    | 50.0  | 4.724    | 120.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC14050MB  | 1.969    | 50.0  | 5.512    | 140.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC14050MG  | 1.969    | 50.0  | 5.512    | 140.0 | 3 - 4   | 0.669  | 17.0 |
| RC14050MH  | 1.969    | 50.0  | 5.512    | 140.0 | 4 - 5   | 0.669  | 17.0 |
| RC15050MB  | 1.969    | 50.0  | 5.906    | 150.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC15050MG  | 1.969    | 50.0  | 5.906    | 150.0 | 3 - 4   | 0.669  | 17.0 |
| RC15050MH  | 1.969    | 50.0  | 5.906    | 150.0 | 4 - 5   | 0.669  | 17.0 |
| RC8060MC   | 2.362    | 60.0  | 3.150    | 80.0  | 3       | 0.669  | 17.0 |
| RC8060ME   | 2.362    | 60.0  | 3.150    | 80.0  | 5       | 0.669  | 17.0 |
| RC12060MC  | 2.362    | 60.0  | 4.724    | 120.0 | 3       | 0.669  | 17.0 |
| RC12060MD  | 2.362    | 60.0  | 4.724    | 120.0 | 4       | 0.669  | 17.0 |
| RC12060ME  | 2.362    | 60.0  | 4.724    | 120.0 | 5       | 0.669  | 17.0 |
| RC12080MB  | 3.150    | 80.0  | 4.724    | 120.0 | 1.5 - 2 | 0.669  | 17.0 |
| RC14080MD  | 3.150    | 80.0  | 5.512    | 140.0 | 4       | 0.669  | 17.0 |
| RC150100MH | 3.937    | 100.0 | 5.906    | 150.0 | 4 - 5   | 0.669  | 17.0 |




**MOCAP**



### Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Provides an Enhanced Aesthetic Appearance  
整体装饰、造型美观
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号         | ( A ) 配管外宽 |      | ( B ) 配管外长 |      | 配管壁厚                 | ( L ) 高度 |      |
|--------------|------------|------|------------|------|----------------------|----------|------|
|              | 英寸         | 毫米   | 英寸         | 毫米   |                      | 英寸       | 毫米   |
| RCPS.75X1.5C | 0.750      | 19.1 | 1.500      | 38.1 | .035-.083" (20-14ga) | 0.430    | 10.9 |
| RCPS1X2C     | 1.000      | 25.0 | 2.000      | 50.8 | .035-.083" (20-14ga) | 0.500    | 12.7 |
| RCPS1X2D     | 1.000      | 25.4 | 2.000      | 50.8 | .083-.134" (14-10ga) | 0.500    | 12.7 |



### Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Provides an Enhanced Aesthetic Appearance  
整体装饰、造型美观
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors:   
可定制颜色




| 产品型号       | ( A ) 配管外宽 |      | ( B ) 配管外长 |      | 配管壁厚    | ( L ) 高度 |      |
|------------|------------|------|------------|------|---------|----------|------|
|            | 英寸         | 毫米   | 英寸         | 毫米   | 毫米      | 英寸       | 毫米   |
| RCPM2010MB | 0.394      | 10.0 | 0.787      | 20.0 | 1.5 - 2 | 0.433    | 11.0 |
| RCPM4010MB | 0.394      | 10.0 | 1.575      | 40.0 | 1.5 - 2 | 0.551    | 14.0 |
| RCPM2015MB | 0.591      | 15.0 | 0.787      | 20.0 | 1.5 - 2 | 0.433    | 11.0 |
| RCPM2515MB | 0.591      | 15.0 | 0.984      | 25.0 | 1.5 - 2 | 0.433    | 11.0 |
| RCPM3015MB | 0.591      | 15.0 | 1.181      | 30.0 | 1.5 - 2 | 0.433    | 11.0 |
| RCPM4015MB | 0.591      | 15.0 | 1.575      | 40.0 | 1.5 - 2 | 0.551    | 14.0 |
| RCPM3020MB | 0.787      | 20.0 | 1.181      | 30.0 | 1.5 - 2 | 0.433    | 11.0 |
| RCPM4020MB | 0.787      | 20.0 | 1.575      | 40.0 | 1.5 - 2 | 0.551    | 14.0 |
| RCPM4025MB | 0.984      | 25.0 | 1.575      | 40.0 | 1.5 - 2 | 0.551    | 14.0 |
| RCPM5025MB | 0.984      | 25.0 | 1.969      | 50.0 | 1.5 - 2 | 0.551    | 14.0 |
| RCPM4030MB | 1.181      | 30.0 | 1.575      | 40.0 | 1.5 - 2 | 0.551    | 14.0 |
| RCPM5030MB | 1.181      | 30.0 | 1.969      | 50.0 | 1.5 - 2 | 0.551    | 14.0 |




# RCA Series - Rectangular Metric Tubing Plugs with Angled Top

## RCA 系列 - 公制斜顶矩形管塞

Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit  
多层加强筋倒扣使装配紧密
- Ideal for Applications With Fixed Leg Angles  
固定支撑管脚的理想选择
- Heavy End Walls for Durability and Abrasion Resistance  
顶部厚实、经久耐用
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色

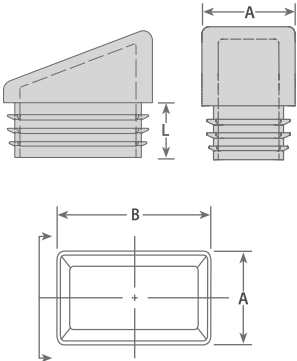


| 产品型号       | ( A ) 配管外宽 |      | ( B ) 配管外长 |      | 配管壁厚    | ( L ) 高度 |      | 斜度  |
|------------|------------|------|------------|------|---------|----------|------|-----|
|            | 英寸         | 毫米   | 英寸         | 毫米   | 毫米      | 英寸       | 毫米   |     |
| RCAM2015MB | 0.591      | 15.0 | 0.787      | 20.0 | 1.5 - 2 | 0.433    | 11.0 | 10° |
| RCAM2515MB | 0.591      | 15.0 | 0.984      | 25.0 | 1.5 - 2 | 0.433    | 11.0 | 10° |
| RCAM3015MB | 0.591      | 15.0 | 1.181      | 30.0 | 1.5 - 2 | 0.433    | 11.0 | 10° |
| RCAM3020MB | 0.787      | 20.0 | 1.181      | 30.0 | 1.5 - 2 | 0.433    | 11.0 | 15° |
| RCAM4020MB | 0.787      | 20.0 | 1.575      | 40.0 | 1.5 - 2 | 0.551    | 14.0 | 20° |



# Outside Pull Tapered Plastic Plugs - OP Series

外拉带柄锥形塑料塞 - OP 系列

Tapered Caps & Plugs



- Pull Tab Allows for Quick and Easy Removal  
带柄设计易于快速拔除，方便高效
- Off-centered tab allows tight-fitting plugs to be more easily pulled out from the side  
不居中的拉片设计使紧密配合的塞子更容易从侧面拔出
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors: ○ ○ ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号        | (A) 小外径 |      | (B) 大外径 |      | (C) 小内径 |      | (D) 大内径 |      | (E) 高度 |      | (F) 帽檐直径 |      |
|-------------|---------|------|---------|------|---------|------|---------|------|--------|------|----------|------|
|             | 英寸      | 毫米   | 英寸      | 毫米   | 英寸      | 毫米   | 英寸      | 毫米   | 英寸     | 毫米   | 英寸       | 毫米   |
| OP.23/.30   | 0.236   | 6.0  | 0.302   | 7.7  | 0.174   | 4.4  | 0.240   | 6.1  | 0.380  | 9.6  | 0.440    | 11.2 |
| OP.26/.33   | 0.267   | 6.8  | 0.335   | 8.5  | 0.205   | 5.2  | 0.273   | 6.9  | 0.380  | 9.6  | 0.470    | 11.9 |
| OP.29/.36   | 0.299   | 7.6  | 0.365   | 9.3  | 0.235   | 6.0  | 0.302   | 7.7  | 0.380  | 9.6  | 0.500    | 12.7 |
| OP.33/.39   | 0.330   | 8.4  | 0.396   | 10.1 | 0.267   | 6.8  | 0.333   | 8.5  | 0.380  | 9.6  | 0.530    | 13.5 |
| OP.36/.42   | 0.361   | 9.2  | 0.427   | 10.9 | 0.298   | 7.6  | 0.365   | 9.3  | 0.380  | 9.6  | 0.560    | 14.2 |
| OP.39/.45   | 0.390   | 9.9  | 0.456   | 11.6 | 0.327   | 8.3  | 0.394   | 10.0 | 0.380  | 9.6  | 0.590    | 15.0 |
| OP.41/.48   | 0.419   | 10.6 | 0.485   | 12.3 | 0.356   | 9.0  | 0.422   | 10.7 | 0.380  | 9.6  | 0.630    | 16.0 |
| OP.44/.51   | 0.447   | 11.3 | 0.513   | 13.0 | 0.385   | 9.8  | 0.451   | 11.5 | 0.380  | 9.6  | 0.660    | 16.8 |
| OP.47/.54   | 0.471   | 12.0 | 0.547   | 13.9 | 0.409   | 10.4 | 0.485   | 12.3 | 0.440  | 11.2 | 0.690    | 17.5 |
| OP.50/.57   | 0.500   | 12.7 | 0.576   | 14.6 | 0.440   | 11.2 | 0.516   | 13.1 | 0.440  | 11.2 | 0.720    | 18.3 |
| OP.53/.60   | 0.532   | 13.5 | 0.608   | 15.4 | 0.468   | 11.9 | 0.545   | 13.8 | 0.440  | 11.2 | 0.750    | 19.1 |
| OP.55/.63   | 0.550   | 14.0 | 0.631   | 16.0 | 0.487   | 12.4 | 0.568   | 14.4 | 0.470  | 11.9 | 0.750    | 19.1 |
| OP.58/.66   | 0.580   | 14.7 | 0.667   | 16.9 | 0.518   | 13.2 | 0.605   | 15.4 | 0.500  | 12.7 | 0.810    | 20.6 |
| OP.61/.69   | 0.610   | 15.5 | 0.695   | 17.6 | 0.549   | 13.9 | 0.634   | 16.1 | 0.500  | 12.7 | 0.840    | 21.3 |
| OP.64/.72   | 0.640   | 16.3 | 0.727   | 18.5 | 0.578   | 14.7 | 0.664   | 16.9 | 0.500  | 12.7 | 0.880    | 22.3 |
| OP.67/.75   | 0.675   | 17.2 | 0.755   | 19.2 | 0.613   | 15.6 | 0.693   | 17.6 | 0.500  | 12.7 | 0.880    | 22.3 |
| OP.69/.78   | 0.690   | 17.5 | 0.788   | 20.0 | 0.628   | 15.9 | 0.726   | 18.4 | 0.560  | 14.2 | 0.940    | 23.9 |
| OP.72/.82   | 0.725   | 18.4 | 0.823   | 20.9 | 0.663   | 16.8 | 0.761   | 19.3 | 0.560  | 14.2 | 0.970    | 24.6 |
| OP.75/.84   | 0.750   | 19.1 | 0.848   | 21.5 | 0.687   | 17.5 | 0.785   | 19.9 | 0.560  | 14.2 | 1.000    | 25.4 |
| OP.80/.91   | 0.802   | 20.4 | 0.911   | 23.1 | 0.740   | 18.8 | 0.849   | 21.6 | 0.630  | 16.0 | 1.060    | 26.9 |
| OP.81/.93   | 0.815   | 20.7 | 0.930   | 23.6 | 0.753   | 19.1 | 0.868   | 22.0 | 0.630  | 16.0 | 1.090    | 27.7 |
| OP.86/.97   | 0.866   | 22.0 | 0.975   | 24.8 | 0.803   | 20.4 | 0.912   | 23.2 | 0.630  | 16.0 | 1.130    | 28.7 |
| OP.91/1.04  | 0.915   | 23.2 | 1.040   | 26.4 | 0.855   | 21.7 | 0.980   | 24.9 | 0.690  | 17.5 | 1.160    | 29.5 |
| OP.96/1.04  | 0.960   | 24.4 | 1.040   | 26.4 | 0.897   | 22.8 | 0.981   | 24.9 | 0.500  | 12.7 | 1.160    | 29.5 |
| OP.96/1.09  | 0.964   | 24.5 | 1.090   | 27.7 | 0.901   | 22.9 | 1.027   | 26.1 | 0.750  | 19.1 | 1.250    | 31.8 |
| OP.99/1.14  | 0.995   | 25.3 | 1.145   | 29.1 | 0.933   | 23.7 | 1.083   | 27.5 | 0.750  | 19.1 | 1.310    | 33.3 |
| OP1.09/1.21 | 1.094   | 27.8 | 1.215   | 30.9 | 1.031   | 26.2 | 1.152   | 29.3 | 0.750  | 19.1 | 1.410    | 35.8 |
| OP1.17/1.28 | 1.175   | 29.9 | 1.284   | 32.6 | 1.113   | 28.3 | 1.222   | 31.0 | 0.630  | 16.0 | 1.440    | 36.6 |
| OP1.23/1.36 | 1.235   | 31.4 | 1.360   | 34.5 | 1.173   | 29.8 | 1.298   | 33.0 | 0.810  | 20.6 | 1.500    | 38.1 |
| OP1.31/1.46 | 1.312   | 33.3 | 1.465   | 37.2 | 1.249   | 31.7 | 1.402   | 35.6 | 0.880  | 22.3 | 1.630    | 41.4 |
| OP1.44/1.60 | 1.447   | 36.8 | 1.600   | 40.6 | 1.384   | 35.2 | 1.537   | 39.0 | 0.880  | 22.3 | 1.750    | 44.5 |
| OP1.56/1.68 | 1.560   | 39.6 | 1.682   | 42.7 | 1.498   | 38.0 | 1.620   | 41.2 | 0.750  | 19.1 | 1.880    | 47.7 |
| OP1.63/1.75 | 1.630   | 41.4 | 1.750   | 44.5 | 1.568   | 39.8 | 1.688   | 42.9 | 0.750  | 19.1 | 1.940    | 49.3 |
| OP1.75/1.88 | 1.750   | 44.5 | 1.880   | 47.7 | 1.688   | 42.9 | 1.818   | 46.2 | 0.750  | 19.1 | 2.000    | 50.8 |
| OP1.78/1.95 | 1.780   | 45.2 | 1.950   | 49.5 | 1.718   | 43.6 | 1.888   | 48.0 | 1.000  | 25.4 | 2.130    | 54.1 |
| OP1.84/2.00 | 1.844   | 46.8 | 2.000   | 50.8 | 1.781   | 45.2 | 1.938   | 49.2 | 1.000  | 25.4 | 2.130    | 54.1 |
| OP1.90/2.07 | 1.900   | 48.3 | 2.076   | 52.7 | 1.837   | 46.7 | 2.013   | 51.1 | 1.000  | 25.4 | 2.250    | 57.2 |



**MOCAP**


Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 74

### *Tapered Caps & Plugs*



- Tapered Design Fits Multiple Diameters  
锥形设计适用于多种不同直径
- Dual Function Closure Can Be Used as a Cap or Plug  
一物两用，盖塞皆可
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号       | (A) 小外径 |      | (B) 大外径 |      | (C) 小内径 |      | (D) 大内径 |      | (E) 高度 |      | (F) 帽檐直径 |      |
|------------|---------|------|---------|------|---------|------|---------|------|--------|------|----------|------|
|            | 英寸      | 毫米   | 英寸      | 毫米   | 英寸      | 毫米   | 英寸      | 毫米   | 英寸     | 毫米   | 英寸       | 毫米   |
| T.116/.182 | 0.116   | 2.9  | 0.182   | 4.6  | 0.053   | 1.4  | 0.120   | 3.1  | 0.380  | 9.6  | 0.310    | 7.9  |
| T.145/.205 | 0.145   | 3.7  | 0.205   | 5.2  | 0.079   | 2.0  | 0.150   | 3.8  | 0.380  | 9.6  | 0.410    | 10.4 |
| T.173/.240 | 0.173   | 4.4  | 0.240   | 6.1  | 0.111   | 2.8  | 0.177   | 4.5  | 0.380  | 9.6  | 0.380    | 9.6  |
| T.203/.260 | 0.203   | 5.2  | 0.260   | 6.6  | 0.136   | 3.5  | 0.199   | 5.1  | 0.380  | 9.6  | 0.402    | 10.2 |
| T.236/.302 | 0.236   | 6.0  | 0.302   | 7.7  | 0.174   | 4.4  | 0.240   | 6.1  | 0.380  | 9.6  | 0.440    | 11.2 |
| T.267/.335 | 0.267   | 6.8  | 0.335   | 8.5  | 0.205   | 5.2  | 0.273   | 6.9  | 0.380  | 9.6  | 0.470    | 11.9 |
| T.299/.365 | 0.299   | 7.6  | 0.365   | 9.3  | 0.235   | 6.0  | 0.302   | 7.7  | 0.380  | 9.6  | 0.500    | 12.7 |
| T.330/.396 | 0.330   | 8.4  | 0.396   | 10.1 | 0.267   | 6.8  | 0.333   | 8.5  | 0.380  | 9.6  | 0.530    | 13.5 |
| T.361/.427 | 0.361   | 9.2  | 0.427   | 10.9 | 0.298   | 7.6  | 0.365   | 9.3  | 0.380  | 9.6  | 0.560    | 14.2 |
| T.390/.456 | 0.390   | 9.9  | 0.456   | 11.6 | 0.327   | 8.3  | 0.394   | 10.0 | 0.380  | 9.6  | 0.590    | 15.0 |
| T.419/.485 | 0.419   | 10.6 | 0.485   | 12.3 | 0.356   | 9.0  | 0.422   | 10.7 | 0.380  | 9.6  | 0.630    | 16.0 |
| T.447/.513 | 0.447   | 11.3 | 0.513   | 13.0 | 0.385   | 9.8  | 0.451   | 11.5 | 0.380  | 9.6  | 0.660    | 16.8 |
| T.471/.547 | 0.471   | 12.0 | 0.547   | 13.9 | 0.409   | 10.4 | 0.485   | 12.3 | 0.440  | 11.2 | 0.690    | 17.5 |
| T.500/.576 | 0.500   | 12.7 | 0.576   | 14.6 | 0.440   | 11.2 | 0.516   | 13.1 | 0.440  | 11.2 | 0.720    | 18.3 |
| T.532/.608 | 0.532   | 13.5 | 0.608   | 15.4 | 0.468   | 11.9 | 0.545   | 13.8 | 0.440  | 11.2 | 0.750    | 19.1 |
| T.550/.631 | 0.550   | 14.0 | 0.631   | 16.0 | 0.487   | 12.4 | 0.568   | 14.4 | 0.470  | 11.9 | 0.750    | 19.1 |
| T.580/.667 | 0.580   | 14.7 | 0.667   | 16.9 | 0.518   | 13.2 | 0.605   | 15.4 | 0.500  | 12.7 | 0.810    | 20.6 |
| T.610/.695 | 0.610   | 15.5 | 0.695   | 17.6 | 0.549   | 13.9 | 0.634   | 16.1 | 0.500  | 12.7 | 0.840    | 21.3 |
| T.640/.727 | 0.640   | 16.3 | 0.727   | 18.5 | 0.578   | 14.7 | 0.664   | 16.9 | 0.500  | 12.7 | 0.880    | 22.3 |
| T.675/.755 | 0.675   | 17.2 | 0.755   | 19.2 | 0.613   | 15.6 | 0.693   | 17.6 | 0.500  | 12.7 | 0.880    | 22.3 |
| T.690/.788 | 0.690   | 17.5 | 0.788   | 20.0 | 0.628   | 15.9 | 0.726   | 18.4 | 0.560  | 14.2 | 0.940    | 23.9 |
| T.725/.823 | 0.725   | 18.4 | 0.823   | 20.9 | 0.663   | 16.8 | 0.761   | 19.3 | 0.560  | 14.2 | 0.970    | 24.6 |
| T.750/.848 | 0.750   | 19.1 | 0.848   | 21.5 | 0.687   | 17.5 | 0.785   | 19.9 | 0.560  | 14.2 | 1.000    | 25.4 |
| T.802/.911 | 0.802   | 20.4 | 0.911   | 23.1 | 0.740   | 18.8 | 0.849   | 21.6 | 0.630  | 16.0 | 1.060    | 26.9 |
| T.815/.930 | 0.815   | 20.7 | 0.930   | 23.6 | 0.753   | 19.1 | 0.868   | 22.0 | 0.630  | 16.0 | 1.090    | 27.7 |
| T.866/.975 | 0.866   | 22.0 | 0.975   | 24.8 | 0.803   | 20.4 | 0.912   | 23.2 | 0.630  | 16.0 | 1.130    | 28.7 |
| T.915/1.04 | 0.915   | 23.2 | 1.040   | 26.4 | 0.855   | 21.7 | 0.980   | 24.9 | 0.690  | 17.5 | 1.160    | 29.5 |
| T.964/1.09 | 0.964   | 24.5 | 1.090   | 27.7 | 0.901   | 22.9 | 1.027   | 26.1 | 0.750  | 19.1 | 1.250    | 31.8 |
| T.995/1.14 | 0.995   | 25.3 | 1.145   | 29.1 | 0.933   | 23.7 | 1.083   | 27.5 | 0.750  | 19.1 | 1.310    | 33.3 |

To Fit **MOCAP** T Series as a CAP, measure the OUTSIDE diameter dimension at least .020" (.5 mm) smaller than the diameter to be capped (increase 1% or more for large diameters).

盖



应用为塞子：选型时，大外径尺寸 (B) 须比要保护的內径至少大0.5mm。




| 产品型号         | (A) 小外径 |       | (B) 大外径 |       | (C) 小内径 |       | (D) 大内径 |       | (E) 高度 |      | (F) 帽檐直径 |       |
|--------------|---------|-------|---------|-------|---------|-------|---------|-------|--------|------|----------|-------|
|              | 英寸      | 毫米    | 英寸      | 毫米    | 英寸      | 毫米    | 英寸      | 毫米    | 英寸     | 毫米   | 英寸       | 毫米    |
| T1.09/1.21   | 1.094   | 27.8  | 1.215   | 30.9  | 1.031   | 26.2  | 1.152   | 29.3  | 0.750  | 19.1 | 1.410    | 35.8  |
| T1.17/1.28   | 1.175   | 29.9  | 1.284   | 32.6  | 1.113   | 28.3  | 1.222   | 31.0  | 0.630  | 16.0 | 1.440    | 36.6  |
| T1.22/1.35   | 1.224   | 31.1  | 1.355   | 34.4  | 1.161   | 29.5  | 1.292   | 32.8  | 0.750  | 19.1 | 1.500    | 38.1  |
| T1.23/1.36   | 1.235   | 31.4  | 1.360   | 34.5  | 1.173   | 29.8  | 1.298   | 33.0  | 0.810  | 20.6 | 1.500    | 38.1  |
| T1.31/1.46   | 1.312   | 33.3  | 1.465   | 37.2  | 1.249   | 31.7  | 1.402   | 35.6  | 0.880  | 22.3 | 1.630    | 41.4  |
| T1.44/1.60   | 1.447   | 36.8  | 1.600   | 40.6  | 1.384   | 35.2  | 1.537   | 39.0  | 0.880  | 22.3 | 1.750    | 44.5  |
| T1.56/1.68   | 1.560   | 39.6  | 1.682   | 42.7  | 1.498   | 38.0  | 1.620   | 41.2  | 0.750  | 19.1 | 1.880    | 47.7  |
| T1.63/1.75   | 1.630   | 41.4  | 1.750   | 44.5  | 1.568   | 39.8  | 1.688   | 42.9  | 0.750  | 19.1 | 1.940    | 49.3  |
| T1.69/1.81   | 1.693   | 43.0  | 1.811   | 46.0  | 1.620   | 41.1  | 1.736   | 44.1  | 0.750  | 19.1 | 2.012    | 51.1  |
| T1.75/1.88   | 1.750   | 44.5  | 1.880   | 47.7  | 1.688   | 42.9  | 1.818   | 46.2  | 0.750  | 19.1 | 2.000    | 50.8  |
| T1.78/1.95   | 1.780   | 45.2  | 1.950   | 49.5  | 1.718   | 43.6  | 1.888   | 48.0  | 1.000  | 25.4 | 2.130    | 54.1  |
| T1.84/2.00   | 1.844   | 46.8  | 2.000   | 50.8  | 1.781   | 45.2  | 1.938   | 49.2  | 1.000  | 25.4 | 2.130    | 54.1  |
| T1.90/2.07   | 1.900   | 48.3  | 2.076   | 52.7  | 1.837   | 46.7  | 2.013   | 51.1  | 1.000  | 25.4 | 2.250    | 57.2  |
| T1.97/2.13   | 1.975   | 50.2  | 2.132   | 54.2  | 1.913   | 48.6  | 2.070   | 52.6  | 1.000  | 25.4 | 2.250    | 57.2  |
| T2.01/2.14   | 2.016   | 51.2  | 2.146   | 54.5  | 1.953   | 49.6  | 2.087   | 53.0  | 0.752  | 19.1 | 2.311    | 58.7  |
| T2.06/2.24   | 2.067   | 52.5  | 2.244   | 57.0  | 2.004   | 50.9  | 2.181   | 55.4  | 1.000  | 25.4 | 2.441    | 62.0  |
| T2.125/2.406 | 2.125   | 54.0  | 2.406   | 61.1  | 2.063   | 52.4  | 2.343   | 59.5  | 1.000  | 25.4 | 2.532    | 64.3  |
| T2.13/2.31   | 2.130   | 54.1  | 2.311   | 58.7  | 2.075   | 52.7  | 2.252   | 57.2  | 1.000  | 25.4 | 2.559    | 65.0  |
| T2.230/2.260 | 2.230   | 56.6  | 2.260   | 57.4  | 2.169   | 55.1  | 2.197   | 55.8  | 0.500  | 12.7 | 2.500    | 63.5  |
| T2.280/2.400 | 2.280   | 57.9  | 2.400   | 61.0  | 2.216   | 56.3  | 2.336   | 59.3  | 0.720  | 18.3 | 2.800    | 71.1  |
| T2.298/2.464 | 2.298   | 58.4  | 2.464   | 62.6  | 2.236   | 56.8  | 2.402   | 61.0  | 1.000  | 25.4 | 2.630    | 66.8  |
| T2.307/2.650 | 2.307   | 58.6  | 2.650   | 67.3  | 2.244   | 57.0  | 2.587   | 65.7  | 1.252  | 31.8 | 2.780    | 70.6  |
| T2.395/2.602 | 2.395   | 60.8  | 2.602   | 66.1  | 2.335   | 59.3  | 2.539   | 64.5  | 1.032  | 26.2 | 2.811    | 71.4  |
| T2.457/2.750 | 2.457   | 62.4  | 2.750   | 69.9  | 2.394   | 60.8  | 2.689   | 68.3  | 1.000  | 25.4 | 2.882    | 73.2  |
| T2.480/2.644 | 2.480   | 63.0  | 2.644   | 67.2  | 2.417   | 61.4  | 2.583   | 65.6  | 0.630  | 16.0 | 2.780    | 70.6  |
| T2.555/2.690 | 2.555   | 64.9  | 2.690   | 68.3  | 2.492   | 63.3  | 2.630   | 66.8  | 0.630  | 16.0 | 2.882    | 73.2  |
| T2.641/2.790 | 2.641   | 67.1  | 2.790   | 70.9  | 2.579   | 65.5  | 2.728   | 69.3  | 0.752  | 19.1 | 2.941    | 74.7  |
| T2.760/2.990 | 2.760   | 70.1  | 2.990   | 75.9  | 2.685   | 68.2  | 2.949   | 74.9  | 1.000  | 25.4 | 3.130    | 79.5  |
| T2.849/2.980 | 2.849   | 72.4  | 2.980   | 75.7  | 2.787   | 70.8  | 2.917   | 74.1  | 0.752  | 19.1 | 3.252    | 82.6  |
| T2.91/3.03   | 2.910   | 73.9  | 3.030   | 77.0  | 2.844   | 72.2  | 2.979   | 75.7  | 1.000  | 25.4 | 3.268    | 83.0  |
| T2.975/3.103 | 2.975   | 75.6  | 3.103   | 78.8  | 2.913   | 74.0  | 3.039   | 77.2  | 0.752  | 19.1 | 3.339    | 84.8  |
| T2.982/3.245 | 2.980   | 75.7  | 3.245   | 82.4  | 2.913   | 74.0  | 3.177   | 80.7  | 1.000  | 25.4 | 3.382    | 85.9  |
| T3.090/3.370 | 3.090   | 78.5  | 3.370   | 85.6  | 3.020   | 76.7  | 3.299   | 83.8  | 1.000  | 25.4 | 3.500    | 88.9  |
| T3.270/3.562 | 3.272   | 83.1  | 3.562   | 90.5  | 3.201   | 81.3  | 3.492   | 88.7  | 1.130  | 28.7 | 3.689    | 93.7  |
| T3.325/3.457 | 3.325   | 84.5  | 3.457   | 87.8  | 3.244   | 82.4  | 3.378   | 85.8  | 0.752  | 19.1 | 3.630    | 92.2  |
| T3.470/3.600 | 3.470   | 88.1  | 3.600   | 91.4  | 3.409   | 86.6  | 3.539   | 89.9  | 0.752  | 19.1 | 3.882    | 98.6  |
| T3.55/3.73   | 3.551   | 90.2  | 3.730   | 94.7  | 3.480   | 88.4  | 3.661   | 93.0  | 1.000  | 25.4 | 4.000    | 101.6 |
| T3.68/3.80   | 3.681   | 93.5  | 3.800   | 96.5  | 3.610   | 91.7  | 3.728   | 94.7  | 0.752  | 19.1 | 4.000    | 101.6 |
| T3.79/3.92   | 3.791   | 96.3  | 3.921   | 99.6  | 3.709   | 94.2  | 3.839   | 97.5  | 0.752  | 19.1 | 4.122    | 104.7 |
| T3.87/4.00   | 3.870   | 98.3  | 4.007   | 101.8 | 3.798   | 96.5  | 3.938   | 100.0 | 0.750  | 19.1 | 4.319    | 109.7 |
| T3.93/4.07   | 3.929   | 99.8  | 4.071   | 103.4 | 3.858   | 98.0  | 4.000   | 101.6 | 0.752  | 19.1 | 4.382    | 111.3 |
| T4.02/4.14   | 4.020   | 102.1 | 4.142   | 105.2 | 3.941   | 100.1 | 4.071   | 103.4 | 0.752  | 19.1 | 4.532    | 115.1 |
| T4.09/4.32   | 4.091   | 103.9 | 4.320   | 109.7 | 4.012   | 101.9 | 4.24    | 107.7 | 1.252  | 31.8 | 4.622    | 117.4 |
| T4.27/4.43   | 4.272   | 108.5 | 4.430   | 112.5 | 4.181   | 106.2 | 4.343   | 110.3 | 0.882  | 22.4 | 4.882    | 124.0 |
| T4.37/4.62   | 4.370   | 111.0 | 4.622   | 117.4 | 4.291   | 109.0 | 4.539   | 115.3 | 1.000  | 25.4 | 5.000    | 127.0 |

### *Tapered Caps & Plugs*



- Tapered Design Fits Multiple Diameters  
锥形设计适用于多种不同直径
- Dual Function Closure Can Be Used as a Cap or Plug  
一物两用，盖塞皆可
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色





### *Tapered Caps & Plugs*



- 帽檐宽于T系列产品，保护更大范围的表面



### *Tapered Caps & Plugs*



### *Tapered Caps & Plugs*



- Thicker and Wider Flange for Added Durability  
外檐更厚更宽，更加持久耐用
- High-Visibility Color  
颜色醒目易见
- Stocked Material: Yellow Low-Density Polyethylene (LDPE)  
库存材质：黄色低密度聚乙烯
- Additional Colors:   
可定制颜色

**TWF 系列锥形盖/塞可应用为盖子或塞子**



蓋

the 塞  
(m)

A close-up photograph of a yellow plastic cap fitted onto the end of a metal rod. The rod is dark grey and has a longitudinal slot. The cap is bright yellow and has a slightly flared top edge.

**MOCAP**



### *Tapered Caps & Plugs*




- 可定制颜色

### *Tapered Caps & Plugs*



- [illegible]





- Center Pull Tab Allows for Quick & Easy Removal  
中间带柄设计易于快速拔除
- Extra Strong Tab is Molded into Plug so it Will Not Break Off  
中心手柄增加产品强度，使其不易破裂
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号        | (A) 小外径 |      | (B) 大外径 |      | (C) 帽檐直径 |      | (D) 塞子高度 |      | (E) 手柄高度 |     | (F) 手柄宽度 |      |
|-------------|---------|------|---------|------|----------|------|----------|------|----------|-----|----------|------|
|             | 英寸      | 毫米   | 英寸      | 毫米   | 英寸       | 毫米   | 英寸       | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   |
| CP1.23/1.36 | 1.235   | 31.4 | 1.360   | 34.5 | 1.530    | 38.9 | 0.750    | 19.1 | 0.250    | 6.4 | 0.826    | 21.0 |
| CP1.29/1.35 | 1.292   | 32.8 | 1.356   | 34.4 | 1.500    | 38.1 | 0.780    | 19.8 | 0.250    | 6.4 | 0.826    | 21.0 |
| CP1.31/1.46 | 1.312   | 33.3 | 1.465   | 37.2 | 1.620    | 41.1 | 0.750    | 19.1 | 0.250    | 6.4 | 0.826    | 21.0 |
| CP1.32/1.41 | 1.326   | 33.7 | 1.419   | 36.0 | 1.650    | 41.9 | 0.550    | 14.0 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP1.34/1.52 | 1.344   | 34.1 | 1.527   | 38.8 | 1.750    | 44.5 | 0.880    | 22.4 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP1.36/1.42 | 1.360   | 34.5 | 1.420   | 36.1 | 1.720    | 43.7 | 0.530    | 13.5 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP1.45/1.60 | 1.451   | 36.9 | 1.601   | 40.7 | 1.750    | 44.5 | 0.750    | 19.1 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP1.56/1.68 | 1.563   | 39.7 | 1.686   | 42.8 | 1.910    | 48.5 | 0.750    | 19.1 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP1.63/1.75 | 1.633   | 41.5 | 1.750   | 44.5 | 1.940    | 49.3 | 0.780    | 19.8 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP1.73/1.78 | 1.735   | 44.1 | 1.784   | 45.3 | 1.940    | 49.3 | 0.500    | 12.7 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP1.76/1.81 | 1.760   | 44.7 | 1.815   | 46.1 | 2.180    | 55.4 | 0.500    | 12.7 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP1.79/1.93 | 1.797   | 45.6 | 1.938   | 49.2 | 2.160    | 54.9 | 1.000    | 25.4 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP1.82/1.83 | 1.820   | 46.2 | 1.835   | 46.6 | 2.030    | 51.6 | 0.500    | 12.7 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP2.06/2.24 | 2.067   | 52.5 | 2.243   | 57.0 | 2.440    | 62.0 | 1.030    | 26.2 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP2.23/2.27 | 2.230   | 56.6 | 2.270   | 57.7 | 2.500    | 63.5 | 0.500    | 12.7 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP2.30/2.46 | 2.300   | 58.4 | 2.464   | 62.6 | 2.660    | 67.6 | 1.000    | 25.4 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP2.42/2.63 | 2.425   | 61.6 | 2.632   | 66.9 | 2.880    | 73.2 | 1.000    | 25.4 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP2.69/2.86 | 2.698   | 68.5 | 2.866   | 72.8 | 2.970    | 75.4 | 0.500    | 12.7 | 0.150    | 3.8 | 1.000    | 25.4 |
| CP2.85/2.98 | 2.850   | 72.4 | 2.982   | 75.7 | 3.280    | 83.3 | 0.750    | 19.1 | 0.250    | 6.4 | 1.000    | 25.4 |
| CP3.32/3.45 | 3.320   | 84.3 | 3.452   | 87.7 | 3.620    | 91.9 | 0.750    | 19.1 | 0.250    | 6.4 | 1.000    | 25.4 |






# BGC Series - Threaded Caps for BSP/Gas Fittings

BGC 系列 - BSP螺纹塑料盖

Threaded Caps & Plugs



- Knurled Grip for Easy Application  
滚花边缘设计，易于装卸
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors: ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○  
可定制颜色



| 产品型号    | 配BSP螺纹   | ( B ) 高度 |      | 滚花数量 |
|---------|----------|----------|------|------|
|         |          | 英寸       | 毫米   |      |
| BGC0125 | 1/8-28   | 0.378    | 9.6  | 4    |
| BGC0250 | 1/4-19   | 0.433    | 11.0 | 4    |
| BGC0375 | 3/8-19   | 0.445    | 11.3 | 4    |
| BGC0500 | 1/2-14   | 0.531    | 13.5 | 6    |
| BGC0625 | 5/8-14   | 0.618    | 15.7 | 6    |
| BGC0750 | 3/4-14   | 0.697    | 17.7 | 6    |
| BGC0875 | 7/8-14   | 0.768    | 19.5 | 6    |
| BGC1000 | 1-11     | 0.756    | 19.2 | 6    |
| BGC1250 | 1-1/4-11 | 0.780    | 19.8 | 8    |
| BGC1500 | 1-1/2-11 | 0.807    | 20.5 | 8    |
| BGC2000 | 2-11     | 0.827    | 21.0 | 8    |
| BGC2250 | 2-1/4-11 | 0.984    | 25.0 | 8    |
| BGC2500 | 2-1/2-11 | 1.087    | 27.6 | 8    |



### Threaded Caps & Plugs



| 产品型号     | 配公制螺纹   | ( B ) 高度 |      | 滚花数量 |
|----------|---------|----------|------|------|
|          |         | 英寸       | 毫米   |      |
| CMT0810  | M8x1    | 0.394    | 10.0 | 4    |
| CMT1010  | M10x1   | 0.394    | 10.0 | 4    |
| CMT1210  | M12x1   | 0.472    | 12.0 | 6    |
| CMT1215  | M12x1.5 | 0.472    | 12.0 | 6    |
| CMT1415  | M14x1.5 | 0.472    | 12.0 | 6    |
| CMT1415L | M14x1.5 | 0.827    | 21.0 | 6    |
| CMT1615  | M16x1.5 | 0.472    | 12.0 | 6    |
| CMT1615L | M16x1.5 | 0.827    | 21.0 | 6    |
| CMT1815  | M18x1.5 | 0.551    | 14.0 | 6    |
| CMT2015  | M20x1.5 | 0.551    | 14.0 | 6    |
| CMT2215  | M22x1.5 | 0.543    | 13.8 | 6    |
| CMT2215L | M22x1.5 | 0.965    | 24.5 | 6    |
| CMT2415  | M24x1.5 | 0.551    | 14.0 | 6    |
| CMT2515  | M25x1.5 | 0.551    | 14.0 | 6    |
| CMT2615  | M26x1.5 | 0.551    | 14.0 | 6    |
| CMT2815  | M28x1.5 | 0.488    | 12.4 | 6    |
| CMT3020  | M30x2   | 0.492    | 12.5 | 8    |
| CMT3620  | M36x2   | 0.630    | 16.0 | 8    |
| CMT4220  | M42x2   | 0.630    | 16.0 | 8    |
| CMT5220  | M52x2   | 0.630    | 16.0 | 8    |








# SPM Series - Sealing Plugs for Metric Threads

SPM 系列 - 带螺纹密封塑料堵头 ( 配公制螺纹 )


Threaded Caps & Plugs




- Designed with Five Complete Threads Plus an Integrated Sealing Lip for a Tight Fit  
五圈全螺纹加密封边设计，密封性能好
- Also Available with a Factory Fit Neoprene O-Ring when a Secure Seal is Required  
可加专配的O型氯丁橡胶垫圈，密封性更强
- Stocked Materials: Red Polypropylene (PP) or Yellow Nylon  
库存材质：红色聚丙烯/黄色尼龙
- Additional Colors: ○ ○ ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号       | O型圈      | 配公制<br>螺纹 | ( A ) 帽檐直径 |      | ( B ) 六角头高度 |      | 颜色           |
|------------|----------|-----------|------------|------|-------------|------|--------------|
|            |          |           | 英寸         | 毫米   | 英寸          | 毫米   |              |
| SPM1010    | n/a      | M10 x 1.0 | 0.560      | 14.2 | 0.390       | 9.9  | RED • YELLOW |
| SPM1010 NO | included | M10 x 1.0 | 0.560      | 14.2 | 0.390       | 9.9  | RED • YELLOW |
| SPM1215    | n/a      | M12 x 1.5 | 0.680      | 17.3 | 0.390       | 9.9  | RED • YELLOW |
| SPM1215 NO | included | M12 x 1.5 | 0.680      | 17.3 | 0.390       | 9.9  | RED • YELLOW |
| SPM1415    | n/a      | M14 x 1.5 | 0.760      | 19.3 | 0.390       | 9.9  | RED • YELLOW |
| SPM1415 NO | included | M14 x 1.5 | 0.760      | 19.3 | 0.390       | 9.9  | RED • YELLOW |
| SPM1615    | n/a      | M16 x 1.5 | 0.870      | 22.1 | 0.390       | 9.9  | RED • YELLOW |
| SPM1615 NO | included | M16 x 1.5 | 0.870      | 22.1 | 0.390       | 9.9  | RED • YELLOW |
| SPM1815    | n/a      | M18 x 1.5 | 0.940      | 23.9 | 0.430       | 10.9 | RED • YELLOW |
| SPM1815 NO | included | M18 x 1.5 | 0.940      | 23.9 | 0.430       | 10.9 | RED • YELLOW |
| SPM2015    | n/a      | M20 x 1.5 | 1.020      | 25.9 | 0.550       | 14.0 | RED • YELLOW |
| SPM2015 NO | included | M20 x 1.5 | 1.020      | 25.9 | 0.550       | 14.0 | RED • YELLOW |
| SPM2215    | n/a      | M22 x 1.5 | 1.070      | 27.2 | 0.550       | 14.0 | RED • YELLOW |
| SPM2215 NO | included | M22 x 1.5 | 1.070      | 27.2 | 0.550       | 14.0 | RED • YELLOW |
| SPM2415    | n/a      | M24 x 1.5 | 1.240      | 31.5 | 0.550       | 14.0 | RED • YELLOW |
| SPM2415 NO | included | M24 x 1.5 | 1.240      | 31.5 | 0.550       | 14.0 | RED • YELLOW |
| SPM2615    | n/a      | M26 x 1.5 | 1.260      | 32.0 | 0.550       | 14.0 | RED • YELLOW |
| SPM2615 NO | included | M26 x 1.5 | 1.260      | 32.0 | 0.550       | 14.0 | RED • YELLOW |
| SPM2720    | n/a      | M27 x 2.0 | 1.270      | 32.3 | 0.550       | 14.0 | RED • YELLOW |
| SPM2720 NO | included | M27 x 2.0 | 1.270      | 32.3 | 0.550       | 14.0 | RED • YELLOW |
| SPM3320    | n/a      | M33 x 2.0 | 1.590      | 40.4 | 0.550       | 14.0 | RED • YELLOW |
| SPM3320 NO | included | M33 x 2.0 | 1.590      | 40.4 | 0.550       | 14.0 | RED • YELLOW |

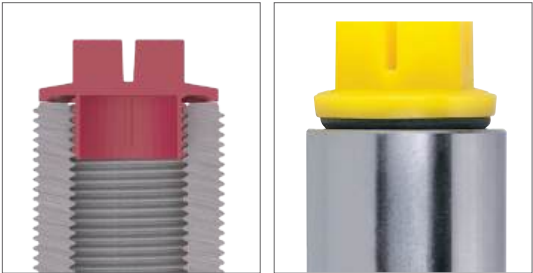

### Threaded Caps & Plugs



- Designed with Five Complete Threads Plus an Integrated Sealing Lip for a Tight Fit  
五圈全螺纹加密封边设计，密封性能好
- Also Available with a Factory Fit Neoprene O-Ring when a Secure Seal is Required  
可加专配的O型氯丁橡胶垫圈，密封性更强
- Stocked Materials: Red Polypropylene (PP) or Yellow Nylon  
库存材质：红色聚丙烯/黄色尼龙
- Additional Colors:   
可定制颜色



| 产品型号       | O型圈      | 配BSP<br>螺纹 | ( A ) 帽檐直径 |      | ( B ) 六角头高度 |      | 颜色           |
|------------|----------|------------|------------|------|-------------|------|--------------|
|            |          |            | 英寸         | 毫米   | 英寸          | 毫米   |              |
| SPB0250    | n/a      | G 1/4      | 0.760      | 19.3 | 0.390       | 9.9  | RED • YELLOW |
| SPB0250 NO | included | G 1/4      | 0.760      | 19.3 | 0.390       | 9.9  | RED • YELLOW |
| SPB0375    | n/a      | G 3/8      | 0.870      | 22.1 | 0.430       | 10.9 | RED • YELLOW |
| SPB0375 NO | included | G 3/8      | 0.870      | 22.1 | 0.430       | 10.9 | RED • YELLOW |
| SPB0500    | n/a      | G 1/2      | 1.070      | 27.2 | 0.510       | 12.9 | RED • YELLOW |
| SPB0500 NO | included | G 1/2      | 1.070      | 27.2 | 0.510       | 12.9 | RED • YELLOW |
| SPB0750    | n/a      | G 3/4      | 1.270      | 32.3 | 0.510       | 12.9 | RED • YELLOW |
| SPB0750 NO | included | G 3/4      | 1.270      | 32.3 | 0.510       | 12.9 | RED • YELLOW |
| SPB1000    | n/a      | G 1        | 1.570      | 39.9 | 0.550       | 14.0 | RED • YELLOW |
| SPB1000 NO | included | G 1        | 1.570      | 39.9 | 0.550       | 14.0 | RED • YELLOW |
| SPB1250    | n/a      | G 1-1/4    | 1.980      | 50.3 | 0.590       | 15.0 | RED • YELLOW |
| SPB1250 NO | included | G 1-1/4    | 1.980      | 50.3 | 0.590       | 15.0 | RED • YELLOW |
| SPB1500    | n/a      | G 1-1/2    | 2.180      | 55.4 | 0.590       | 15.0 | RED • YELLOW |
| SPB1500 NO | included | G 1-1/2    | 2.180      | 55.4 | 0.590       | 15.0 | RED • YELLOW |
| SPB2000    | n/a      | G 2        | 2.690      | 68.3 | 0.590       | 15.0 | RED • YELLOW |
| SPB2000 NO | included | G 2        | 2.690      | 68.3 | 0.590       | 15.0 | RED • YELLOW |




### Threaded Caps & Plugs




- 

| 产品型号 |                                           | 配螺纹   | ( B ) 总高度 |       | ( C ) 斜边高度 |       | ( D ) 柄直径 |    |
|------|-------------------------------------------|-------|-----------|-------|------------|-------|-----------|----|
|      |                                           |       | 英寸        | 毫米    | 英寸         | 毫米    | 英寸        | 毫米 |
| U100 | 1/8" NPT, 7/16" UNF, 1/8" BSP, M10        | 0.530 | 13.5      | 0.260 | 6.6        | 0.434 | 11.0      |    |
| U105 | 1/2" UNF, 1/4" BSP, M11-12                | 0.560 | 14.2      | 0.280 | 7.1        | 0.504 | 12.8      |    |
| U110 | 1/4" NPT, 9/16" UNF, 1/4" BSP, M14        | 0.590 | 15.0      | 0.310 | 7.9        | 0.568 | 14.4      |    |
| U115 | 3/4" UNF, 3/8" BSP, M16-20                | 0.670 | 17.0      | 0.390 | 9.9        | 0.774 | 19.7      |    |
| U120 | 1" UNF, 1/2" - 5/8" BSP, M22-25           | 0.740 | 18.8      | 0.460 | 11.7       | 0.976 | 24.8      |    |
| U125 | 3/4" NPT, 1-3/16" UNF, 3/4"-7/8" BSP, M30 | 0.910 | 23.1      | 0.560 | 14.2       | 1.216 | 30.9      |    |
| U130 | 1-7/16" UNF, 7/8"-1" BSP, M36             | 0.980 | 24.9      | 0.560 | 14.2       | 1.480 | 37.6      |    |





### Threaded Caps & Plugs



- Designed for Flared JIC Fittings & to Seal 37° Flare Fittings without Gaskets  
专用于密封不带垫圈的37°扩口式管件
- Knurled Grip for Easy On-Off Application  
滚花边缘设计，易于手动装卸
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色




| 产品型号   | 管尺寸   | 配标准<br>螺纹 | ( B ) 高度 |      | ( C ) 帽檐直径 |      | ( D ) 帽檐厚度 |     |
|--------|-------|-----------|----------|------|------------|------|------------|-----|
|        | 英寸    |           | 英寸       | 毫米   | 英寸         | 毫米   | 英寸         | 毫米  |
| FJP20  | 0.125 | 5/16-24   | 0.440    | 11.2 | 0.440      | 11.2 | 0.180      | 4.6 |
| FJP30  | 0.188 | 3/8-24    | 0.460    | 11.7 | 0.500      | 12.7 | 0.180      | 4.6 |
| FJP40  | 0.250 | 7/16-20   | 0.530    | 13.5 | 0.620      | 15.7 | 0.190      | 4.8 |
| FJP50  | 0.313 | 1/2-20    | 0.530    | 13.5 | 0.680      | 17.3 | 0.250      | 6.4 |
| FJP60  | 0.375 | 9/16-18   | 0.500    | 12.7 | 0.810      | 20.6 | 0.250      | 6.4 |
| FJP65  | ---   | 5/8-18    | 0.590    | 15.0 | 0.810      | 20.6 | 0.250      | 6.4 |
| FJP80  | 0.500 | 3/4-16    | 0.750    | 19.1 | 0.940      | 23.9 | 0.250      | 6.4 |
| FJP100 | 0.625 | 7/8-14    | 0.870    | 22.1 | 1.060      | 26.9 | 0.250      | 6.4 |
| FJP110 | 0.750 | 1-1/16-12 | 0.860    | 21.8 | 1.410      | 35.8 | 0.250      | 6.4 |
| FJP140 | 0.750 | 1-1/16-14 | 0.860    | 21.8 | 1.410      | 35.8 | 0.250      | 6.4 |
| FJP120 | 0.750 | 1-1/16-14 | 1.120    | 28.4 | 1.310      | 33.3 | 0.250      | 6.4 |
| FJP150 | 0.875 | 1-3/16-12 | 0.930    | 23.6 | 1.500      | 38.1 | 0.250      | 6.4 |
| FJP160 | 1.000 | 1-5/16-12 | 0.930    | 23.6 | 1.500      | 38.1 | 0.250      | 6.4 |
| FJP180 | ---   | 1-1/2-12  | 0.930    | 23.6 | 1.750      | 44.5 | 0.250      | 6.4 |
| FJP190 | 1.250 | 1-5/8-12  | 0.940    | 23.9 | 2.220      | 56.4 | 0.340      | 8.6 |
| FJP200 | ---   | 1-3/4-12  | 0.970    | 24.6 | 2.310      | 58.7 | 0.340      | 8.6 |
| FJP280 | 1.500 | 1-7/8-12  | 1.060    | 26.9 | 2.470      | 62.7 | 0.380      | 9.7 |
| FJP240 | 1.500 | 1-7/8-12  | 1.150    | 29.2 | 2.310      | 58.7 | 0.310      | 7.9 |
| FJP300 | 1.750 | 2-1/4-12  | 1.310    | 33.3 | 2.750      | 69.9 | 0.380      | 9.7 |
| FJP320 | 2.000 | 2-1/2-12  | 1.310    | 33.3 | 3.090      | 78.5 | 0.380      | 9.7 |



### Threaded Caps & Plugs



- Knurled Grip for Easy On-Off Application & Can be Used to Seal Boss-Type Fittings without Gaskets  
滚花边缘设计，易于手动装卸；可用于密封不带垫圈的 boss 管件
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色



| 产品型号   | 配标准<br>螺纹 | ( B ) 高度 |      | ( C ) 帽檐直径 |      | ( D ) 帽檐高度 |     |
|--------|-----------|----------|------|------------|------|------------|-----|
|        |           | 英寸       | 毫米   | 英寸         | 毫米   | 英寸         | 毫米  |
| IFP300 | 5/16-28   | 0.220    | 5.6  | 0.440      | 11.2 | 0.190      | 4.8 |
| IFP310 | 3/8-24    | 0.250    | 6.4  | 0.500      | 12.7 | 0.190      | 4.8 |
| IFP320 | 7/16-24   | 0.270    | 6.9  | 0.630      | 16.0 | 0.190      | 4.8 |
| IFP330 | 1/2-20    | 0.280    | 7.1  | 0.690      | 17.5 | 0.250      | 6.4 |
| IFP340 | 5/8-18    | 0.310    | 7.9  | 0.810      | 20.6 | 0.250      | 6.4 |
| IFP350 | 5/8-18    | 0.500    | 12.7 | 0.810      | 20.6 | 0.250      | 6.4 |
| IFP360 | 11/16-18  | 0.310    | 7.9  | 0.870      | 22.1 | 0.250      | 6.4 |
| IFP370 | 3/4-18    | 0.380    | 9.7  | 0.870      | 22.1 | 0.250      | 6.4 |
| IFP380 | 1-1/16-16 | 0.430    | 10.9 | 1.190      | 30.2 | 0.250      | 6.4 |



### Threaded Caps & Plugs




| 产品型号    | 配标准螺纹     | ( A ) 高度 |      | ( B ) 帽檐直径 |      |
|---------|-----------|----------|------|------------|------|
|         |           | 英寸       | 毫米   | 英寸         | 毫米   |
| TNP0375 | 3/8-24    | 0.350    | 8.9  | 0.500      | 12.7 |
| TNP0438 | 7/16-20   | 0.400    | 10.2 | 0.560      | 14.2 |
| TNP0500 | 1/2-20    | 0.460    | 11.7 | 0.630      | 16.0 |
| TNP0562 | 9/16-18   | 0.480    | 12.2 | 0.680      | 17.3 |
| TNP0750 | 3/4-16    | 0.540    | 13.7 | 0.870      | 22.1 |
| TNP0875 | 7/8-14    | 0.620    | 15.7 | 1.000      | 25.4 |
| TNP1063 | 1-1/16-12 | 0.640    | 16.3 | 1.250      | 31.8 |
| TNP1313 | 1-5/16-12 | 0.720    | 18.3 | 1.500      | 38.1 |



### Threaded Caps & Plugs



- Knurled Head for Easy Use in Manual Assembly and Removal  
滚花边缘设计，易于手动装卸及移除
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors:   
可定制颜色




| 产品型号   | 配标准螺纹     | 配管尺寸  |      | ( A ) 高度 |      | ( B ) 帽檐直径 |      |
|--------|-----------|-------|------|----------|------|------------|------|
|        |           | 英寸    | 毫米   | 英寸       | 毫米   | 英寸         | 毫米   |
| FOP200 | 11/16-16  | 0.375 | 9.5  | 0.440    | 11.2 | 0.870      | 22.1 |
| FOP210 | 13/16-16  | 0.500 | 12.7 | 0.500    | 12.7 | 0.940      | 23.9 |
| FOP220 | 1-14      | 0.625 | 15.9 | 0.590    | 15.0 | 1.160      | 29.5 |
| FOP230 | 1-3/16-12 | 0.750 | 19.1 | 0.630    | 16.0 | 1.330      | 33.8 |
| FOP240 | 1-7/16-12 | 1.000 | 25.4 | 0.750    | 19.1 | 1.630      | 41.4 |



# General Purpose Plugs for BSP Threads - **GPB Series**

带螺纹通用塑料堵头 (配BSP螺纹) - GPB 系列

Threaded Caps & Plugs



- Designed to Protect BSP Threads and Fittings from Damage, Dust, Debris and Contaminants  
专用于保护BSP螺纹及管件，防损、防尘、防碎、防污染
- Knurled Head and Slot for Easy On-Off Application  
中间带槽，滚花边缘设计，方便装卸
- Stocked Material: Red Polypropylene (PP)  
库存材质：红色聚丙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号    | 配BSP螺纹  | (B) 帽檐厚度 |      | (C) 高度 |      | (D) 帽檐直径 |      |
|---------|---------|----------|------|--------|------|----------|------|
|         |         | 英寸       | 毫米   | 英寸     | 毫米   | 英寸       | 毫米   |
| GPB0125 | G 1/8   | 0.200    | 5.1  | 0.350  | 8.9  | 0.830    | 21.1 |
| GPB0250 | G 1/4   | 0.200    | 5.1  | 0.350  | 8.9  | 0.830    | 21.1 |
| GPB0375 | G 3/8   | 0.240    | 6.1  | 0.390  | 9.9  | 0.910    | 23.1 |
| GPB0500 | G 1/2   | 0.240    | 6.1  | 0.470  | 11.9 | 1.100    | 27.9 |
| GPB0625 | G 5/8   | 0.240    | 6.1  | 0.470  | 11.9 | 1.200    | 30.5 |
| GPB0750 | G 3/4   | 0.240    | 6.1  | 0.550  | 14.0 | 1.350    | 34.3 |
| GPB0875 | G 7/8   | 0.300    | 7.6  | 0.550  | 14.0 | 1.500    | 38.1 |
| GPB1000 | G 1     | 0.300    | 7.6  | 0.550  | 14.0 | 1.600    | 40.6 |
| GPB1250 | G 1-1/4 | 0.300    | 7.6  | 0.550  | 14.0 | 2.000    | 50.8 |
| GPB1500 | G 1-1/2 | 0.350    | 8.9  | 0.590  | 15.0 | 2.150    | 54.6 |
| GPB2000 | G2      | 0.350    | 8.9  | 0.590  | 15.0 | 2.610    | 66.9 |
| GPB3000 | G3      | 0.400    | 10.2 | 0.750  | 19.1 | 3.730    | 94.7 |



**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 96


# GPM Series - General Purpose Plugs for Metric Threads

GPM 系列 - 带螺纹通用塑料堵头 ( 配公制螺纹 )

Threaded Caps & Plugs



- Designed to Protect Metric Threads and Fittings from Damage, Dust, Debris and Contaminants  
专用于保护公制螺纹及管件，防损、防尘、防碎、防污染
- Knurled Head and Slot for Easy On-Off Application  
中间带槽，滚花边缘设计，方便装卸
- Stocked Material: Red Polypropylene (PP)  
库存材质：红色聚丙烯
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●  
可定制颜色



| 产品型号    | 配公制螺纹   | ( B ) 帽檐厚度 |     | ( C ) 高度 |      | ( D ) 帽檐直径 |      |
|---------|---------|------------|-----|----------|------|------------|------|
|         |         | 英寸         | 毫米  | 英寸       | 毫米   | 英寸         | 毫米   |
| GPM0810 | M8x1.0  | 0.200      | 5.1 | 0.350    | 8.9  | 0.650      | 16.5 |
| GPM1010 | M10x1.0 | 0.200      | 5.1 | 0.350    | 8.9  | 0.650      | 16.5 |
| GPM1210 | M12x1.0 | 0.200      | 5.1 | 0.350    | 8.9  | 0.830      | 21.1 |
| GPM1215 | M12x1.5 | 0.200      | 5.1 | 0.350    | 8.9  | 0.830      | 21.1 |
| GPM1415 | M14x1.5 | 0.200      | 5.1 | 0.350    | 8.9  | 0.830      | 21.1 |
| GPM1615 | M16x1.5 | 0.240      | 6.1 | 0.390    | 9.9  | 0.910      | 23.1 |
| GPM1815 | M18x1.5 | 0.240      | 6.1 | 0.390    | 9.9  | 0.910      | 23.1 |
| GPM2015 | M20x1.5 | 0.240      | 6.1 | 0.470    | 11.9 | 1.100      | 27.9 |
| GPM2215 | M22x1.5 | 0.240      | 6.1 | 0.470    | 11.9 | 1.100      | 27.9 |
| GPM2415 | M24x1.5 | 0.240      | 6.1 | 0.470    | 11.9 | 1.220      | 31.0 |
| GPM2515 | M25x1.5 | 0.240      | 6.1 | 0.470    | 11.9 | 1.220      | 31.0 |
| GPM2615 | M26x1.5 | 0.240      | 6.1 | 0.470    | 11.9 | 1.300      | 33.0 |
| GPM5220 | M52x2.0 | 0.350      | 8.9 | 0.590    | 15.0 | 2.400      | 61.0 |



### Threaded Caps & Plugs




- Designed to Provide Positive Seal on SAE Straight-Thread Ports  
为SAE标准直螺纹端口提供有效密封防护
- Features a Molded-In O-Ring Style Bead & External Lip on the Flange to Seal Out Contaminants  
独立开模的O形圈胎圈座及外凸缘帽檐设计，有效保护产品，防止污染
- Stocked Material: Red Polypropylene (PP)  
库存材质：红色聚丙烯
- Additional Colors:   
可定制颜色

| 产品型号       | 配标准螺纹     | ( A ) 高度 |      | ( B ) 头部高度 |     | ( C ) 帽檐直径 |      |
|------------|-----------|----------|------|------------|-----|------------|------|
|            |           | 英寸       | 毫米   | 英寸         | 毫米  | 英寸         | 毫米   |
| GPU0437-20 | 7/16-20   | 0.340    | 8.6  | 0.210      | 5.3 | 0.660      | 16.8 |
| GPU0437-24 | 7/16-24   | 0.340    | 8.6  | 0.210      | 5.3 | 0.660      | 16.8 |
| GPU0500-20 | 1/2-20    | 0.340    | 8.6  | 0.250      | 6.4 | 0.730      | 18.5 |
| GPU0562-18 | 9/16-18   | 0.360    | 9.1  | 0.250      | 6.4 | 0.800      | 20.3 |
| GPU0625-18 | 5/8-18    | 0.360    | 9.1  | 0.250      | 6.4 | 0.870      | 22.1 |
| GPU0750-16 | 3/4-16    | 0.410    | 10.4 | 0.250      | 6.4 | 1.020      | 25.9 |
| GPU0875-14 | 7/8-14    | 0.530    | 13.5 | 0.250      | 6.4 | 1.160      | 29.5 |
| GPU1000-14 | 1-14      | 0.530    | 13.5 | 0.250      | 6.4 | 1.380      | 34.9 |
| GPU1062-12 | 1-1/16-12 | 0.610    | 15.5 | 0.250      | 6.4 | 1.450      | 36.8 |
| GPU1187-12 | 1-3/16-12 | 0.610    | 15.5 | 0.250      | 6.4 | 1.600      | 40.6 |
| GPU1313-12 | 1-5/16-12 | 0.610    | 15.5 | 0.250      | 6.4 | 1.740      | 44.2 |
| GPU1625-12 | 1-5/8-12  | 0.610    | 15.5 | 0.250      | 6.4 | 2.170      | 55.1 |
| GPU1875-12 | 1-7/8-12  | 0.610    | 15.5 | 0.250      | 6.4 | 2.440      | 61.9 |





### Threaded Caps & Plugs



The image displays four red plastic components. On the left, there is a small cap, a large cap, a small plug, and a large plug with a brass fitting. On the right, there is a large plug with a brass fitting, shown from a different angle.

### Threaded Caps & Plugs



- 库存材质：红色聚丙烯




### SPN 系列 - 方头螺纹堵头 (配NPT螺纹)

### Threaded Caps & Plugs



- Designed to Protect Threads from Dirt, Dust & Moisture During Low-Pressure Testing & In-Plant Handling  
低压测试或运输过程中保护螺纹，防尘、防潮、防污染
- Stocked Material: Red Polypropylene (PP)  
库存材质：红色聚丙烯
- Additional Colors:   
可定制颜色




| 产品型号    | 配NPT螺纹         | (B) 方头高度 |     | (C) 螺纹长度 |      | (D) 总高度 |      | (E) 方头边长 |      |
|---------|----------------|----------|-----|----------|------|---------|------|----------|------|
|         |                | 英寸       | 毫米  | 英寸       | 毫米   | 英寸      | 毫米   | 英寸       | 毫米   |
| SPN0125 | 1/8-27         | 0.250    | 6.4 | 0.290    | 7.4  | 0.370   | 9.4  | 0.280    | 7.1  |
| SPN0250 | 1/4-18         | 0.250    | 6.4 | 0.350    | 8.9  | 0.430   | 10.9 | 0.380    | 9.7  |
| SPN0375 | 3/8-18         | 0.250    | 6.4 | 0.420    | 10.7 | 0.490   | 12.4 | 0.440    | 11.2 |
| SPN0500 | 1/2-14         | 0.250    | 6.4 | 0.470    | 11.9 | 0.550   | 14.0 | 0.560    | 14.2 |
| SPN0750 | 3/4-14         | 0.250    | 6.4 | 0.520    | 13.2 | 0.640   | 16.3 | 0.620    | 15.7 |
| SPN1000 | 1 - 11-1/2     | 0.250    | 6.4 | 0.590    | 15.0 | 0.700   | 17.8 | 0.810    | 20.6 |
| SPN1250 | 1-1/4 - 11-1/2 | 0.380    | 9.7 | 0.830    | 21.1 | 0.980   | 24.9 | 1.000    | 25.4 |
| SPN1500 | 1-1/2 - 11-1/2 | 0.380    | 9.7 | 0.830    | 21.1 | 0.980   | 24.9 | 1.250    | 31.8 |



Hex Socket Plugs for NPT Threads - **HSPN Series**  
内六角头螺纹堵头 ( 配NPT螺纹 ) - HSPN 系列

Threaded Caps & Plugs



- Designed to Protect Threads from Dirt, Dust & Moisture During Low-Pressure Testing & In-Plant Handling  
低压测试或运输过程中保护螺纹，防尘、防潮、防污染
- Stocked Material: Red Polypropylene (PP)  
库存材质：红色聚丙烯
- Additional Colors:   
可定制颜色



| 产品型号     | 配NPT螺纹     | ( B ) 内六角对边直径 |      | ( C ) 凹口深度 |      | ( D ) 总高度 |      |
|----------|------------|---------------|------|------------|------|-----------|------|
|          |            | 英寸            | 毫米   | 英寸         | 毫米   | 英寸        | 毫米   |
| HSPN0250 | 1/4-18     | 0.260         | 6.6  | 0.310      | 7.9  | 0.500     | 12.7 |
| HSPN0375 | 3/8-18     | 0.330         | 8.4  | 0.380      | 9.7  | 0.566     | 14.4 |
| HSPN0500 | 1/2-14     | 0.390         | 9.9  | 0.380      | 9.7  | 0.566     | 14.4 |
| HSPN0750 | 3/4-14     | 0.570         | 14.5 | 0.470      | 11.9 | 0.610     | 15.5 |
| HSPN1000 | 1 - 11-1/2 | 0.640         | 16.3 | 0.590      | 15.0 | 0.740     | 18.8 |




# PIP Series - Push-In Plugs for SAE & NPT Threads

PIP 系列 - 按压式塑料堵头 (配SAE&NPT螺纹)

Threaded Caps & Plugs



- Designed to Simply Snap into Place to Protect Threads  
轻轻一按、安装方便，有效保护螺纹管件
- Stocked Material: Red Low-Density Polyethylene (LDPE)  
库存材质：红色低密度聚乙烯
- Additional Colors: ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○  
可定制颜色



| 产品型号     | 配NPT螺纹 | 配SAE螺纹  | (A) 外径 |      | (B) 高度 |      | (C) 帽檐直径 |      |
|----------|--------|---------|--------|------|--------|------|----------|------|
|          |        |         | 英寸     | 毫米   | 英寸     | 毫米   | 英寸       | 毫米   |
| PIP0250  | ---    | 1/4"    | 0.206  | 5.2  | 0.220  | 5.6  | 0.452    | 11.5 |
| PIP0313  | ---    | 5/16"   | 0.262  | 6.7  | 0.235  | 6.0  | 0.527    | 13.4 |
| PIPL0375 | 1/8"   | 3/8"    | 0.310  | 7.9  | 0.340  | 8.6  | 0.588    | 14.9 |
| PIP0375  | 1/8"   | 3/8"    | 0.324  | 8.2  | 0.235  | 6.0  | 0.588    | 14.9 |
| PIP0438  | ---    | 7/16"   | 0.380  | 9.7  | 0.270  | 6.9  | 0.656    | 16.7 |
| PIP0500  | 1/4"   | 1/2"    | 0.437  | 11.1 | 0.270  | 6.9  | 0.724    | 18.4 |
| PIPL0563 | ---    | 9/16"   | 0.480  | 12.2 | 0.360  | 9.1  | 0.835    | 21.2 |
| PIP0563  | ---    | 9/16"   | 0.495  | 12.6 | 0.290  | 7.4  | 0.810    | 20.6 |
| PIP0625  | 3/8"   | 5/8"    | 0.558  | 14.2 | 0.290  | 7.4  | 0.971    | 24.7 |
| PIP0688  | ---    | 11/16"  | 0.610  | 15.5 | 0.290  | 7.4  | 1.008    | 25.6 |
| PIP0750  | ---    | 3/4"    | 0.676  | 17.2 | 0.290  | 7.4  | 1.045    | 26.5 |
| PIP0813  | 1/2"   | 13/16"  | 0.732  | 18.6 | 0.290  | 7.4  | 1.094    | 27.8 |
| PIP0875  | ---    | 7/8"    | 0.798  | 20.3 | 0.295  | 7.5  | 1.172    | 29.8 |
| PIP1000  | 3/4"   | 1"      | 0.922  | 23.4 | 0.290  | 7.4  | 1.305    | 33.1 |
| PIP1062  | ---    | 1-1/16" | 0.972  | 24.7 | 0.290  | 7.4  | 1.417    | 36.0 |
| PIP1188  | ---    | 1-3/16" | 1.090  | 27.7 | 0.340  | 8.6  | 1.518    | 38.6 |
| PIP1250  | ---    | 1-1/4"  | 1.160  | 29.5 | 0.340  | 8.6  | 1.571    | 39.9 |
| PIP1313  | 1"     | 1-5/16" | 1.215  | 30.9 | 0.340  | 8.6  | 1.640    | 41.7 |
| PIP1438  | ---    | 1-7/16" | 1.360  | 34.5 | 0.460  | 11.7 | 1.803    | 45.8 |
| PIP1500  | ---    | 1-1/2"  | 1.405  | 35.7 | 0.460  | 11.7 | 1.854    | 47.1 |
| PIP1625  | ---    | 1-5/8"  | 1.525  | 38.7 | 0.460  | 11.7 | 1.982    | 50.3 |
| PIP1750  | ---    | 1-3/4"  | 1.650  | 41.9 | 0.460  | 11.7 | 2.117    | 53.8 |
| PIP1875  | ---    | 1-7/8"  | 1.775  | 45.1 | 0.460  | 11.7 | 2.216    | 56.3 |




**MOCAP**

103 www.mocap.com.cn | 4006-4006-49 | 微信号 13802665016

Free Samples

### Pipe & Flange Protection

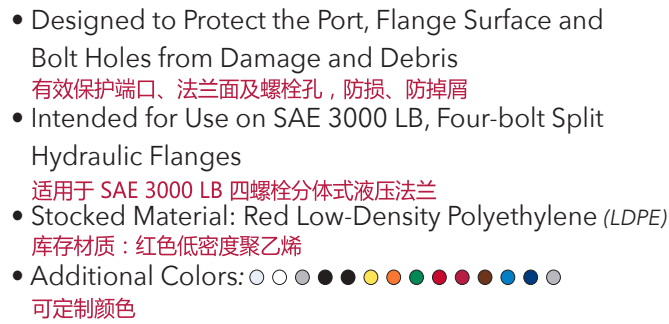



# PC Series - Pipe Caps

## PC 系列 - 管帽

Pipe & Flange Protection



- Designed to Protect Metric, BSP and NPT Male Pipe Threads from Damage and Contamination  
保护公制螺纹、BSP及NPT螺纹管件，防损、防污染
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯




| 产品型号   | 配管外径 | 配BSP螺纹  | 配NPT螺纹 | (L) 高度 |      |
|--------|------|---------|--------|--------|------|
|        | 毫米   | 英寸      | 英寸     | 英寸     | 毫米   |
| PC100  | 8.0  | ---     | ---    | 0.445  | 11.3 |
| PC100A | 9.7  | G 1/8   | ---    | 0.492  | 12.5 |
| PC100B | 10.3 | ---     | 1/8    | 0.433  | 11.0 |
| PC102  | 10.3 | ---     | ---    | 0.490  | 12.4 |
| PC103  | 12.0 | ---     | ---    | 0.539  | 13.7 |
| PC104  | 12.7 | ---     | ---    | 0.569  | 14.4 |
| PC104A | 13.2 | G 1/4   | ---    | 0.626  | 15.9 |
| PC104B | 13.7 | ---     | 1/4    | 0.571  | 14.5 |
| PC105  | 13.7 | ---     | ---    | 0.626  | 15.9 |
| PC106  | 14.0 | ---     | ---    | 0.624  | 15.8 |
| PC107  | 15.0 | ---     | ---    | 0.596  | 15.1 |
| PC108  | 16.0 | ---     | ---    | 0.648  | 16.4 |
| PC108A | 16.7 | G 3/8   | ---    | 0.693  | 17.6 |
| PC108B | 17.1 | ---     | 3/8    | 0.571  | 14.5 |
| PC109  | 17.1 | ---     | ---    | 0.693  | 17.6 |
| PC110  | 18.0 | ---     | ---    | 0.701  | 17.8 |
| PC112  | 20.0 | ---     | ---    | 0.691  | 17.5 |
| PC112A | 21.0 | G 1/2   | ---    | 0.677  | 17.2 |
| PC112B | 21.2 | ---     | 1/2    | 0.689  | 17.5 |
| PC114  | 21.3 | ---     | ---    | 0.677  | 17.2 |
| PC115  | 22.0 | ---     | ---    | 0.709  | 18.0 |
| PC116  | 25.4 | ---     | ---    | 0.667  | 16.9 |
| PC116A | 26.6 | G 3/4   | 3/4    | 0.693  | 17.6 |
| PC117  | 26.7 | ---     | ---    | 0.695  | 17.6 |
| PC118  | 28.0 | ---     | ---    | 0.709  | 18.0 |
| PC119  | 30.0 | ---     | ---    | 0.656  | 16.6 |
| PC120  | 31.8 | ---     | ---    | 0.793  | 20.1 |
| PC120A | 33.2 | G 1     | 1      | 0.827  | 21.0 |
| PC121  | 33.4 | ---     | ---    | 0.827  | 21.0 |
| PC123  | 35.0 | ---     | ---    | 0.886  | 22.5 |
| PC123A | 37.9 | G 1-1/8 | ---    | 0.866  | 22.0 |
| PC124  | 38.1 | ---     | ---    | 0.868  | 22.0 |
| PC125  | 40.0 | ---     | ---    | 0.768  | 19.5 |
| PC125A | 42.0 | G 1-1/4 | 1-1/4  | 0.874  | 22.2 |
| PC126  | 42.0 | ---     | ---    | 0.874  | 22.2 |
| PC126A | 44.3 | G 1-3/8 | ---    | 0.807  | 20.5 |
| PC127  | 45.0 | ---     | ---    | 0.805  | 20.4 |
| PC127A | 47.8 | G 1-1/2 | ---    | 0.890  | 22.6 |
| PC127B | 48.1 | ---     | 1-1/2  | 0.890  | 22.6 |
| PC128  | 48.3 | ---     | ---    | 0.890  | 22.6 |
| PC129  | 50.0 | ---     | ---    | 1.008  | 25.6 |



**MOCAP**





- Designed to Protect Metric, BSP and NPT Male Pipe Threads from Damage and Contamination  
保护公制螺纹、BSP及NPT螺纹管件，防损、防污染
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯



| 产品型号   | 配管外径    | 配BSP螺纹  | 配NPT螺纹 | (L) 高度 |      |
|--------|---------|---------|--------|--------|------|
|        | 毫米      | 英寸      | 英寸     | 英寸     | 毫米   |
| PC130  | 50.8    | ---     | ---    | 0.892  | 22.6 |
| PC130A | 53.8    | G 1-3/4 | ---    | 0.894  | 22.7 |
| PC133  | 54.0    | ---     | ---    | 0.894  | 22.7 |
| PC134  | 57.0    | ---     | ---    | 0.906  | 23.0 |
| PC134A | 59.6    | G 2     | ---    | 0.965  | 24.5 |
| PC134B | 60.1    | ---     | 2      | 0.965  | 24.5 |
| PC135  | 60.3    | ---     | ---    | 0.967  | 24.5 |
| PC137  | 63.5    | ---     | ---    | 0.941  | 23.9 |
| PC139  | 70.0    | ---     | ---    | 1.047  | 26.6 |
| PC140  | 73.0    | ---     | 2-1/2  | 1.041  | 26.4 |
| PC141  | 76.3    | G2-1/2  | ---    | 0.992  | 25.2 |
| PC142  | 82.0    | G2-3/4  | ---    | 1.087  | 27.6 |
| PC143  | 85.0    | ---     | ---    | 0.907  | 23.0 |
| PC144  | 88.9    | G 3     | 3      | 1.063  | 27.0 |
| PC146  | 95.0    | ---     | ---    | 0.969  | 24.6 |
| PC147  | 101.6   | ---     | 3-1/2  | 1.063  | 27.0 |
| PC149  | 108.0   | ---     | ---    | 1.156  | 29.3 |
| PC150  | 114.0   | G4      | 4      | 1.035  | 26.3 |
| PC151  | 121.0   | ---     | ---    | 1.071  | 27.2 |
| PC152  | 127.0   | G4-1/2  | ---    | 1.085  | 27.5 |
| PC153  | 129.0   | ---     | ---    | 1.035  | 26.3 |
| PC154  | 133.0   | ---     | ---    | 1.073  | 27.2 |
| PC155  | 139.7   | G5      | 5      | 1.035  | 26.3 |
| PC157  | 152.0   | G5-1/2  | ---    | 1.069  | 27.1 |
| PC159  | 159.0   | ---     | ---    | 1.116  | 28.3 |
| PC161  | 168.3   | G6      | 6      | 1.205  | 30.6 |
| PC167  | 219.0   | G8      | 8      | 1.276  | 32.4 |
| PC173  | 273.0   | G10     | 10     | 1.35   | 34.3 |
| PC178  | 323.9   | G12     | 12     | 1.825  | 46.3 |
| PC182  | 355.6   | G14     | 14     | 1.85   | 47.0 |
| PC186  | 406.4   | G16     | 16     | 2.071  | 52.6 |
| PC188  | 457.2   | G18     | 18     | 1.929  | 49.0 |
| PC190  | 508.0   | G20     | 20     | 2.008  | 51.0 |
| PC192  | 558.0   | G22     | 22     | 2.087  | 53.0 |
| PC193  | 610.0   | G24     | 24     | 2.165  | 55.0 |
| PC195  | 660.4   | G26     | 26     | 2.421  | 61.5 |
| PC196  | 711.2   | G28     | 28     | 2.48   | 63.0 |
| PC197  | 762.0   | G30     | 30     | 2.953  | 75.0 |
| PC198  | 812.8   | G32     | 32     | 3.004  | 76.3 |
| PC200  | 914.4   | G36     | 36     | 3.189  | 81.0 |
| PC201  | 1,016.0 | G40     | 40     | 3.622  | 92.0 |




# PP Series - Pipe Plugs

PP 系列 - 管塞


Pipe & Flange Protection



- Designed to Protect Metric, BSP and NPT Pipe from Damage and Contamination  
保护公制螺纹、BSP及NPT螺纹管件，防损、防污染
- Stocked Material: Black Low-Density Polyethylene (LDPE)  
库存材质：黑色低密度聚乙烯




| 产品型号  | 配管外径  | 配BSP螺纹 | 配NPT螺纹 |
|-------|-------|--------|--------|
|       | 毫米    | 英寸     | 英寸     |
| PP114 | 21.3  | 1/2    | 1/2    |
| PP116 | 25.4  | ---    | ---    |
| PP117 | 26.7  | 3/4    | 3/4    |
| PP121 | 33.4  | 1      | 1      |
| PP124 | 38.1  | 1-1/8  | ---    |
| PP126 | 42.0  | 1-1/4  | 1-1/4  |
| PP128 | 48.3  | 1-1/2  | 1-1/2  |
| PP129 | 50.0  | ---    | ---    |
| PP134 | 57.0  | ---    | ---    |
| PP135 | 60.3  | 2      | 2      |
| PP137 | 63.5  | ---    | ---    |
| PP140 | 73.0  | ---    | 2-1/2  |
| PP141 | 76.3  | 2-1/2  | ---    |
| PP144 | 88.9  | 3      | 3      |
| PP147 | 101.6 | ---    | 3-1/2  |
| PP149 | 108.0 | ---    | ---    |
| PP150 | 114.0 | 4      | 4      |
| PP151 | 121.0 | ---    | ---    |
| PP152 | 127.0 | 4-1/2  | ---    |
| PP154 | 133.0 | ---    | ---    |
| PP156 | 141.3 | ---    | ---    |
| PP157 | 152.0 | 5-1/2  | ---    |
| PP159 | 159.0 | ---    | ---    |
| PP161 | 168.3 | 6      | 6      |
| PP162 | 177.8 | ---    | ---    |



# Push-In Flange Protectors - MPI Series

多功能法兰保护套 - MPI 系列

Pipe & Flange Protection



- Flexible Rings Allow for Easy Installation  
弹性双层圆环垫圈设计，安装方便
- Designed to Protect Flange Faces from Damage and Contamination  
专用于保护法兰面，防损、防污染
- Stocked Material: Yellow Low-Density Polyethylene (LDPE)  
库存材质：黄色低密度聚乙烯



| 产品型号     | 配管尺寸  |  | DIN法兰尺寸 |  | (A) 直径 |       | (B) 帽檐直径 |       | (C) 高度 |      |
|----------|-------|--|---------|--|--------|-------|----------|-------|--------|------|
|          | 英寸    |  | 英寸      |  | 英寸     | 毫米    | 英寸       | 毫米    | 英寸     | 毫米   |
| MPI500   | 1/2   |  | DN 15   |  | 0.748  | 19.0  | 3.543    | 90.0  | 0.591  | 15.0 |
| MPI750   | 3/4   |  | DN 20   |  | 0.945  | 24.0  | 3.937    | 100.0 | 0.591  | 15.0 |
| MPI1000  | 1     |  | DN 25   |  | 1.181  | 30.0  | 4.331    | 110.0 | 0.787  | 20.0 |
| MPI1250  | 1-1/4 |  | DN 32   |  | 1.535  | 39.0  | 5.354    | 136.0 | 0.787  | 20.0 |
| MPI1500  | 1-1/2 |  | DN 40   |  | 1.772  | 45.0  | 5.748    | 146.0 | 0.787  | 20.0 |
| MPI2000  | 2     |  | DN 50   |  | 2.205  | 56.0  | 6.299    | 160.0 | 0.787  | 20.0 |
| MPI2500  | 2-1/2 |  | DN 65   |  | 2.835  | 72.0  | 7.087    | 180.0 | 0.787  | 20.0 |
| MPI3000  | 3     |  | DN 80   |  | 3.346  | 85.0  | 7.717    | 196.0 | 0.984  | 25.0 |
| MPI4000  | 4     |  | DN 100  |  | 4.291  | 109.0 | 8.504    | 216.0 | 0.984  | 25.0 |
| MPI5000  | 5     |  | DN 125  |  | 5.276  | 134.0 | 9.685    | 246.0 | 0.984  | 25.0 |
| MPI6000  | 6     |  | DN 150  |  | 6.339  | 161.0 | 11.023   | 280.0 | 1.378  | 35.0 |
| MPI8000  | 8     |  | DN 200  |  | 8.268  | 210.0 | 13.228   | 336.0 | 1.378  | 35.0 |
| MPI10000 | 10    |  | DN 250  |  | 10.315 | 262.0 | 15.354   | 390.0 | 1.575  | 40.0 |
| MPI12000 | 12    |  | DN 300  |  | 12.520 | 318.0 | 17.717   | 450.0 | 1.890  | 48.0 |



**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 108


# MOF Series - Outside Fitting Flange Protectors

## MOF 系列 - 法兰外保护盖

Pipe & Flange Protection



- Designed to Easily Snap Over the Full Face of the Flange for Maximum Protection  
快捷遮蔽整个法兰，为其提供最大保护
- Stocked Material: Yellow Low-Density Polyethylene (LDPE)  
库存材质：黄色低密度聚乙烯




| 产品型号        | 配管尺寸  | 压力范围        |
|-------------|-------|-------------|
|             | 英寸    |             |
| MOF150500   | 1/2   | #150        |
| MOF300500   | 1/2   | #300 - #600 |
| MOF150750   | 3/4   | #150        |
| MOF1501000  | 1     | #150        |
| MOF3001000  | 1     | #300 - #600 |
| MOF1501500  | 1-1/2 | #150        |
| MOF1502000  | 2     | #150        |
| MOF3002000  | 2     | #300        |
| MOF1503000  | 3     | #150        |
| MOF1504000  | 4     | #150        |
| MOF1506000  | 6     | #150        |
| MOF15010000 | 10    | #150        |



# Bolt Hole Flange Protectors - MBH Series

四孔法兰防尘盖 - MBH 系列

Pipe & Flange Protection



- Designed to Snap-In Easily Without Additional Fasteners  
无需其他额外扣件即可快速压紧
- Stocked Material: Blue or Black Low-Density Polyethylene:  
Blue or Black, per Pipe Pressure Rating  
库存材质：黑色或蓝色低密度聚乙烯 - 颜色根据管件压力范围来定



| 产品型号           | 配管尺寸  | 压力范围           | 颜色    |
|----------------|-------|----------------|-------|
| 英寸             |       |                |       |
| MBH150500MB1   | 1/2   | #125 #150      | BLUE  |
| MBH300500BK1   | 1/2   | #300 #400 #600 | BLACK |
| MBH150750MB1   | 3/4   | #125 #150      | BLUE  |
| MBH300750BK1   | 3/4   | #300 #400 #600 | BLACK |
| MBH1501000MB1  | 1     | #125 #150      | BLUE  |
| MBH3001000BK1  | 1     | #300 #400 #600 | BLACK |
| MBH1501250MB1  | 1-1/4 | #125 #150      | BLUE  |
| MBH3001250BK1  | 1-1/4 | #300 #400 #600 | BLACK |
| MBH1501500MB1  | 1-1/2 | #125 #150      | BLUE  |
| MBH3001500BK1  | 1-1/2 | #300 #400 #600 | BLACK |
| MBH1502000MB1  | 2     | #125 #150      | BLUE  |
| MBH3002000BK1  | 2     | #300 #400 #600 | BLACK |
| MBH1502500MB1  | 2-1/2 | #125 #150      | BLUE  |
| MBH3002500BK1  | 2-1/2 | #300 #400 #600 | BLACK |
| MBH1503000MB1  | 3     | #125 #150      | BLUE  |
| MBH3003000BK1  | 3     | #300 #400 #600 | BLACK |
| MBH1504000MB1  | 4     | #125 #150      | BLUE  |
| MBH3004000BK1  | 4     | #300           | BLACK |
| MBH1505000MB1  | 5     | #125 #150      | BLUE  |
| MBH3005000BK1  | 5     | #300           | BLACK |
| MBH1506000MB1  | 6     | #125 #150      | BLUE  |
| MBH3006000BK1  | 6     | #300           | BLACK |
| MBH1508000MB1  | 8     | #125 #150      | BLUE  |
| MBH3008000BK1  | 8     | #300           | BLACK |
| MBH15010000MB1 | 10    | #125 #150      | BLUE  |
| MBH30010000BK1 | 10    | #300           | BLACK |
| MBH15012000MB1 | 12    | #125 #150      | BLUE  |
| MBH30012000BK1 | 12    | #300           | BLACK |



**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 110


# RVG Series - Round Vinyl Grips

## RVG 系列 - 圆形浸塑手柄套

### Grips



- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Printable\*  
可印刷
- Can Be Sliced to Any Length  
长度可调整
- Stocked Material: Black Vinyl (*glossy and textured*)  
库存材质：黑色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色




| 模具编号    | (A) 内径 |      | (B) 最短内长 |       | (C) 最长内长 |       | (D) 壁厚 |     | 库存长度 |
|---------|--------|------|----------|-------|----------|-------|--------|-----|------|
|         | 英寸     | 毫米   | 英寸       | 毫米    | 英寸       | 毫米    | 英寸     | 毫米  |      |
| RVG9087 | 0.187  | 4.7  | 1.562    | 39.7  | 4.000    | 101.6 | 0.055  | 1.4 | ---  |
| RVG9088 | 0.250  | 6.4  | 1.562    | 39.7  | 6.000    | 152.4 | 0.055  | 1.4 | ---  |
| RVG9089 | 0.281  | 7.1  | 1.562    | 39.7  | 6.000    | 152.4 | 0.055  | 1.4 | ---  |
| RVG9090 | 0.313  | 8.0  | 1.562    | 39.7  | 6.000    | 152.4 | 0.060  | 1.5 | ---  |
| RVG9091 | 0.375  | 9.5  | 1.562    | 39.7  | 6.250    | 158.8 | 0.065  | 1.7 | ---  |
| RVG9092 | 0.375  | 9.5  | 6.312    | 160.3 | 12.500   | 317.5 | 0.065  | 1.7 | ---  |
| RVG9093 | 0.406  | 10.3 | 1.562    | 39.7  | 3.500    | 88.9  | 0.065  | 1.7 | ---  |
| RVG9094 | 0.437  | 11.1 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9095 | 0.437  | 11.1 | 6.062    | 154.0 | 12.500   | 317.5 | 0.065  | 1.7 | ---  |
| RVG9096 | 0.468  | 11.9 | 1.562    | 39.7  | 2.500    | 63.5  | 0.065  | 1.7 | ---  |
| RVG4555 | 0.468  | 11.9 | 2.562    | 65.1  | 15.750   | 400.1 | 0.065  | 1.7 | ---  |
| RVG9097 | 0.500  | 12.7 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | 4.50 |
| RVG0574 | 0.500  | 12.7 | 6.062    | 154.0 | 7.500    | 190.5 | 0.065  | 1.7 | ---  |
| RVG2618 | 0.500  | 12.7 | 7.562    | 192.1 | 10.000   | 254.0 | 0.065  | 1.7 | ---  |
| RVG9098 | 0.531  | 13.5 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9099 | 0.562  | 14.3 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9100 | 0.610  | 15.5 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9101 | 0.625  | 15.9 | 1.562    | 39.7  | 2.500    | 63.5  | 0.065  | 1.7 | ---  |
| RVG9102 | 0.625  | 15.9 | 2.562    | 65.1  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG3798 | 0.625  | 15.9 | 6.062    | 154.0 | 14.500   | 368.3 | 0.065  | 1.7 | ---  |
| RVG4454 | 0.625  | 15.9 | 14.562   | 369.9 | 23.000   | 584.2 | 0.065  | 1.7 | ---  |
| RVG9540 | 0.650  | 16.5 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9103 | 0.687  | 17.4 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9571 | 0.700  | 17.8 | 1.562    | 39.7  | 7.750    | 196.9 | 0.065  | 1.7 | ---  |
| RVG0733 | 0.700  | 17.8 | 7.812    | 198.4 | 14.500   | 368.3 | 0.065  | 1.7 | ---  |
| RVG4364 | 0.700  | 17.8 | 14.562   | 369.9 | 23.000   | 584.2 | 0.065  | 1.7 | ---  |
| RVG9104 | 0.730  | 18.5 | 1.562    | 39.7  | 12.500   | 317.5 | 0.065  | 1.7 | ---  |
| RVG9105 | 0.750  | 19.1 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | 4.50 |
| RVG0560 | 0.750  | 19.1 | 6.062    | 154.0 | 8.500    | 215.9 | 0.065  | 1.7 | ---  |
| RVG0641 | 0.750  | 19.1 | 8.562    | 217.5 | 14.250   | 362.0 | 0.065  | 1.7 | ---  |
| RVG0125 | 0.750  | 19.1 | 14.062   | 357.2 | 22.000   | 558.8 | 0.065  | 1.7 | ---  |
| RVG9106 | 0.812  | 20.6 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG0944 | 0.812  | 20.6 | 6.062    | 154.0 | 13.500   | 342.9 | 0.065  | 1.7 | ---  |
| RVG4266 | 0.812  | 20.6 | 13.625   | 346.1 | 22.750   | 577.9 | 0.065  | 1.7 | ---  |
| RVG9107 | 0.845  | 21.5 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG9108 | 0.845  | 21.5 | 6.062    | 154.0 | 12.500   | 317.5 | 0.065  | 1.7 | ---  |
| RVG9109 | 0.875  | 22.2 | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | 4.50 |
| RVG2672 | 0.875  | 22.2 | 6.062    | 154.0 | 10.750   | 273.1 | 0.065  | 1.7 | ---  |
| RVG5378 | 0.875  | 22.2 | 10.062   | 255.6 | 22.000   | 558.8 | 0.065  | 1.7 | ---  |

\*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color



**MOCAP**



- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Printable\*  
可印刷
- Stocked Material: Black Vinyl (*glossy and textured*)  
库存材质：黑色乙烯基
- Additional Colors: ○●●●●●●●●●●  
可定制颜色



| 模具编号    | (A) 内径 |       | (B) 最短内长 |       | (C) 最长内长 |       | (D) 壁厚 |     | 库存长度 |
|---------|--------|-------|----------|-------|----------|-------|--------|-----|------|
|         | 英寸     | 毫米    | 英寸       | 毫米    | 英寸       | 毫米    | 英寸     | 毫米  |      |
| RVG2182 | 0.926  | 23.5  | 1.562    | 39.7  | 8.500    | 215.9 | 0.065  | 1.7 | ---  |
| RVG9110 | 0.937  | 23.8  | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG4010 | 0.937  | 23.8  | 6.062    | 154.0 | 14.500   | 368.3 | 0.065  | 1.7 | ---  |
| RVG4279 | 0.937  | 23.8  | 14.562   | 369.9 | 22.250   | 565.2 | 0.065  | 1.7 | ---  |
| RVG9111 | 0.970  | 24.6  | 1.562    | 39.7  | 12.500   | 317.5 | 0.065  | 1.7 | ---  |
| RVG9112 | 1.000  | 25.4  | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | 4.50 |
| RVG4413 | 1.000  | 25.4  | 6.062    | 154.0 | 22.250   | 565.2 | 0.065  | 1.7 | ---  |
| RVG9113 | 1.062  | 27.0  | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG2301 | 1.062  | 27.0  | 6.062    | 154.0 | 8.500    | 215.9 | 0.065  | 1.7 | ---  |
| RVG3826 | 1.062  | 27.0  | 8.562    | 217.5 | 14.750   | 374.7 | 0.065  | 1.7 | ---  |
| RVG4387 | 1.062  | 27.0  | 14.812   | 376.2 | 22.500   | 571.5 | 0.065  | 1.7 | ---  |
| RVG9114 | 1.125  | 28.6  | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | ---  |
| RVG4126 | 1.125  | 28.6  | 6.062    | 154.0 | 8.500    | 215.9 | 0.065  | 1.7 | ---  |
| RVG1685 | 1.125  | 28.6  | 8.562    | 217.5 | 15.500   | 393.7 | 0.065  | 1.7 | ---  |
| RVG4213 | 1.125  | 28.6  | 15.562   | 395.3 | 22.500   | 571.5 | 0.065  | 1.7 | ---  |
| RVG9115 | 1.187  | 30.1  | 1.562    | 39.7  | 3.250    | 82.6  | 0.065  | 1.7 | ---  |
| RVG4159 | 1.187  | 30.1  | 3.312    | 84.1  | 8.500    | 215.9 | 0.065  | 1.7 | ---  |
| RVG4355 | 1.187  | 30.1  | 8.562    | 217.5 | 13.250   | 336.6 | 0.065  | 1.7 | ---  |
| RVG4032 | 1.187  | 30.1  | 13.312   | 338.1 | 22.500   | 571.5 | 0.065  | 1.7 | ---  |
| RVG9116 | 1.230  | 31.2  | 1.562    | 39.7  | 12.500   | 317.5 | 0.065  | 1.7 | ---  |
| RVG9117 | 1.250  | 31.8  | 1.562    | 39.7  | 6.000    | 152.4 | 0.065  | 1.7 | 4.50 |
| RVG3219 | 1.250  | 31.8  | 6.062    | 154.0 | 7.000    | 177.8 | 0.065  | 1.7 | ---  |
| RVG2393 | 1.250  | 31.8  | 7.062    | 179.4 | 20.500   | 520.7 | 0.065  | 1.7 | ---  |
| RVG9320 | 1.313  | 33.4  | 1.562    | 39.7  | 7.000    | 177.8 | 0.065  | 1.7 | ---  |
| RVG9118 | 1.375  | 34.9  | 1.562    | 39.7  | 3.000    | 76.2  | 0.065  | 1.7 | ---  |
| RVG9325 | 1.375  | 34.9  | 3.062    | 77.8  | 7.000    | 177.8 | 0.065  | 1.7 | ---  |
| RVG2004 | 1.437  | 36.5  | 1.562    | 39.7  | 5.000    | 127.0 | 0.065  | 1.7 | ---  |
| RVG4442 | 1.437  | 36.5  | 5.062    | 128.6 | 22.500   | 571.5 | 0.065  | 1.7 | ---  |
| RVG9044 | 1.500  | 38.1  | 1.562    | 39.7  | 3.000    | 76.2  | 0.060  | 1.5 | ---  |
| RVG4022 | 1.500  | 38.1  | 3.062    | 77.8  | 14.500   | 368.3 | 0.065  | 1.7 | ---  |
| RVG9421 | 1.540  | 39.1  | 1.562    | 39.7  | 9.500    | 241.3 | 0.065  | 1.7 | ---  |
| RVG9119 | 1.687  | 42.8  | 1.562    | 39.7  | 1.750    | 44.5  | 0.065  | 1.7 | ---  |
| RVG4923 | 1.687  | 42.8  | 1.812    | 46.0  | 22.000   | 558.8 | 0.065  | 1.7 | ---  |
| RVG9120 | 1.750  | 44.5  | 1.562    | 39.7  | 3.000    | 76.2  | 0.065  | 1.7 | ---  |
| RVG9363 | 2.000  | 50.8  | 1.562    | 39.7  | 5.500    | 139.7 | 0.065  | 1.7 | ---  |
| RVG9053 | 2.750  | 69.9  | 1.562    | 39.7  | 3.500    | 88.9  | 0.065  | 1.7 | ---  |
| RVG9365 | 3.000  | 76.2  | 1.562    | 39.7  | 5.500    | 139.7 | 0.065  | 1.7 | ---  |
| RVG9269 | 4.000  | 101.6 | 1.562    | 39.7  | 3.500    | 88.9  | 0.065  | 1.7 | ---  |
| RVG9121 | 4.530  | 115.1 | 1.562    | 39.7  | 5.000    | 127.0 | 0.065  | 1.7 | ---  |
| RVG9123 | 4.625  | 117.5 | 1.562    | 39.7  | 4.000    | 101.6 | 0.065  | 1.7 | ---  |

\*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color





# FVG Series - Flat Rectangular Vinyl Grips

## FVG 系列 - 扁平型浸塑手柄套

Grips




- Grips Feature either a Round End (RFVG) or a Flat End (FFVG)  
圆头或平头扁平型手柄套
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Printable\*  
可印刷
- Available Colors: ○●●●●●●●●●●  
可定制颜色

### RFVG Series

Round End Grips

圆头手柄套




Inside Length Measured at Center for RFVG Series

### FFVG Series

Flat End Grips

平头手柄套



| 模具编号     | (A) 内厚 |     | (B) 内宽 |      | (C) 头部形状 | (D) 最短内长 |      | (E) 最长内长 |       | (F) 壁厚 |     |
|----------|--------|-----|--------|------|----------|----------|------|----------|-------|--------|-----|
|          | 英寸     | 毫米  | 英寸     | 毫米   |          | 英寸       | 毫米   | 英寸       | 毫米    | 英寸     | 毫米  |
| RFVG9523 | 0.062  | 1.6 | 0.313  | 7.9  | Round    | 0.188    | 4.8  | 1.750    | 44.5  | 0.055  | 1.4 |
| RFVG9057 | 0.062  | 1.6 | 0.313  | 7.9  | Round    | 1.812    | 46.0 | 4.000    | 101.6 | 0.055  | 1.4 |
| RFVG9058 | 0.062  | 1.6 | 0.375  | 9.5  | Round    | 0.188    | 4.8  | 4.000    | 101.6 | 0.055  | 1.4 |
| RFVG9059 | 0.062  | 1.6 | 0.437  | 11.1 | Round    | 0.188    | 4.8  | 4.000    | 101.6 | 0.055  | 1.4 |
| FFVG9063 | 0.062  | 1.6 | 0.500  | 12.7 | Flat     | 0.188    | 4.8  | 1.500    | 38.1  | 0.055  | 1.4 |
| FFVG9061 | 0.062  | 1.6 | 0.500  | 12.7 | Flat     | 1.562    | 39.7 | 4.000    | 101.6 | 0.055  | 1.4 |
| RFVG9064 | 0.062  | 1.6 | 0.625  | 15.9 | Round    | 0.188    | 4.8  | 4.000    | 101.6 | 0.060  | 1.5 |
| FFVG9065 | 0.062  | 1.6 | 0.750  | 19.1 | Flat     | 0.188    | 4.8  | 0.375    | 9.5   | 0.060  | 1.5 |
| RFVG9066 | 0.062  | 1.6 | 0.750  | 19.1 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| FFVG9067 | 0.062  | 1.6 | 1.250  | 31.8 | Flat     | 0.188    | 4.8  | 4.000    | 101.6 | 0.060  | 1.5 |
| FFVG9068 | 0.090  | 2.3 | 1.000  | 25.4 | Flat     | 0.188    | 4.8  | 5.250    | 133.4 | 0.060  | 1.5 |
| FFVG9327 | 0.090  | 2.3 | 1.563  | 39.7 | Flat     | 0.188    | 4.8  | 2.250    | 57.2  | 0.060  | 1.5 |
| RFVG9070 | 0.125  | 3.2 | 0.437  | 11.1 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9071 | 0.125  | 3.2 | 0.500  | 12.7 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| FFVG9072 | 0.125  | 3.2 | 0.563  | 14.3 | Flat     | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9073 | 0.125  | 3.2 | 0.625  | 15.9 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9074 | 0.125  | 3.2 | 0.750  | 19.1 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9332 | 0.125  | 3.2 | 0.875  | 22.2 | Round    | 0.188    | 4.8  | 8.750    | 222.3 | 0.060  | 1.5 |
| RFVG9326 | 0.125  | 3.2 | 1.000  | 25.4 | Round    | 0.188    | 4.8  | 2.500    | 63.5  | 0.060  | 1.5 |
| RFVG9075 | 0.125  | 3.2 | 1.000  | 25.4 | Round    | 2.562    | 65.1 | 8.000    | 203.2 | 0.060  | 1.5 |
| RFVG9076 | 0.125  | 3.2 | 1.250  | 31.8 | Round    | 0.188    | 4.8  | 2.250    | 57.2  | 0.060  | 1.5 |
| RFVG9077 | 0.125  | 3.2 | 1.563  | 39.7 | Round    | 0.188    | 4.8  | 1.500    | 38.1  | 0.060  | 1.5 |
| FFVG9078 | 0.125  | 3.2 | 2.000  | 50.8 | Flat     | 0.188    | 4.8  | 3.000    | 76.2  | 0.060  | 1.5 |
| FFVG9080 | 0.125  | 3.2 | 2.250  | 57.2 | Flat     | 0.188    | 4.8  | 4.750    | 120.7 | 0.060  | 1.5 |
| RFVG9079 | 0.125  | 3.2 | 2.250  | 57.2 | Round    | 0.188    | 4.8  | 1.500    | 38.1  | 0.060  | 1.5 |
| RFVG0598 | 0.187  | 4.7 | 0.500  | 12.7 | Round    | 0.188    | 4.8  | 4.000    | 101.6 | 0.060  | 1.5 |
| FFVG0894 | 0.187  | 4.7 | 0.625  | 15.9 | Flat     | 0.188    | 4.8  | 4.000    | 101.6 | 0.060  | 1.5 |
| RFVG0979 | 0.187  | 4.7 | 1.089  | 27.7 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9316 | 0.187  | 4.7 | 1.375  | 34.9 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| FFVG9082 | 0.187  | 4.7 | 3.000  | 76.2 | Flat     | 0.188    | 4.8  | 1.750    | 44.5  | 0.060  | 1.5 |
| FFVG9348 | 0.250  | 6.4 | 0.500  | 12.7 | Flat     | 0.188    | 4.8  | 1.000    | 25.4  | 0.060  | 1.5 |
| RFVG9083 | 0.250  | 6.4 | 0.750  | 19.1 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9404 | 0.250  | 6.4 | 0.875  | 22.2 | Round    | 0.188    | 4.8  | 1.500    | 38.1  | 0.060  | 1.5 |
| FFVG9443 | 0.250  | 6.4 | 1.000  | 25.4 | Flat     | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG9084 | 0.250  | 6.4 | 1.000  | 25.4 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| FFVG9447 | 0.250  | 6.4 | 1.250  | 31.8 | Flat     | 0.188    | 4.8  | 6.000    | 152.4 | 0.060  | 1.5 |
| RFVG9085 | 0.250  | 6.4 | 1.250  | 31.8 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| RFVG1202 | 0.250  | 6.4 | 1.437  | 36.5 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |
| FFVG9512 | 0.250  | 6.4 | 1.500  | 38.1 | Flat     | 0.188    | 4.8  | 2.000    | 50.8  | 0.060  | 1.5 |
| FFVG9263 | 0.250  | 6.4 | 1.500  | 38.1 | Flat     | 2.062    | 52.4 | 7.000    | 177.8 | 0.060  | 1.5 |
| FFVG9086 | 0.250  | 6.4 | 2.000  | 50.8 | Flat     | 0.188    | 4.8  | 2.250    | 57.2  | 0.060  | 1.5 |
| FFVG9264 | 0.250  | 6.4 | 2.000  | 50.8 | Flat     | 2.312    | 58.7 | 8.000    | 203.2 | 0.060  | 1.5 |
| FFVG9321 | 0.250  | 6.4 | 3.000  | 76.2 | Flat     | 0.188    | 4.8  | 8.000    | 203.2 | 0.060  | 1.5 |
| RFVG2546 | 0.313  | 8.0 | 0.500  | 12.7 | Round    | 0.188    | 4.8  | 6.000    | 152.4 | 0.060  | 1.5 |
| RFVG0235 | 0.313  | 8.0 | 1.500  | 38.1 | Round    | 0.188    | 4.8  | 4.000    | 101.6 | 0.060  | 1.5 |
| RFVG9544 | 0.375  | 9.5 | 1.250  | 31.8 | Round    | 0.188    | 4.8  | 5.000    | 127.0 | 0.060  | 1.5 |


\*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color

**MOCAP**

# Vinyl Finger Nub Grips - MFG Series

波浪型浸塑手柄套 - MFG 系列

Grips



- Stretches for a Snug Fit but Won't Split, Tear or Shred  
弹性好，装配后贴合紧密，不会断裂、撕裂或产生碎屑
- Ergonomic Design Allows for a Secure Hold  
人体工学设计使手握时贴合紧密
- Stocked Material: Black Vinyl  
库存材质：黑色乙烯基
- Available Colors: ○●●●●●●●●●●  
可定制颜色




| 模具编号    | 配外径  | (A) 内径 |      | (B) 最短内长 |       | (C) 最长内长 |       | (D) 壁厚 |     | 库存长度 |
|---------|------|--------|------|----------|-------|----------|-------|--------|-----|------|
|         |      | 英寸     | 毫米   | 英寸       | 毫米    | 英寸       | 毫米    | 英寸     | 毫米  |      |
| MFG0293 | 5/8" | 0.610  | 15.5 | 2.500    | 63.5  | 3.750    | 95.3  | 0.065  | 1.6 | 3.75 |
| MFG0188 | 3/4" | 0.730  | 18.5 | 3.500    | 88.9  | 4.500    | 114.3 | 0.065  | 1.6 | 4.50 |
| MFG0072 | 7/8" | 0.840  | 21.3 | 4.000    | 101.6 | 4.500    | 114.3 | 0.065  | 1.6 | 4.50 |
| MFG0043 | 1"   | 0.960  | 24.4 | 3.500    | 88.9  | 4.500    | 114.3 | 0.065  | 1.6 | 4.50 |



## MOCAP

Textured & Double Dip Grips

- Tough, Weather Resistant and Attractive  
坚韧、耐候、美观
- Many Colors Available  
多色可选
- Glossy or Textured Materials  
光面或纹面材质



### Textured Grips 纹面手柄套

Choose from Single or Double Dip Grips 单色或双色浸塑手柄套

- Available on Round or Flat Rectangular Sizes  
适用于圆形或扁平尺寸
- Allows for a Firm Non-Slip Hold  
手握时牢固防滑
- Stretches for a Snug Fit but Won't Split, Tear or Shred  
弹性好，装配后贴合紧密，不会断裂、撕裂或产生碎屑
- Durable  
经久耐用
- Material: Black Vinyl Please call for info on other colors  
材质：黑色乙烯基



### Double Dip Grips 双色浸塑手柄套

Choose from Smooth/Glossy or Textured Grips 光面或纹面手柄套

- Available on Round or Flat Rectangular Sizes  
适用于圆形或扁平尺寸
- Stretches for a Snug Fit but Won't Split, Tear or Shred  
弹性好，装配后贴合紧密，不会断裂、撕裂或产生碎屑
- Extra Durable  
特别经久耐用
- Material: Black Vinyl Please call for info on other colors  
材质：黑色乙烯基



Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 114

## MOCAP


# RVC-T Series - High-Temp Round Vinyl Caps

RVC-T 系列 - 耐高温圆形浸塑盖

Masking



- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings  
可用于直螺纹、公制螺纹、BSP&NPT螺纹管件
- Withstands Up to 475°F (246°C)  
可承受高达475°F (246°C)的高温
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Available Colors: Black and Yellow  
颜色：黑色和黄色




| 模具编号     | 配标准螺纹     | 配公制螺纹 | 配NPT螺纹 | (A) 内径 |      | (B) 最短内长 |     | (C) 最长内长 |      | (D) 壁厚 |     |
|----------|-----------|-------|--------|--------|------|----------|-----|----------|------|--------|-----|
|          |           |       |        | 英寸     | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸     | 毫米  |
| RVC9001T | 1         | ---   | ---    | 0.062  | 1.6  | 0.188    | 4.8 | 0.500    | 12.7 | 0.022  | 0.6 |
| RVC9002T | 1 or 2    | ---   | ---    | 0.070  | 1.8  | 0.188    | 4.8 | 0.500    | 12.7 | 0.022  | 0.6 |
| RVC9003T | 2 or 3    | ---   | ---    | 0.080  | 2.0  | 0.188    | 4.8 | 0.625    | 15.9 | 0.028  | 0.7 |
| RVC9004T | 3 or 4    | ---   | ---    | 0.093  | 2.4  | 0.188    | 4.8 | 0.750    | 19.1 | 0.028  | 0.7 |
| RVC9005T | 4 or 5    | ---   | ---    | 0.112  | 2.8  | 0.188    | 4.8 | 1.000    | 25.4 | 0.030  | 0.8 |
| RVC9006T | 5 or 6    | ---   | ---    | 0.125  | 3.2  | 0.188    | 4.8 | 1.500    | 38.1 | 0.033  | 0.8 |
| RVC9007T | ---       | M4    | ---    | 0.137  | 3.5  | 0.188    | 4.8 | 1.500    | 38.1 | 0.033  | 0.8 |
| RVC9008T | 8         | M4    | ---    | 0.156  | 4.0  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9009T | 10        | M5    | ---    | 0.172  | 4.4  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9010T | ---       | M5    | ---    | 0.187  | 4.7  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9011T | 12        | ---   | ---    | 0.207  | 5.3  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9012T | ---       | ---   | ---    | 0.218  | 5.5  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9440T | 1/4 - 20  | M6    | ---    | 0.234  | 5.9  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9013T | 1/4 - 20  | ---   | ---    | 0.250  | 6.4  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9014T | ---       | ---   | ---    | 0.281  | 7.1  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9278T | 5/16 - 24 | M8    | ---    | 0.300  | 7.6  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9015T | 5/16 - 24 | M8    | ---    | 0.313  | 8.0  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9016T | ---       | ---   | ---    | 0.320  | 8.1  | 0.188    | 4.8 | 1.000    | 25.4 | 0.038  | 1.0 |
| RVC9017T | ---       | ---   | ---    | 0.343  | 8.7  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9018T | 3/8 - 24  | ---   | ---    | 0.364  | 9.2  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9019T | 3/8 - 24  | M10   | ---    | 0.375  | 9.5  | 0.188    | 4.8 | 1.500    | 38.1 | 0.038  | 1.0 |
| RVC9542T | ---       | M10   | 1/8    | 0.390  | 9.9  | 0.188    | 4.8 | 2.000    | 50.8 | 0.055  | 1.4 |
| RVC9021T | 7/16 - 20 | ---   | 1/8    | 0.406  | 10.3 | 0.188    | 4.8 | 1.500    | 38.1 | 0.055  | 1.4 |
| RVC9022T | 7/16 - 20 | M12   | ---    | 0.437  | 11.1 | 0.188    | 4.8 | 1.500    | 38.1 | 0.055  | 1.4 |
| RVC9023T | ---       | ---   | 1/4    | 0.500  | 12.7 | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9024T | 9/16 - 18 | M14   | 1/4    | 0.531  | 13.5 | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9025T | 9/16 - 18 | ---   | ---    | 0.562  | 14.3 | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9306T | 5/8 - 18  | M16   | ---    | 0.610  | 15.5 | 0.188    | 4.8 | 1.000    | 25.4 | 0.060  | 1.5 |

For Material Specifications, please see page 139.  
Low-Temp Applications on pg. 13




**MOCAP**



- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings  
可用于直螺纹、公制螺纹、BSP&NPT螺纹管件
- Withstands Up to 475°F (246°C)  
可承受高达475°F (246°C)的高温
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Available Colors: Black and Yellow  
颜色：黑色和黄色



| 模具编号     | 配标准螺纹        | 配公制螺纹     | 配NPT螺纹 | (A) 内径 |       | (B) 最短内长 |     | (C) 最长内长 |      | (D) 壁厚 |     |
|----------|--------------|-----------|--------|--------|-------|----------|-----|----------|------|--------|-----|
|          |              |           |        | 英寸     | 毫米    | 英寸       | 毫米  | 英寸       | 毫米   | 英寸     | 毫米  |
| RVC9034T | 11/16 - 16   | M16       | 3/8    | 0.625  | 15.9  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9035T | 3/4 - 16     | M18       |        | 0.687  | 17.4  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9036T | 13/16 - 16   | M20       |        | 0.750  | 19.1  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9037T | 13/16 - 16   | ---       | 1/2    | 0.812  | 20.6  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9038T | 7/8 - 14     | M22       | ---    | 0.843  | 21.4  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9039T | 7/8 - 14     | ---       | ---    | 0.875  | 22.2  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9040T | 1 - 16       | M24       | ---    | 0.937  | 23.8  | 0.188    | 4.8 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9041T | 1-1/16 - 12  | M26       | 3/4    | 1.000  | 25.4  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9397T | 1-1/16 - 12  | M27       | ---    | 1.062  | 27.0  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9273T | 1-3/16 - 12  | M30       | ---    | 1.125  | 28.6  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9042T | 1-3/16 - 12  | ---       | ---    | 1.187  | 30.1  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9043T | 1-5/16 - 12  | M32       | 1      | 1.250  | 31.8  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9044T | 1-5/8 - 12   | M39 - M40 | ---    | 1.500  | 38.1  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9045T | 1-11/16 - 12 | M42       | 1-1/4  | 1.625  | 41.3  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9046T | 1-7/8 - 12   | M48       | 1-1/2  | 1.875  | 47.6  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9324T | 1-7/8 - 12   | ---       | ---    | 1.937  | 49.2  | 0.250    | 6.4 | 2.000    | 50.8 | 0.060  | 1.5 |
| RVC9047T | 2            | M52       | ---    | 2.000  | 50.8  | 0.250    | 6.4 | 1.750    | 44.5 | 0.060  | 1.5 |
| RVC9048T | 2-1/4 - 12   | M52       | ---    | 2.125  | 54.0  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9049T | 2-1/4 - 12   | M58 - M60 | 2      | 2.250  | 57.2  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9050T | 2-1/2 - 12   | ---       | 2      | 2.375  | 60.3  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9051T | 2-1/2 - 12   | M64       | ---    | 2.500  | 63.5  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9052T | ---          | M68       | ---    | 2.625  | 66.7  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9053T | ---          | M72       | 2-1/2  | 2.750  | 69.9  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9054T | ---          | M80       | ---    | 3.000  | 76.2  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9055T | ---          | M90       | 3      | 3.500  | 88.9  | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9490T | ---          | M105      | 3-1/2  | 4.000  | 101.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 |
| RVC9056T | ---          | ---       | ---    | 6.000  | 152.4 | 0.250    | 6.4 | 1.750    | 44.5 | 0.060  | 1.5 |



For Material Specifications, please see page 139.  
Low-Temp Applications on pg. 13


# FPT-T Series - High-Temp Pull Tab Vinyl Caps

FPT-T 系列 - 耐高温易拔除浸塑盖

Masking



- Withstands Up to 475°F (246°C)  
可承受高达475°F (246°C)的高温
- Stretches for a Snug Fit but Won't Split, Tear or Shred  
弹性好, 装配后贴合紧密, 不会断裂、撕裂或产生碎屑
- Flat / Ergonomic Tab for Easy Removal  
符合人体工学的拉手设计, 移除方便
- Available Colors: Black and Yellow  
颜色: 黑色和黄色



| 模具编号     | (A) 内径 |      | (B) 最短内长 |     | (C) 最长内长 |      | (D) 壁厚 |     | (E) 拔柄高度 |      |
|----------|--------|------|----------|-----|----------|------|--------|-----|----------|------|
|          | 英寸     | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸     | 毫米  | 英寸       | 毫米   |
| FPT9617T | 0.187  | 4.7  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 |
| FPT9618T | 0.215  | 5.5  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 |
| FPT9619T | 0.236  | 6.0  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 |
| FPT9620T | 0.250  | 6.4  | 0.250    | 6.4 | 1.000    | 25.4 | 0.038  | 1.0 | 0.500    | 12.7 |
| FPT9406T | 0.313  | 8.0  | 0.250    | 6.4 | 1.500    | 38.1 | 0.038  | 1.0 | 0.655    | 16.6 |
| FPT9507T | 0.343  | 8.7  | 0.250    | 6.4 | 1.500    | 38.1 | 0.038  | 1.0 | 0.695    | 17.7 |
| FPT9430T | 0.375  | 9.5  | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.695    | 17.7 |
| FPT9422T | 0.406  | 10.3 | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.709    | 18.0 |
| FPT9431T | 0.437  | 11.1 | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.725    | 18.4 |
| FPT9435T | 0.460  | 11.7 | 0.250    | 6.4 | 1.500    | 38.1 | 0.055  | 1.4 | 0.750    | 19.1 |
| FPT9432T | 0.500  | 12.7 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.752    | 19.1 |
| FPT9433T | 0.531  | 13.5 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.764    | 19.4 |
| FPT9362T | 0.562  | 14.3 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.613    | 15.6 |
| FPT9429T | 0.625  | 15.9 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.709    | 18.0 |
| FPT9621T | 0.655  | 16.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.812    | 20.6 |
| FPT9436T | 0.687  | 17.4 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.812    | 20.6 |
| FPT9622T | 0.750  | 19.1 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.826    | 21.0 |
| FPT9623T | 0.812  | 20.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.837    | 21.3 |
| FPT9624T | 0.843  | 21.4 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.846    | 21.5 |
| FPT9434T | 0.875  | 22.2 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.846    | 21.5 |
| FPT9438T | 0.937  | 23.8 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.853    | 21.7 |
| FPT9439T | 1.000  | 25.4 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 |
| FPT9625T | 1.062  | 27.0 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 |
| FPT9626T | 1.125  | 28.6 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 |
| FPT9627T | 1.250  | 31.8 | 0.250    | 6.4 | 1.500    | 38.1 | 0.060  | 1.5 | 0.858    | 21.8 |

For Material Specifications, please see page 139.  
Low-Temp Applications on pg. 16



**MOCAP**


117 www.mocap.com.cn | 4006-4006-49 | 微信号 13802665016

Free Samples

# High-Temp Vinyl Insertion Plugs - MCP-T Series

耐高温浸塑塞 - MCP-T 系列

Masking



- Withstands Up to 475° F (246° C)  
可承受高达475°F (246°C)的高温
- Wide Flange for Easy Removal  
宽缘易于拔除
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Stocked Material: Black High-Temp Vinyl  
库存材质：黑色耐高温乙烯基
- Additional Colors: Yellow  
其它颜色：黄色



| 模具编号     | 配标准螺纹                | 配公制螺纹  | 配NPT螺纹 | ( A ) 帽檐直径 |      |
|----------|----------------------|--------|--------|------------|------|
|          |                      |        |        | 英寸         | 毫米   |
| MCP9252T | 1/4                  | M6     | ---    | 0.400      | 10.2 |
| MCP9253T | 5/16                 | M8     | ---    | 0.460      | 11.7 |
| MCP9254T | 3/8                  | M10    | 1/8    | 0.495      | 12.6 |
| MCP9255T | 7/16                 | M12    | ---    | 0.550      | 14.0 |
| MCP9256T | 1/2                  | M14    | 1/4    | 0.620      | 15.7 |
| MCP9257T | 9/16                 | M16    | ---    | 0.683      | 17.3 |
| MCP9258T | 5/8                  | M18    | 3/8    | 0.807      | 20.5 |
| MCP9259T | 3/4                  | M20    | 1/2    | 0.961      | 24.4 |
| MCP9260T | 7/8                  | M22/24 | ---    | 1.058      | 26.9 |
| MCP9261T | 1-1/16               | M26/28 | 3/4    | 1.245      | 31.6 |
| MCP9262T | 1-1/8, 1-3/16, 1-1/4 | M32/34 | 1      | 1.495      | 38.0 |

For Material Specifications, please see page 139.



**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 118


# TP-T Series - High-Temp Vinyl Tapered Plugs

TP-T 系列 - 耐高温浸塑锥形塞

Masking




- Withstands Up to 475°F (246°C)  
可承受高达475°F (246°C)的高温
- Flange for Easy Removal  
宽缘易于拔除
- Flexible Yet Durable - Won't Split, Tear or Shred  
柔韧且耐用，不会断裂、撕裂或产生碎屑
- Stocked Material: Black High-Temp Vinyl  
库存材质：黑色乙烯基
- Additional Colors: Yellow  
其它颜色：黄色



| 模具编号    | 配标准螺纹               | 配公制螺纹   |
|---------|---------------------|---------|
| TP9211T | 6-32, 8-32, 10-24   | M4, M5  |
| TP9212T | 1/4 - 20            | M6, M7  |
| TP9213T | 5/16 - 18, 3/8 - 16 | M8, M10 |

For Material Specifications, please see page 139.

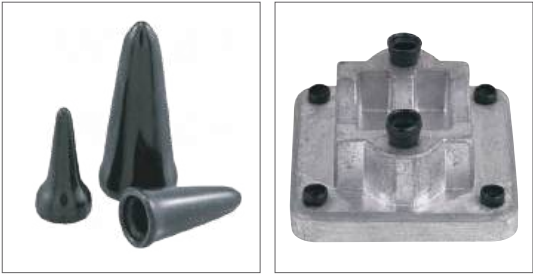




# Silicone Straight Caps - MSC Series

硅树脂橡胶盖 - MSC 系列

Masking



- Resists Temps to 600°F (316°C)  
耐温至600°F (316°C)
- Flexible for Masking Threaded and Smooth Studs  
柔软坚韧，遮蔽螺纹，保护螺柱
- Material: Iron Oxide Red Silicone  
材质：铁锈红有机硅胶



| 产品型号          | 使用建议                    | (A) 内径 |      | (B) 内长 |       | (C) 壁厚 |     |
|---------------|-------------------------|--------|------|--------|-------|--------|-----|
|               |                         | 英寸     | 毫米   | 英寸     | 毫米    | 英寸     | 毫米  |
| MSC.070-1     | M2, 2-56                | 0.070  | 1.8  | 1.000  | 25.4  | 0.065  | 1.7 |
| MSC.100-1     | M3, 4-40                | 0.100  | 2.5  | 1.000  | 25.4  | 0.050  | 1.3 |
| MSC.120-1     | 6-32, 1/8" tube         | 0.120  | 3.0  | 1.000  | 25.4  | 0.050  | 1.3 |
| MSC.148-1     | M4, 8-32                | 0.148  | 3.8  | 1.000  | 25.4  | 0.055  | 1.4 |
| MSC.175-1     | 10-24, 3/16" tube       | 0.175  | 4.4  | 1.000  | 25.4  | 0.055  | 1.4 |
| MSC.221-1     | M6                      | 0.221  | 5.6  | 1.000  | 25.4  | 0.060  | 1.5 |
| MSC.223-1.5   | M6                      | 0.223  | 5.7  | 1.500  | 38.1  | 0.060  | 1.5 |
| MSC.233-1.5   | 1/4-20, 1/4" tube       | 0.233  | 5.9  | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.295-1.5   | M8, 5/16-18, 5/16" tube | 0.295  | 7.5  | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.355-1.5   | 3/8-16, 3/8" tube       | 0.355  | 9.0  | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.375-1.5   | M10                     | 0.375  | 9.5  | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.415-1.5   | 7/16" tube/thread       | 0.415  | 10.5 | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.456-1.5   | M12                     | 0.456  | 11.6 | 1.500  | 38.1  | 0.067  | 1.7 |
| MSC.480-1.5   | 1/2" tube/thread        | 0.480  | 12.2 | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.535-1.5   | M14, 9/16" tube/thread  | 0.535  | 13.6 | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.600-1.5   | M16, 5/8" tube/thread   | 0.600  | 15.2 | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.615-4     | M16, 5/8" tube/thread   | 0.615  | 15.6 | 4.000  | 101.6 | 0.060  | 1.5 |
| MSC.730-1.5   | M19, 3/4" tube/thread   | 0.730  | 18.5 | 1.500  | 38.1  | 0.060  | 1.5 |
| MSC.740-4     | M19, 3/4" tube/thread   | 0.740  | 18.8 | 4.000  | 101.6 | 0.055  | 1.4 |
| MSC.855-1.5   | M22, 7/8" tube/thread   | 0.855  | 21.7 | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC.970-4     | M25, 1" tube/thread     | 0.970  | 24.6 | 4.000  | 101.6 | 0.055  | 1.4 |
| MSC.980-1.5   | M25, 1" tube/thread     | 0.980  | 24.9 | 1.500  | 38.1  | 0.055  | 1.4 |
| MSC1.062-1.75 | 1-1/16" tube/thread     | 1.062  | 27.0 | 1.750  | 44.5  | 0.062  | 1.6 |
| MSC1.125-1.75 | 1-1/8" tube/thread      | 1.125  | 28.6 | 1.750  | 44.5  | 0.062  | 1.6 |
| MSC1.187-1.75 | 1-3/16" tube/thread     | 1.187  | 30.1 | 1.750  | 44.5  | 0.062  | 1.6 |
| MSC1.230-5    | 1-1/4" tube/thread      | 1.230  | 31.2 | 5.000  | 127.0 | 0.055  | 1.4 |
| MSC1.250-1.75 | 1-1/4" tube/thread      | 1.250  | 31.8 | 1.750  | 44.5  | 0.062  | 1.6 |
| MSC1.375-2    | 1-3/8" tube/thread      | 1.375  | 34.9 | 2.000  | 50.8  | 0.062  | 1.6 |
| MSC1.500-2    | 1-1/2" tube/thread      | 1.500  | 38.1 | 2.000  | 50.8  | 0.062  | 1.6 |
| MSC1.750-2    | 1-3/4" tube/thread      | 1.750  | 44.5 | 2.000  | 50.8  | 0.062  | 1.6 |
| MSC1.875-2    | 1-7/8" tube/thread      | 1.875  | 47.6 | 2.000  | 50.8  | 0.062  | 1.6 |
| MSC2.000-2    | 2" tube/thread          | 2.000  | 50.8 | 2.000  | 50.8  | 0.062  | 1.6 |

For Material Specifications, please see page 139.



Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 120

**MOCAP**


# MSP Series - Silicone Tapered Plugs

## MSP 系列 - 硅树脂锥形塞

Masking



- Resists Temps to 600°F (316°C)  
耐温至600°F (316°C)
- Larger Sizes also Available with a Hollow End for  
Cost Savings - MHSP Series  
为节省成本, 较大尺寸可提供锥形中空硅树脂橡胶塞-MHSP系列
- Tapered Design Allows for Masking of Various Hole Diameters  
锥形设计便于遮蔽多种不同孔径
- Material: Iron Oxide Red Silicone  
材质: 铁锈红有机硅胶




| 产品型号             | 使用建议                      | (A) 小直径 |      | (B) 大直径 |       | (C) 高度 |      |
|------------------|---------------------------|---------|------|---------|-------|--------|------|
|                  |                           | 英寸      | 毫米   | 英寸      | 毫米    | 英寸     | 毫米   |
| MSP.062/187      | M3, 5-40, 8-32            | 0.062   | 1.6  | 0.187   | 4.7   | 0.750  | 19.1 |
| MSP.125/250      | M4, M5, 10-24, 12-48      | 0.125   | 3.2  | 0.250   | 6.4   | 1.000  | 25.4 |
| MSP.187/343      | M6, M7, M8, 1/4 -20, 5/16 | 0.187   | 4.7  | 0.343   | 8.7   | 1.000  | 25.4 |
| MSP.250/437      | M10, 3/8, 7/16            | 0.250   | 6.4  | 0.437   | 11.1  | 1.000  | 25.4 |
| MSP.313/562      | M12, M14, 1/2, 9/16       | 0.313   | 8.0  | 0.562   | 14.3  | 1.125  | 28.6 |
| MSP.437/687      | M16, 5/8                  | 0.437   | 11.1 | 0.687   | 17.4  | 1.000  | 25.4 |
| MSP.562/750      | M18, 3/4                  | 0.562   | 14.3 | 0.750   | 19.1  | 1.000  | 25.4 |
| MSP.625/800      | M20, 7/8                  | 0.625   | 15.9 | 0.800   | 20.3  | 1.000  | 25.4 |
| MSP.750/925      | M22, M24, 1               | 0.750   | 19.1 | 0.925   | 23.5  | 1.000  | 25.4 |
| MSP.827/1.063 *  | ---                       | 0.827   | 21.0 | 1.063   | 27.0  | 1.113  | 28.3 |
| MSP1.036/1.246 * | ---                       | 1.036   | 26.3 | 1.246   | 31.6  | 1.000  | 25.4 |
| MSP1.187/1.437 * | ---                       | 1.187   | 30.1 | 1.437   | 36.5  | 1.000  | 25.4 |
| MSP1.306/1.622 * | ---                       | 1.306   | 33.2 | 1.622   | 41.2  | 1.000  | 25.4 |
| MSP1.469/1.750 * | ---                       | 1.469   | 37.3 | 1.750   | 44.5  | 1.000  | 25.4 |
| MSP1.621/1.973 * | ---                       | 1.621   | 41.2 | 1.973   | 50.1  | 1.000  | 25.4 |
| MSP1.881/2.198 * | ---                       | 1.881   | 47.8 | 2.168   | 55.1  | 1.000  | 25.4 |
| MSP2.000/2.469 * | ---                       | 2.000   | 50.8 | 2.469   | 62.7  | 1.000  | 25.4 |
| MSP2.118/2.506 * | ---                       | 2.118   | 53.8 | 2.506   | 63.7  | 1.000  | 25.4 |
| MSP2.272/2.697 * | ---                       | 2.272   | 57.7 | 2.697   | 68.5  | 1.000  | 25.4 |
| MSP2.437/2.953 * | ---                       | 2.437   | 61.9 | 2.953   | 75.0  | 1.375  | 34.9 |
| MSP2.750/3.500 * | ---                       | 2.750   | 69.9 | 3.500   | 88.9  | 1.500  | 38.1 |
| MSP3.250/4.000 * | ---                       | 3.250   | 82.6 | 4.000   | 101.6 | 1.500  | 38.1 |
| MSP3.500/5.000 * | ---                       | 3.500   | 88.9 | 5.000   | 127.0 | 2.000  | 50.8 |

For Material Specifications, please see page 139.



\* Also Available as Hollow Plugs; Please Specify MHSP Prefix When Ordering.

**MHSP Series\***  
Hollow Silicone Plugs




**MOCAP's** Hollow Silicone Plugs are  
a Lower Cost Option to Solid.

**MOCAP**

# Silicone Pull Plugs - MSPP Series

硅树脂橡胶拉手塞 - MSPP 系列

Masking



- Resists Temps to 600°F (316°C)  
耐温至600°F (316°C)
- Convenient Handle and Parallel Design for Masking of Through-Holes  
平行设计，通孔遮蔽，操作方便
- Material: Iron Oxide Red Silicone  
材质：铁锈红有机硅胶



| 产品型号     | 使用建议        | (A) 塞体直径 |      | (B) 拉柄直径 |     | (C) 塞体高度 |      | (D) 斜位高度 |     | (E) 拉柄高度 |      |
|----------|-------------|----------|------|----------|-----|----------|------|----------|-----|----------|------|
|          |             | 英寸       | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   |
| MSPP.109 | 4-40        | 0.109    | 2.8  | 0.060    | 1.5 | 0.625    | 15.9 | 0.118    | 3.0 | 0.625    | 15.9 |
| MSPP.130 | 6-32        | 0.130    | 3.3  | 0.082    | 2.1 | 0.625    | 15.9 | 0.118    | 3.0 | 0.625    | 15.9 |
| MSPP.141 | M4          | 0.141    | 3.6  | 0.086    | 2.2 | 0.625    | 15.9 | 0.078    | 2.0 | 0.551    | 14.0 |
| MSPP.156 | 8-32        | 0.156    | 4.0  | 0.082    | 2.1 | 0.625    | 15.9 | 0.118    | 3.0 | 0.625    | 15.9 |
| MSPP.180 | 10-24       | 0.180    | 4.6  | 0.110    | 2.8 | 0.625    | 15.9 | 0.118    | 3.0 | 0.625    | 15.9 |
| MSPP.217 | M6          | 0.217    | 5.5  | 0.125    | 3.2 | 0.984    | 25.0 | 0.118    | 3.0 | 0.866    | 22.0 |
| MSPP.225 | 1/4-20      | 0.225    | 5.7  | 0.125    | 3.2 | 1.000    | 25.4 | 0.118    | 3.0 | 1.000    | 25.4 |
| MSPP.275 | M8, 5/16-18 | 0.275    | 7.0  | 0.130    | 3.3 | 1.000    | 25.4 | 0.118    | 3.0 | 1.000    | 25.4 |
| MSPP.335 | 3/8-16      | 0.335    | 8.5  | 0.157    | 4.0 | 1.000    | 25.4 | 0.118    | 3.0 | 1.000    | 25.4 |
| MSPP.355 | M10         | 0.355    | 9.0  | 0.157    | 4.0 | 0.984    | 25.0 | 0.118    | 3.0 | 0.866    | 22.0 |
| MSPP.445 | 1/2         | 0.445    | 11.3 | 0.157    | 4.0 | 1.000    | 25.4 | 0.196    | 5.0 | 1.000    | 25.4 |



For Material Specifications, please see page 139.

**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 122


# MSWP Series - Silicone Washer Plugs

MSWP 系列 - 硅树脂橡胶垫圈塞

Masking




- Resists Temps to 600° F (316°C)  
耐温至600°F (316°C)
- Features a Flange for Masking the Area Around a Hole  
翻边帽檐设计用于保护遮蔽孔及其周边区域
- Material: Iron Oxide Red Silicone  
材质：铁锈红有机硅胶



| 产品型号   | (A) 拉柄直径 |     | (B) 塞体小外径 |     | (C) 塞体大外径 |      | (D) 塞檐外径 |      | (E) 塞体高度 |     | (F) 斜位高度 |      | (G) 拉柄高度 |      | (H) 塞檐高度 |     |
|--------|----------|-----|-----------|-----|-----------|------|----------|------|----------|-----|----------|------|----------|------|----------|-----|
|        | 英寸       | 毫米  | 英寸        | 毫米  | 英寸        | 毫米   | 英寸       | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸       | 毫米   | 英寸       | 毫米  |
| MSWP3  | 0.156    | 4.0 | 0.060     | 1.5 | 0.094     | 2.4  | 0.393    | 10.0 | 0.098    | 2.5 | 0.156    | 4.0  | 0.590    | 15.0 | 0.118    | 3.0 |
| MSWP4  | 0.156    | 4.0 | 0.078     | 2.0 | 0.141     | 3.6  | 0.472    | 12.0 | 0.125    | 3.2 | 0.156    | 4.0  | 0.590    | 15.0 | 0.118    | 3.0 |
| MSWP5  | 0.156    | 4.0 | 0.110     | 2.8 | 0.177     | 4.5  | 0.472    | 12.0 | 0.137    | 3.5 | 0.216    | 5.5  | 0.590    | 15.0 | 0.118    | 3.0 |
| MSWP6  | 0.196    | 5.0 | 0.118     | 3.0 | 0.208     | 5.3  | 0.511    | 13.0 | 0.137    | 3.5 | 0.255    | 6.5  | 0.590    | 15.0 | 0.118    | 3.0 |
| MSWP8  | 0.196    | 5.0 | 0.156     | 4.0 | 0.283     | 7.2  | 0.590    | 15.0 | 0.156    | 4.0 | 0.313    | 8.0  | 0.590    | 15.0 | 0.118    | 3.0 |
| MSWP10 | 0.236    | 6.0 | 0.177     | 4.5 | 0.346     | 8.8  | 0.787    | 20.0 | 0.156    | 4.0 | 0.472    | 12.0 | 0.590    | 15.0 | 0.118    | 3.0 |
| MSWP12 | 0.236    | 6.0 | 0.216     | 5.5 | 0.417     | 10.6 | 0.866    | 22.0 | 0.156    | 4.0 | 0.551    | 14.0 | 0.590    | 15.0 | 0.118    | 3.0 |

For Material Specifications, please see page 139.





- Stocked in 50 Ft./100 Ft. Lengths  
库存长度为50英尺 ( ~15米 ) 和100英尺 ( ~30米 ) 的产品
- Resists Temperatures to 500° F (260°C)  
耐温至500°F (260°C)
- Material: Iron Oxide Red Silicone  
材质：铁锈红有机硅胶



| 产品型号   | ( A ) 内径 |      | ( B ) 壁厚 |     | 每卷长度 |      |
|--------|----------|------|----------|-----|------|------|
|        | 英寸       | 毫米   | 英寸       | 毫米  | 英尺   | 米    |
| SRT104 | 0.104    | 2.6  | 0.040    | 1.0 | 100  | 30.5 |
| SRT110 | 0.110    | 2.8  | 0.040    | 1.0 | 100  | 30.5 |
| SRT130 | 0.130    | 3.3  | 0.040    | 1.0 | 100  | 30.5 |
| SRT149 | 0.149    | 3.8  | 0.040    | 1.0 | 100  | 30.5 |
| SRT163 | 0.163    | 4.1  | 0.040    | 1.0 | 100  | 30.5 |
| SRT181 | 0.181    | 4.6  | 0.040    | 1.0 | 100  | 30.5 |
| SRT224 | 0.224    | 5.7  | 0.040    | 1.0 | 100  | 30.5 |
| SRT239 | 0.239    | 6.1  | 0.040    | 1.0 | 100  | 30.5 |
| SRT302 | 0.302    | 7.7  | 0.060    | 1.5 | 100  | 30.5 |
| SRT330 | 0.330    | 8.4  | 0.060    | 1.5 | 100  | 30.5 |
| SRT363 | 0.363    | 9.2  | 0.060    | 1.5 | 100  | 30.5 |
| SRT380 | 0.380    | 9.6  | 0.060    | 1.5 | 100  | 30.5 |
| SRT420 | 0.420    | 10.7 | 0.060    | 1.5 | 100  | 30.5 |
| SRT460 | 0.460    | 11.7 | 0.060    | 1.5 | 100  | 30.5 |
| SRT485 | 0.485    | 12.3 | 0.060    | 1.5 | 50   | 15.2 |
| SRT535 | 0.535    | 13.6 | 0.060    | 1.5 | 50   | 15.2 |
| SRT609 | 0.609    | 15.5 | 0.060    | 1.5 | 50   | 15.2 |
| SRT727 | 0.727    | 18.5 | 0.060    | 1.5 | 50   | 15.2 |
| SRT853 | 0.853    | 21.7 | 0.060    | 1.5 | 50   | 15.2 |
| SRT915 | 0.915    | 23.2 | 0.060    | 1.5 | 50   | 15.2 |
| SRT975 | 0.975    | 24.8 | 0.060    | 1.5 | 50   | 15.2 |

For Material Specifications, please see page 139.




# MEC Series - EPDM Straight Caps

MEC 系列 - EPDM橡胶盖

Masking



- Resists Chemicals and Temps to 300° F (149° C)  
耐化学性，防酸碱腐蚀，耐温高达300°F (149°C)
- Flexible for Masking Threaded and Smooth Studs  
柔软坚韧，遮蔽螺纹，保护螺柱
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)  
材质：黑色EPDM橡胶



| 产品型号          | 使用建议                    | (A) 内径 |      | (B) 内长 |       | (C) 壁厚 |     |
|---------------|-------------------------|--------|------|--------|-------|--------|-----|
|               |                         | 英寸     | 毫米   | 英寸     | 毫米    | 英寸     | 毫米  |
| MEC.070-1     | M2, 2-56                | 0.070  | 1.8  | 1.000  | 25.4  | 0.065  | 1.7 |
| MEC.100-1     | M3, 4-40                | 0.100  | 2.5  | 1.000  | 25.4  | 0.050  | 1.3 |
| MEC.120-1     | 6-32, 1/8" tube         | 0.120  | 3.0  | 1.000  | 25.4  | 0.050  | 1.3 |
| MEC.148-1     | M4, 8-32                | 0.148  | 3.8  | 1.000  | 25.4  | 0.055  | 1.4 |
| MEC.175-1     | 10-24, 3/16" tube       | 0.175  | 4.4  | 1.000  | 25.4  | 0.055  | 1.4 |
| MEC.221-1     | M6                      | 0.221  | 5.6  | 1.000  | 25.4  | 0.060  | 1.5 |
| MEC.223-1.5   | M6                      | 0.223  | 5.7  | 1.500  | 38.1  | 0.060  | 1.5 |
| MEC.233-1.5   | 1/4-20 1/4" tube        | 0.233  | 5.9  | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.295-1.5   | M8, 5/16-18, 5/16" tube | 0.295  | 7.5  | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.355-1.5   | 3/8-16, 3/8" tube       | 0.355  | 9.0  | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.375-1.5   | M10                     | 0.375  | 9.5  | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.415-1.5   | 7/16" tube/thread       | 0.415  | 10.5 | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.456-1.5   | M12                     | 0.456  | 11.6 | 1.500  | 38.1  | 0.067  | 1.7 |
| MEC.480-1.5   | 1/2" tube/thread        | 0.480  | 12.2 | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.535-1.5   | M14, 9/16" tube/thread  | 0.535  | 13.6 | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.600-1.5   | M16, 5/8" tube/thread   | 0.600  | 15.2 | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.615-4     | M16, 5/8" tube/thread   | 0.615  | 15.6 | 4.000  | 101.6 | 0.060  | 1.5 |
| MEC.730-1.5   | M19, 3/4" tube/thread   | 0.730  | 18.5 | 1.500  | 38.1  | 0.060  | 1.5 |
| MEC.740-4     | M19, 3/4" tube/thread   | 0.740  | 18.8 | 4.000  | 101.6 | 0.055  | 1.4 |
| MEC.855-1.5   | M22, 7/8" tube/thread   | 0.855  | 21.7 | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC.970-4     | M25, 1" tube/thread     | 0.970  | 24.6 | 4.000  | 101.6 | 0.055  | 1.4 |
| MEC.980-1.5   | M25, 1" tube/thread     | 0.980  | 24.9 | 1.500  | 38.1  | 0.055  | 1.4 |
| MEC1.062-1.75 | 1-1/16" tube/thread     | 1.062  | 27.0 | 1.750  | 44.5  | 0.062  | 1.6 |
| MEC1.125-1.75 | 1-1/8" tube/thread      | 1.125  | 28.6 | 1.750  | 44.5  | 0.062  | 1.6 |
| MEC1.187-1.75 | 1-3/16" tube/thread     | 1.187  | 30.1 | 1.750  | 44.5  | 0.062  | 1.6 |
| MEC1.230-5    | 1-1/4" tube/thread      | 1.230  | 31.2 | 5.000  | 127.0 | 0.055  | 1.4 |
| MEC1.250-1.75 | 1-1/4" tube/thread      | 1.250  | 31.8 | 1.750  | 44.5  | 0.062  | 1.6 |
| MEC1.375-2    | 1-3/8" tube/thread      | 1.375  | 34.9 | 2.000  | 50.8  | 0.062  | 1.6 |
| MEC1.500-2    | 1-1/2" tube/thread      | 1.500  | 38.1 | 2.000  | 50.8  | 0.062  | 1.6 |
| MEC1.750-2    | 1-3/4" tube/thread      | 1.750  | 44.5 | 2.000  | 50.8  | 0.062  | 1.6 |
| MEC1.875-2    | 1-7/8" tube/thread      | 1.875  | 47.6 | 2.000  | 50.8  | 0.062  | 1.6 |
| MEC2.000-2    | 2" tube/thread          | 2.000  | 50.8 | 2.000  | 50.8  | 0.062  | 1.6 |

For Material Specifications, please see page 139.



**MOCAP**


125 www.mocap.com.cn | 4006-4006-49 | 微信号 13802665016

Free Samples


# EPDM Tapered Plugs - MEP Series

EPDM锥形橡胶塞 - MEP 系列

Masking



- Resists Chemicals and Temps to 300°F (149°C)  
耐化学性，防酸碱腐蚀，耐高温达300°F (149°C)
- Tapered Design Allows for Masking of Various Hole Diameters  
锥形设计便于遮蔽多种不同孔径
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)  
材质：黑色EPDM橡胶



| 产品型号           | 使用建议                      | (A) 小直径 |      | (B) 大直径 |       | (C) 高度 |      |
|----------------|---------------------------|---------|------|---------|-------|--------|------|
|                |                           | 英寸      | 毫米   | 英寸      | 毫米    | 英寸     | 毫米   |
| MEP.062/187    | M3, 5-40, 8-32            | 0.062   | 1.6  | 0.187   | 4.7   | 0.750  | 19.1 |
| MEP.125/250    | M4, M5, 10-24, 12-48      | 0.125   | 3.2  | 0.250   | 6.4   | 1.000  | 25.4 |
| MEP.187/343    | M6, M7, M8, 1/4 -20, 5/16 | 0.187   | 4.7  | 0.343   | 8.7   | 1.000  | 25.4 |
| MEP.250/437    | M10, 3/8, 7/16            | 0.250   | 6.4  | 0.437   | 11.1  | 1.000  | 25.4 |
| MEP.313/562    | M12, M14, 1/2, 9/16       | 0.313   | 8.0  | 0.562   | 14.3  | 1.125  | 28.6 |
| MEP.437/687    | M16, 5/8                  | 0.437   | 11.1 | 0.687   | 17.4  | 1.000  | 25.4 |
| MEP.562/750    | M18, 3/4                  | 0.562   | 14.3 | 0.750   | 19.1  | 1.000  | 25.4 |
| MEP.625/800    | M20, 7/8                  | 0.625   | 15.9 | 0.800   | 20.3  | 1.000  | 25.4 |
| MEP.750/925    | M22, M24, 1               | 0.750   | 19.1 | 0.925   | 23.5  | 1.000  | 25.4 |
| MEP.827/1.063  | ---                       | 0.827   | 21.0 | 1.063   | 27.0  | 1.113  | 28.3 |
| MEP1.036/1.246 | ---                       | 1.036   | 26.3 | 1.246   | 31.6  | 1.000  | 25.4 |
| MEP1.187/1.437 | ---                       | 1.187   | 30.1 | 1.437   | 36.5  | 1.000  | 25.4 |
| MEP1.306/1.622 | ---                       | 1.306   | 33.2 | 1.622   | 41.2  | 1.000  | 25.4 |
| MEP1.469/1.750 | ---                       | 1.469   | 37.3 | 1.750   | 44.5  | 1.000  | 25.4 |
| MEP1.621/1.973 | ---                       | 1.621   | 41.2 | 1.973   | 50.1  | 1.000  | 25.4 |
| MEP1.881/2.198 | ---                       | 1.881   | 47.8 | 2.168   | 55.1  | 1.000  | 25.4 |
| MEP2.000/2.469 | ---                       | 2.000   | 50.8 | 2.469   | 62.7  | 1.000  | 25.4 |
| MEP2.118/2.506 | ---                       | 2.118   | 53.8 | 2.506   | 63.7  | 1.000  | 25.4 |
| MEP2.272/2.697 | ---                       | 2.272   | 57.7 | 2.697   | 68.5  | 1.000  | 25.4 |
| MEP2.437/2.953 | ---                       | 2.437   | 61.9 | 2.953   | 75.0  | 1.375  | 34.9 |
| MEP2.750/3.500 | ---                       | 2.750   | 69.9 | 3.500   | 88.9  | 1.500  | 38.1 |
| MEP3.250/4.000 | ---                       | 3.250   | 82.6 | 4.000   | 101.6 | 1.500  | 38.1 |
| MEP3.500/5.000 | ---                       | 3.500   | 88.9 | 5.000   | 127.0 | 2.000  | 50.8 |



For Material Specifications, please see page 139.

**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 126




# MEPP Series - EPDM Pull Plugs

MEPP 系列 - EPDM橡胶手拉塞

Masking




- Resists Chemicals and Temps to 300°F (149°C)  
耐化学性，防酸碱腐蚀，耐温高达300°F (149°C)
- Convenient Handle and Parallel Design  
for Masking of Through-Holes  
平行设计，通孔遮蔽，操作方便
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)  
材质：黑色EPDM橡胶



| 产品型号     | 使用建议        | ( A ) 塞体直径 |      | ( B ) 拉柄直径 |     | ( C ) 塞体高度 |      | ( D ) 斜位高度 |     | ( E ) 拉柄高度 |      |
|----------|-------------|------------|------|------------|-----|------------|------|------------|-----|------------|------|
|          |             | 英寸         | 毫米   | 英寸         | 毫米  | 英寸         | 毫米   | 英寸         | 毫米  | 英寸         | 毫米   |
| MEPP.109 | 4-40        | 0.109      | 2.8  | 0.060      | 1.5 | 0.625      | 15.9 | 0.118      | 3.0 | 0.625      | 15.9 |
| MEPP.130 | 6-32        | 0.130      | 3.3  | 0.082      | 2.1 | 0.625      | 15.9 | 0.118      | 3.0 | 0.625      | 15.9 |
| MEPP.141 | M4          | 0.141      | 3.6  | 0.086      | 2.2 | 0.625      | 15.9 | 0.078      | 2.0 | 0.551      | 14.0 |
| MEPP.156 | 8-32        | 0.156      | 4.0  | 0.082      | 2.1 | 0.625      | 15.9 | 0.118      | 3.0 | 0.625      | 15.9 |
| MEPP.180 | 10-24       | 0.180      | 4.6  | 0.110      | 2.8 | 0.625      | 15.9 | 0.118      | 3.0 | 0.625      | 15.9 |
| MEPP.217 | M6          | 0.217      | 5.5  | 0.125      | 3.2 | 0.984      | 25.0 | 0.118      | 3.0 | 0.866      | 22.0 |
| MEPP.225 | 1/4-20      | 0.225      | 5.7  | 0.125      | 3.2 | 1.000      | 25.4 | 0.118      | 3.0 | 1.000      | 25.4 |
| MEPP.275 | M8, 5/16-18 | 0.275      | 7.0  | 0.130      | 3.3 | 1.000      | 25.4 | 0.118      | 3.0 | 1.000      | 25.4 |
| MEPP.335 | 3/8-16      | 0.335      | 8.5  | 0.157      | 4.0 | 1.000      | 25.4 | 0.118      | 3.0 | 1.000      | 25.4 |
| MEPP.355 | M10         | 0.355      | 9.0  | 0.157      | 4.0 | 0.984      | 25.0 | 0.118      | 3.0 | 0.866      | 22.0 |
| MEPP.445 | 1/2         | 0.445      | 11.3 | 0.157      | 4.0 | 1.000      | 25.4 | 0.196      | 5.0 | 1.000      | 25.4 |


For Material Specifications, please see page 139.

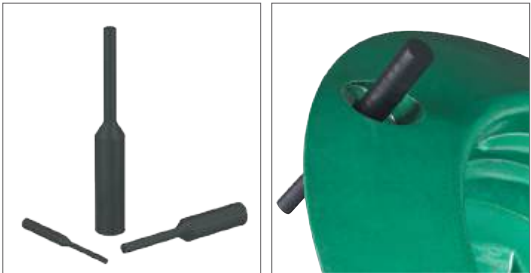

# EPDM Washer Plugs - MEWP Series

EPDM橡胶垫圈塞 - MEWP 系列

Masking



- Resists Chemicals and Temps to 300°F (149°C)  
耐化学性，防酸碱腐蚀，耐高温达300°F (149°C)
- Features a Flange for Masking the Area Around a Hole  
翻边帽檐设计用于保护遮蔽孔及其周围区域
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)  
材质：黑色EPDM橡胶



| 产品型号   | (A) 拉柄直径 |     | (B) 塞体小外径 |     | (C) 塞体大外径 |      | (D) 塞檐外径 |      | (E) 塞体高度 |     | (F) 斜位高度 |      | (G) 拉柄高度 |      | (H) 塞檐高度 |     |
|--------|----------|-----|-----------|-----|-----------|------|----------|------|----------|-----|----------|------|----------|------|----------|-----|
|        | 英寸       | 毫米  | 英寸        | 毫米  | 英寸        | 毫米   | 英寸       | 毫米   | 英寸       | 毫米  | 英寸       | 毫米   | 英寸       | 毫米   | 英寸       | 毫米  |
| MEWP3  | 0.156    | 4.0 | 0.060     | 1.5 | 0.094     | 2.4  | 0.393    | 10.0 | 0.098    | 2.5 | 0.156    | 4.0  | 0.590    | 15.0 | 0.118    | 3.0 |
| MEWP4  | 0.156    | 4.0 | 0.078     | 2.0 | 0.141     | 3.6  | 0.472    | 12.0 | 0.125    | 3.2 | 0.156    | 4.0  | 0.590    | 15.0 | 0.118    | 3.0 |
| MEWP5  | 0.156    | 4.0 | 0.110     | 2.8 | 0.177     | 4.5  | 0.472    | 12.0 | 0.137    | 3.5 | 0.216    | 5.5  | 0.590    | 15.0 | 0.118    | 3.0 |
| MEWP6  | 0.196    | 5.0 | 0.118     | 3.0 | 0.208     | 5.3  | 0.511    | 13.0 | 0.137    | 3.5 | 0.255    | 6.5  | 0.590    | 15.0 | 0.118    | 3.0 |
| MEWP8  | 0.196    | 5.0 | 0.156     | 4.0 | 0.283     | 7.2  | 0.590    | 15.0 | 0.156    | 4.0 | 0.313    | 8.0  | 0.590    | 15.0 | 0.118    | 3.0 |
| MEWP10 | 0.236    | 6.0 | 0.177     | 4.5 | 0.346     | 8.8  | 0.787    | 20.0 | 0.156    | 4.0 | 0.472    | 12.0 | 0.590    | 15.0 | 0.118    | 3.0 |
| MEWP12 | 0.236    | 6.0 | 0.216     | 5.5 | 0.417     | 10.6 | 0.866    | 22.0 | 0.156    | 4.0 | 0.551    | 14.0 | 0.590    | 15.0 | 0.118    | 3.0 |



For Material Specifications, please see page 139.

**MOCAP**


Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 128


# MCT620 Series - Polyester Tape

MCT620 系列 - 高温聚酯遮蔽带


Masking




- Widths from 3/16" to 18"  
胶带宽度自0.188英寸至18英寸
- Withstands Up to 425° F (218°C) for 1 hour  
能在425°F (218°C)环境下耐温1小时
- Adhesive Leaves No Residue After Removal  
移除后无残留物
- Material: Green Polyester  
材质：绿色聚酯纤维



| 产品型号         | 宽度    |       | 每卷长度  |      |
|--------------|-------|-------|-------|------|
|              | 英寸    | 毫米    | 英尺    | 米    |
| MCT-620-3/16 | 0.187 | 4.8   | 216.0 | 65.8 |
| MCT-620-1/4  | 0.250 | 6.4   | 216.0 | 65.8 |
| MCT-620-1/2  | 0.500 | 12.7  | 216.0 | 65.8 |
| MCT-620-5/8  | 0.625 | 15.9  | 216.0 | 65.8 |
| MCT-620-3/4  | 0.750 | 19.1  | 216.0 | 65.8 |
| MCT-620-7/8  | 0.875 | 22.2  | 216.0 | 65.8 |
| MCT-620-1    | 1.000 | 25.4  | 216.0 | 65.8 |
| MCT-620-1.5  | 1.500 | 38.1  | 216.0 | 65.8 |
| MCT-620-2    | 2.000 | 50.8  | 216.0 | 65.8 |
| MCT-620-3    | 3.000 | 76.2  | 216.0 | 65.8 |
| MCT-620-4    | 4.000 | 101.6 | 216.0 | 65.8 |
| MCT-620-5    | 5.000 | 127.0 | 216.0 | 65.8 |
| MCT-620-6    | 6.000 | 152.4 | 216.0 | 65.8 |

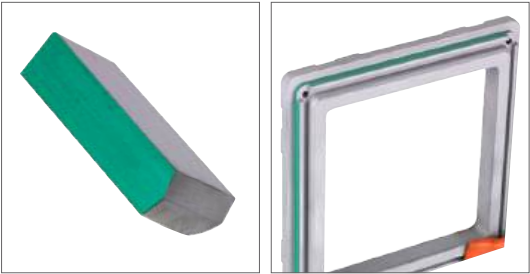

Polyester Discs - **MCD-PE Series**  
高温聚酯圆点胶片 - MCD-PE 系列  
Masking



- Diameters from 3/16" to 1-3/4" Please call for info on other sizes  
胶带直径自0.188英寸至1.75英寸
- Withstands Up to 425°F (218°C) for 1 hour  
能在425°F (218°C)环境下耐温1小时
- Split Backing Saves Labor Time  
分割线设计易于撕开，省时省力
- Adhesive Leaves No Residue After Removal  
移除后无残留物
- Material: Green Polyester  
材质：绿色聚酯纤维



| 产品型号           | 直径    |      | 每卷片数 |
|----------------|-------|------|------|
|                | 英寸    | 毫米   |      |
| POLY-DOT-.187  | 0.187 | 4.8  | 5000 |
| POLY-DOT-.250  | 0.250 | 6.4  | 5000 |
| POLY-DOT-.313  | 0.313 | 7.9  | 5000 |
| POLY-DOT-.375  | 0.375 | 9.5  | 5000 |
| POLY-DOT-.437  | 0.437 | 11.1 | 5000 |
| POLY-DOT-.500  | 0.500 | 12.7 | 2500 |
| POLY-DOT-.562  | 0.562 | 14.3 | 2000 |
| POLY-DOT-.625  | 0.625 | 15.9 | 2000 |
| POLY-DOT-.750  | 0.750 | 19.1 | 2000 |
| POLY-DOT-.875  | 0.875 | 22.2 | 2000 |
| POLY-DOT-1.00  | 1.000 | 25.4 | 2000 |
| POLY-DOT-1.125 | 1.125 | 28.6 | 1000 |
| POLY-DOT-1.187 | 1.187 | 30.2 | 1000 |
| POLY-DOT-1.250 | 1.250 | 31.8 | 1000 |
| POLY-DOT-1.500 | 1.500 | 38.1 | 1000 |
| POLY-DOT-1.750 | 1.750 | 44.5 | 1000 |



**Custom Shapes Available**  
提供定制产品


# MCT800 Series - Polyimide Tape

MCT800 系列 - 高温聚酰亚胺胶带


Masking



- Widths from 3/16" to 18"  
胶带宽度自0.188英寸至18英寸
- Withstands Up to 500°F (260°C) for 1 hour  
能在500°F (260°C)环境下耐温1小时
- Adhesive Leaves No Residue After Removal  
移除后无残留物
- Material: Amber Polyimide  
材质：琥珀色聚酰亚胺




| 产品型号         | 宽度    |       | 每卷长度 |      |
|--------------|-------|-------|------|------|
|              | 英寸    | 毫米    | 英尺   | 米    |
| MCT-800-3/16 | 0.187 | 4.8   | 108  | 32.9 |
| MCT-800-1/4  | 0.250 | 6.4   | 108  | 32.9 |
| MCT-800-1/2  | 0.500 | 12.7  | 108  | 32.9 |
| MCT-800-5/8  | 0.625 | 15.9  | 108  | 32.9 |
| MCT-800-3/4  | 0.750 | 19.1  | 108  | 32.9 |
| MCT-800-7/8  | 0.875 | 22.2  | 108  | 32.9 |
| MCT-800-1    | 1.000 | 25.4  | 108  | 32.9 |
| MCT-800-1.5  | 1.500 | 38.1  | 108  | 32.9 |
| MCT-800-2    | 2.000 | 50.8  | 108  | 32.9 |
| MCT-800-3    | 3.000 | 76.2  | 108  | 32.9 |
| MCT-800-4    | 4.000 | 101.6 | 108  | 32.9 |
| MCT-800-5    | 5.000 | 127.0 | 108  | 32.9 |
| MCT-800-6    | 6.000 | 152.4 | 108  | 32.9 |




# Polyimide Discs - MCD-PI Series

高温聚酰亚胺圆点胶片 - MCD-PI 系列

Masking



- Diameters from 3/16" to 1-3/4" *Please call for info on other sizes*  
胶带直径自0.188英寸至1.75英寸
- Withstands Up to 500°F (260°C) for 1 hour  
能在500°F (260°C)环境下耐温1小时
- Split Backing Saves Labor Time  
分割线设计易于撕开, 省时省力
- Adhesive Leaves No Residue After Removal  
移除后无残留物
- Material: Amber Polyimide  
材质: 琥珀色聚酰亚胺




| 产品型号           | 直径    |      | 每卷片数 |
|----------------|-------|------|------|
|                | 英寸    | 毫米   |      |
| PMIDE-DOT-.187 | 0.187 | 4.8  | 5000 |
| PMIDE-DOT-.250 | 0.250 | 6.4  | 5000 |
| PMIDE-DOT-.313 | 0.313 | 7.9  | 5000 |
| PMIDE-DOT-.375 | 0.375 | 9.5  | 5000 |
| PMIDE-DOT-.437 | 0.437 | 11.1 | 5000 |
| PMIDE-DOT-.500 | 0.500 | 12.7 | 2500 |
| PMIDE-DOT-.562 | 0.562 | 14.3 | 2500 |
| PMIDE-DOT-.625 | 0.625 | 15.9 | 2000 |
| PMIDE-DOT-.750 | 0.750 | 19.1 | 2000 |
| PMIDE-DOT-.875 | 0.875 | 22.2 | 2000 |
| PMIDE-DOT-1.00 | 1.000 | 25.4 | 2000 |
| PMIDE-DOT-1.12 | 1.125 | 28.6 | 1000 |
| PMIDE-DOT-1.18 | 1.187 | 30.2 | 1000 |
| PMIDE-DOT-1.25 | 1.250 | 31.8 | 1000 |
| PMIDE-DOT-1.50 | 1.500 | 38.1 | 1000 |
| PMIDE-DOT-1.75 | 1.750 | 44.5 | 1000 |



# MCN Series - Plastic Netting for Superior Protection



MCN 系列 - 保护网套

Mesh Netting



- Open Design Prevents Corrosion  
开口设计，防止腐蚀
- Flexible to Fit Irregular Shapes  
柔韧性好，适用于不规则形状产品
- Sold in Rolls, but can be Sliced to Length  
以卷出售，可根据要求切成所需的长度
- Material: Low-Density Polyethylene in Specific Colors Per Size  
材质：低密度聚乙烯，颜色因尺寸各异

| 产品型号   | 颜色      | 适合直径范围     |                  | 每卷长度 |        |
|--------|---------|------------|------------------|------|--------|
|        |         | 英寸         | 毫米               | 英尺   | 米      |
| MCN 3  | RED     | 1/4 to 3/8 | 6.35 to 9.53     | 820  | 249.94 |
| MCN 3A | RED     | 1/4 to 3/8 | 6.35 to 9.53     | 1500 | 457.20 |
| MCN 4  | ORANGE  | 3/8 to 5/8 | 9.53 to 15.88    | 820  | 249.94 |
| MCN 4A | ORANGE  | 3/8 to 5/8 | 9.53 to 15.88    | 1500 | 457.20 |
| MCN 5  | BLUE    | 5/8 to 1   | 15.88 to 25.40   | 820  | 249.94 |
| MCN 5A | BLUE    | 5/8 to 1   | 15.88 to 25.40   | 1500 | 457.20 |
| MCN 6  | YELLOW  | 1 to 2     | 25.40 to 50.80   | 164  | 49.99  |
| MCN 6A | YELLOW  | 1 to 2     | 25.40 to 50.80   | 1500 | 457.20 |
| MCN 7  | RED     | 2 to 4     | 50.80 to 101.60  | 164  | 49.99  |
| MCN 7A | RED     | 2 to 4     | 50.80 to 101.60  | 1500 | 457.20 |
| MCN 8  | GREEN   | 4 to 6     | 101.60 to 152.40 | 164  | 49.99  |
| MCN 9  | BROWN   | 6 to 8     | 152.40 to 203.20 | 164  | 49.99  |
| MCN 10 | CRYSTAL | 8 to 10    | 203.20 to 254.00 | 164  | 49.99  |
| MCN 11 | GREEN   | 10 to 12   | 254.00 to 304.80 | 164  | 49.99  |

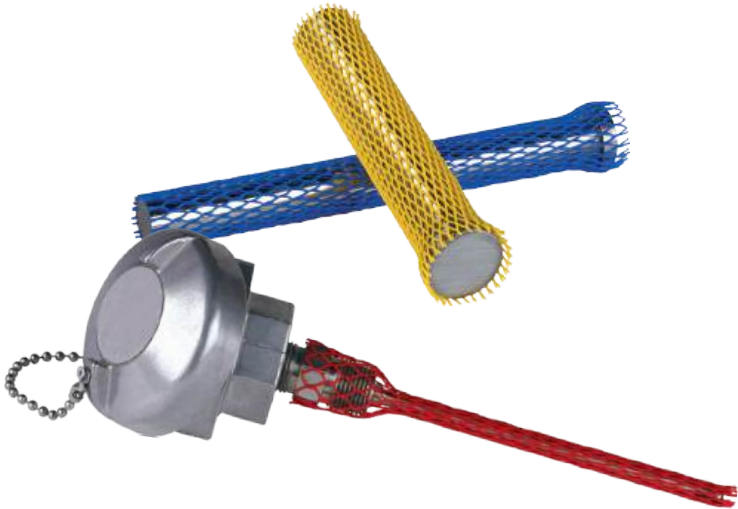



# Printing, Punching, Slicing, Assembly - Secondary Operations

印刷、冲孔、裁切、装配 - 后续加工

When your application requires something more than a standard part, **MOCAP** offers several secondary operations to convert, enhance or improve your product. We can create custom sleeves, rings, slots, covers, masks, and punch outs at the most economical prices.

如果您对茂凯的标准产品有额外要求，我们能提供相应后续加工以满足您的需要。  
包括：

**Printing** can add your logo or other valuable information to most dip molded vinyl plastic caps, plugs and grips. Multi-color and consecutive number printing are also available.

印刷：可将公司标志及其它有用信息印在各种浸塑盖子、塞子及手柄上。

**Punching** can add a hole or custom shape not possible through conventional molding processes

冲孔：可提供冲孔及塑造常规成型生产不能实现的各种外形。

**Slicing** to remove a portion of the part creating a custom fit or specialized function.

裁切：能按客户的要求进行尺寸与外形裁剪。

**Slitting** adds a slot or thin opening on almost any surface

开槽：产品表面可增加细纹或槽缝。

**Assembly** to create products from components, or add packaging to your product

装配：可提供装配与包装服务。



## Printing

印刷

## Assembly

装配

## Punching & Slicing

冲孔&裁切

Customized to Fit Your Specifications

客户化定制



### Standard Ink Colors



Additional Colors Available

更多信息，欢迎致电

**4006-4006-49**

**MOCAP**

Free Samples

微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 134

# NEW SELECTION OF PLASTIC CAPS & PLUGS

Now offering more size, shape, material and color options than ever before!

New Tubing Plug  
Sizes, Shapes & Profiles

Expanded Straight  
Cap Offerings

New Offset Pull Tab Options  
OP SERIES



**MOCAP** has again expanded its product lines by adding styles of Polyethylene Plastic Caps and Plastic Plugs.

If you do not see a **MOCAP** part to fit your application, please contact our sales department for assistance and we will work with you to find a *Solution that Fits®*.

茂凯再次扩大产品线，开发了不同形状，尺寸齐全的管塞系列；新增了移除方便，使用高效的OP系列塞子；扩展了锥形盖，直身盖，螺纹盖，螺纹塞等系列尺寸，包括LDPE材质和TPE材质的SK系列盖子等！如无法找到适配产品，请联系我们的销售协助您找到解决方案。

**Smaller Quantity Micro-Packs Now Available!**

**Offering the Lowest Minimum Order Quantity with the Highest Stocking Levels in the Industry**



### 伸缩盒 - SQT 系列

棘轮式设计，长度可调节，可带或不带挂钩

多种颜色和尺寸任意选择

库存充足，发货迅速

适用于保护各种钻头、铣刀、车刀、刀杆、丝锥、硬质合金工具等



### 刀片盒 - IB 系列


可带泡棉，多种颜色和尺寸任意选择

双向打开设计，快速堆叠

可定制模具印刷公司LOGO或信息

库存充足，发货迅速

适用于保护各种刀片/刀粒、切削工具等

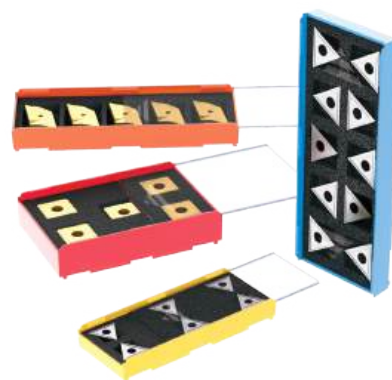

### 铣刀盒 - GRP 系列

透明盖子和颜色多样的底座

底部基座牢固安全地固定刀具

库存充足，发货迅速

适用于保护钻头、铣刀、带圆柄的硬质合金刀具等



### 锥底铣刀盒 - GRC 系列

带棘齿功能，长度可调节

内部锥形结构设计可安全地将不同直径的工具和刀具定位在盒中心

安全固定刀具两端的同时，最大限度保护刀具刃部



### 可提供印刷和贴标服务

可根据需求直接印刷

可定制标签

可定制膜片



# Silicone X-TREME TAPE®

Self-Fusing Silicone Tape

A Division of MOCAP



硅胶自粘胶带最初为美国军事应用开发而成，在极端条件和环境中进行了测试和验证。易于使用，作紧急救援修复用途，快速方便，应用广泛。它是一种自粘合，耐温耐压，防腐防污染，有弹性，粘性好的绝缘硅胶产品。



## 家居修补

X-Treme Tape 茂凯自粘胶带具有低吸水率和较高的持续耐温范围特点，尤其适合家庭装修及日常维护，省时省力。应用于：


洗碗机软管 • 烘干机通风口 • 洗衣机排水软管 • 真空吸尘器软管 • P型存水弯 • 排水管 • 花园软管和配件 • 电源线 • 电气维修



## 汽车客车

X-Treme Tape 茂凯自粘胶带防水，增加电器连接部分的气密性，甚至修补漏气管道。它能迅速自粘，是汽车，客户，货车，卡车.....的车内必配工具。应用于：

散热器软管 • 空气软管 • 空调管路 • 排气系统 • 线束捆扎/保护



## 电机电气设备

X-Treme Tape 茂凯自粘胶带的介电强度为400千伏/英寸，因此对于厚度为0.020英寸的单层缠绕，它可以绝缘高达8000伏特的电压。X-Treme Tape自粘胶带已通过UL认证，是安全有效的绝缘自粘产品。应用于：

电气连接 • 电缆夹 • 电机线圈 • 变压器 • 电动工具 • 电线 • 端子拼接



## 海洋项目

X-Treme Tape 茂凯自粘胶带耐海洋盐水和紫外线，可在超过1000英尺的深度下应用，是海洋环境的便捷自粘工具，非常适合快速修理船舶相关等。应用于：

水管 • 排水管 • 排气装置 • 索具 • 布线 • 捕鱼设备 • 船栏杆 • 水肺装备



sales@mocap.com.cn



4006-4006-49




www.xtremetape.com.cn





# Silicone **X-TREME TAPE®**

## Self Fusing Silicone Tape

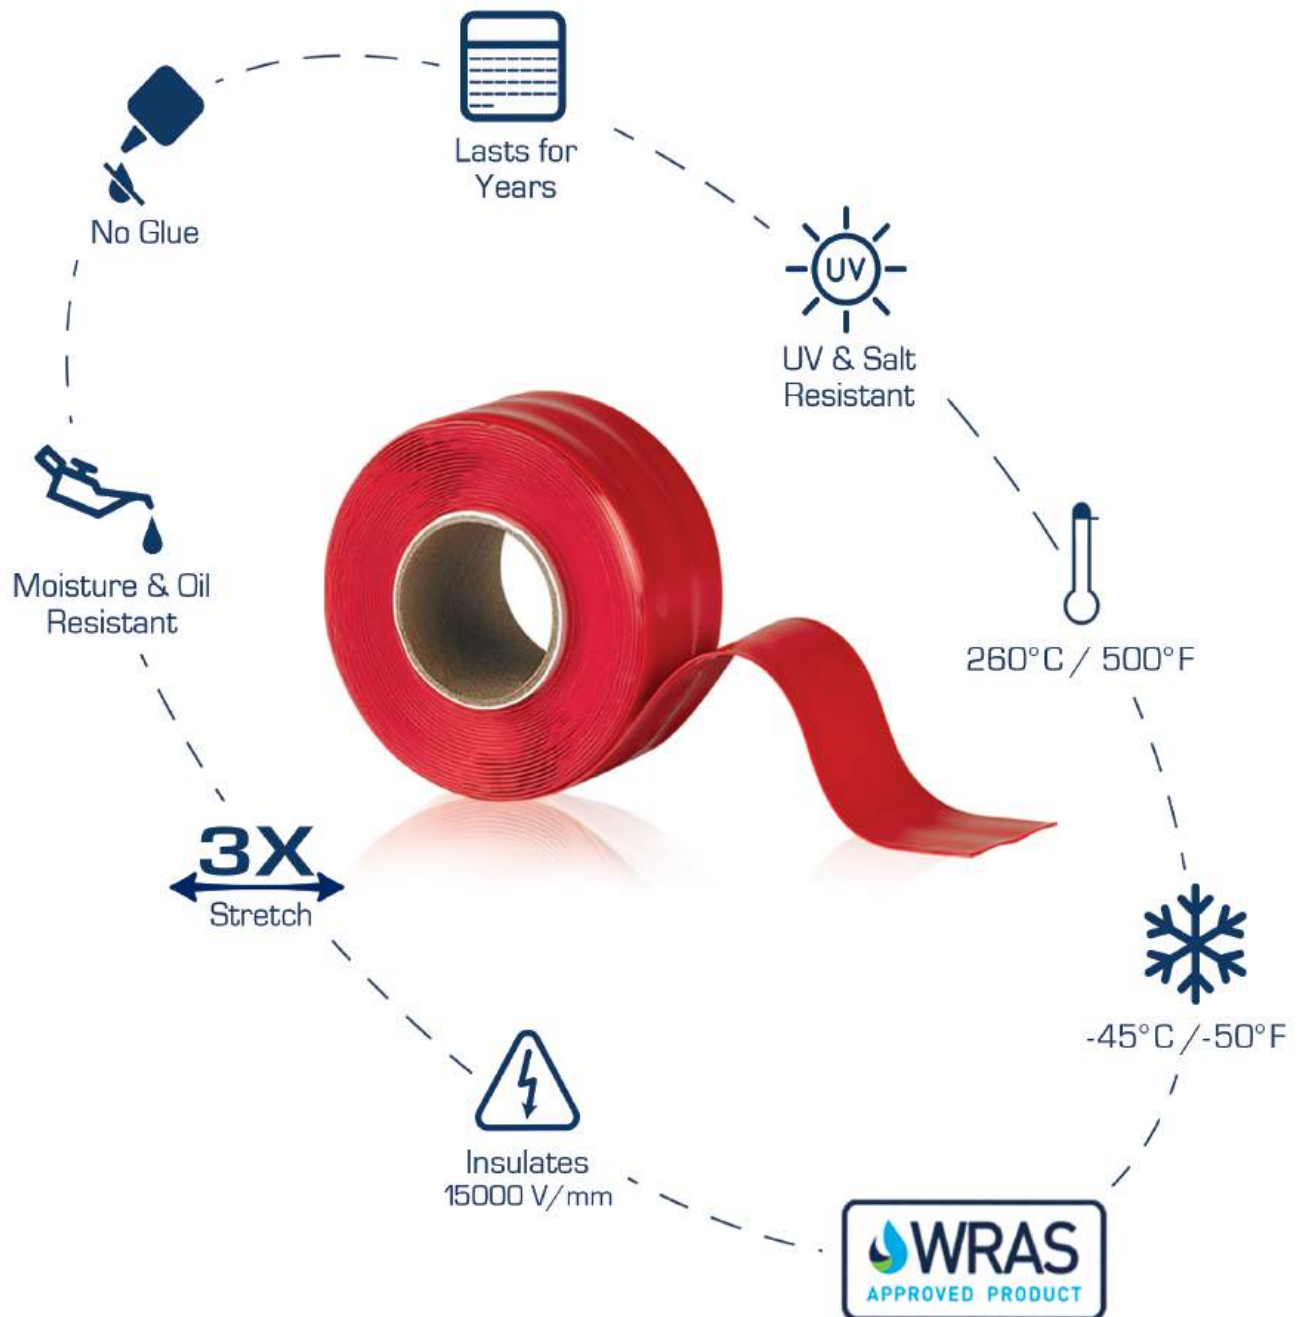

|     | 材料       | 描述                            | 硬度<br>(肖A) | 拉伸强度<br>(PSI) | 延展率<br>(%) | 撕裂强度<br>(PPI) | 适用温度      |           |           |           | 电绝缘性      |
|-----|----------|-------------------------------|------------|---------------|------------|---------------|-----------|-----------|-----------|-----------|-----------|
|     |          |                               |            |               |            |               | (低)<br>°F | (低)<br>°C | (高)<br>°F | (高)<br>°C |           |
| 浸塑类 | 9500     | General Purpose, Glossy       | 73         | 1520          | 380        | 200           | -20       | -29       | 300       | 149       | Good      |
|     | 9250     | High -Temp Resistant (HT-201) | 84         | 2500          | 350        | 250           | 0         | -18       | 475       | 246       | Good      |
|     | 9700     | Low Exudation                 | 73         | 1500          | 300        | 150           | +20       | -7        | 250       | 121       | Good      |
|     | 9400     | FDA Acceptable                | 58         | 1800          | 500        | 270           | -20       | -29       | 140       | 60        | ---       |
|     | 9240     | Semi-Rigid, Glossy            | 86         | 2200          | 260        | 250           | +20       | -7        | 250       | 121       | Good      |
|     | 9238     | Non-Copper Staining           | 75         | 1750          | 300        | 200           | -20       | -29       | 250       | 121       | Good      |
|     | 9222     | Flame Retardant, Matte        | 73         | 620           | 230        | 80            | 0         | -18       | 280       | 138       | Very Good |
|     | 9100     | Textured                      | 60         | 850           | 300        | 100           | -20       | -29       | 150       | 66        | ---       |
|     | 4610     | General Purpose, Matte        | 65         | 600           | 175        | 45            | +20       | -7        | 175       | 79        | ---       |
|     | 4406     | Anti-Static                   | 70         | 1200          | 250        | 200           | -20       | -29       | 250       | 121       | Good      |
|     | 3810     | Extended U.V. Resistant       | 75         | 1750          | 300        | 250           | -20       | -29       | 250       | 121       | Good      |
|     | 1219     | Gas & Oil Resistant, Glossy   | 70         | 1500          | 250        | 150           | -20       | -29       | 300       | 149       | Good      |
| 橡胶类 | 1217     | Textured                      | 45         | 500           | 250        | 95            | -20       | -29       | 150       | 66        | ---       |
|     | Silicone | Ultra High-Temp Resistant     | 50-60      | 800           | 200        | 75            | -104      | -76       | 600       | 316       | ---       |
|     | EPDM     | High-Temp Chemical Resistant  | 50         | 1015          | 300        | 200           | -67       | -55       | 300       | 149       | ---       |
|     | LDPE     | Low-Density Polyethylene      | ---        | 1600          | ---        | ---           | -94       | -70       | 175       | 79        | ---       |
|     | HDPE     | High-Density Polyethylene     | ---        | 3100-5500     | ---        | ---           | 0         | -18       | 215       | 102       | ---       |
|     | PP       | Polypropylene                 | ---        | 3300-5300     | ---        | ---           | -94       | -70       | 250       | 121       | ---       |
|     | TPE      | Thermoplastic Elastomer       | ---        | 985           | ---        | ---           | -76       | -60       | 194       | 90        | ---       |
|     | NYLON    | Nylon PA6                     | ---        | 10741         | ---        | ---           | -40       | -40       | 250       | 121       | ---       |
| 塑胶类 | Paper    | Tan Recycled Paper            | ---        | ---           | ---        | ---           | ---       | ---       | 400       | 204       | ---       |

Additional Formulas, Compounds & Resins Available, Please Contact Sales. 如需特殊材料制作，请与销售人员联系

| Material Temp | Material Maximum Temperature Specifications 材料最高耐温规格 |                 |                 |                 |                  |                                                 |                  |                     |                  |                  |                  |
|---------------|------------------------------------------------------|-----------------|-----------------|-----------------|------------------|-------------------------------------------------|------------------|---------------------|------------------|------------------|------------------|
|               | 9400                                                 | 9100 • 1217     | 4610 • LDPE     | TPE             | HDPE             | 3810 • 4406<br>9238 • 9240<br>9700 • PP • NYLON | 9222             | 9500 • EPDM<br>1219 | PAPER            | 9250             | SILICONE         |
|               | 140° F<br>60° C                                      | 150° F<br>66° C | 175° F<br>79° C | 194° F<br>90° C | 215° F<br>102° C | 250° F<br>121° C                                | 275° F<br>135° C | 300° F<br>149° C    | 400° F<br>204° C | 475° F<br>246° C | 600° F<br>316° C |

Temperatures shown are guidelines. Please request a **FREE** sample for your testing.

9500 Formula Vinyl Color Options

BLACK

-002

WHITE

-001

GRAY

-005

PMS 422

RED

-011

PMS 1795

YELLOW

-033

PMS 7404

ORANGE

-052

PMS 1665

MEDIUM GREEN

-023

PMS 347

DARK GREEN

-021

PMS 3308

BROWN

-605

PMS 462

MEDIUM BLUE

-040

PMS 3015

DARK BLUE

-041

PMS 295

Plastic Color Options

NATURAL

NA

WHITE

WH

GRAY

GR

PMS 422

DK GRAY

GD

PMS 431

BLACK

BK

YELLOW

YW

PMS 7404

ORANGE

OR

PMS 1665

MED GREEN

MG

PMS 348

MED RED

MR

PMS 1795

DK RED

RD

PMS 201

BROWN

BR

PMS 477

MED BLUE

MB

PMS 285

DK BLUE

BL

PMS 281

SILVER

SV

PMS 877

| Tolerances 公差                                                           |  |
|-------------------------------------------------------------------------|--|
| <b>浸塑产品</b>                                                             |  |
| • 最短内长：3/16" (4.75mm)                                                   |  |
| • 长度按1/16" (1.58mm) 进行增量                                                |  |
| • 内长尺寸公差为+/- 1/16" (1.58mm)                                             |  |
| • 沿内壁测量内长，而不是从中间开始测量，RFVG 系列除外。                                         |  |
| • 壁厚为标准尺寸，除非客户有特殊要求                                                     |  |
| • 壁厚公差为+/- .010" (0.25mm)                                               |  |
| • 壁厚测量位置为从开口端往顶端约1/4" (6.35mm)处                                         |  |
| • 标准材料：9500及9250 (其他特殊材料需定制)                                            |  |
| <b>注塑产品</b>                                                             |  |
| • 因产品尺寸而异                                                               |  |
| • 0.000" -3.000" : ± 0.010" (0mm to 76.2mm : ± .25mm)                   |  |
| • 3.001" -5.000" : ± 0.015" (76.23mm to 127mm : ± .38mm)                |  |
| • 5.001" and up: ± 0.020" (127.1mm and up : ± .51mm)                    |  |
| • SMR系列中，尺寸大于等于SMR1-1/16BK1的产品，A尺寸公差为+0.018" /-0.010" (+0.45mm/-0.25mm) |  |
| <b>橡胶产品</b>                                                             |  |
| 所有橡胶产品公差均可参照RMA® "A3" 公差标准。                                             |  |

