

MOCAP *Solutions that Fit.*



Caps, Plugs, Grips & Tapes
for
Product Protection, Masking & Finishing



MOCAP 茂凯

Xiaolan Town, Zhongshan Guangdong • China

Sales & Manufacturing Location

MOCAP has steadily grown from a small dip molding operation into several divisions with multiple facilities totaling more than 400,000 square feet. Our manufacturing capabilities include Vinyl Dip Molding, Plastic & Rubber Injection Molding, Clear Plastic & Rubber Extrusion and Blow Molding.

MOCAP has sales offices in the United States, United Kingdom, China and Mexico serving thousands of customers globally with our Product Protection, Masking, Finishing and Packaging products.

In 2025, we moved to a new building, located in Xiaolan Town, Zhongshan Guangdong, China, expanding our production areas and incorporating new equipment into our existing production procedures.

MOCAP®

ClearTec®
Packaging
Packaging Solutions from MOCAP

BECKETT®
PACKAGING
Packaging Solutions from MOCAP

Silicone
X-TREME TAPE®



MOCAP®

mocap.com.cn | 4006-4006-49 | 企业微信号 13802665016

Free Samples

Global Locations



World Headquarters Park Hills, MO • USA

Sales & Manufacturing Location

www.mocap.com
800.633.6775
sales@mocap.com
customerservice@mocap.com



Farmington, MO • USA

Warehouse Location

Tel: 314.543.4000
Fax: 14.543.4111



Telford, Shropshire • UK

Sales & Manufacturing Location

Tel: +44 1952 670247
Fax: +44 1952 670241
www.mocap.co.uk
sales@mocap.co.uk



Sheffield, South Yorkshire • UK

Sales & Manufacturing Location

Tel: +44 1952 670247
Fax: +44 1952 670241



Zerniki, Poznan • Poland

Sales & Warehouse Location

+48 618 347 002
info@mocap.com.pl



Monterrey, NL • Mexico

Sales Location

Tel: +52 (81) 8344-1843
Fax: + 52 (81) 8340-0984
www.mocap.com.mx
ventas@mocap.com

MOCAP®

Free Samples

企业微信号 13802665016 | 4006-4006-49 | mocap.com.cn

Contents

Products by Page Number

Friction Fit Caps & Plugs

Non-Threaded Design Allows for Easy Placement and Removal to Protect Threads and Fittings



Tubing Plugs

LDPE Plastic Tube Plugs are designed to fit multiple tube gauges and provide a secure fit.




Tapered Caps & Plugs

Designed with Slight Taper to Secure Tightly to Protect Threads and Fittings



Threaded Caps & Plugs

Designed to Fit a Variety of Standard and Metric Threads, Threaded Ports, Fittings and Assemblies

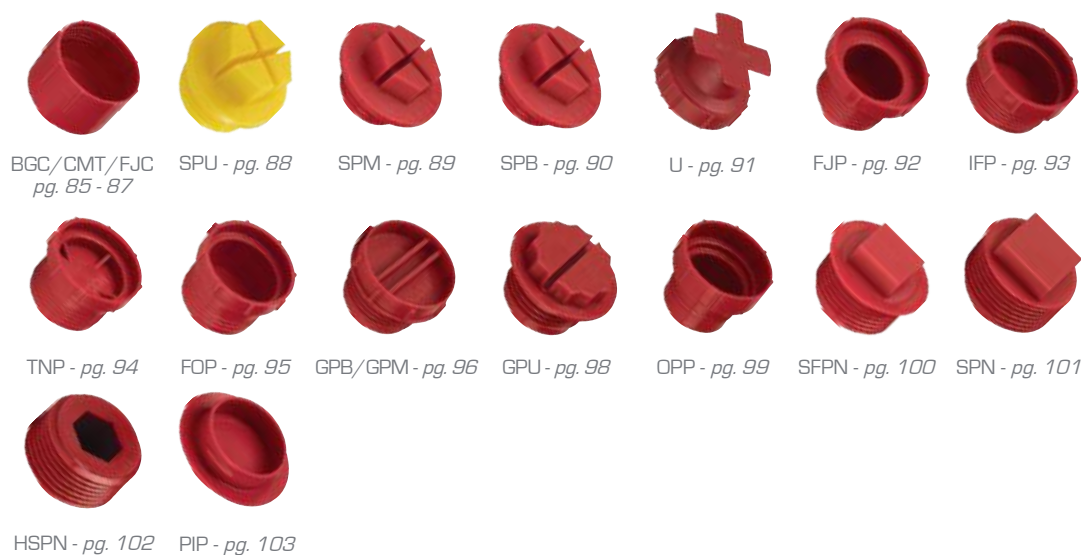

MOCAP

mocap.com.cn | 4006-4006-49 | 企业微信号 13802665016

Free Samples

Pipe & Flange Protection

Caps, Plugs and Push-In Flange Protectors for Use with Pipe, Tubing and Flanges



SHF - pg. 104



PC - pg. 105



PP - pg. 107



MPI - pg. 108



MOF - pg. 109



MBH - pg. 110

Grips

Round, Flat and Finger Nub Styles for Improved Appearance, Durability and Comfort



RVG - pg. 111



FVG - pg. 113



MFG - pg. 114



Textured
pg. 114



Double Dipped
pg. 114

Masking

Caps, Plugs, Tapes and Discs in a Variety of Materials, Shapes, Sizes and Temperature Requirements



RVC-T - pg. 115



FPT-T - pg. 117



MCP-T - pg. 118



TP-T - pg. 119



MSC - pg. 120



MSP - pg. 121



MSPP - pg. 122



MSWP - pg. 123



SRT - pg. 124



MEC - pg. 125



MEP - pg. 126



MEPP - pg. 127



MEWP - pg. 128



MCT620
pg. 129



MCD-PE
pg. 130




MCT800
pg. 131



MCD-PI
pg. 132

Mesh Netting

Flexible Mesh Plastic Netting for Superior Protection



MCN - pg. 133

Secondary Operations

Printing, Assembly, Packaging, Punching and Slicing, Customized to Fit Your Specifications



Printing
pg. 134



Punching & Slicing
pg. 134

Application Advisors

To assist you in selecting the best product for your requirements, we have included Application Advisors for many of our products. Please note the part number in the Application Advisor when ordering.

pg. 1 - Pipe & Flange Protection

pg. 4 - Threaded Caps & Plugs

pg. 7 - Friction Fit Caps & Plugs

Application Advisor - Pipe & Flange Protection

Use this guide to help select the right product for your application

MOCAP offers a variety of solutions to protect and secure pipe threads, tubes, flanges and fittings from moisture and debris during application, shipping or storage.

BPF Series - Barrel Plugs with Flange



PP Series - Pipe Plugs



Pipe Plugs are designed for maximum flexibility to fit many different threaded and non-threaded pipes and tubing.

Application Advisor is offered as a guideline. Please request samples to test within your application at sales@mocap.com.cn.

For SCHEDULE 40 Pipe

	Pipe Caps	Pipe Plugs	Tubing Plugs	Tapered Plugs	Barrel Plugs
To Fit Pipe Size	Black LDPE	Black LDPE	Black LDPE	Red LDPE	Natural LDPE
1/2"	PC114	PP114	RNPP.5	T.532/.608	BPF200
3/4"	PC117	PP117	RNPP.75	T.725/.823	BPF280
1"	PC121	PP121	RNPP1	T1.22/1.35	BPF380
1-1/4"	PC126	PP126	RNPP1.25	T1.23/1.36	BPF440
1-1/2"	PC128	PP128	RNPP1.5	T1.44/1.60	BPF500
2"	PC135	PP135	RNPP2	T1.90/2.07	BPF540
2-1/2"	PC140	PP140	RNPP2.5	T2.298/2.464	BPF581
3"	PC144	PP144	RNPP3	T2.975/3.103	---
3-1/2"	PC147	PP147	RNPP3.5	T3.270/3.562	---
4"	PC150	PP150	RNPP4	T3.929/4.07	---
5"	PC155	PP156	RNPP5	T4.91/5.09	---
6"	PC161	PP161	---	T6.01/6.18	---

8"-24" Schedule 40 Pipe Caps can be found on our website, www.mocap.com.cn

T-Series Tapered Plug Caps Can Be Used as a Cap or a Plug



Cap



Plug

To Fit **MOCAP** T-Series as a **CAP**, measure the **OUTSIDE** diameter.

To Fit **MOCAP** T-Series as a **PLUG**, measure the **INSIDE** diameter.

For SCHEDULE 80 Pipe

	Pipe Caps	Pipe Plugs	Tapered Plugs	Barrel Plugs
To Fit Pipe Size	Black LDPE	Black LDPE	Red LDPE	Natural LDPE
1/2"	PC114	PP114	T.471/.547	BPF150
3/4"	PC117	PP117	T.640/.727	BPF250
1"	PC121	PP116	T.866/.975	BPF340
1-1/4"	PC126	PP121	T1.17/1.28	BPF420
1-1/2"	PC128	PP124	T1.31/1.46	BPF470
2"	PC135	PP128	T1.78/1.95	BPF531
2-1/2"	PC140	PP134	T2.13/2.31	---
3"	PC144	PP140	T2.760/2.990	---
3-1/2"	PC147	PP144	T3.090/3.370	---
4"	PC150	PP147	T3.68/3.80	---
5"	PC155	PP151	T4.64/4.85	---
6"	PC161	PP156	T5.57/5.75	---
8"	PC167	---	T7.34/7.65	---
10"	PC173	---	---	---
12"	PC178	---	T11.11/11.46	---

14"-24" Schedule 80 Pipe Caps can be found on our website, www.mocap.com.cn

MOCAP Pipe Caps provide excellent protection and are available in diameters up to 40".

Application Advisor is offered as a guideline. Please request samples to test within your application at sales@mocap.com.cn.

MOCAP

Pipe & Flange Protection - Application Advisor

For NPT & BSP Pipe Threads

Use this guide to help select the right product for your application

		Tapered Caps	Pipe Caps	Flanged Caps	Tear Caps	Thick Extra Wide Tapered Plugs	Pipe Plugs	Barrel Plugs	Tapered Plugs
									
To Fit NPT	To Fit BSP	Red LDPE	Black LDPE	Natural LDPE	Red LDPE	Yellow LDPE	Black LDPE	Natural LDPE	Red LDPE
1/8"	1/8"	T.419/.485	PC102	---	---	---	---	BPF80 BPF90	---
1/8"	---	T.419/.485	---	FCN0125	TCNPT0125	---	---	BPF70	T.330/.396
---	1/8"	T.390/.456	---	FCB0125	---	---	---	---	T.299/.365
1/4"	1/4"	T.532/.608	PC105	FCBN0250	---	---	---	BPF130	T.419/.485
1/4"	---	T.532/.608	---	---	TCNPT0250	---	---	---	T.419/.485
---	1/4"	T.500/.576	---	---	TCBSP0250	---	---	BPF140	T.390/.456
3/8"	3/8"	T.675/.755	PC109	---	---	---	---	---	T.550/.631
3/8"	---	T.675/.755	---	FCN0375	TCNPT0375	---	---	BPF190 BPF180	T.550/.631
---	3/8"	T.690/.788	---	FCB0375	TCBSP0375	---	---	BPF200	T.532/.608
1/2"	1/2"	T.802/.911	PC114	FCBN0500	---	---	PP114	BPF251	T.690/.788
1/2"	---	T.802/.911	---	---	TCNPT0500	---	---	BPF250	T.690/.788
---	1/2"	T.815/.930	---	---	TCBSP0500	XW.867/.975	---	BPF260	T.675/.755 T.725/.823
3/4"	3/4"	T.995/1.14	PC117	FCBN0750	---	---	PP117	BPF360	T.915/1.04
3/4"	---	T.995/1.14	---	---	TCNPT0750	---	---	BPF350	T.915/1.04
---	3/4"	T.995/1.14	---	---	TCBSP0750	---	---	---	T.915/1.04
1"	1"	---	PC121	FCBN1000	---	---	PP121	BPF400	T1.17/1.28
1"	---	T1.23/1.36	---	---	TCNPT1000	XW1.11/1.25	---	BPF391	T1.17/1.28
---	1"	T1.31/1.46	---	---	TCBSP1000	XW1.31/1.46	---	BPF410	T1.09/1.21
1-1/4"	1-1/4"	---	PC126	FCBN1250	---	---	PP126	BPF481	T1.44/1.60
1-1/4"	---	T1.56/1.68	---	---	TCNPT1250	XW1.45/1.60	---	BPF480	T1.44/1.60
---	1-1/4"	T1.63/1.75	---	---	---	---	---	---	T1.44/1.60
1-1/2"	1-1/2"	---	PC128	FCBN1500	---	---	PP128	BPF511	T1.75/1.88
1-1/2"	---	T1.78/1.95	---	---	TCNPT1500	XW1.73/1.90	---	BPF520	T1.75/1.88
---	1-1/2"	T1.90/2.07	---	FCB1500	---	XW1.92/2.05	---	---	T1.75/1.88
2"	2"	T2.298/2.464	PC135	---	---	---	PP135	BPF561	---
2"	---	T2.298/2.464	---	FCN2000	TCNPT2000	XW2.12/2.29	---	---	T2.230/2.260
---	2"	T2.307/2.650	---	FCB2000	---	XW2.39/2.60	---	---	T2.06/2.24 T2.125/2.406 T2.13/2.31
2-1/2"	---	T2.760/2.990	PC140	---	TCNPT2500	XW2.63/2.79	PP140	---	T2.641/2.790
---	2-1/2"	T2.975/3.103 T2.982/3.245	PC141	---	---	---	PP141	---	T2.760/2.990
3"	3"	T3.470/3.600	PC144	---	---	---	PP144	---	---
3"	---	T3.470/3.600	---	---	TCNPT3000	---	---	---	T3.325/3.457
---	3"	T3.470/3.600	---	---	---	---	---	---	T3.090/3.370 T3.270/3.562
3-1/2"	---	T3.79/3.52	PC147	---	---	---	PP147	---	T3.79/3.92
4"	4"	T4.37/4.62	PC150	---	---	---	PP150	---	T4.27/4.43
---	4-1/2"	T4.91/5.09	PC152	---	---	---	PP152	---	T4.64/4.85 T4.79/4.97
5"	5"	---	PC155	---	---	---	---	---	---
5"	---	T5.57/5.75	---	---	---	---	---	---	T5.33/5.49
---	5"	T5.33/5.49	---	---	---	---	---	---	T5.18/5.36
---	5-1/2"	T6.01/6.18	PC157	---	---	---	PP157	---	T5.70/5.87
6"	6"	---	PC161	---	---	---	PP161	---	---
6"	---	T6.61/6.71	---	---	---	---	---	---	T6.40/6.56
---	6"	T6.40/6.56	---	---	---	---	---	---	T6.18/6.35
8"	8"	---	PC167	---	---	---	---	---	---
8"	---	T8.67/8.73	---	---	---	---	---	---	T8.40/8.60
---	8"	T8.40/8.60	---	---	---	---	---	---	T8.15/8.35
10"	10"	---	PC173	---	---	---	---	---	---
10"	---	T10.79/11.10	---	---	---	---	---	---	---
12"	12"	---	PC178	---	---	---	---	---	---
12"	---	T12.79/13.14	---	---	---	---	---	---	---

14" - 40" NPT & BSP Pipe Caps can be found on our website, www.mocap.com.cn

Application Advisor is offered as a guideline.
Please request samples to test within your application
at sales@mocap.com.cn.

MOCAP

Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn

Application Advisor - Pipe & Flange Protection

Use this guide to help select the right product for your application

MOCAP manufactures plugs designed specifically for Type K, L & Type M copper tubing.

For Copper Tubing

To Fit Copper Tube Size	Tapered Plugs for Type K	Tapered Plugs for Type L and M	General Purpose Plugs for Type L & M
	Red LDPE	Red LDPE	Red LDPE
3/16"	---	---	GKP0188
1/4"	---	---	GKP0250
5/16"	---	---	GKP0313
3/8"	KTP0375	LMP0375	GKP0375
1/2"	KTP0500	LMP0500	GKP0500
5/8"	KTP0625	LMP0625	GKP0625
3/4"	KTP0750	LMP0750	GKP0750
7/8"	KTP0875	LMP0875	---
1-1/8"	KTP1125	LMP1125	---
1-3/8"	KTP1375	LMP1375	---
1-5/8"	KTP1625	LMP1625	---
2-1/8"	KTP2125	LMP2125	---
2-5/8"	KTP2625	LMP2625	---
3-1/8"	KTP3125	LMP3125	---
3-5/8"	---	LMP3625	---
4-1/8"	---	LMP4125	---

MOCAP offers a variety of solutions to protect flange bolt holes, faces and edges from damage and debris.

For Pipe Flanges

			Bolt Hole Flange Protectors	Outside Fitting Flange Protectors	Push In Flange Protectors
			Black or Blue LDPE	Yellow LDPE	Yellow LDPE
Nominal Pipe Sizes	DIN	Pipe Pressure	Black or Blue LDPE	Yellow LDPE	Yellow LDPE
1/2"	15	125-150	MBH150500	MOF150500	MPI500
1/2"	15	300-600	MBH300500	MOF300500	MPI500
3/4"	20	125-150	MBH150750	MOF150750	MPI750
3/4"	20	300-600	MBH300750	MOF300750	MPI750
1"	25	125-150	MBH1501000	MOF1501000	MPI1000
1"	25	300-600	MBH3001000	MOF3001000	MPI1000
1-1/4"	32	125-150	MBH1501250	---	MPI1250
1-1/4"	32	300-600	MBH3001250	---	MPI1250
1-1/2"	40	125-150	MBH1501500	MOF1501500	MPI1500
1-1/2"	40	300-600	MBH3001500	---	MPI1500
2"	50	125-150	MBH1502000	MOF1502000	MPI2000
2"	50	300	MBH3002000	MOF3002000	MPI2000
2-1/2"	65	125-150	MBH1502500	---	MPI2500
2-1/2"	65	300	MBH3002500	---	MPI2500
3"	80	125-150	MBH1503000	MOF1503000	MPI3000
3"	80	300	MBH3003000	---	MPI3000
4"	100	125-150	MBH1504000	MOF1504000	MPI4000
4"	100	300	MBH3004000	---	MPI4000
5"	125	125-150	MBH1505000	---	MPI5000
5"	125	300	MBH3005000	---	MPI5000
6"	150	125-150	MBH1506000	MOF1506000	MPI6000
6"	150	300	MBH3006000	---	MPI6000
8"	200	125-150	MBH1508000	---	MPI8000
8"	200	300	MBH3008000	---	MPI8000
10"	250	125-150	MBH15010000	MOF15010000	MPI10000
10"	250	300	MBH30010000	---	MPI10000
12"	300	125-150	MBH15012000	---	MPI12000
12"	300	300	MBH30012000	---	MPI12000

MOCAP stocks all part sizes for immediate shipment.

MOCAP

Application Advisor is offered as a guideline.
Please request samples to test within your application
at sales@mocap.com.cn.

Threaded Caps and Plugs - Application Advisor

Use this guide to help select the right product for your application

These Threaded Plastic Caps and Plugs are designed for easy application and handling and are available for BSP/ Gas Fittings, Metric Threads, Standard, Flared JIC and NPT fittings.

Because these caps and plugs are manufactured in an assortment of styles and materials, **MOCAP** can offer you a solution that fits for most desired applications. All sizes are available for immediate shipment and in micro and mini-packs when less than case quantities are needed.

For STANDARD Threads

Sealing Plugs
are also available with factory-fit
neoprene O-ring

	Plugs for Flat Faced O-Ring	Plugs for Inverted Flared Fittings	Plugs for Straight Thread O-Ring	Plugs for MS-21921 Flareless	General Purpose Plugs	Sealing Plugs	Sealing Plugs	Push-In Plugs	Universal Plugs
									
To Fit Standard Threads	Red LDPE	Red LDPE	Red Polypropylene	Red LDPE	Red Polypropylene	Red Polypropylene	Yellow Nylon	Red LDPE	Red LDPE
1/4	---	---	---	---	---	---	---	PIP0250	---
5/16-28	---	IFP300	---	---	---	---	---	PIP0313	---
3/8-24	---	IFP310	---	TNP0375	---	---	---	PIP0375	---
7/16-20	---	---	OPP0438	TNP0438	GPU0437-20	SPU0437-20	SPU0437-20	PIP0438	U100
7/16-24	---	IFP320	---	---	GPU0437-24	---	---	PIP0438	U100
1/2-14	---	---	---	---	---	---	---	PIP0500	U105
1/2-20	---	IFP330	OPP0500	TNP0500	GPU0500-20	SPU0500-20	SPU0500-20	PIP0500	U105
9/16-18	---	---	OPP0562	TNP0562	GPU0562-18	SPU0562-18	SPU0562-18	PIP0563	U110
5/8-18	---	IFP340 • IFP350	---	---	GPU0625-18	SPU0625-18	SPU0625-18	PIP0625	---
1-11/16-18	FOP200	IFP360	---	---	---	---	---	PIP0688	---
3/4-16	---	---	OPP0750	TNP0750	GPU0750-16	SPU0750-16	SPU0750-16	PIP0750	U115
3/4-18	---	IFP370	---	---	---	---	---	PIP0750	U115
13/16-16	FOP210	---	---	---	---	---	---	PIP0813	---
7/8-14	---	---	OPP0875	TNP0875	GPU0875-14	SPU0875-14	SPU0875-14	PIP0875	---
1-14	FOP220	---	---	---	GPU1000-14	---	---	PIP1000	U120
1-1/16-12	---	---	OPP1062	TNP1063	GPU1062-12	SPU1062-12	SPU1062-12	PIP1062	---
1-1/16-14	---	---	---	---	---	---	---	PIP1062	---
1-1/16-16	---	IFP380	---	---	---	---	---	PIP1062	---
1-3/16-12	FOP230	---	---	---	GPU1187-12	---	---	PIP1188	U125
1-1/4-12	---	---	---	---	---	---	---	PIP1250	---
1-5/16-12	---	---	OPP1312	TNP1313	GPU1313-12	SPU1313-12	SPU1313-12	PIP1313	---
1-7/16-12	FOP240	---	---	---	---	---	---	PIP1438	U130
1-1/2-12	---	---	---	---	---	---	---	PIP1500	---
1-5/8-12	---	---	OPP1625	---	GPU1625-12	SPU1625-12	SPU1625-12	PIP1625	---
1-3/4-12	---	---	---	---	---	---	---	PIP1750	---
1-7/8-12	---	---	---	---	GPU1875-12	---	---	PIP1875	---

Maximum Temperature Specifications

LDPE	Polypropylene Nylon
175° F / 79° C	250° F / 121° C

MOCAP stocks all part sizes
for immediate shipment.

Threaded Cap

MOCAP now offers Micro-Pack and Mini-Pack quantities
when less than case quantities are what you really need.

Application Advisor is offered as a guideline.
Please request samples to test within your application
at sales@mocap.com.cn.

Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn

Application Advisor - Threaded Caps and Plugs

Use this guide to help select the right product for your application

General Purpose Plug



Maximum Temperature Specifications

LDPE

175° F /
79° C


Polypropylene
Nylon

250° F /
121° C

Sealing Plug
(shown with O-ring)



Universal Plug

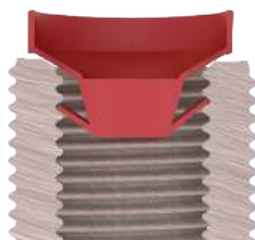

Universal Plugs are designed for maximum flexibility to fit many different thread types and sizes with a simple push-in and turn to lock-in-place.

Maximum Temperature Specifications

LDPE

175° F /
79° C

Polypropylene
Nylon

250° F /
121° C

For BSP Threads

Sealing Plugs
are also available with factory-fit
neoprene O-ring

	Caps	General Purpose Plugs	Sealing Plugs	Sealing Plugs	Universal Plugs
To Fit BSP Threads	Red LDPE	Red Polypropylene	Red Polypropylene	Yellow Nylon	Red LDPE
G 1/8	BGC0125	GPB0125	---	---	U100
G 1/4	BGC0250	GPB0250	SPB0250	SPB0250	U105 • U110
G 3/8	BGC0375	GPB0375	SPB0375	SPB0375	U115
G 1/2	BGC0500	GPB0500	SPB0500	SPB0500	U120
G 5/8	BGC0625	GPB0625	---	---	U120
G 3/4	BGC0750	GPB0750	SPB0750	SPB0750	U125
G 7/8	BGC0875	GPB0875	---	---	U125 • U130
G 1	BGC1000	GPB1000	SPB1000	SPB1000	U130
G 1-1/4	BGC1250	GPB1250	SPB1250	SPB1250	---
G 1-1/2	BGC1500	GPB1500	SPB1500	SPB1500	---
G 2	BGC2000	GPB2000	SPB2000	SPB2000	---
G 2-1/4	BGC2250	---	---	---	---
G 2-1/2	BGC2500	---	---	---	---
G 3	---	GPB3000	---	---	---

For METRIC Threads

Sealing Plugs
are also available with factory-fit
neoprene O-ring

	Caps	General Purpose Plugs	Sealing Plugs	Sealing Plugs	Universal Plugs
To Fit METRIC Threads	Red LDPE	Red Polypropylene	Red Polypropylene	Yellow Nylon	Red LDPE
M8x1.0	CMT0810	GPM0810	---	---	---
M10x1.0	CMT1010	GPM1010	SPM1010	SPM1010	U100
M12x1.0	CMT1210	GPM1210	---	---	U105
M12x1.5	CMT1215	GPM1215	SPM1215	SPM1215	U105
M14x1.5	CMT1415	GPM1415	SPM1415	SPM1415	U110
M16x1.5	CMT1615	GPM1615	SPM1615	SPM1615	U115
M18x1.5	CMT1815	GPM1815	SPM1815	SPM1815	U115
M20x1.5	CMT2015	GPM2015	SPM2015	SPM2015	U115
M22x1.5	CMT2215	GPM2215	SPM2215	SPM2215	U120
M24x1.5	CMT2415	GPM2415	SPM2415	SPM2415	U120
M25x1.5	CMT2515	GPM2515	---	---	U120
M26x1.5	CMT2615	GPM2615	SPM2615	SPM2615	---
M27x2.0	---	---	SPM2720	SPM2720	---
M28x1.5	CMT2815	---	---	---	---
M30x2.0	CMT3020	---	---	---	U125
M33x2.0	---	---	SPM3320	SPM3320	---
M36x2.0	CMT3620	---	---	---	U130
M42x2.0	CMT4220	---	---	---	---
M52x2.0	CMT5220	GPM5220	---	---	---

Application Advisor is offered as a guideline.
Please request samples to test within your application
at sales@mocap.com.cn.

MOCAP

Threaded Caps and Plugs - Application Advisor

Use this guide to help select the right product for your application

For JIC Fittings

		Threaded Caps for Flared JIC	Threaded Plugs for Flared JIC
			
To Fit JIC Fittings	JIC Fitting Dash Size	Red LDPE	Red LDPE
5/16-24	2	---	FJP20
3/8-24	3	FJC110	FJP30
7/16-20	4	FJC120	FJP40
7/16-24	4	FJC140	---
1/2-20	5	FJC130 • FJC150 • FJC160	FJP50
9/16-18	6	FJC180	FJP60
5/8-18	---	FJC170 • FJC190 • FJC200	FJP65
5/8-24	---	FJC210	---
3/4-16	8	FJC220 • FJC230 • FJC240	FJP80
3/4-18	8	FJC250	---
3/4-20	8	FJC260	---
7/8-14	10	FJC270	FJP100
7/8-18	10	FJC280 • FJC290	---
7/8-20	10	FJC300	---
1-14	---	FJC310	---
1-20	---	FJC320	---
1-1/16-12	12	FJC330	FJP110
1-1/16-14	12	FJC340	FJP120 • FJP140
1-3/16-12	14	---	FJP150
1-1/8-18	---	FJC350	---
1-3/16-12	14	FJC360	---
1-1/4-18	---	FJC370	---
1-5/16-12	16	FJC380	FJP160
1-3/8-18	---	FJC390	---
1-1/2-12	---	FJC400	FJP180
1-5/8-12	20	FJC410	FJP190
1-3/4-12	---	FJC420	FJP200
1-7/8-12	24	FJC430	FJP240 • FJP280
2-1/4-12	---	---	FJP300
2-1/2-12	32	---	FJP320



Maximum Temperature Specifications

LDPE	Polypropylene Nylon
175° F / 79° C	250° F / 121° C

For NPT Threads

		Hex Socket Plugs	Square Head Plugs	Square Head Flanged Plugs	Push-In Plugs	Universal Plugs
						
To Fit NPT Threads		Red Polypropylene	Red Polypropylene	Red Polypropylene	Red LDPE	Red LDPE
1/8"	---	---	SPN0125	SFPN0125	PIPL0375 • PIP0375	U100
1/4"	HSPN0250	---	SPN0250	SFPN0250	PIP0500	U110
3/8"	HSPN0375	---	SPN0375	SFPN0375	PIP0625	---
1/2"	HSPN0500	---	SPN0500	SFPN0500	PIP0813	---
3/4"	HSPN0750	---	SPN0750	SFPN0750	PIP1000	U125
1"	HSPN1000	---	SPN1000	---	PIP1313	---
1-1/4"	---	---	SPN1250	---	---	---
1-1/2"	---	---	SPN1500	---	---	---

Maximum Temperature Specifications

LDPE	Polypropylene Nylon
175° F / 79° C	250° F / 121° C



MOCAP now offers Micro-Pack and Mini-Pack quantities when less than case quantities are what you really need.

Application Advisor is offered as a guideline.
Please request samples to test within your application
at sales@mocap.com.cn.

MOCAP

Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn

Application Advisor - Friction Fit Tubing Plugs

Use this guide to help select the right product for your application

MOCAP LDPE Plastic Tube Plugs are designed to fit multiple tube gauges and provide a secure fit. Poly tubing end plugs are ideal for office and patio furniture, tubular racks, appliances, exercise equipment, or anywhere a finished look is needed. Tube plugs include multiple horizontal ribs designed with built-in flexibility for easy installation and secure fit.

Available to fit Round Tubes, Square Tubes and Rectangular Tubes in Standard and Metric Sizes.

Tubing End Plugs are Stocked for Immediate Shipment

All Tube End Plugs are Available in Micro and Mini-Paks when Less than Case Quantities are Needed

RNS Series

Plugs for Round Standard Tubes



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance



External Tube Size	Tube Wall	Flat Part #	Domed Part #	Angled Part #	Angled Part #
in					
0.500	16-20ga (.065" - .035")	RN.5A			
0.500	13-17ga (.095" - .058")	RN.5T			
0.625	14-20ga (.083" - .035")	RN.625C	RNDS.625C		
0.625	10-14ga (.134" - .083")	RN.625D	RNDS.625D		
0.750	14-20ga (.083" - .035")	RN.75C	RNDS.75C	RNAS.75C25.5	RNAS.75C15
0.875	14-20ga (.083" - .035")	RN.875C	RNDS.875C	RNAS.875C19	
0.875	10-14ga (.134" - .083")	RN.875D			
1.000	14-20ga (.083" - .035")	RN1C	RNDS1C	RNAS1C12	RNAS1C19
1.000	10-14ga (.134" - .083")	RN1D			
1.125	14-20ga (.083" - .035")	RN1.125C	RNDS1.125C	RNAS1.125C15	
1.250	14-20ga (.083" - .035")	RN1.25C	RNDS1.25C	RNAS1.25C7	RNAS1.25C15
1.250	10-14ga (.134" - .083")	RN1.25D			
1.375	14-20ga (.083" - .035")	RN1.375C	RNDS1.375C		
1.500	14-20ga (.083" - .035")	RN1.5C	RNDS1.5C	RNAS1.5C19	
1.500	10-14ga (.134" - .083")	RN1.5D	RNDS1.5D		
1.500	8-12ga (.165" - .109")	RN1.5Q	RNDS1.5Q		
1.625	14-20ga (.083" - .035")	RN1.625C			
1.625	10-14ga (.134" - .083")	RN1.625D			
1.750	14-20ga (.083" - .035")	RN1.75C			
1.750	10-14ga (.134" - .083")	RN1.75D			
1.875	14-20ga (.083" - .035")	RN1.875C			
2.000	14-20ga (.083" - .035")	RN2C			
2.000	10-14ga (.134" - .083")	RN2D			
2.125	10-16ga (.134" - .065")	RN2.125E			
2.250	14-20ga (.083" - .035")	RN2.25C			
2.250	10-14ga (.134" - .083")	RN2.25D			
2.375	10-14ga (.134" - .083")	RN2.375D			
2.500	14-20ga (.083" - .035")	RN2.5C			
2.500	8-12ga (.165" - .109")	RN2.5Q			
2.750	7-14ga (.180" - .083")	RN2.75S			
3.000	3-10ga (.259" - .134")	RN3P			
3.000	8-12ga (.165" - .109")	RN3Q			
3.000	13-17ga (.095" - .058")	RN3T			
3.500	6-13ga (.203" - .095")	RN3.5U			
4.000	10-16ga (.134" - .065")	RN4E			
4.000	4-8ga (.238" - .165")	RN4G			
4.000	3-10ga (.259" - .134")	RN4P			
4.750	8-14ga (.165" - .083")	RN4.75J			

Tubing Plugs are available in a range of colors.



* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information

MOCAP

Friction Fit Tubing Plugs - Application Advisor

Use this guide to help select the right product for your application

External Tube Size	Tube Wall	Flat Part #	Domed Part #	Angled Part #
mm				
10.0	1-2mm	RN10MA		
12.0	1-2mm	RN12MA		
13.0	1-2mm	RN13MA		
14.0	1-2mm	RN14MA		
15.0	1-2mm	RN15MA		
16.0	1-2mm	RN16MA	RNDM16MA	
18.0	1-2mm	RN18MA	RNDM18MA	RNAM18MA15
20.0	1-2mm	RN20MA	RNDM20MA	RNAM20MA15
22.0	1-2mm	RN22MA	RNDM22MA	RNAM22MA15
25.0	1-2mm	RN25MA	RNDM25MA	RNAM25MA15
27.0	1-2mm	RN27MA		
28.0	1-2mm	RN28MA	RNDM28MA	
30.0	1-2mm	RN30MA	RNDM30MA	
30.0	3-4mm	RN30MG		
32.0	1-2mm	RN32MA	RNDM32MA	
34.0	1-2mm	RN34MA		
35.0	1-2mm	RN35MA	RNDM35MA	
36.0	1-2mm	RN36MA		
38.0	1-2mm	RN38MA		
40.0	1-2mm	RN40MA	RNDM40MA	
42.0	1-2mm	RN42MA		
45.0	1-2mm	RN45MA		
48.0	1-2mm	RN48MA		
48.0	3-4mm	RN48MG		
50.0	1-2mm	RN50MA		
55.0	1-2mm	RN55MA		
55.0	3-4mm	RN55MG		
60.0	1-2mm	RN60MA		
60.0	2-3mm	RN60MF		
70.0	2-3mm	RN70MF		
70.0	3-4mm	RN70MG		
76.0	2-3mm	RN76MF		
76.0	3-4mm	RN76MG		
80.0	2-3mm	RN80MF		
90.0	2-3mm	RN90MF		
90.0	3-4mm	RN90MG		
102.0	2-3mm	RN102MF		
102.0	3-4mm	RN102MG		
110.0	4-5mm	RN110MH		

RNM Series

Plugs for Round Metric Tubes



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance



Tubing Plugs are available in a range of colors.



* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information

Nominal Pipe Size	External Tube Size	Tube Wall	Flat Part #
in			
1.000	1.315	0.133"	RNPP1
1.250	1.660	0.140"	RNPP1-1/4
1.500	1.900	0.145"	RNPP1-1/2
2.000	2.375	0.154"	RNPP2
2.500	2.875	0.203"	RNPP2-1/2
3.000	3.500	0.216"	RNPP3
3.500	4.000	0.226"	RNPP3-1/2
4.000	4.500	0.237"	RNPP4

RNPP Series

Plugs for Schedule 40 Pipe & Tubing



Free Samples


企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn

Application Advisor - Friction Fit Tubing Plugs


Use this guide to help select the right product for your application

SQS Series

Plugs for Square
Standard Tubes



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance



External Tube Size	Tube Wall	Flat Part #	Pyramid Part #	Domed Part #	Angled Part #	Angled Part #
in						
0.500	16-18ga (.065" - .049")	SQ.5B				
0.625	14-20ga (.083" - .035")	SQ.625C	SQPS.625C			
0.750	14-20ga (.083" - .035")	SQ.75C	SQPS.750C	SQDS.75C	SQAS.75C5	SQAS.75C25
0.750	10-14ga (.134" - .083")	SQ.75D				
0.875	14-20ga (.083" - .035")	SQ.875C	SQPS.875C	SQDS.875C	SQAS.875C25	
1.000	14-20ga (.083" - .035")	SQ1C	SQPS1C	SQDS1C	SQAS1C15	
1.000	10-14ga (.134" - .083")	SQ1D				
1.125	14-20ga (.083" - .035")	SQ1.125C				
1.250	14-20ga (.083" - .035")	SQ1.25C	SQPS1.25C	SQDS1.25C		
1.250	10-14ga (.134" - .083")	SQ1.25D				
1.375	14-20ga (.083" - .035")	SQ1.375C				
1.375	10-14ga (.134" - .083")	SQ1.375D				
1.500	14-20ga (.083" - .035")	SQ1.5C	SQPS1.5C	SQDS1.5C		
1.500	10-14ga (.134" - .083")	SQ1.5D				
1.500	3-6ga (.203" - .259")	SQ1.5W				
1.750	14-20ga (.083" - .035")	SQ1.75C				
1.750	10-14ga (.134" - .083")	SQ1.75D				
2.000	14-20ga (.083" - .035")	SQ2C	SQPS2C			
2.000	10-14ga (.134" - .083")	SQ2D	SQPS2D			
2.000	4-8ga (.238" - .165")	SQ2G				
2.250	10-14ga (.134" - .083")	SQ2.25D				
2.500	10-14ga (.134" - .083")	SQ2.5D				
2.500	6-10ga (.203" - .134")	SQ2.5H				
2.500	16-23ga (.065" - .025")	SQ2.5I				
2.750	14-20ga (.083" - .035")	SQ2.75C				
2.750	8-14ga (.165" - .083")	SQ2.75J				
3.000	3-7ga (.259" - .180")	SQ3K				
3.000	8-12ga (.165" - .109")	SQ3Q				
3.125	6-11ga (.203" - .120")	SQ3.125O				
3.500	14-20ga (.083" - .035")	SQ3.5C				
3.500	6ga (.203")	SQ3.5L				
3.500	6-14ga (.203" - .083")	SQ3.5M				
3.875	4-8ga (.238" - .165")	SQ3.875G				
4.000	3-7ga (.259" - .180")	SQ4K				
4.000	4-11ga (.238" - .120")	SQ4N				
4.750	6-11ga (.203" - .120")	SQ4.75O				
5.000	3-10ga (.259" - .134")	SQ5P				
6.000	10-14ga (.134" - .083")	SQ6D				
6.000	3-10ga (.259" - .134")	SQ6P				



Tubing Plugs are available in a range of colors.



* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information

MOCAP

Friction Fit Tubing Plugs - Application Advisor

Use this guide to help select the right product for your application

SQM Series

Plugs for Square Metric Tubes

External Tube Size	Tube Wall	Flat Part #	Pyramid Part #	Domed Part #	Angled Part #	Angled Part #
mm						
10.0	1.5 - 2mm	SQ10MB				
12.0	1.5 - 2mm	SQ12MB	SQPM12MB			
15.0	1.5 - 2mm	SQ15MB	SQPM15MB			
16.0	1-2mm	SQ16MA	SQPM16MA			
18.0	1.5 - 2mm	SQ18MB	SQPM18MB		SQAM18MB10	
20.0	1.5 - 2mm	SQ20MB	SQPM20MB	SQDM20MB	SQAM20MB10	SQAM20MB25
22.0	1-2mm	SQ22MA				
25.0	1-2mm	SQ25MA	SQPM25MA		SQAM25MA15	
25.0	2-3mm	SQ25MF				
30.0	1.5 - 2mm	SQ30MB	SQPM30MB			
30.0	3mm	SQ30MC				
34.0	1.5 - 2mm	SQ34MB	SQPM34MB			
34.0	3mm	SQ34MC				
35.0	1-2mm	SQ35MA				
35.0	2-3mm	SQ35MF				
40.0	1.5 - 2mm	SQ40MB	SQPM40MB			
40.0	3mm	SQ40MC				
40.0	4mm	SQ40MD				
40.0	5mm	SQ40ME				
45.0	1.5 - 2mm	SQ45MB				
50.0	1.5 - 2mm	SQ50MB				
50.0	3mm	SQ50MC				
50.0	5mm	SQ50ME				
60.0	1.5 - 2mm	SQ60MB				
60.0	3mm	SQ60MC				
60.0	4mm	SQ60MD				
60.0	5mm	SQ60ME				
70.0	3mm	SQ70MC				
70.0	4mm	SQ70MD				
80.0	3mm	SQ80MC				
90.0	1.5 - 2mm	SQ90MB				
90.0	5mm	SQ90ME				
100.0	3mm	SQ100MC				
100.0	5mm	SQ100ME				
120.0	5mm	SQ120ME				



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance



Smaller Quantity Micro-Packs Now Available!

Offering the Lowest Minimum Order Quantity with the Highest Stocking Levels in the Industry

Same Day Shipping (on orders placed by 2p.m. CST)

MOCAP

Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 10

Application Advisor - Friction Fit Tubing Plugs

Use this guide to help select the right product for your application

RCS Series

Plugs for Rectangular Standard Tubes



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance

External Tube Size	External Tube Size	Tube Wall	Flat Part #	Pyramid Part #
in	in			
0.500	1.000	16-18ga (.065" - .049")	RC.5X1B	
0.500	1.500	14-20ga (.083" - .035")	RC.5X1.5C	
0.625	1.375	14-20ga (.083" - .035")	RC.625X1.375C	
0.750	1.500	14-20ga (.083" - .035")	RC.75X1.5C	RCPS.75X1.5C
1.000	1.250	14-20ga (.083" - .035")	RC1X1.25C	
1.000	1.500	14-20ga (.083" - .035")	RC1X1.5C	
1.000	1.500	10-14ga (.134" - .083")	RC1X1.5D	
1.000	2.000	14-20ga (.083" - .035")	RC1X2C	RCPS1X2C
1.000	2.000	10-14ga (.134" - .083")	RC1X2D	RCPS1X2D
1.000	2.500	14-20ga (.083" - .035")	RC1X2.5C	
1.000	3.000	14-20ga (.083" - .035")	RC1X3C	
1.000	3.000	10-14ga (.134" - .083")	RC1X3D	
1.500	2.000	10-14ga (.134" - .083")	RC1.5X2D	
1.500	2.500	12-16ga (.109" - .065")	RC1.5X2.5E	
1.500	2.500	8-12ga (.165" - .109")	RC1.5X2.5Q	
1.500	3.000	10-14ga (.134" - .083")	RC1.5X3D	
1.500	3.500	10-14ga (.134" - .083")	RC1.5X3.5D	
2.000	2.500	10-14ga (.134" - .083")	RC2X2.5D	
2.000	3.000	14-20ga (.083" - .035")	RC2X3C	
2.000	3.000	10-14ga (.134" - .083")	RC2X3D	
2.000	3.000	6-8ga (.203" - .165")	RC2X3V	
2.000	4.000	14-20ga (.083" - .035")	RC2X4C	
2.000	4.000	10-14ga (.134" - .083")	RC2X4D	
2.000	5.000	10-14ga (.134" - .083")	RC2X5D	
2.000	5.000	8ga (.165")	RC2X5F	
2.000	6.000	6-8ga (.203" - .165")	RC2X6V	
3.000	4.000	6-8ga (.203" - .165")	RC3X4V	
4.000	6.000	6-8ga (.203" - .165")	RC4X6V	

RCM Series

Plugs for Rectangular Metric Tubes



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance

External Tube Size	External Tube Size	Tube Wall	Flat Part #	Pyramid Part #	Angled Part #
mm	mm				
20.0	10.0	1.5 - 2mm	RC2010MB	RCPM2010MB	
20.0	15.0	1.5 - 2mm	RC2015MB	RCPM2015MB	RCAM2015MB10
25.0	10.0	1.5 - 2mm	RC2510MB		
25.0	12.0	1.5 - 2mm	RC2512MB		
25.0	15.0	1.5 - 2mm	RC2515MB	RCPM2515MB	RCAM2515MB10
25.0	20.0	1.5 - 2mm	RC2520MB		
30.0	10.0	1.5 - 2mm	RC3010MB		
30.0	15.0	1.5 - 2mm	RC3015MB	RCPM3015MB	RCAM3015MB10
30.0	20.0	1.5 - 2mm	RC3020MB	RCPM3020MB	RCAM3020MB15
30.0	20.0	3mm	RC3020MC		
30.0	25.0	1.5 - 2mm	RC3025MB		
35.0	20.0	1.5 - 2mm	RC3520MB		
35.0	25.0	1.5 - 2mm	RC3525MB		
35.0	30.0	1.5 - 2mm	RC3530MB		
40.0	10.0	1.5 - 2mm	RC4010MB	RCPM4010MB	
40.0	15.0	1.5 - 2mm	RC4015MB	RCPM4015MB	
40.0	20.0	1.5 - 2mm	RC4020MB	RCPM4020MB	RCAM4020MB20
40.0	20.0	3mm	RC4020MC		
40.0	25.0	1.5 - 2mm	RC4025MB	RCPM4025MB	
40.0	30.0	1.5 - 2mm	RC4030MB	RCPM4030MB	


MOCAP

Friction Fit Tubing Plugs - Application Advisor

Use this guide to help select the right product for your application

RCM Series *(continued)* Plugs for Rectangular Metric Tubes

External Tube Size	External Tube Size	Tube Wall	Flat Part #	Pyramid Part #	Angled Part #
mm	mm				
40.0	30.0	3mm	RC4030MC		
45.0	15.0	1.5 - 2mm	RC4515MB		
45.0	20.0	1.5 - 2mm	RC4520MB		
45.0	25.0	1.5 - 2mm	RC4525MB		
48.0	38.0	1.5 - 2mm	RC4838MB		
50.0	20.0	1.5 - 2mm	RC5020MB		
50.0	25.0	1.5 - 2mm	RC5025MB	RCPM5025MB	
50.0	30.0	1.5 - 2mm	RC5030MB	RCPM5030MB	
50.0	30.0	3mm	RC5030MC		
50.0	34.0	1.5 - 2mm	RC5034MB		
50.0	40.0	1.5 - 2mm	RC5040MB		
55.0	35.0	1.5 - 2mm	RC5535MB		
60.0	20.0	1.5 - 2mm	RC6020MB		
60.0	30.0	1.5 - 2mm	RC6030MB		
60.0	30.0	3mm	RC6030MC		
60.0	40.0	3mm	RC6040MC		
60.0	40.0	1.5 - 2mm	RC6040MB		
60.0	40.0	4mm	RC6040MD		
60.0	40.0	5mm	RC6040ME		
70.0	30.0	1.5 - 2mm	RC7030MB		
70.0	40.0	1.5 - 2mm	RC7040MB		
70.0	40.0	4mm	RC7040MD		
70.0	50.0	1.5-2mm	RC7050MB		
70.0	50.0	3mm	RC7050MC		
80.0	20.0	1.5 - 2mm	RC8020MB		
80.0	30.0	1.5 - 2mm	RC8030MB		
80.0	40.0	1.5 - 2mm	RC8040MB		
80.0	40.0	4mm	RC8040MD		
80.0	40.0	5mm	RC8040ME		
80.0	50.0	1.5 - 2mm	RC8050MB		
80.0	50.0	4mm	RC8050MD		
80.0	60.0	3mm	RC8060MC		
80.0	60.0	5mm	RC8060ME		
100.0	20.0	1.5-2mm	RC10020MB		
100.0	25.0	1.5-2mm	RC10025MB		
100.0	30.0	1.5-2mm	RC10030MB		
100.0	40.0	1.5 - 2mm	RC10040MB		
100.0	40.0	3mm	RC10040MC		
100.0	50.0	3mm	RC10050MC		
100.0	50.0	4mm	RC10050MD		
100.0	50.0	5mm	RC10050ME		
120.0	40.0	3mm	RC12040MC		
120.0	50.0	1.5-2mm	RC12050MB		
120.0	60.0	3mm	RC12060MC		
120.0	60.0	4mm	RC12060MD		
120.0	60.0	5mm	RC12060ME		
120.0	80.0	1.5 - 2mm	RC12080MB		
140.0	50.0	1.5-2mm	RC14050MB		
140.0	50.0	3-4mm	RC14050MG		
140.0	50.0	4-5mm	RC14050MH		
140.0	80.0	4mm	RC14080MD		
150.0	25.0	1.5-2mm	RC15025MB		
150.0	50.0	1.5-2mm	RC15050MB		
150.0	50.0	3-4mm	RC15050MG		
150.0	50.0	4-5mm	RC15050MH		
150.0	100.0	4-5mm	RC150100MH		



- Material: LDPE
- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability and Abrasion Resistance



Tubing Plugs are available in a range of colors.



* Most of our Tubing Plugs are stocked in black, white, gray and red. Other colors may require a longer lead time. Please contact sales for more information




MOCAP


Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 12

Friction Fit Caps & Plugs



- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Use as Thread Protector or End Cap
- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable*
- Available in High-Temp Formula *refer to page 115*
- Stocked Material: Black Vinyl
- Additional Colors: 



Part #	To Fit STD Thread	To Fit METRIC Thread	To Fit NPT	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		Stocked Length
				in	mm	in	mm	in	mm	in	mm	
RVC9001	1	---	---	0.062	1.6	0.188	4.8	0.500	12.7	0.022	0.6	0.5
RVC9002	1 or 2	---	---	0.070	1.8	0.188	4.8	0.500	12.7	0.022	0.6	0.5
RVC9003	2 or 3	---	---	0.080	2.0	0.188	4.8	0.625	15.9	0.028	0.7	0.5
RVC9004	3 or 4	---	---	0.093	2.4	0.188	4.8	0.750	19.1	0.028	0.7	0.5
RVC9005	4 or 5	---	---	0.112	2.8	0.188	4.8	1.000	25.4	0.033	0.8	0.5 · 1
RVC9006	5 or 6	---	---	0.125	3.2	0.188	4.8	1.500	38.1	0.033	0.8	0.5 · 1 · 1.5
RVC9007	---	M4	---	0.137	3.5	0.188	4.8	1.500	38.1	0.033	0.8	0.5 · 1 · 1.5
RVC9008	8	M4	---	0.156	4.0	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9009	10	M5	---	0.172	4.4	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9010	---	M5	---	0.187	4.7	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9011	12	---	---	0.207	5.3	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9012	---	---	---	0.218	5.5	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9440	1/4 - 20	M6	---	0.234	5.9	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 0.75 · 1.5 · 0.5
RVC9013	1/4 - 20	---	---	0.250	6.4	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9014	---	---	---	0.281	7.1	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9278	5/16 - 24	M8	---	0.300	7.6	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9015	5/16 - 24	M8	---	0.313	8.0	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5 · 0.5
RVC9016	---	---	---	0.320	8.1	0.188	4.8	1.000	25.4	0.038	1.0	---
RVC9017	---	---	---	0.343	8.7	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5
RVC9018	3/8 - 24	---	---	0.364	9.2	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 1 · 1.5

Stocked Parts are in General Purpose 9500-002 Black Material, with some available in our General Purpose 9500-011 Red Material. See the size chart for stock offerings.

*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color



(continued) Round Vinyl Caps - **RVC Series**
Friction Fit Caps & Plugs

Part #	To Fit STD Thread	To Fit METRIC Thread	To Fit NPT	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		Stocked Length
				in	mm	in	mm	in	mm	in	mm	
RVC9019	3/8 - 24	M10	---	0.375	9.5	0.188	4.8	1.500	38.1	0.038	1.0	0.5 · 0.75 · 1 · 1.5
RVC9542	---	M10	---	0.390	9.9	0.188	4.8	2.000	50.8	0.055	1.4	0.5 · 1 · 1.5
RVC9021	7/16 - 20	---	---	0.406	10.3	0.188	4.8	1.500	38.1	0.055	1.4	0.5 · 0.5
RVC9022	7/16 - 20	M12	---	0.437	11.1	0.188	4.8	1.500	38.1	0.055	1.4	0.5 · 1 · 1.5
RVC9096	---	---	---	0.468	11.9	0.188	4.8	1.500	38.1	0.055	1.4	0.5 · 1 · 1.5
RVC9023	---	---	1/4	0.500	12.7	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5
RVC9024	9/16 - 18	M14	1/4	0.531	13.5	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1.5 · 0.5
RVC9025	9/16 - 18	---	---	0.562	14.3	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5
RVC9306	5/8 - 18	M16	---	0.610	15.5	0.188	4.8	1.000	25.4	0.060	1.5	0.5 · 1
RVC9034	11/16 - 16	M16	3/8	0.625	15.9	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5 · 0.5
RVC9035	3/4 - 16	M18	---	0.687	17.4	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 0.75 · 1 · 1.5 · 0.75
RVC9036	13/16 - 16	M20	---	0.750	19.1	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5
RVC9037	13/16 - 16	---	1/2	0.812	20.6	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5 · 1
RVC9038	7/8 - 14	M22	---	0.843	21.4	0.188	4.8	1.500	38.1	0.060	1.5	1 · 1.5
RVC9039	7/8 - 14	---	---	0.875	22.2	0.188	4.8	1.500	38.1	0.060	1.5	1 · 1.5 · 1
RVC9040	1 - 16	M24	---	0.937	23.8	0.188	4.8	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5 · 1
RVC9041	1-1/16 - 12	M26	3/4	1.000	25.4	0.250	6.4	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5 · 1
RVC9397	1-1/16 - 12	M27	---	1.062	27.0	0.250	6.4	1.500	38.1	0.060	1.5	1 · 1.5 · 1
RVC9273	1-3/16 - 12	M30	---	1.125	28.6	0.250	6.4	1.500	38.1	0.060	1.5	1 · 1
RVC9042	1-3/16 - 12	---	---	1.187	30.1	0.250	6.4	1.500	38.1	0.060	1.5	1 · 1.5 · 1
RVC9043	1-5/16 - 12	M32	1	1.250	31.8	0.250	6.4	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5
RVC9320	---	---	---	1.313	33.4	0.250	6.4	1.500	38.1	0.065	1.7	---
RVC9118	---	---	---	1.375	34.9	0.250	6.4	1.500	38.1	0.065	1.7	1.5 · 1.5
RVC9044	1-5/8 - 12	M39 - M40	---	1.500	38.1	0.250	6.4	1.500	38.1	0.060	1.5	0.5 · 1 · 1.5 · 1.5
RVC9045	1-11/16 - 12	M42	1-1/4	1.625	41.3	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9119	---	---	---	1.687	42.8	0.250	6.4	1.500	38.1	0.065	1.7	1.5 · 1.5
RVC9120	---	---	---	1.750	44.5	0.250	6.4	1.500	38.1	0.065	1.7	1.5 · 1.5
RVC9046	1-7/8 - 12	M48	1-1/2	1.875	47.6	0.250	6.4	1.500	38.1	0.060	1.5	---
RVC9324	1-7/8 - 12	---	---	1.937	49.2	0.250	6.4	2.000	50.8	0.060	1.5	1.5 · 1.5
RVC9047	2	M52	---	2.000	50.8	0.250	6.4	1.750	44.5	0.060	1.5	1.5 · 1.5
RVC9048	2-1/4 - 12	M52	---	2.125	54.0	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9049	2-1/4 - 12	M58 - M60	2	2.250	57.2	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9050	2-1/2 - 12	---	2	2.375	60.3	0.250	6.4	1.500	38.1	0.060	1.5	---
RVC9051	2-1/2 - 12	M64	---	2.500	63.5	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9052	---	M68	---	2.625	66.7	0.250	6.4	1.500	38.1	0.060	1.5	---
RVC9053	---	M72	2-1/2	2.750	69.9	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9054	---	M80	---	3.000	76.2	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9579	---	M85	---	3.250	82.6	0.250	6.4	1.500	38.1	0.060	1.5	---
RVC9055	---	M90	3	3.500	88.9	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9490	---	M105	3-1/2	4.000	101.6	0.250	6.4	1.500	38.1	0.060	1.5	1.5 · 1.5
RVC9121	---	---	---	4.530	115.1	0.250	6.4	1.500	38.1	0.065	1.7	---
RVC9123	---	---	---	4.625	117.5	0.250	6.4	1.500	38.1	0.065	1.7	---
RVC9056	---	---	---	6.000	152.4	0.250	6.4	1.750	44.5	0.060	1.5	---

As a Guide for Part Selection, an Application Advisor is Available On Our Website.

MOCAP

Free Samples


企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 14

VHC Series - Vinyl Hanger Caps

Friction Fit Caps & Plugs



- Stretches for a Snug Fit, but Won't Split, Tear or Shred
- Durable
- Stocked Material: Black Vinyl
- Additional Colors: ○●●●●●●●●●●




Part #	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		Stocked Length
	in	mm	in	mm	in	mm	in	mm	
VHC9501	0.531	13.5	0.500	12.7	2.000	50.8	0.060	1.5	0.5
VHC9500	0.812	20.6	0.500	12.7	2.000	50.8	0.060	1.5	1
VHC9502	1.062	27.0	0.500	12.7	2.000	50.8	0.060	1.5	1
VHC9505	1.375	34.9	0.500	12.7	2.000	50.8	0.060	1.5	1
VHC9503	1.625	41.3	0.500	12.7	2.000	50.8	0.060	1.5	1
VHC9398	1.750	44.5	0.500	12.7	0.750	19.1	0.060	1.5	0.75
VHC9504	2.000	50.8	0.500	12.7	2.000	50.8	0.060	1.5	1



Pull Tab Vinyl Caps - **FPT Series**

Friction Fit Caps & Plugs

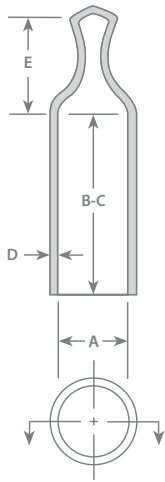

- Flat / Ergonomic Tab for Easy Removal
- Stretches for a Snug Fit, but Won't Split, Tear or Shred
- Available in High-Temp Formula *refer to page 117*
- Stocked Material: Black Vinyl
- Additional Colors: ○●●●●●●●●●●



Part #	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		(E) Tab Height		Stocked Length
	in	mm	in	mm	in	mm	in	mm	in	mm	
FPT9617	0.187	4.7	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7	-
FPT9618	0.215	5.5	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7	-
FPT9619	0.236	6.0	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7	1
FPT9620	0.250	6.4	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7	1
FPT9406	0.313	8.0	0.250	6.4	1.500	38.1	0.038	1.0	0.655	16.6	1
FPT9507	0.343	8.7	0.250	6.4	1.500	38.1	0.038	1.0	0.695	17.7	1
FPT9430	0.375	9.5	0.250	6.4	1.500	38.1	0.055	1.4	0.695	17.7	1
FPT9422	0.406	10.3	0.250	6.4	1.500	38.1	0.055	1.4	0.709	18.0	1
FPT9431	0.437	11.1	0.250	6.4	1.500	38.1	0.055	1.4	0.725	18.4	1
FPT9435	0.460	11.7	0.250	6.4	1.500	38.1	0.055	1.4	0.750	19.1	1
FPT9432	0.500	12.7	0.250	6.4	1.500	38.1	0.060	1.5	0.752	19.1	1
FPT9433	0.531	13.5	0.250	6.4	1.500	38.1	0.060	1.5	0.764	19.4	1
FPT9362	0.562	14.3	0.250	6.4	1.500	38.1	0.060	1.5	0.613	15.6	1
FPT9429	0.625	15.9	0.250	6.4	1.500	38.1	0.060	1.5	0.709	18.0	1
FPT9621	0.655	16.6	0.250	6.4	1.500	38.1	0.060	1.5	0.812	20.6	1
FPT9436	0.687	17.4	0.250	6.4	1.500	38.1	0.060	1.5	0.812	20.6	1
FPT9622	0.750	19.1	0.250	6.4	1.500	38.1	0.060	1.5	0.826	21.0	1
FPT9623	0.812	20.6	0.250	6.4	1.500	38.1	0.060	1.5	0.837	21.3	1
FPT9624	0.843	21.4	0.250	6.4	1.500	38.1	0.060	1.5	0.846	21.5	1
FPT9434	0.875	22.2	0.250	6.4	1.500	38.1	0.060	1.5	0.846	21.5	1
FPT9438	0.937	23.8	0.250	6.4	1.500	38.1	0.060	1.5	0.853	21.7	1
FPT9439	1.000	25.4	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8	1
FPT9625	1.062	27.0	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8	1
FPT9626	1.125	28.6	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8	1
FPT9627	1.250	31.8	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8	1



MOCAP

Free Samples


企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 16

SVC Series - Square Vinyl Caps


Friction Fit Caps & Plugs



- Stretches for a Snug Fit, but Won't Split, Tear or Shred
- Durable
- Available Colors: ○●●●●●●●●●●




Part #	(A) Inside Width		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness	
	in	mm	in	mm	in	mm	in	mm
SVC9172	0.420	10.7	0.250	6.4	0.563	14.3	0.060	1.5
SVC9413	0.500	12.7	0.250	6.4	3.500	88.9	0.060	1.5
SVC9405	0.615	15.6	0.250	6.4	1.500	38.1	0.060	1.5
SVC9241	0.687	17.4	0.250	6.4	0.875	22.2	0.060	1.5
SVC9414	0.750	19.1	0.250	6.4	3.500	88.9	0.060	1.5
SVC9585	0.875	22.2	0.250	6.4	3.500	88.9	0.060	1.5
SVC9411	1.000	25.4	0.250	6.4	3.500	88.9	0.060	1.5
SVC9415	1.250	31.8	0.250	6.4	3.500	88.9	0.065	1.7
SVC9416	1.500	38.1	0.250	6.4	3.500	88.9	0.065	1.7
SVC9412	2.000	50.8	0.250	6.4	3.500	88.9	0.065	1.7

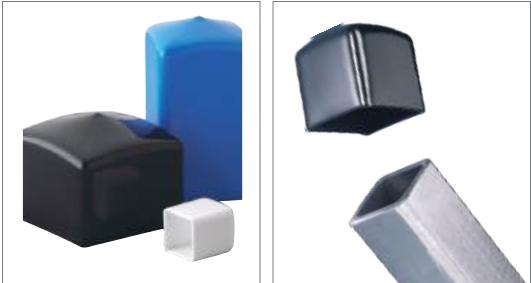


Vinyl Hex Caps - **VHX Series**


Friction Fit Caps & Plugs



- Use as Thread Protector or End Cap
- Flexible Yet Durable - Won't Split, Tear or Shred
- Available Colors: ○●●●●●●●●●



Part #	To Fit Hex Size		(A) Inside Width		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness	
	in	mm	in	mm	in	mm	in	mm	in	mm
VHX9184	7/16	11.0	0.438	11.1	0.250	6.4	1.500	38.1	0.060	1.5
VHX9186	5/8	16.0	0.625	15.9	0.250	6.4	1.500	38.1	0.060	1.5
VHX9187	3/4	19.0	0.750	19.1	0.250	6.4	1.500	38.1	0.060	1.5

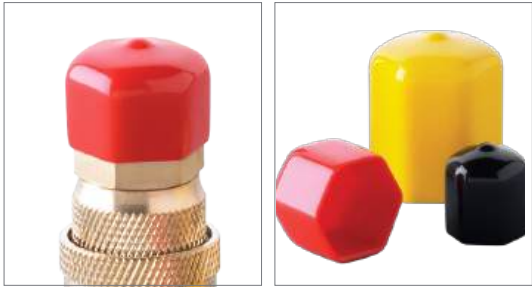


MCP Series - Vinyl Insertion Plugs

Friction Fit Caps & Plugs



- Wide Flange for Easy Removal
- Flexible Yet Durable - Won't Split, Tear or Shred
- Available in High Temp Formula *refer to page 118*
- Stocked Material: Red Vinyl
- Additional Colors: ○●●●●●●●●●●




Part #	To Fit METRIC Thread	To Fit STD Thread	To Fit NPT Thread	(A) Flange O.D.	
				in	mm
MCP9252	M6	1/4	---	0.400	10.2
MCP9253	M8	5/16	---	0.460	11.7
MCP9254	M10	3/8	1/8	0.495	12.6
MCP9255	M12	7/16	---	0.550	14.0
MCP9256	M14	1/2	1/4	0.620	15.7
MCP9257	M16	9/16	---	0.683	17.3
MCP9258	M18	5/8	3/8	0.807	20.5
MCP9259	M20	3/4	1/2	0.961	24.4
MCP9260	M22, M24	7/8	---	1.058	26.9
MCP9261	M26, M28	1-1/16	3/4	1.245	31.6
MCP9262	M32, M43	1-1/8 - 1-3/16 - 1-1/4	1	1.495	38.0

For Material Specifications, please see page 139.
High-Temp Applications on pg. 120



Vinyl Corner Covers - VCC Series


Friction Fit Caps & Plugs





- Prevents Chipping & Breakage During Transport & Storage
- Snug Fit, but Easily Removed
- Stocked Material: See Chart Below for Stocked Vinyl Colors
- Additional Colors: ○●●●●●●●●●●



Part #	To Fit Glass Size		(A) Inside Width		(B) Min Length		(C) Max Length		(D) Wall Thickness		Stocked Color	Stocked Length
	in	mm	in	mm	in	mm	in	mm	in	mm		
VCC9340	1/16	1.59	0.062	1.6	0.500	12.7	1.500	38.1	0.055	1.4	---	---
VCC9482	1/8	3.18	0.125	3.2	0.500	12.7	1.750	44.5	0.060	1.5	YELLOW	1.5
VCC9483	1/4	6.35	0.250	6.4	0.500	12.7	2.000	50.8	0.060	1.5	BLACK	2
VCC9460	3/8	9.53	0.375	9.5	0.500	12.7	2.500	63.5	0.075	1.9	BLUE	2
VCC9459	1/2	12.7	0.500	12.7	0.500	12.7	2.500	63.5	0.075	1.9	RED	2
VCC9489	3/4	19.05	0.750	19.1	0.500	12.7	2.500	63.5	0.060	1.5	BLACK	2



Friction Fit Caps & Plugs

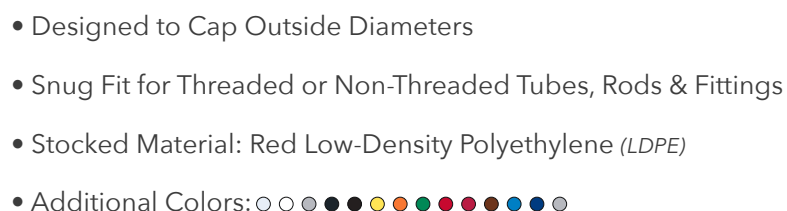

MOCAP

(continued) Straight Caps for Imperial Parts - **S Series**

Friction Fit Caps & Plugs

Part #	To Fit Outside Diameter	(B) Inside Length	
		in	mm
S.687-12S	11/16	0.750	19.1
S.687-14S	11/16	0.875	22.2
S.720-14S	23/32	0.875	22.2
S.720-16S	23/32	1.000	25.4
S.720-22S	23/32	1.375	34.9
S.750-6S	3/4	0.375	9.5
S.750-14S	3/4	0.875	22.2
S.750-16S	3/4	1.000	25.4
S.750-40S	3/4	2.500	63.5
S.787-16S	M20	1.000	25.4
S.813-6S	13/16	0.375	9.5
S.813-10S	13/16	0.625	15.9
S.813-14S	13/16	0.875	22.2
S.866-12S	M22	0.750	19.1
S.875-8S	7/8	0.500	12.7
S.875-14S	7/8	0.875	22.2
S.875-28S	7/8	1.750	44.5
S.906-12S	29/32, M23	0.750	19.1
S.906-14S	29/32, M23	0.875	22.2
S.937-16S	15/16	1.000	25.4
S.937-24S	15/16	1.500	38.1
S1.000-6S	1	0.375	9.5
S1.000-8S	1	0.500	12.7
S1.000-10S	1	0.625	15.9
S1.000-12S	1	0.750	19.1
S1.000-16S	1	1.000	25.4
S1.000-28S	1	1.750	44.5
S1.063-14S	1-1/16	0.875	22.2
S1.063-16S	1-1/16	1.000	25.4
S1.125-14S	1-1/8	0.875	22.2
S1.125-16S	1-1/8	1.000	25.4
S1.125-21S	1-1/8	1.313	33.4
S1.187-16S	1-3/16	1.000	25.4
S1.250-8S	1-1/4	0.500	12.7
S1.250-10S	1-1/4	0.625	15.9
S1.250-14S	1-1/4	0.875	22.2
S1.250-16S	1-1/4	1.000	25.4
S1.250-24S	1-1/4	1.500	38.1
S1.250-28S	1-1/4	1.750	44.5
S1.313-12S	1-5/16	0.750	19.1
S1.313-14S	1-5/16	0.875	22.2
S1.313-16S	1-5/16	1.000	25.4
S1.375-10S	1-3/8	0.625	15.9
S1.375-14S	1-3/8	0.875	22.2
S1.375-16S	1-3/8	1.000	25.4
S1.375-24S	1-3/8	1.500	38.1
S1.375-28S	1-3/8	1.750	44.5
S1.437-14S	1-7/16	0.875	22.2
S1.500-14S	1-1/2	0.875	22.2
S1.500-16S	1-1/2	1.000	25.4
S1.500-28S	1-1/2	1.750	44.5
S1.563-16S	1-9/16	1.000	25.4
S1.625-16S	1-5/8	1.000	25.4
S1.625-20S	1-5/8	1.250	31.8
S1.719-16S	1-23/32	1.000	25.4
S1.750-14S	1-3/4	0.875	22.2
S1.750-16S	1-3/4	1.000	25.4
S1.844-20S	1-27/32	1.250	31.8



MOCAP

Free Samples


企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 22

S Series - Straight Caps for Imperial Parts *(continued)*

Friction Fit Caps & Plugs



- Designed to Cap Outside Diameters
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Stocked Material: Red Low-Density Polyethylene (LDPE)
- Additional Colors:




Part #	To Fit Outside Diameter	(B) Inside Length	
		in	mm
S1.875-14S	1-7/8	0.875	22.2
S1.875-16S	1-7/8	1.000	25.4
S2.000-14S	2	0.875	22.2
S2.000-16S	2	1.000	25.4
S2.000-24S	2	1.500	38.1
S2.125-8S	2-1/8	0.500	12.7
S2.125-14S	2-1/8	0.875	22.2
S2.125-16S	2-1/8	1.000	25.4
S2.250-14S	2-1/4	0.875	22.2
S2.250-16S	2-1/4	1.000	25.4
S2.250-20S	2-1/4	1.250	31.8
S2.375-14S	2-3/8	0.875	22.2
S2.500-14S	2-1/2	0.875	22.2
S2.563-6S	2-9/16	0.375	9.5
S2.563-16S	2-9/16	1.000	25.4
S2.609-16S	2-39/64	1.000	25.4
S2.625-16S	2-5/8	1.000	25.4
S2.750-16S	2-3/4	1.000	25.4
S3.000-16S	3	1.000	25.4
S3.062-32S	3-1/16	2.000	50.8
S3.125-22S	3-1/8	1.375	34.9
S3.250-16S	3-1/4	1.000	25.4
S3.250-30S	3-1/4	1.875	47.6
S3.313-16S	3-5/16	1.000	25.4
S3.437-16S	3-7/16	1.000	25.4
S3.500-16S	3-1/2	1.000	25.4
S3.500-22S	3-1/2	1.375	34.9
S3.531-32S	3-1/16	2.000	50.8
S3.625-22S	3-5/8	1.375	34.9
S3.740-16S	M95	1.000	25.4
S3.750-22S	3-3/4	1.375	34.9
S3.990-16S	3.99	1.000	25.4
S4.000-18S	4	1.125	28.6
S4.000-22S	4	1.375	34.9
S4.115-16S	4.115	1.000	25.4
S4.125-24S	4-1/8	1.500	38.1
S4.331-22S	M110	1.375	34.9
S4.500-23S	4-1/2	1.437	36.5
S4.813-10S	4-13/16	0.625	15.9
S4.875-16S	4-7/8	1.000	25.4
S5.125-26S	5-1/8	1.625	41.3
S5.250-29S	5-1/4	1.812	46.0



MOCAP

Friction Fit Caps & Plugs

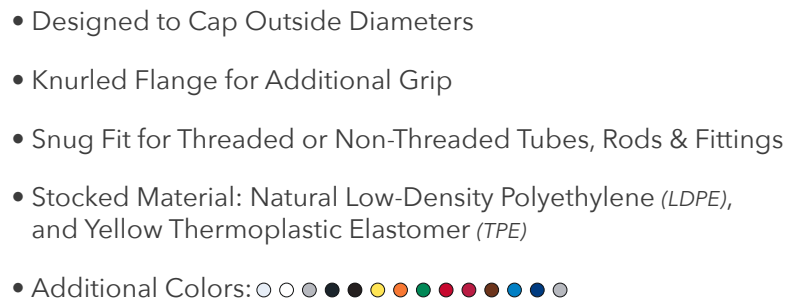


SK Series - Knurled Straight Caps for Imperial Parts *(continued)*


Friction Fit Caps & Plugs




- Designed to Cap Outside Diameters
- Knurled Flange for Additional Grip
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Stocked Material: Natural Low-Density Polyethylene (LDPE), and Yellow Thermoplastic Elastomer (TPE)
- Additional Colors:



Part #	(A) To Fit Outside Diameter	(B) Inside Length	
		in	mm
S.625-6K	5/8	0.375	9.5
S.625-10K	5/8	0.625	15.9
S.625-14K	5/8	0.875	22.2
S.625-16K	5/8	1.000	25.4
S.625-24K	5/8	1.500	38.1
S.625-40K	5/8	2.500	63.5
S.687-12K	11/16	0.750	19.1
S.687-14K	11/16	0.875	22.2
S.720-14K	23/32	0.875	22.2
S.720-16K	23/32	1.000	25.4
S.720-22K	23/32	1.375	34.9
S.750-6K	3/4	0.375	9.5
S.750-14K	3/4	0.875	22.2
S.750-16K	3/4	1.000	25.4
S.750-40K	3/4	2.500	63.5
S.787-16K	M20	1.000	25.4
S.813-6K	13/16	0.375	9.5
S.813-10K	13/16	0.625	15.9
S.813-14K	13/16	0.875	22.2
S.866-12K	M22	0.750	19.1
S.875-8K	7/8	0.500	12.7
S.875-14K	7/8	0.875	22.2
S.875-28K	7/8	1.750	44.5
S.906-12K	29/32, M23	0.750	19.1
S.906-14K	29/32, M23	0.875	22.2
S.937-16K	15/16	1.000	25.4
S.937-24K	15/16	1.500	38.1
S1.000-6K	1	0.375	9.5
S1.000-8K	1	0.500	12.7
S1.000-10K	1	0.625	15.9
S1.000-12K	1	0.750	19.1
S1.000-16K	1	1.000	25.4
S1.000-28K	1	1.750	44.5
S1.063-14K	1-1/16	0.875	22.2
S1.063-16K	1-1/16	1.000	25.4

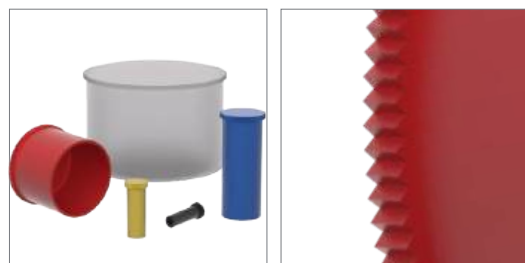

MOCAP



- Designed to Cap Outside Diameters
- Knurled Flange for Additional Grip
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Stocked Material: Natural Low-Density Polyethylene (*LDPE*), and Yellow Thermoplastic Elastomer (*TPE*)
- Additional Colors: 



Part #	(A) To Fit Outside Diameter	(B) Inside Length	
		in	mm
S1.125-14K	1-1/8	0.875	22.2
S1.125-16K	1-1/8	1.000	25.4
S1.125-21K	1-1/8	1.313	33.4
S1.187-16K	1-3/16	1.000	25.4
S1.250-8K	1-1/4	0.500	12.7
S1.250-10K	1-1/4	0.625	15.9
S1.250-14K	1-1/4	0.875	22.2
S1.250-16K	1-1/4	1.000	25.4
S1.250-24K	1-1/4	1.500	38.1
S1.250-28K	1-1/4	1.750	44.5
S1.313-12K	1-5/16	0.750	19.1
S1.313-14K	1-5/16	0.875	22.2
S1.313-16K	1-5/16	1.000	25.4
S1.375-10K	1-3/8	0.625	15.9
S1.375-14K	1-3/8	0.875	22.2
S1.375-16K	1-3/8	1.000	25.4
S1.375-24K	1-3/8	1.500	38.1
S1.375-28K	1-3/8	1.750	44.5
S1.437-14K	1-7/16	0.875	22.2
S1.500-14K	1-1/2	0.875	22.2
S1.500-16K	1-1/2	1.000	25.4
S1.500-28K	1-1/2	1.750	44.5
S1.563-16K	1-9/16	1.000	25.4
S1.625-16K	1-5/8	1.000	25.4
S1.625-20K	1-5/8	1.250	31.8
S1.719-16K	1-23/32	1.000	25.4
S1.750-14K	1-3/4	0.875	22.2
S1.750-16K	1-3/4	1.000	25.4
S1.844-20K	1-27/32	1.250	31.8
S1.875-14K	1-7/8	0.875	22.2
S1.875-16K	1-7/8	1.000	25.4
S2.000-14K	2	0.875	22.2
S2.000-16K	2	1.000	25.4
S2.000-24K	2	1.500	38.1




S Series - Straight Caps for Metric Parts

Friction Fit Caps & Plugs




- Designed to Cap Outside Diameters
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Stocked Material: Red Low-Density Polyethylene (LDPE)
- Additional Colors:




Part #	To Fit Outside Diameter	(B) Inside Length	
		in	mm
SM05X13S	M5	0.512	13.0
SM05X20S	M5	0.787	20.0
SM06X10S	M6	0.394	10.0
SM06X16S	M6	0.630	16.0
SM06X31S	M6	1.220	31.0
SM07X16S	M7	0.630	16.0
SM08X10S	M8	0.394	10.0
SM08X16S	M8	0.630	16.0
SM08X30S	M8	1.181	30.0
SM09X12S	M9	0.472	12.0
SM09X16S	M9	0.630	16.0
SM10X06S	M10	0.236	6.0
SM10X10S	M10	0.394	10.0
SM10X22S	M10	0.866	22.0
SM10X28S	M10	1.102	28.0
SM10X33S	M10	1.299	33.0
SM12X10S	M12	0.394	10.0
SM12X16S	M12	0.630	16.0
SM12X35S	M12	1.378	35.0
SM12.5X20S	M12.5	0.787	20.0
SM14X08S	M14	0.315	8.0
SM14X10S	M14	0.394	10.0
SM14X15S	M14	0.591	15.0
SM14X20S	M14	0.787	20.0
SM14X38S	M14	1.496	38.0
SM14.5X15S	M14.5	0.591	15.0





- Designed to Cap Outside Diameters
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 




Part #	To Fit Outside Diameter	(B) Inside Length	
		in	mm
SM16X08S	M16	0.315	8.0
SM16X15S	M16	0.591	15.0
SM16X20S	M16	0.787	20.0
SM16X25S	M16	0.984	25.0
SM18X15S	M18	0.591	15.0
SM18X20S	M18	0.787	20.0
SM18X26S	M18	1.024	26.0
SM20X14S	M20	0.551	14.0
SM20X20S	M20	0.787	20.0
SM22X18S	M22	0.709	18.0
SM22X30S	M22	1.181	30.0
SM24X18S	M24	0.709	18.0
SM27X20S	M27	0.787	20.0
SM28X20S	M28	0.787	20.0
SM30X22S	M30	0.866	22.0
SM32X22S	M32	0.866	22.0
SM33X25S	M33	0.984	25.0
SM35X25S	M35	0.984	25.0
SM36X25S	M36	0.984	25.0
SM38X25S	M38	0.984	25.0
SM39X27S	M39	1.063	27.0
SM40X27S	M40	1.063	27.0
SM42X27S	M42	1.063	27.0
SM45X30S	M45	1.181	30.0
SM48X30S	M48	1.181	30.0
SM50X30S	M50	1.181	30.0




Friction Fit Caps & Plugs




- Designed to Cap Outside Diameters
- Knurled Flange for Additional Grip
- Snug Fit for Threaded or Non-Threaded Tubes, Rods & Fittings
- Stocked Material: Natural Low-Density Polyethylene (*LDPE*), and Yellow Thermoplastic Elastomer (*TPE*)
- Additional Colors: 



Part #	(A) To Fit Outside Diameter	(B) Inside Length	
		in	mm
SM05X13K	M5	0.512	13.0
SM05X20K	M5	0.787	20.0
SM06X10K	M6	0.394	10.0
SM06X16K	M6	0.630	16.0
SM06X31K	M6	1.220	31.0
SM07X16K	M7	0.630	16.0
SM08X10K	M8	0.394	10.0
SM08X16K	M8	0.630	16.0
SM08X30K	M8	1.181	30.0
SM09X12K	M9	0.472	12.0
SM09X16K	M9	0.630	16.0
SM10X06K	M10	0.236	6.0
SM10X10K	M10	0.394	10.0
SM10X22K	M10	0.866	22.0
SM10X28K	M10	1.102	28.0
SM10X33K	M10	1.299	33.0
SM12X10K	M12	0.394	10.0
SM12X16K	M12	0.630	16.0
SM12X35K	M12	1.378	35.0
SM12.5X20K	M12.5	0.787	20.0
SM14X08K	M14	0.315	8.0
SM14X10K	M14	0.394	10.0
SM14X15K	M14	0.591	15.0
SM14X20K	M14	0.787	20.0
SM14X38K	M14	1.496	38.0
SM14.5X15K	M14.5	0.591	15.0




Friction Fit Caps & Plugs

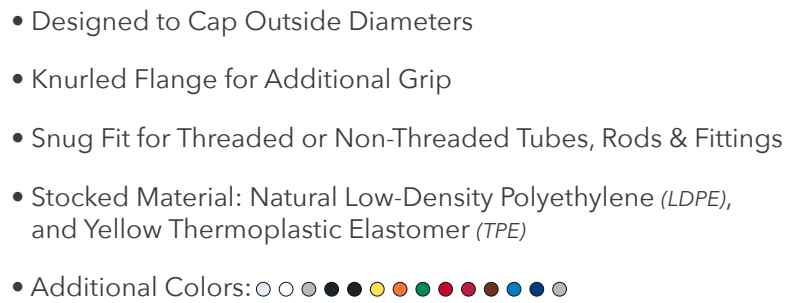


Friction Fit Caps & Plugs


- Flanged for Easy Removal
- Use as Thread Protector or End Cap
- Stocked Material: Natural Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit STD Thread	(A) Inside Diameter		(B) Inside Length		(C) Flange O.D.	
		in	mm	in	mm	in	mm
FCS.313L	5/16	0.310	7.9	0.840	21.3	0.510	13.0
FCS.375	3/8	0.370	9.4	0.470	11.9	0.600	15.2
FCS.375L	3/8	0.370	9.4	0.840	21.3	0.600	15.2
FCS.437	7/16	0.428	10.9	0.470	11.9	0.690	17.5
FCS.500	1/2	0.490	12.4	0.470	11.9	0.750	19.1
FCS.563	9/16	0.550	14.0	0.500	12.7	0.810	20.6
FCS.625L	5/8	0.610	15.5	0.840	21.3	0.760	19.3
FCS.687	11/16	0.676	17.2	0.500	12.7	0.940	23.9
FCS.687L	11/16	0.676	17.2	0.840	21.3	0.940	23.9
FCS.750	3/4	0.738	18.7	0.670	17.0	1.000	25.4
FCS.750L	3/4	0.738	18.7	0.880	22.4	0.900	22.9
FCS.813	13/16	0.802	20.4	0.560	14.2	1.060	26.9
FCS.875	7/8	0.864	21.9	0.660	16.8	1.120	28.4
FCS1.000	1	0.990	25.1	0.660	16.8	1.250	31.8
FCS1.062	1-1/16	1.051	26.7	0.750	19.1	1.310	33.3
FCS1.187	1-3/16	1.175	29.8	0.750	19.1	1.440	36.6
FCS1.313	1-5/16	1.298	33.0	0.750	19.1	1.560	39.6
FCS1.437	1-7/16	1.426	36.2	0.750	19.1	1.690	42.9
FCS1.563	1-9/16	1.548	39.3	0.750	19.1	1.710	43.4
FCS1.625	1-5/8	1.612	40.9	0.850	21.6	1.880	47.8
FCS1.687	1-11/16	1.672	42.5	0.750	19.1	1.920	48.8
FCS1.875	1-7/8	1.860	47.2	1.080	27.4	2.120	53.8
FCS2.500	2-1/2	2.485	63.1	1.300	33.0	2.750	69.9
FCS3.500	3-1/2	3.485	88.5	1.340	34.0	4.090	103.9




Friction Fit Caps & Plugs

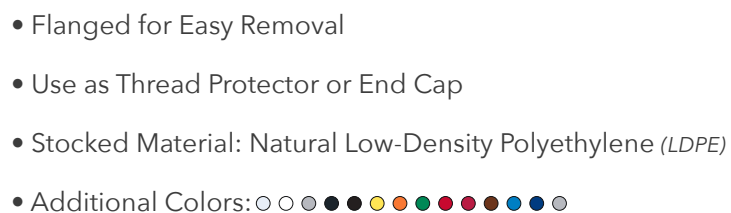

The left image is a close-up photograph of a metal fitting, likely a plug valve, with a white plastic cap. The right image is a cross-sectional diagram of a plug valve, showing the internal plug and the valve body with a T-shaped opening.

Friction Fit Caps & Plugs


- Flanged for Easy Removal
- Use as Thread Protector or End Cap
- Stocked Material: Natural Low-Density Polyethylene (LDPE)
- Additional Colors: 



Part #	To Fit NPT Thread	To Fit BSP Thread	(A) Inside Diameter		(B) Small I.D.		(C) Length		(D) Flange O.D.	
			in	mm	in	mm	in	mm	in	mm
FCB0125	---	1/8	0.389	9.9	0.344	8.7	0.380	9.7	0.650	16.5
FCN0125	1/8	---	0.399	10.1	0.383	9.7	0.380	9.7	0.660	16.8
FCBN0250	1/4	1/4	0.533	13.5	0.510	12.9	0.530	13.5	0.810	20.6
FCB0375	---	3/8	0.661	16.8	0.616	15.6	0.530	13.5	0.930	23.6
FCN0375	3/8	---	0.669	17.0	0.644	16.4	0.530	13.5	0.940	23.9
FCBN0500	1/2	1/2	0.833	21.2	0.800	20.3	0.720	18.3	1.090	27.7
FCBN0750	3/4	3/4	1.045	26.5	1.011	25.7	0.750	19.1	1.310	33.3
FCBN1000	1	1	1.310	33.3	1.267	32.2	0.930	23.6	1.560	39.6
FCBN1250	1-1/4	1-1/4	1.655	42.0	1.611	40.9	0.970	24.6	1.940	49.3
FCB1500	---	1-1/2	1.884	47.9	1.839	46.7	0.970	24.6	2.150	54.6
FCBN1500	1-1/2	1-1/2	1.893	48.1	1.848	46.9	0.970	24.6	2.160	54.9
FCB2000	---	2	2.350	59.7	2.305	58.5	1.030	26.2	2.610	66.3
FCN2000	2	---	2.370	60.2	2.323	59.0	1.030	26.2	2.620	66.5




Friction Fit Caps & Plugs

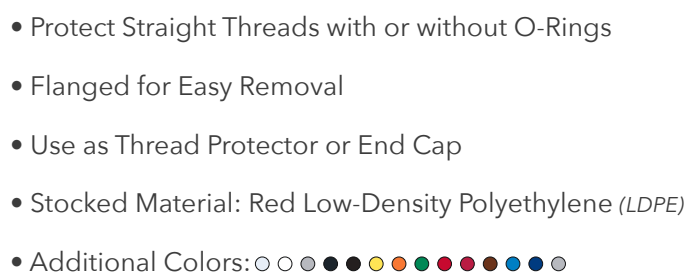

Friction Fit Caps & Plugs




- Secure Fit Until Removed by Pulling Tab and Breaking Seal
- Use as Shipping Cap, End Cap or Thread Protector
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit STD Thread	(A) Inside Diameter		(B) Inside Length	
		in	mm	in	mm
TCS0375	3/8 - 24	0.371	9.4	0.440	11.2
TCS0437	7/16 - 20	0.428	10.9	0.440	11.2
TCS0500	1/2 - 20	0.495	12.6	0.460	11.7
TCS0562	9/16 - 20	0.559	14.2	0.480	12.2
TCS0625	5/8 - 18	0.615	15.6	0.480	12.2
TCS0687	11/16 - 16	0.680	17.3	0.480	12.2
TCS0750	3/4 - 16	0.740	18.8	0.560	14.2
TCS0812	13/16 - 12	0.803	20.4	0.640	16.3
TCS0875	7/8 - 14	0.865	22.0	0.700	17.8
TCS1000	1 - 14	0.993	25.2	0.650	16.5
TCS1062	1-1/16 - 12	1.053	26.7	0.830	21.1
TCS1187	1-3/16 - 12	1.180	30.0	0.750	19.1
TCS1312	1-5/16 - 12	1.305	33.1	0.750	19.1
TCS1437	1-7/16 - 12	1.430	36.3	0.750	19.1




Tear Caps for Straight Metric Threads - **TCM Series**
Friction Fit Caps & Plugs



- Secure Fit Until Removed by Pulling Tab and Breaking Seal
- Use as Shipping Cap, End Cap or Thread Protector
- Stocked Material: Red Low-Density Polyethylene (LDPE)
- Additional Colors: 




Part #	To Fit METRIC Thread	(A) Inside Diameter		(B) Inside Length	
		in	mm	in	mm
TCM12	M12	0.472	12.0	0.472	12.0
TCM14	M14	0.551	14.0	0.551	14.0
TCM16	M16	0.630	16.0	0.638	16.2
TCM18	M18	0.709	18.0	0.732	18.6
TCM20	M20	0.787	20.0	0.787	20.0
TCM22	M22	0.866	22.0	0.528	13.4

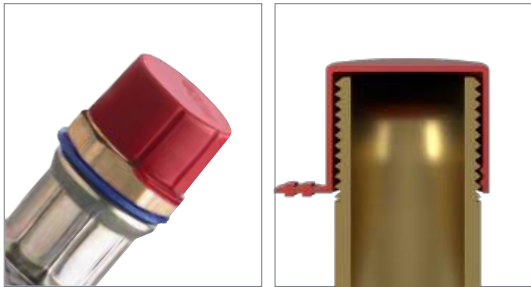


Friction Fit Caps & Plugs



- Secure Fit Until Removed by Pulling Tab and Breaking Seal
- Use as Shipping Cap, End Cap or Thread Protector
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit BSP Thread	(A) Inside Diameter		(B) Inside Length	
		in	mm	in	mm
TCBSP0250	1/4 - 19	0.506	12.9	0.433	11.0
TCBSP0375	3/8 - 19	0.644	16.4	0.472	12.0
TCBSP0500	1/2 - 14	0.813	20.7	0.591	15.0
TCBSP0625	5/8 - 14	0.890	22.6	0.728	18.5
TCBSP0750	3/4 - 14	1.029	26.1	0.937	23.8
TCBSP0875	7/8 - 14	1.177	29.9	0.984	25.0
TCBSP1000	1 - 11	1.297	32.9	0.709	18.0




Friction Fit Caps & Plugs



- Additional Colors: 

Friction Fit Caps & Plugs


- General Purpose Plug Designed to fit Many Types and Sizes of Internal Threads and Non-Threaded Holes
- Flanged for Easy Removal
- Stocked Material: Black LDPE and Natural LDPE
(Low-Density Polyethylene)
- Additional Colors: 




Part #	To Fit STD Thread	To Fit NPT Thread	To Fit METRIC Thread	To Fit METRIC Fine Threads	To Fit BSP Thread	(A) Large Diameter		(B) Overall Length		(C) Flange O.D.		(D) Length	
						in	mm	in	mm	in	mm	in	mm
BPF30	1/4-20	---	---	---	---	0.215	5.4	0.153	3.9	0.315	8.0	0.114	2.9
BPF40	5/16-24	1/16	M8	M8 X 1	1/16	0.283	7.2	0.315	8.0	0.551	14.0	0.236	6.0
BPF50	---	---	---	M9 X 1	---	0.331	8.4	0.315	8.0	0.551	14.0	0.236	6.0
BPF60	3/8-24	---	M10	---	---	0.339	8.6	0.256	6.5	0.551	14.0	0.177	4.5
BPF70	3/8-24	1/8	M10	---	---	0.339	8.6	0.315	8.0	0.709	18.0	0.236	6.0
BPF80	3/8-24	1/8	M10	M9.5 X 1	1/8	0.346	8.8	0.374	9.5	0.512	13.0	0.295	7.5
BPF90	---	1/8	---	M10 X 1	1/8	0.362	9.2	0.256	6.5	0.551	14.0	0.177	4.5
BPF100	---	---	---	M10 X 1	---	0.370	9.4	0.256	6.5	0.551	14.0	0.177	4.5
BPF110	7/16-20	---	M12	M11 X 1	---	0.406	10.3	0.295	7.5	0.512	13.0	0.217	5.5
BPF120	---	---	M12	M12 X 1.5	---	0.421	10.7	0.295	7.5	0.551	14.0	0.217	5.5
BPF130	1/2-20	1/4	---	M12X1, M12X1.25, M13X1.5	1/4	0.461	11.7	0.354	9.0	0.630	16.0	0.276	7.0
BPF140	---	---	M14	M13 X 1	1/4	0.484	12.3	0.354	9.0	0.630	16.0	0.276	7.0
BPF150	9/16-18	---	---	M13.5X1, M14X1.5	---	0.512	13.0	0.354	9.0	0.630	16.0	0.276	7.0
BPF160	9/16-18	---	---	M15 X 1.5	---	0.539	13.7	0.394	10.0	0.787	20.0	0.315	8.0
BPF170	5/8-18	---	M16	M 15 X 1, M16X1.5	---	0.575	14.6	0.295	7.5	0.787	20.0	0.217	5.5
BPF180	5/8-18	3/8	---	M16 X 1.5	---	0.591	15.0	0.394	10.0	0.787	20.0	0.315	8.0
BPF190	5/8-18	3/8	---	M16 X 1.5	---	0.591	15.0	0.295	7.5	0.787	20.0	0.217	5.5
BPF200	---	---	M18	M16 X 1	3/8	0.614	15.6	0.394	10.0	0.787	20.0	0.315	8.0
BPF210	---	---	---	M17X1, M18X1.5, M18X2.5	---	0.650	16.5	0.295	7.5	0.866	22.0	0.217	5.5
BPF220	---	---	---	M17X1, M18X1.5, M18X2.5	---	0.650	16.5	0.295	7.5	0.787	20.0	0.217	5.5
BPF230	---	---	---	M18X1.5, M18X2.5	---	0.657	16.7	0.295	7.5	0.866	22.0	0.217	5.5
BPF240	---	---	---	M18 X 1.5	---	0.673	17.1	0.413	10.5	0.866	22.0	0.315	8.0
BPF241	3/4-16	---	---		---	0.706	17.9	0.413	10.5	0.984	25.0	0.315	8.0
BPF250	3/4-16	1/2	---	M19X1, M20X2	---	0.724	18.4	0.413	10.5	0.984	25.0	0.315	8.0
BPF251	---	1/2	---	M20X1.5	---	0.741	18.8	0.413	10.5	0.984	25.0	0.315	8.0
BPF260	---	---	---	M20X1, M21X2	1/2	0.760	19.3	0.425	10.8	0.984	25.0	0.315	8.0
BPF270	---	---	M22	M21 X 1.5	---	0.772	19.6	0.413	10.5	0.984	25.0	0.315	8.0
BPF280	---	---	---	M22 X 1.5	---	0.815	20.7	0.413	10.5	0.984	25.0	0.315	8.0
BPF290	7/8-16	---	M24	M22X1, M22X1.5	5/8	0.835	21.2	0.394	10.0	0.984	25.0	0.315	8.0
BPF300	7/8-16	---	M24	M22X1, M23X,2	---	0.843	21.4	0.374	9.5	0.984	25.0	0.295	7.5
BPF310	---	---	---	M22 X 1	---	0.854	21.7	0.413	10.5	0.984	25.0	0.315	8.0



Friction Fit Caps & Plugs





Part #	To Fit STD Thread	To Fit NPT Thread	To Fit METRIC Thread	To Fit METRIC Fine Threads	To Fit BSP Thread	(A) Large Diameter		(B) Overall Length		(C) Flange O.D.		(D) Length	
						in	mm	in	mm	in	mm	in	mm
BPF360	---	3/4	---	M25X1, M26X1.5, M26X2	3/4	0.969	24.6	0.472	12.0	1.102	28.0	0.354	9.0
BPF370	1-1/16 -12	---	---	M26X1 M27X2	---	1.004	25.5	0.374	9.5	1.102	28.0	0.295	7.5
BPF380	---	---	M30	M27X1, M28X2	---	1.043	26.5	0.472	12.0	1.102	28.0	0.354	9.0
BPF381	1-3/16-12	---	---	---	7/8	1.121	28.5	0.591	15.0	1.417	36.0	0.472	12.0
BPF390	---	---	---	M30 X 1.5	---	1.142	29.0	0.591	15.0	1.417	36.0	0.472	12.0
BPF391	---	1	---	---	---	1.185	30.1	0.591	15.0	1.417	36.0	0.472	12.0
BPF400	---	1	---	M31X1, M32X2	1	1.201	30.5	0.591	15.0	1.417	36.0	0.472	12.0
BPF410	---	---	---	M32 X 1.5	1	1.220	31.0	0.591	15.0	1.417	36.0	0.472	12.0
BPF411	1-5/16-12	---	---	---	---	1.247	31.6	0.591	15.0	1.417	36.0	0.472	12.0
BPF420	---	---	M36	M33 X 1.5	---	1.260	32.0	0.492	12.5	1.417	36.0	0.394	10.0
BPF430	---	---	---	M34X1, M35X2, M36X3	---	1.319	33.5	0.551	14.0	1.417	36.0	0.472	12.0
BPF440	---	---	---	M36 X 1.5	---	1.370	34.8	0.709	18.0	1.654	42.0	0.591	15.0
BPF450	---	---	M39	M36X1, M37X2, M38X3	1-1/8	1.398	35.5	0.709	18.0	1.654	42.0	0.591	15.0
BPF460	---	---	---	M37X1, M38X2, M39X3	---	1.437	36.5	0.709	18.0	1.654	42.0	0.591	15.0
BPF470	---	---	---	M39X1, M40X2	---	1.512	38.4	0.492	12.5	1.654	42.0	0.394	10.0
BPF480	---	1-1/4	---	M40X1.5, M42X3	---	1.535	39.0	0.709	18.0	1.654	42.0	0.591	15.0
BPF481	1-5/8-12	1-1/4	---	---	1-1/4	1.558	39.5	0.709	18.0	1.654	42.0	0.591	15.0
BPF490	---	---	---	---	---	1.575	40.0	0.709	18.0	1.654	42.0	0.591	15.0
BPF500	---	---	M45	M42X1.5, M42X2	---	1.602	40.7	0.709	18.0	1.772	45.0	0.591	15.0
BPF510	---	---	---	M45 X 3	---	1.665	42.3	0.709	18.0	1.890	48.0	0.591	15.0
BPF511	---	1-1/2	---	---	1-1/2	1.770	44.9	0.709	18.0	2.047	52.0	0.591	15.0
BPF520	1-7/8-12	---	---	M50 X 4	1-1/2	1.811	46.0	0.827	21.0	2.165	55.0	0.709	18.0
BPF530	---	---	---	M50 X 2	---	1.909	48.6	0.591	15.0	2.165	55.0	0.472	12.0
BPF531	2-12	---	---	---	---	1.934	49.1	0.827	21.0	2.165	55.0	0.709	18.0
BPF540	---	---	---	M52 X 1	1-3/4	2.028	51.5	0.827	21.0	2.165	55.0	0.709	18.0
BPF550	---	---	---	M56 X 1.5	---	2.165	55.0	0.827	21.0	2.480	63.0	0.709	18.0
BPF551	2-1/4-12	---	---	---	---	2.184	55.4	0.827	21.0	2.480	63.0	0.709	18.0
BPF560	2-1/4-12	---	---	M56 X 1	---	2.197	55.8	0.827	21.0	2.480	63.0	0.709	18.0
BPF561	---	2	---	---	2	2.249	57.1	0.827	21.0	2.480	63.0	0.709	18.0
BPF570	---	---	M64	M62 X 4	---	2.283	58.0	0.827	21.0	2.480	63.0	0.709	18.0
BPF580	---	---	---	M60 X 1.5	---	2.323	59.0	0.839	21.3	2.480	63.0	0.709	18.0
BPF581	2-1/2-12	---	---	---	---	2.434	61.8	0.843	21.4	2.638	67.0	0.709	18.0
BPF590	---	---	---	M70 X 4	---	2.598	66.0	0.846	21.5	2.795	71.0	0.709	18.0
BPF600	---	---	---	M72X1.5, M75X4	---	2.795	71.0	0.866	22.0	3.071	78.0	0.709	18.0
BPF620	---	---	---	M90 X 4	---	3.386	86.0	0.760	19.3	3.740	95.0	0.709	18.0

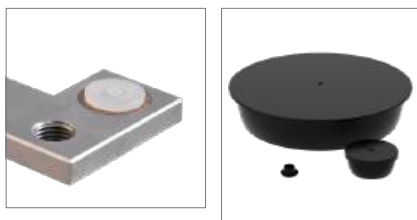

MOCAP

Friction Fit Caps & Plugs

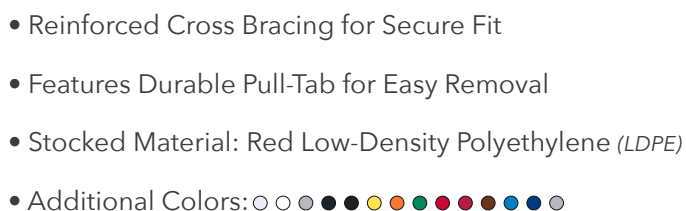


Friction Fit Caps & Plugs




- Additional Colors:

Friction Fit Caps & Plugs

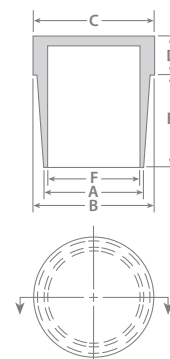

Friction Fit Caps & Plugs



- Snap-in Design for an Attractive and Secure Fit
- Used on Auto Bodies, Tanks, HVAC Units, etc.
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit Hole Size	Metal Thickness	(A) Small O.D.		(B) Flange O.D.		(C) Length	
			in	mm	in	mm	in	mm
SMR1/2	.50"- .53" (12.70 - 13.46mm)	.02"- .07" (.51 - 1.78mm)	0.550	14.0	0.850	21.6	0.290	7.4
SMR3/4	.74"- .77" (18.80 - 19.56mm)	.02"- .14" (.51 - 3.56mm)	0.790	20.1	1.160	29.5	0.320	8.2
SMR13/16	.79"- .83" (20.07 - 21.08mm)	.02"- .07" (.51 - 1.78mm)	0.850	21.6	1.150	29.2	0.290	7.4
SMR7/8	.87"- .91" (22.10 - 23.11mm)	.02"- .10" (.51 - 2.54mm)	0.930	23.6	1.230	31.2	0.350	8.9
SMR1	.99"- 1.03" (25.15 - 26.16mm)	.02"- .10" (.51 - 2.54mm)	1.050	26.7	1.350	34.3	0.350	8.9
SMR1-1/16	1.04"- 1.08" (26.42 - 27.43mm)	.02"- .10" (.51 - 2.54mm)	1.100	27.9	1.400	35.6	0.350	8.9
SMR1-1/8	1.11"- 1.16" (28.19 - 29.46mm)	.02"- .18" (.51 - 4.57mm)	1.180	30.0	1.530	38.9	0.430	10.9
SMR1-1/4	1.24"- 1.28" (31.50 - 32.51mm)	.02"- .10" (.51 - 2.54mm)	1.300	33.0	1.600	40.6	0.350	8.9
SMR1-3/8	1.36"- 1.41" (34.54 - 35.81mm)	.02"- .10" (.51 - 2.54mm)	1.430	36.3	1.730	43.9	0.350	8.9
SMR1-1/2-7	1.48"- 1.52" (37.59 - 38.61mm)	.13"- .22" (3.3 - 5.59mm)	1.540	39.1	1.830	46.5	0.500	12.7
SMR1-1/2	1.48"- 1.53" (37.59 - 38.86mm)	.02"- .10" (.51 - 2.54mm)	1.550	39.4	1.850	47.0	0.350	8.9
SMR1-5/8	1.59"- 1.65" (40.39 - 41.91mm)	.03"- .10" (.76 - 2.54mm)	1.680	42.7	2.000	50.8	0.360	9.1
SMR1-3/4	1.72"- 1.77" (43.69 - 44.96mm)	.02"- .10" (.51 - 2.54mm)	1.800	45.7	2.100	53.3	0.350	8.9
SMR1-3/4-5	1.70"- 1.78" (43.18 - 45.21mm)	.02"- .16" (.51 - 4.06mm)	1.800	45.7	2.250	57.2	0.430	10.9
SMR1-13/16	1.77"- 1.82" (44.96 - 46.23mm)	.02"- .10" (.51 - 2.54mm)	1.850	47.0	2.160	54.9	0.350	8.9
SMR1-7/8	1.85"- 1.90" (46.99 - 48.26mm)	.02"- .10" (.51 - 2.54mm)	1.930	49.0	2.240	56.9	0.350	8.9
SMR2	1.97"- 2.02" (50.04 - 51.31mm)	.02"- .10" (.51 - 2.54mm)	2.050	52.1	2.350	59.7	0.360	9.1
SMR2-1/2	2.45"- 2.51" (62.23 - 63.75mm)	.02"- .10" (.51 - 2.54mm)	2.540	64.5	2.850	72.4	0.350	8.9
SMR2-1/2-5	2.44"- 2.53" (61.98 - 64.26mm)	.02"- .14" (.51 - 3.56mm)	2.550	64.8	3.000	76.2	0.430	10.9



Friction Fit Caps & Plugs




-

Part #	To Fit Hole Size	Metal Thickness	(A) Small O.D.		(B) Flange O.D.		(C) Length	
			in	mm	in	mm	in	mm
SMF3/8	.370"- .380" (9.40 - 9.65mm)	.020"- .060" (.51 - 1.52mm)	0.410	10.4	0.750	19.1	0.190	4.8
SMF7/16	.430"- .450" (10.92 - 11.43mm)	.030"- .060" (.76 - 1.52mm)	0.470	11.9	0.690	17.5	0.220	5.6
SMF1/2	.490"- .520" (12.45 - 13.21mm)	.030"- .080" (.76 - 2.03mm)	0.540	13.7	0.860	21.8	0.250	6.4
SMF9/16	.550"- .580" (13.97 - 14.73mm)	.030"- .080" (.76 - 2.03mm)	0.600	15.2	0.870	22.1	0.250	6.4
SMF5/8	.610"- .640" (15.49 - 16.26mm)	.030"- .080" (.76 - 2.03mm)	0.670	17.0	0.930	23.6	0.260	6.6
SMF3/4	.740"- .770" (18.80 - 19.56mm)	.030"- .110" (.76 - 2.79mm)	0.790	20.1	1.060	26.9	0.290	7.4
SMF7/8	.860"- .890" (21.84 - 22.61mm)	.030"- .080" (.76 - 2.03mm)	0.910	23.1	1.160	29.5	0.250	6.4
SMF15/16	.920"- .960" (23.37 - 24.38mm)	.030"- .080" (.76 - 2.03mm)	0.980	24.9	1.310	33.3	0.250	6.4
SMF1	.960"- 1.020" (24.38 - 25.91mm)	.030"- .080" (.76 - 2.03mm)	1.040	26.4	1.370	34.8	0.250	6.4
SMF1-3/16	1.170"- 1.200" (29.72 - 30.48mm)	.030"- .080" (.76 - 2.03mm)	1.220	31.0	1.560	39.6	0.250	6.4
SMF1-1/4	1.230"- 1.270" (31.24 - 32.26mm)	.030"- .080" (.76 - 2.03mm)	1.290	32.8	1.620	41.1	0.250	6.4
SMF1-5/16	1.300"- 1.330" (33.02 - 33.78mm)	.030"- .080" (.76 - 2.03mm)	1.360	34.5	1.680	42.7	0.250	6.4
SMF1-1/2	1.490"- 1.520" (37.85 - 38.61mm)	.030"- .080" (.76 - 2.03mm)	1.540	39.1	1.880	47.8	0.250	6.4
SMF1-3/4	1.730"- 1.760" (43.94 - 44.70mm)	.030"- .080" (.76 - 2.03mm)	1.790	45.5	2.130	54.1	0.250	6.4
SMF2	1.980"- 2.010" (50.29 - 51.05mm)	.030"- .080" (.76 - 2.03mm)	2.050	52.1	2.440	62.0	0.250	6.4
SMF2-1/8	2.100"- 2.140" (53.34 - 54.36mm)	.030"- .080" (.76 - 2.03mm)	2.170	55.1	2.490	63.2	0.250	6.4
SMF3	2.970"- 3.020" (75.44 - 76.71mm)	.030"- .080" (.76 - 2.03mm)	3.060	77.7	3.360	85.3	0.250	6.4
SMF3-1/8	3.100"- 3.150" (78.74 - 80.01mm)	.030"- .080" (.76 - 2.03mm)	3.180	80.8	3.520	89.4	0.250	6.4
SMF3-3/8	3.350"- 3.400" (85.09 - 86.36mm)	.030"- .080" (.76 - 2.03mm)	3.430	87.1	3.750	95.3	0.250	6.4
SMF3-1/2	3.470"- 3.520" (88.14 - 89.41mm)	.030"- .110" (.76 - 2.79mm)	3.560	90.4	3.860	98.0	0.280	7.1
SMF4	3.970"- 4.020" (100.84 - 102.11mm)	.050"- .100" (1.27 - 2.54mm)	4.070	103.4	4.370	111.0	0.280	7.1




Friction Fit Caps & Plugs

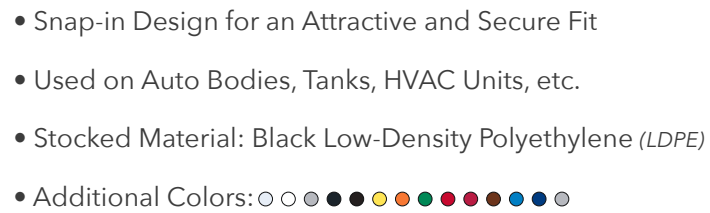


Friction Fit Caps & Plugs



- Finish and Protect Nut and Bolt Threads
- Durable
- UV Stabilized Material
- Material: LDPE (Low Density Polyethylene)
- Stocked Material: LDPE (Black)
- Additional Colors: 

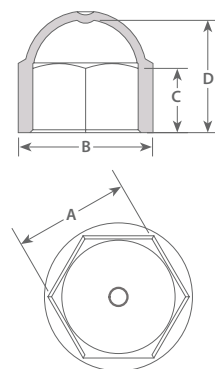


Part #	To Fit Bolt Size	(A) Width Across Flats		(B) Diameter		(C) Inside Length		(D) Max. Inside Length	
		in	mm	in	mm	in	mm	in	mm
BNCD.190	#10	0.361	9.2	0.497	12.6	0.130	3.3	0.366	9.3
BNCD.250	1/4	0.426	10.8	0.573	14.6	0.226	5.7	0.539	13.7
BNCD.313	5/16	0.487	12.4	0.643	16.3	0.273	6.9	0.551	14.0
BNCD.375	3/8	0.549	13.9	0.725	18.4	0.337	8.6	0.709	18.0
BNCD.437	7/16	0.674	17.1	0.868	22.0	0.385	9.8	0.728	18.5
BNCD.500	1/2	0.736	18.7	0.940	23.9	0.448	11.4	0.787	20.0
BNCD.563	9/16	0.861	21.9	1.084	27.5	0.496	12.6	0.906	23.0
BNCD.625	5/8	0.922	23.4	1.165	29.6	0.559	14.2	1.004	25.5
BNCD.750	3/4	1.088	27.6	1.366	34.7	0.665	16.9	1.220	31.0
BNCD.875	7/8	1.269	32.2	1.585	40.3	0.776	19.7	1.339	34.0
BNCD1.000	1	1.450	36.8	1.804	45.8	0.887	22.5	1.575	40.0



Round Finishing Caps - RFC Series

Friction Fit Caps & Plugs



-


Part #	To Fit Outside Diameter	Imperial or Metric	End Style	(A) Inside Diameter		(B) Inside Length	
				in	mm	in	mm
RFC.187-7	3/16	Imperial	Round	0.182	4.6	0.437	11.1
RFC.250-7	1/4	Imperial	Round	0.245	6.2	0.437	11.1
RFC.313-7	5/16	Imperial	Round	0.308	7.8	0.437	11.1
RFC.375-7	3/8	Imperial	Round	0.37	9.4	0.437	11.1
RFC.437-8	7/16	Imperial	Round	0.431	10.9	0.500	12.7
RFC.500-8	1/2	Imperial	Round	0.494	12.5	0.500	12.7
RFC.625-8	5/8	Imperial	Round	0.618	15.7	0.500	12.7
RFC.750-8	3/4	Imperial	Flat	0.742	18.8	0.500	12.7
RFC.750-11	3/4	Imperial	Flat	0.742	18.8	0.687	17.4
RFC.875-8	7/8	Imperial	Flat	0.865	22.0	0.500	12.7
RFC.875-11	7/8	Imperial	Flat	0.865	22.0	0.687	17.4
RFC1.000-8	1	Imperial	Flat	0.988	25.1	0.500	12.7
RFC1.000-12	1	Imperial	Flat	0.988	25.1	0.750	19.1
RFC1.125-10	1-1/8	Imperial	Flat	1.113	28.3	0.625	15.9
RFC1.125-15	1-1/8	Imperial	Flat	1.113	28.3	0.937	23.8
RFC1.250-10	1-1/4	Imperial	Flat	1.238	31.4	0.625	15.9
RFC1.250-15	1-1/4	Imperial	Flat	1.238	31.4	0.937	23.8
RFC1.500-15	1-1/2	Imperial	Flat	1.485	37.7	0.937	23.8
RFC1.750-16	1-3/4	Imperial	Flat	1.735	44.1	1.000	25.4



Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit Schedule 40	To Fit DN Size	(A) External Tube Diameter		Tube Wall	(B) Length	
	in		in	mm		in	mm
RNPP.5	0.500	DN15 (SCH40)	0.840	21.3	.109" (0.50 Sched 40)	0.440	11.2
RNPP.75	0.750	DN20 (SCH40)	1.050	26.7	.113" (0.75 Sched 40)	0.450	11.4
RNPP1	1.000	DN25 (SCH40)	1.315	33.4	.133" (1.00 Sched 40)	0.519	13.2
RNPP1.25	1.250	DN32 (SCH40)	1.660	42.2	.140" (1.25 Sched 40)	0.510	13.0
RNPP1.5	1.500	DN40 (SCH40)	1.900	48.3	.145" (1.50 Sched 40)	0.580	14.7
RNPP2	2.000	DN50 (SCH40)	2.375	60.3	.154" (2.00 Sched 40)	0.680	17.3
RNPP2.5	2.500	DN65 (SCH40)	2.875	73.0	.203" (2.50 Sched 40)	0.840	21.3
RNPP3	3.000	DN80 (SCH40)	3.500	88.9	.216" (3.00 Sched 40)	0.770	19.6
RNPP3.5	3.500	DN90 (SCH40)	4.000	101.6	.226" (3.50 Sched 40)	1.000	25.4
RNPP4	4.000	DN100 (SCH40)	4.500	114.3	.237" (4.00 Sched 40)	1.000	25.4
RNPP5	5.000	DN125 (SCH40)	5.563	141.3	.258" (5.00 Sched 40)	1.000	25.4



Friction Fit Caps & Plugs





- Additional Colors:




Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) External Tube Diameter		Tube Wall	(B) Length	
	in	mm		mm	in
RN10MA	0.394	10.0	1-2	0.433	11.0
RN12MA	0.472	12.0	1-2	0.433	11.0
RN13MA	0.512	13.0	1-2	0.433	11.0
RN14MA	0.551	14.0	1-2	0.433	11.0
RN15MA	0.591	15.0	1-2	0.433	11.0
RN16MA	0.630	16.0	1-2	0.425	10.8
RN18MA	0.709	18.0	1-2	0.433	11.0
RN20MA	0.787	20.0	1-2	0.433	11.0
RN22MA	0.866	22.0	1-2	0.551	14.0
RN25MA	0.984	25.0	1-2	0.450	11.4
RN27MA	1.063	27.0	1-2	0.551	14.0
RN28MA	1.102	28.0	1-2	0.551	14.0
RN30MA	1.181	30.0	1-2	0.551	14.0
RN30MG	1.181	30.0	3-4	0.669	17.0
RN32MA	1.260	32.0	1-2	0.510	13.0
RN34MA	1.339	34.0	1-2	0.551	14.0
RN35MA	1.378	35.0	1-2	0.551	14.0
RN36MA	1.417	36.0	1-2	0.551	14.0
RN38MA	1.496	38.0	1-2	0.510	13.0
RN40MA	1.575	40.0	1-2	0.551	14.0
RN42MA	1.654	42.0	1-2	0.551	14.0
RN45MA	1.772	45.0	1-2	0.551	14.0
RN48MA	1.890	48.0	1-2	0.551	14.0
RN48MG	1.890	48.0	3-4	0.551	17.0
RN50MA	1.969	50.0	1-2	0.669	17.0
RN55MA	2.165	55.0	1-2	0.669	17.0
RN55MG	2.165	55.0	3-4	0.669	17.0
RN60MA	2.362	60.0	1-2	0.669	17.0
RN60MF	2.362	60.0	2-3	0.669	17.0
RN70MF	2.756	70.0	2-3	0.669	17.0
RN70MG	2.756	70.0	3-4	0.669	17.0
RN76MF	2.992	76.0	2-3	0.669	17.0
RN76MG	2.992	76.0	3-4	0.669	17.0
RN80MF	3.150	80.0	2-3	0.669	17.0
RN90MF	3.543	90.0	2-3	0.669	17.0
RN90MG	3.543	90.0	3-4	0.669	17.0
RN102MF	4.016	102.0	2-3	0.669	17.0
RN102MG	4.016	102.0	3-4	0.669	17.0
RN110MH	4.331	110.0	4-5	0.669	17.0



Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Provides an Enhanced Aesthetic Appearance
- Accommodates Any Degree of Leg Angle
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 





Part #	(A) External Tube Diameter		Tube Wall	(L) Length	
	in	mm		in	mm
RNDS.625C	0.625	15.9	.035-.083" (20-14ga)	0.423	10.7
RNDS.625D	0.625	15.9	.083-.134" (14-10ga)	0.423	10.7
RNDS.75C	0.750	19.1	.035-.083" (20-14ga)	0.446	11.3
RNDS.875C	0.875	22.2	.035-.083" (20-14ga)	0.448	11.4
RNDS1C	1.000	25.4	.035-.083" (20-14ga)	0.450	11.4
RNDS1.125C	1.125	28.6	.035-.083" (20-14ga)	0.460	11.7
RNDS1.25C	1.250	31.8	.035-.083" (20-14ga)	0.510	13.0
RNDS1.375C	1.375	34.9	.035-.083" (20-14ga)	0.519	13.2
RNDS1.5C	1.500	38.1	.035-.083" (20-14ga)	0.510	13.0
RNDS1.5D	1.500	38.1	.083-.134" (14-10ga)	0.520	13.2
RNDS1.5Q	1.500	38.1	.109-.165" (12-8ga)	0.520	13.2



Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Provides an Enhanced Aesthetic Appearance
- Accommodates Any Degree of Leg Angle
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) External Tube Diameter		Tube Wall	(L) Length	
	in	mm		in	mm
RNDM16MA	0.630	16.0	1-2	0.433	11.0
RNDM18MA	0.709	18.0	1-2	0.433	11.0
RNDM20MA	0.787	20.0	1-2	0.433	11.0
RNDM22MA	0.866	22.0	1-2	0.551	14.0
RNDM25MA	0.984	25.0	1-2	0.450	11.4
RNDM28MA	1.102	28.0	1-2	0.551	14.0
RNDM30MA	1.181	30.0	1-2	0.551	14.0
RNDM32MA	1.260	32.0	1-2	0.510	13.0
RNDM35MA	1.378	35.0	1-2	0.551	14.0
RNDM40MA	1.575	40.0	1-2	0.551	14.0



Friction Fit Caps & Plugs





- 




Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Ideal for Applications With Fixed Leg Angles
- Provides an Enhanced Aesthetic Appearance
- Heavy End Walls for Durability and Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) External Tube Diameter		Tube Wall	(L) Length		Angle
	in	mm		mm	in	
RNAM18MA	0.709	18.0	1-2	0.433	11.0	15°
RNAM20MA	0.787	20.0	1-2	0.433	11.0	15°
RNAM22MA	0.866	22.0	1-2	0.551	14.0	15°
RNAM25MA	0.984	25.0	1-2	0.450	11.4	15°



Friction Fit Caps & Plugs

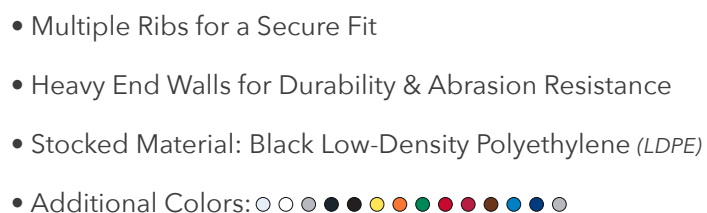


Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length	
	in	mm	in	mm		in	mm
OV.625X1.25C	0.625	15.9	1.250	31.8	.035-.083" (20-14ga)	0.453	11.5
OV.75X1.5I	0.750	19.1	1.500	38.1	.025-.065" (23-16ga)	0.453	11.5



Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 

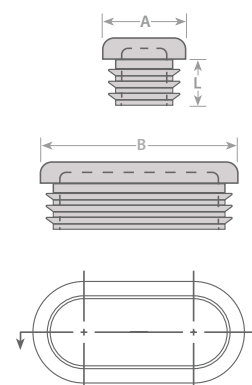


Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length	
	in	mm	in	mm	mm	in	mm
OV2010MI	0.394	10.0	0.787	20.0	.75 - 2	0.453	11.5
OV2510MI	0.394	10.0	0.984	25.0	.75 - 2	0.453	11.5
OV3010MI	0.394	10.0	1.181	30.0	.75 - 2	0.453	11.5
OV3015MF	0.591	15.0	1.181	30.0	2 - 3	0.453	11.5
OV3015MA	0.591	15.0	1.181	30.0	1 - 2	0.453	11.5
OV3515MF	0.591	15.0	1.378	35.0	2 - 3	0.453	11.5
OV3515MI	0.591	15.0	1.378	35.0	.75 - 2	0.453	11.5
OV3520MA	0.787	20.0	1.378	35.0	1 - 2	0.453	11.5
OV3520MF	0.787	20.0	1.378	35.0	2 - 3	0.453	11.5
OV3820MF	0.787	20.0	1.496	38.0	2 - 3	0.453	11.5
OV3820MA	0.787	20.0	1.496	38.0	1 - 2	0.453	11.5
OV4020MF	0.787	20.0	1.575	40.0	2 - 3	0.453	11.5
OV4020MI	0.787	20.0	1.575	40.0	.75 - 2	0.453	11.5
OV4025MA	0.984	25.0	1.575	40.0	1 - 2	0.453	11.5
OV4025MF	0.984	25.0	1.575	40.0	2 - 3	0.453	11.5
OV4518MA	0.709	18.0	1.772	45.0	1 - 2	0.453	11.5
OV4518MF	0.709	18.0	1.772	45.0	2 - 3	0.453	11.5
OV4520MA	0.787	20.0	1.772	45.0	1 - 2	0.453	11.5
OV4520MF	0.787	20.0	1.772	45.0	2 - 3	0.453	11.5
OV4820MF	0.787	20.0	1.890	48.0	2 - 3	0.453	11.5
OV4820MA	0.787	20.0	1.890	48.0	1 - 2	0.453	11.5
OV5015MA	0.591	15.0	1.969	50.0	1 - 2	0.453	11.5
OV5015MF	0.591	15.0	1.969	50.0	2 - 3	0.453	11.5
OV5020MA	0.787	20.0	1.969	50.0	1 - 2	0.453	11.5
OV5020MF	0.787	20.0	1.969	50.0	2 - 3	0.453	11.5
OV5025MA	0.984	25.0	1.969	50.0	1 - 2	0.453	11.5
OV5025MF	0.984	25.0	1.969	50.0	2 - 3	0.453	11.5
OV5030MA	1.181	30.0	1.969	50.0	1 - 2	0.453	11.5
OV5030MF	1.181	30.0	1.969	50.0	2 - 3	0.453	11.5
OV6020MF	0.787	20.0	2.362	60.0	2 - 3	0.453	11.5
OV6020MI	0.787	20.0	2.362	60.0	.75 - 2	0.453	11.5
OV6025MA	0.984	25.0	2.362	60.0	1 - 2	0.571	14.5
OV6025MF	0.984	25.0	2.362	60.0	2 - 3	0.571	14.5
OV6030MA	1.181	30.0	2.362	60.0	1 - 2	0.571	14.5
OV7040MA	1.575	40.0	2.756	70.0	1 - 2	0.571	14.5
OV7040MF	1.575	40.0	2.756	70.0	2 - 3	0.571	14.5
OV8025MA	0.984	25.0	3.150	80.0	1 - 2	0.571	14.5
OV8025MF	0.984	25.0	3.150	80.0	2 - 3	0.571	14.5
OV8040MA	1.575	40.0	3.150	80.0	1 - 2	0.571	14.5
OV8040MF	1.575	40.0	3.150	80.0	2 - 3	0.571	14.5



Top - OVD Series



- 




OVA Series - Plugs for Metric Oval Tubes with Angled Top

Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (LDPE)
- Additional Colors:

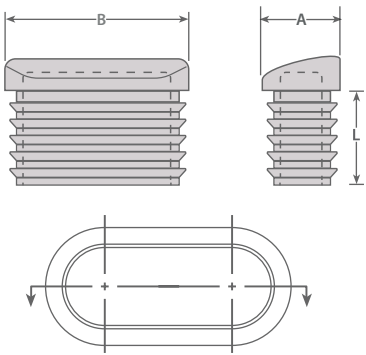


Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length		Curved Angle
	in	mm	in	mm		in	mm	Degrees
OVAM3015MA	0.591	15.0	1.181	30.0	1 - 2	0.984	25.0	0° - 21°
OVAM3820MA	0.787	20.0	1.496	38.0	1 - 2	0.984	25.0	0° - 21°
OVAM4020MI	0.787	20.0	1.575	40.0	.75 - 2	0.984	25.0	0° - 21°
OVAM4820MA	0.787	20.0	1.890	48.0	1 - 2	0.984	25.0	0° - 21°




Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 





Part #	(A) External Tube Size		Tube Wall	(B) Length	
	in	mm		in	mm
SQ.5B	0.500	12.7	.049-.065" (18-16ga)	0.470	11.9
SQ.625C	0.625	15.9	.035-.083" (20-14ga)	0.470	11.9
SQ.75C	0.750	19.1	.035-.083" (20-14ga)	0.445	11.3
SQ.75D	0.750	19.1	.083-.134" (14-10ga)	0.430	10.9
SQ.875C	0.875	22.2	.035-.083" (20-14ga)	0.445	11.3
SQ1C	1.000	25.4	.035-.083" (20-14ga)	0.444	11.3
SQ1D	1.000	25.4	.083-.134" (14-10ga)	0.444	11.3
SQ1.125C	1.125	28.6	.035-.083" (20-14ga)	0.445	11.3
SQ1.25C	1.250	31.8	.035-.083" (20-14ga)	0.445	11.3
SQ1.25D	1.250	31.8	.083-.134" (14-10ga)	0.445	11.3
SQ1.375C	1.375	34.9	.035-.083" (20-14ga)	0.520	13.2
SQ1.375D	1.375	34.9	.083-.134" (14-10ga)	0.520	13.2
SQ1.5C	1.500	38.1	.035-.083" (20-14ga)	0.577	14.7
SQ1.5D	1.500	38.1	.083-.134" (14-10ga)	0.577	14.7
SQ1.5W	1.500	38.1	.203-.259" (6-3ga)	0.445	11.3
SQ1.75C	1.750	44.5	.035-.083" (20-14ga)	0.577	14.7
SQ1.75D	1.750	44.5	.083-.134" (14-10ga)	0.520	13.2
SQ2C	2.000	50.8	.035-.083" (20-14ga)	0.576	14.6
SQ2D	2.000	50.8	.083-.134" (14-10ga)	0.576	14.6
SQ2G	2.000	50.8	.165-.238" (8-4ga)	0.520	13.2
SQ2X	2.000	50.8	.250-.313"	0.520	13.2
SQ2.25D	2.250	57.2	.083-.134" (14-10ga)	0.574	14.6
SQ2.5D	2.500	63.5	.083-.134" (14-10ga)	0.560	14.2
SQ2.5H	2.500	63.5	.134-.203" (10-6ga)	0.560	14.2
SQ2.5I	2.500	63.5	.025-.065" (23-16ga)	0.560	14.2
SQ2.75C	2.750	69.9	.035-.083" (20-14ga)	0.650	16.5
SQ2.75J	2.750	69.9	.083-.165" (14-8ga)	0.730	18.5
SQ3K	3.000	76.2	.180-.259" (7-3ga)	0.520	13.2
SQ3Q	3.000	76.2	.109-.165" (12-8ga)	0.900	22.9
SQ3.125O	3.125	79.4	.120-.203" (11-6ga)	0.970	24.6
SQ3.5C	3.500	88.9	.035-.083" (20-14ga)	0.690	17.5
SQ3.5L	3.500	88.9	.203" (6ga)	0.690	17.5
SQ3.5M	3.500	88.9	.083-.203" (14-6ga)	0.690	17.5
SQ3.875G	3.875	98.4	.165-.238" (8-4ga)	1.000	25.4
SQ4K	4.000	101.6	.180-.259" (7-3ga)	0.910	23.1
SQ4N	4.000	101.6	.120-.238" (11-4ga)	0.910	23.1
SQ4.75O	4.750	120.7	.120-.203" (11-6ga)	1.000	25.4
SQ5P	5.000	127.0	.134-.259" (10-3ga)	0.980	24.9
SQ6D	6.000	152.4	.083-.134" (14-10ga)	0.980	24.9
SQ6P	6.000	152.4	.134-.259" (10-3ga)	0.980	24.9

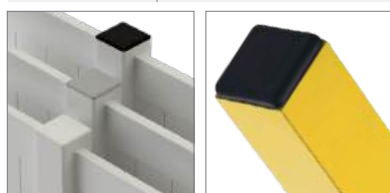


MOCAP

Friction Fit Caps & Plugs

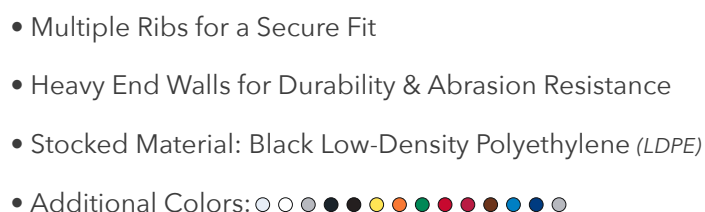

Top - SQD Series



- 




SQD Series - Square Metric Tubing Plugs with Domed Top


Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Accommodates Any Degree of Leg Angle
- Provides an Enhanced Aesthetic Appearance
- Heavy End Walls for Durability and Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (LDPE)
- Additional Colors: ○ ○ ○ ● ● ● ● ● ● ● ● ● ● ● ● ● ● ● ●





Part #	(A) External Tube Size		Tube Wall	(L) Length	
	in	mm		in	mm
SQDM20MB	0.787	20.0	1.5 - 2	0.433	11.0

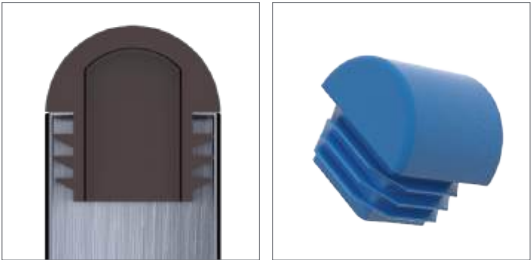

Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Provides an Enhanced Aesthetic Appearance
- Heavy End Walls for Durability and Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) External Tube Size		Tube Wall	(L) Length	
	in	mm	mm	in	mm
SQPM12MB	0.472	12.0	1.5 - 2	0.433	11.0
SQPM15MB	0.591	15.0	1.5 - 2	0.433	11.0
SQPM16MA	0.630	16.0	1 - 2	0.470	11.9
SQPM18MB	0.709	18.0	1.5 - 2	0.433	11.0
SQPM20MB	0.787	20.0	1.5 - 2	0.433	11.0
SQPM25MA	0.984	25.0	1 - 2	0.444	11.3
SQPM30MB	1.181	30.0	1.5 - 2	0.551	14.0
SQPM34MB	1.339	34.0	1.5 - 2	0.551	14.0
SQPM40MB	1.575	40.0	1.5 - 2	0.551	14.0



Friction Fit Caps & Plugs





- 

The left image shows a close-up of a white plastic corner bracket installed on a metal frame. The right image shows a collection of various colored plastic brackets (black, grey, white, yellow, blue, red, green) arranged in a group.


Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Ideal for Applications With Fixed Leg Angles
- Heavy End Walls for Durability and Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) External Tube Size		Tube Wall	(L) Length		Angle
	in	mm		mm	in	
SQAM18MB	0.709	18.0	1.5 - 2	0.433	11.0	10°
SQAM20MB	0.787	20.0	1.5 - 2	0.433	11.0	10° • 25°
SQAM25MA	0.984	25.0	1 - 2	0.444	11.3	15°



Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length	
	in	mm	in	mm		in	mm
RC.5X1B	0.500	12.7	1.000	25.4	.049-.065" (18-16ga)	0.430	10.9
RC.5X1.5C	0.500	12.7	1.500	38.1	.035-.083" (20-14ga)	0.500	12.7
RC.625X1.37C	0.625	15.9	1.375	34.9	.035-.083" (20-14ga)	0.430	10.9
RC.75X1.5C	0.750	19.1	1.500	38.1	.035-.083" (20-14ga)	0.430	10.9
RC1X1.25C	1.000	25.4	1.250	31.8	.035-.083" (20-14ga)	0.500	12.7
RC1X1.5C	1.000	25.4	1.500	38.1	.035-.083" (20-14ga)	0.500	12.7
RC1X1.5D	1.000	25.4	1.500	38.1	.083-.134" (14-10ga)	0.500	12.7
RC1X2C	1.000	25.4	2.000	50.8	.035-.083" (20-14ga)	0.500	12.7
RC1X2D	1.000	25.4	2.000	50.8	.083-.134" (14-10ga)	0.500	12.7
RC1X2.5C	1.000	25.4	2.500	63.5	.035-.083" (20-14ga)	0.450	11.4
RC1X3C	1.000	25.4	3.000	76.2	.035-.083" (20-14ga)	0.500	12.7
RC1X3D	1.000	25.4	3.000	76.2	.083-.134" (14-10ga)	0.520	13.2
RC1.5X2D	1.500	38.1	2.000	50.8	.083-.134" (14-10ga)	0.500	12.7
RC1.5X2.5E	1.500	38.1	2.500	63.5	.065-.134" (16-10ga)	0.530	13.5
RC1.5X2.5Q	1.500	38.1	2.500	63.5	.109-.165" (12-8ga)	0.520	13.2
RC1.5X3D	1.500	38.1	3.000	76.2	.083-.134" (14-10ga)	0.600	15.2
RC1.5X3.5D	1.500	38.1	3.500	88.9	.083-.134" (14-10ga)	0.500	12.7
RC2X2.5D	2.000	50.8	2.500	63.5	.083-.134" (14-10ga)	0.520	13.2
RC2X3C	2.000	50.8	3.000	76.2	.035-.083" (20-14ga)	0.500	12.7
RC2X3D	2.000	50.8	3.000	76.2	.083-.134" (14-10ga)	0.520	13.2
RC2X3V	2.000	50.8	3.000	76.2	.165-.203" (8-6ga)	0.520	13.2
RC2X4C	2.000	50.8	4.000	101.6	.035-.083" (20-14ga)	0.500	12.7
RC2X4D	2.000	50.8	4.000	101.6	.083-.134" (14-10ga)	0.500	12.7
RC2X5D	2.000	50.8	5.000	127.0	.083-.134" (14-10ga)	1.000	25.4
RC2X5F	2.000	50.8	5.000	127.0	.165" (8ga)	1.000	25.4
RC2X6V	2.000	50.8	6.000	152.4	.165-.203" (8-6ga)	1.000	25.4
RC3X4V	3.000	76.2	4.000	101.6	.165-.203" (8-6ga)	0.980	24.9
RC4X6V	4.000	101.6	6.000	152.4	.165-.203" (8-6ga)	1.000	25.4




MOCAP

Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 

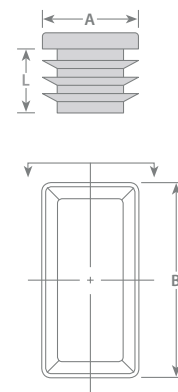

Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length	
	in	mm	in	mm	mm	in	mm
RC2010MB	0.394	10.0	0.787	20.0	1.5 - 2	0.433	11.0
RC2510MB	0.394	10.0	0.984	25.0	1.5 - 2	0.433	11.0
RC3010MB	0.394	10.0	1.181	30.0	1.5 - 2	0.433	11.0
RC4010MB	0.394	10.0	1.575	40.0	1.5 - 2	0.551	14.0
RC2512MB	0.472	12.0	0.984	25.0	1.5 - 2	0.433	11.0
RC2015MB	0.591	15.0	0.787	20.0	1.5 - 2	0.433	11.0
RC2515MB	0.591	15.0	0.984	25.0	1.5 - 2	0.433	11.0
RC3015MB	0.591	15.0	1.181	30.0	1.5 - 2	0.433	11.0
RC4015MB	0.591	15.0	1.575	40.0	1.5 - 2	0.551	14.0
RC4515MB	0.591	15.0	1.772	45.0	1.5 - 2	0.551	14.0
RC2520MB	0.787	20.0	0.984	25.0	1.5 - 2	0.433	11.0
RC3020MB	0.787	20.0	1.181	30.0	1.5 - 2	0.433	11.0
RC3020MC	0.787	20.0	1.181	30.0	3	0.433	11.0
RC3520MB	0.787	20.0	1.378	35.0	1.5 - 2	0.551	14.0
RC4020MB	0.787	20.0	1.575	40.0	1.5 - 2	0.551	14.0
RC4020MC	0.787	20.0	1.575	40.0	3	0.551	14.0
RC4520MB	0.787	20.0	1.772	45.0	1.5 - 2	0.551	14.0
RC5020MB	0.787	20.0	1.969	50.0	1.5 - 2	0.551	14.0
RC6020MB	0.787	20.0	2.362	60.0	1.5 - 2	0.551	14.0
RC8020MB	0.787	20.0	3.150	80.0	1.5 - 2	0.669	17.0
RC10020MB	0.787	20.0	3.937	100.0	1.5 - 2	0.669	17.0
RC3025MB	0.984	25.0	1.181	30.0	1.5 - 2	0.551	14.0
RC3525MB	0.984	25.0	1.378	35.0	1.5 - 2	0.551	14.0
RC4025MB	0.984	25.0	1.575	40.0	1.5 - 2	0.551	14.0
RC4525MB	0.984	25.0	1.772	45.0	1.5 - 2	0.551	14.0
RC5025MB	0.984	25.0	1.969	50.0	1.5 - 2	0.551	14.0
RC10025MB	0.984	25.0	3.937	100.0	1.5 - 2	0.669	17.0
RC15025MB	0.984	25.0	5.906	150.0	1.5 - 2	0.669	17.0
RC3530MB	1.181	30.0	1.378	35.0	1.5 - 2	0.551	14.0
RC4030MB	1.181	30.0	1.575	40.0	1.5 - 2	0.551	14.0
RC4030MC	1.181	30.0	1.575	40.0	3	0.551	14.0
RC5030MB	1.181	30.0	1.969	50.0	1.5 - 2	0.551	14.0
RC5030MC	1.181	30.0	1.969	50.0	3	0.551	14.0
RC6030MB	1.181	30.0	2.362	60.0	1.5 - 2	0.551	14.0
RC6030MC	1.181	30.0	2.362	60.0	3	0.551	14.0
RC7030MB	1.181	30.0	2.756	70.0	1.5 - 2	0.669	17.0
RC8030MB	1.181	30.0	3.150	80.0	1.5 - 2	0.669	17.0



Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Heavy End Walls for Durability & Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 





Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length	
	in	mm	in	mm		in	mm
RC10030MB	1.181	30.0	3.937	100.0	1.5 - 2	0.669	17.0
RC5034MB	1.339	34.0	1.969	50.0	1.5 - 2	0.551	14.0
RC5535MB	1.378	35.0	2.165	55.0	1.5 - 2	0.551	14.0
RC4838MB	1.496	38.0	1.890	48.0	1.5 - 2	0.551	14.0
RC5040MB	1.575	40.0	1.969	50.0	1.5 - 2	0.551	14.0
RC6040MB	1.575	40.0	2.362	60.0	1.5 - 2	0.551	14.0
RC6040MC	1.575	40.0	2.362	60.0	3	0.551	14.0
RC6040MD	1.575	40.0	2.362	60.0	4	0.551	14.0
RC6040ME	1.575	40.0	2.362	60.0	5	0.551	14.0
RC7040MB	1.575	40.0	2.756	70.0	1.5 - 2	0.669	17.0
RC7040MD	1.575	40.0	2.756	70.0	4	0.669	17.0
RC8040MB	1.575	40.0	3.150	80.0	1.5 - 2	0.669	17.0
RC8040MD	1.575	40.0	3.150	80.0	4	0.669	17.0
RC8040ME	1.575	40.0	3.150	80.0	5	0.669	17.0
RC10040MB	1.575	40.0	3.937	100.0	1.5 - 2	0.669	17.0
RC10040MC	1.575	40.0	3.937	100.0	3	0.669	17.0
RC12040MC	1.575	40.0	4.724	120.0	3	0.669	17.0
RC7050MB	1.969	50.0	2.756	70.0	1.5 - 2	0.669	17.0
RC7050MC	1.969	50.0	2.756	70.0	3	0.669	17.0
RC8050MB	1.969	50.0	3.150	80.0	1.5 - 2	0.669	17.0
RC8050MD	1.969	50.0	3.150	80.0	4	0.669	17.0
RC10050MC	1.969	50.0	3.937	100.0	3	0.669	17.0
RC10050MD	1.969	50.0	3.937	100.0	4	0.669	17.0
RC10050ME	1.969	50.0	3.937	100.0	5	0.669	17.0
RC12050MB	1.969	50.0	4.724	120.0	1.5 - 2	0.669	17.0
RC14050MB	1.969	50.0	5.512	140.0	1.5 - 2	0.669	17.0
RC14050MG	1.969	50.0	5.512	140.0	3 - 4	0.669	17.0
RC14050MH	1.969	50.0	5.512	140.0	4 - 5	0.669	17.0
RC15050MB	1.969	50.0	5.906	150.0	1.5 - 2	0.669	17.0
RC15050MG	1.969	50.0	5.906	150.0	3 - 4	0.669	17.0
RC15050MH	1.969	50.0	5.906	150.0	4 - 5	0.669	17.0
RC8060MC	2.362	60.0	3.150	80.0	3	0.669	17.0
RC8060ME	2.362	60.0	3.150	80.0	5	0.669	17.0
RC12060MC	2.362	60.0	4.724	120.0	3	0.669	17.0
RC12060MD	2.362	60.0	4.724	120.0	4	0.669	17.0
RC12060ME	2.362	60.0	4.724	120.0	5	0.669	17.0
RC12080MB	3.150	80.0	4.724	120.0	1.5 - 2	0.669	17.0
RC14080MD	3.150	80.0	5.512	140.0	4	0.669	17.0
RC150100MH	3.937	100.0	5.906	150.0	4 - 5	0.669	17.0



Friction Fit Caps & Plugs




- Multiple Ribs for a Secure Fit
- Provides an Enhanced Aesthetic Appearance
- Heavy End Walls for Durability and Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length	
	in	mm	in	mm		in	mm
RCPS.75X1.5C	0.750	19.1	1.500	38.1	.035-.083" (20-14ga)	0.430	10.9
RCPS1X2C	1.000	25.0	2.000	50.8	.035-.083" (20-14ga)	0.500	12.7
RCPS1X2D	1.000	25.4	2.000	50.8	.083-.134" (14-10ga)	0.500	12.7



Friction Fit Caps & Plugs




- 



Friction Fit Caps & Plugs



- Multiple Ribs for a Secure Fit
- Ideal for Applications With Fixed Leg Angles
- Heavy End Walls for Durability and Abrasion Resistance
- Stocked Material: Black Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) Small External Tube Size		(B) Large External Tube Size		Tube Wall	(L) Length		Angle
	in	mm	in	mm		mm	in	
RCAM2015MB	0.591	15.0	0.787	20.0	1.5 - 2	0.433	11.0	10°
RCAM2515MB	0.591	15.0	0.984	25.0	1.5 - 2	0.433	11.0	10°
RCAM3015MB	0.591	15.0	1.181	30.0	1.5 - 2	0.433	11.0	10°
RCAM3020MB	0.787	20.0	1.181	30.0	1.5 - 2	0.433	11.0	15°
RCAM4020MB	0.787	20.0	1.575	40.0	1.5 - 2	0.551	14.0	20°



Tapered Caps & Plugs



- Additional Colors:




Free Samples

Tapered Caps & Plugs



- Tapered Design Fits Multiple Diameters
- Dual Function Closure Can Be Used as a Cap or Plug
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



T-Series Tapered Plug Caps Can Be Used as a Cap or a Plug



Cap



Plug




(continued) Tapered Plug Caps - **T Series**
Tapered Caps & Plugs

Part #	(A) Small O.D.		(B) Large O.D.		(C) Small I.D.		(D) Large I.D.		(E) Length		(F) Flange OD	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
T1.09/1.21	1.094	27.8	1.215	30.9	1.031	26.2	1.152	29.3	0.750	19.1	1.410	35.8
T1.17/1.28	1.175	29.9	1.284	32.6	1.113	28.3	1.222	31.0	0.630	16.0	1.440	36.6
T1.22/1.35	1.224	31.1	1.355	34.4	1.161	29.5	1.292	32.8	0.750	19.1	1.500	38.1
T1.23/1.36	1.235	31.4	1.360	34.5	1.173	29.8	1.298	33.0	0.810	20.6	1.500	38.1
T1.31/1.46	1.312	33.3	1.465	37.2	1.249	31.7	1.402	35.6	0.880	22.3	1.630	41.4
T1.44/1.60	1.447	36.8	1.600	40.6	1.384	35.2	1.537	39.0	0.880	22.3	1.750	44.5
T1.56/1.68	1.560	39.6	1.682	42.7	1.498	38.0	1.620	41.2	0.750	19.1	1.880	47.7
T1.63/1.75	1.630	41.4	1.750	44.5	1.568	39.8	1.688	42.9	0.750	19.1	1.940	49.3
T1.69/1.81	1.693	43.0	1.811	46.0	1.620	41.1	1.736	44.1	0.750	19.1	2.012	51.1
T1.75/1.88	1.750	44.5	1.880	47.7	1.688	42.9	1.818	46.2	0.750	19.1	2.000	50.8
T1.78/1.95	1.780	45.2	1.950	49.5	1.718	43.6	1.888	48.0	1.000	25.4	2.130	54.1
T1.84/2.00	1.844	46.8	2.000	50.8	1.781	45.2	1.938	49.2	1.000	25.4	2.130	54.1
T1.90/2.07	1.900	48.3	2.076	52.7	1.837	46.7	2.013	51.1	1.000	25.4	2.250	57.2
T1.97/2.13	1.975	50.2	2.132	54.2	1.913	48.6	2.070	52.6	1.000	25.4	2.250	57.2
T2.01/2.14	2.016	51.2	2.146	54.5	1.953	49.6	2.087	53.0	0.752	19.1	2.311	58.7
T2.06/2.24	2.067	52.5	2.244	57.0	2.004	50.9	2.181	55.4	1.000	25.4	2.441	62.0
T2.125/2.406	2.125	54.0	2.406	61.1	2.063	52.4	2.343	59.5	1.000	25.4	2.532	64.3
T2.13/2.31	2.130	54.1	2.311	58.7	2.075	52.7	2.252	57.2	1.000	25.4	2.559	65.0
T2.230/2.260	2.230	56.6	2.260	57.4	2.169	55.1	2.197	55.8	0.500	12.7	2.500	63.5
T2.280/2.400	2.280	57.9	2.400	61.0	2.216	56.3	2.336	59.3	0.720	18.3	2.800	71.1
T2.298/2.464	2.298	58.4	2.464	62.6	2.236	56.8	2.402	61.0	1.000	25.4	2.630	66.8
T2.307/2.650	2.307	58.6	2.650	67.3	2.244	57.0	2.587	65.7	1.252	31.8	2.780	70.6
T2.395/2.602	2.395	60.8	2.602	66.1	2.335	59.3	2.539	64.5	1.032	26.2	2.811	71.4
T2.457/2.750	2.457	62.4	2.750	69.9	2.394	60.8	2.689	68.3	1.000	25.4	2.882	73.2
T2.480/2.644	2.480	63.0	2.644	67.2	2.417	61.4	2.583	65.6	0.630	16.0	2.780	70.6
T2.555/2.690	2.555	64.9	2.690	68.3	2.492	63.3	2.630	66.8	0.630	16.0	2.882	73.2
T2.641/2.790	2.641	67.1	2.790	70.9	2.579	65.5	2.728	69.3	0.752	19.1	2.941	74.7
T2.760/2.990	2.760	70.1	2.990	75.9	2.685	68.2	2.949	74.9	1.000	25.4	3.130	79.5
T2.849/2.980	2.849	72.4	2.980	75.7	2.787	70.8	2.917	74.1	0.752	19.1	3.252	82.6
T2.91/3.03	2.910	73.9	3.030	77.0	2.844	72.2	2.979	75.7	1.000	25.4	3.268	83.0
T2.975/3.103	2.975	75.6	3.103	78.8	2.913	74.0	3.039	77.2	0.752	19.1	3.339	84.8
T2.982/3.245	2.980	75.7	3.245	82.4	2.913	74.0	3.177	80.7	1.000	25.4	3.382	85.9
T3.090/3.370	3.090	78.5	3.370	85.6	3.020	76.7	3.299	83.8	1.000	25.4	3.500	88.9
T3.270/3.562	3.272	83.1	3.562	90.5	3.201	81.3	3.492	88.7	1.130	28.7	3.689	93.7
T3.325/3.457	3.325	84.5	3.457	87.8	3.244	82.4	3.378	85.8	0.752	19.1	3.630	92.2
T3.470/3.600	3.470	88.1	3.600	91.4	3.409	86.6	3.539	89.9	0.752	19.1	3.882	98.6
T3.55/3.73	3.551	90.2	3.730	94.7	3.480	88.4	3.661	93.0	1.000	25.4	4.000	101.6
T3.68/3.80	3.681	93.5	3.800	96.5	3.610	91.7	3.728	94.7	0.752	19.1	4.000	101.6
T3.79/3.92	3.791	96.3	3.921	99.6	3.709	94.2	3.839	97.5	0.752	19.1	4.122	104.7
T3.87/4.00	3.870	98.3	4.007	101.8	3.798	96.5	3.938	100.0	0.750	19.1	4.319	109.7
T3.93/4.07	3.929	99.8	4.071	103.4	3.858	98.0	4.000	101.6	0.752	19.1	4.382	111.3
T4.02/4.14	4.020	102.1	4.142	105.2	3.941	100.1	4.071	103.4	0.752	19.1	4.532	115.1
T4.09/4.32	4.091	103.9	4.320	109.7	4.012	101.9	4.24	107.7	1.252	31.8	4.622	117.4
T4.27/4.43	4.272	108.5	4.430	112.5	4.181	106.2	4.343	110.3	0.882	22.4	4.882	124.0
T4.37/4.62	4.370	111.0	4.622	117.4	4.291	109.0	4.539	115.3	1.000	25.4	5.000	127.0

Tapered Caps & Plugs



- Tapered Design Fits Multiple Diameters
- Dual Function Closure Can Be Used as a Cap or Plug
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	(A) Small O.D.		(B) Large O.D.		(C) Small I.D.		(D) Large I.D.		(E) Length		(F) Flange O.D.	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
T4.64/4.85	4.642	117.9	4.850	123.2	4.571	116.1	4.780	121.4	0.882	22.4	5.252	133.4
T4.79/4.97	4.791	121.7	4.970	126.2	4.709	119.6	4.890	124.2	1.000	25.4	5.382	136.7
T4.91/5.09	4.909	124.7	5.091	129.3	4.831	122.7	5.012	127.3	1.000	25.4	5.500	139.7
T4.99/5.20	4.992	126.8	5.201	132.1	4.921	125.0	5.098	129.5	1.000	25.4	5.630	143.0
T5.18/5.36	5.181	131.6	5.360	136.1	5.118	130.0	5.291	134.4	1.000	25.4	5.882	149.4
T5.33/5.49	5.331	135.4	5.492	139.5	5.209	132.3	5.370	136.4	0.882	22.4	5.882	149.4
T5.47/5.62	5.472	139.0	5.622	142.8	5.390	136.9	5.539	140.7	1.000	25.4	6.130	155.7
T5.57/5.75	5.571	141.5	5.752	146.1	5.492	139.5	5.669	144.0	1.000	25.4	6.189	157.2
T5.70/5.87	5.701	144.8	5.870	149.1	5.610	142.5	5.791	147.1	0.980	24.9	6.252	158.8
T5.77/6.07	5.779	146.8	6.070	154.2	5.680	144.3	5.956	151.3	1.000	25.4	6.530	165.9
T5.83/5.98	5.827	148.0	5.984	152.0	5.754	146.2	5.908	150.1	1.000	25.4	6.464	164.2
T6.01/6.18	6.012	152.7	6.181	157.0	5.921	150.4	6.098	154.9	1.000	25.4	6.622	168.2
T6.18/6.35	6.181	157.0	6.350	161.3	6.091	154.7	6.260	159.0	1.000	25.4	6.752	171.5
T6.40/6.56	6.402	162.6	6.560	166.6	6.331	160.8	6.492	164.9	0.870	22.1	6.941	176.3
T6.61/6.71	6.610	167.9	6.710	170.4	6.530	165.9	6.630	168.4	1.500	38.1	7.190	182.6
T6.67/6.77	6.670	169.4	6.774	172.1	6.562	166.7	6.668	169.4	1.500	38.1	7.190	182.6
T6.77/7.03	6.770	171.9	7.030	178.6	6.681	169.7	6.950	176.5	1.456	37.0	7.670	194.8
T6.88/7.03	6.880	174.8	7.030	178.6	6.800	172.7	6.950	176.5	0.500	12.7	7.670	194.8
T6.94/7.36	6.943	176.4	7.360	186.9	6.851	174.0	7.264	184.5	1.460	37.1	7.720	196.1
T7.05/7.12	7.050	179.1	7.120	180.8	6.970	177.0	7.060	179.3	1.000	25.4	7.630	193.8
T7.34/7.65	7.340	186.4	7.650	194.3	7.260	184.4	7.560	192.0	1.000	25.4	7.940	201.7
T7.66/7.84	7.660	194.6	7.840	199.1	7.580	192.5	7.760	197.1	1.000	25.4	8.120	206.2
T7.72/7.99	7.717	196.0	7.992	203.0	7.640	194.1	7.912	201.0	1.000	25.4	8.252	209.6
T7.97/8.14	7.970	202.4	8.140	206.8	7.880	200.2	8.050	204.5	1.000	25.4	8.380	212.9
T8.15/8.35	8.150	207.0	8.350	212.1	8.050	204.5	8.250	209.6	1.380	35.1	8.750	222.3
T8.40/8.60	8.400	213.4	8.600	218.4	8.300	210.8	8.50	215.9	1.380	35.1	9.000	228.6
T8.67/8.73	8.670	220.2	8.730	221.7	8.55	217.2	8.600	218.4	1.500	38.1	9.130	231.9
T8.86/9.02	8.860	225.0	9.020	229.1	8.710	221.2	8.870	225.3	1.000	25.4	9.530	242.1
T9.06/9.36	9.060	230.1	9.364	237.8	8.890	225.8	9.240	234.7	1.750	44.5	9.860	250.4
T9.30/9.60	9.300	236.2	9.600	243.8	9.112	231.4	9.370	238.0	1.750	44.5	10.100	256.5
T9.97/10.22	9.970	253.2	10.220	259.6	9.820	249.4	10.080	256.0	0.970	24.6	10.560	268.2
T10.79/11.10	10.790	274.1	11.100	281.9	10.62	269.7	10.910	277.1	1.750	44.5	11.600	294.6
T11.11/11.46	11.110	282.2	11.460	291.1	10.940	277.9	11.310	287.3	2.000	50.8	11.960	303.8
T11.75/12.10	11.750	298.5	12.100	307.3	11.482	291.6	11.790	299.5	2.000	50.8	12.600	320.0
T11.93/12.56	11.930	303.0	12.560	319.0	11.650	295.9	12.216	310.3	2.000	50.8	13.060	331.7
T12.05/12.35	12.050	306.1	12.350	313.7	11.782	299.3	12.062	306.4	2.000	50.8	12.850	326.4
T12.79/13.14	12.790	324.9	13.140	333.8	12.658	321.5	12.923	328.2	2.000	50.8	13.640	346.5
T13.25/13.60	13.250	336.6	13.600	345.4	12.960	329.2	13.308	338.0	2.000	50.8	14.100	358.1




Tapered Caps & Plugs



- Additional Colors: 



Tapered Caps & Plugs



Tapered Caps & Plugs



- | Part # | (A) Small O.D. | | (B) Large O.D. | | (C) Small I.D. | | (D) Large I.D. | | (E) Length | | (F) Flange O.D. | |
|--------------|----------------|-------|----------------|-------|----------------|-------|----------------|-------|------------|------|-----------------|-------|
| | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| TWF1.23/1.38 | 1.237 | 31.4 | 1.382 | 35.1 | 1.167 | 29.6 | 1.288 | 32.7 | 0.660 | 16.8 | 1.680 | 42.7 |
| TWF1.31/1.46 | 1.312 | 33.3 | 1.465 | 37.2 | 1.249 | 31.7 | 1.364 | 34.6 | 0.810 | 20.6 | 1.840 | 46.7 |
| TWF1.41/1.51 | 1.416 | 36.0 | 1.516 | 38.5 | 1.354 | 34.4 | 1.462 | 37.1 | 0.690 | 17.5 | 1.750 | 44.4 |
| TWF1.45/1.60 | 1.452 | 36.9 | 1.603 | 40.7 | 1.377 | 35.0 | 1.503 | 38.2 | 0.630 | 16.0 | 1.940 | 49.3 |
| TWF1.58/1.71 | 1.580 | 40.1 | 1.714 | 43.5 | 1.515 | 38.5 | 1.649 | 41.9 | 0.630 | 16.0 | 2.060 | 52.3 |
| TWF1.73/1.88 | 1.730 | 43.9 | 1.887 | 47.9 | 1.650 | 41.9 | 1.780 | 45.2 | 0.630 | 16.0 | 2.310 | 58.7 |
| TWF1.81/1.97 | 1.810 | 46.0 | 1.975 | 50.2 | 1.730 | 43.9 | 1.895 | 48.1 | 0.630 | 16.0 | 2.380 | 60.4 |
| TWF1.85/2.02 | 1.850 | 47.0 | 2.020 | 51.3 | 1.788 | 45.4 | 1.917 | 48.7 | 1.000 | 25.4 | 2.440 | 62.0 |
| TWF1.92/2.05 | 1.927 | 49.0 | 2.058 | 52.3 | 1.857 | 47.2 | 1.988 | 50.5 | 0.630 | 16.0 | 2.380 | 60.4 |
| TWF2.07/2.22 | 2.067 | 52.5 | 2.243 | 57.0 | 2.005 | 50.9 | 2.135 | 54.2 | 1.000 | 25.4 | 2.690 | 68.3 |
| TWF2.12/2.40 | 2.126 | 54.0 | 2.406 | 61.1 | 2.063 | 52.4 | 2.343 | 59.5 | 1.000 | 25.4 | 2.689 | 68.3 |
| TWF2.13/2.31 | 2.138 | 54.3 | 2.311 | 58.7 | 2.075 | 52.7 | 2.252 | 57.2 | 1.000 | 25.4 | 2.752 | 69.9 |
| TWF2.29/2.46 | 2.299 | 58.4 | 2.465 | 62.6 | 2.236 | 56.8 | 2.370 | 60.2 | 1.000 | 25.4 | 2.882 | 73.2 |
| TWF2.30/2.62 | 2.307 | 58.6 | 2.622 | 66.6 | 2.244 | 57.0 | 2.559 | 65.0 | 1.250 | 31.8 | 3.059 | 77.7 |
| TWF2.39/2.60 | 2.394 | 60.8 | 2.602 | 66.1 | 2.335 | 59.3 | 2.500 | 63.5 | 1.130 | 28.7 | 3.000 | 76.2 |
| TWF2.47/2.72 | 2.476 | 62.9 | 2.724 | 69.2 | 2.406 | 61.1 | 2.650 | 67.3 | 0.910 | 23.1 | 3.161 | 80.3 |
| TWF2.63/2.75 | 2.638 | 67.0 | 2.760 | 70.1 | 2.567 | 65.2 | 2.661 | 67.6 | 0.690 | 17.5 | 3.220 | 81.8 |
| TWF2.68/2.95 | 2.685 | 68.2 | 2.957 | 75.1 | 2.622 | 66.6 | 2.917 | 74.1 | 1.000 | 25.4 | 3.441 | 87.4 |
| TWF2.99/3.25 | 2.994 | 76.0 | 3.252 | 82.6 | 2.921 | 74.2 | 3.150 | 80.0 | 1.000 | 25.4 | 3.752 | 95.3 |
| TWF3.00/3.12 | 3.002 | 76.3 | 3.129 | 79.5 | 2.925 | 74.3 | 3.080 | 78.2 | 0.750 | 19.1 | 3.590 | 91.2 |
| TWF3.09/3.37 | 3.091 | 78.5 | 3.370 | 85.6 | 3.020 | 76.7 | 3.323 | 84.4 | 1.000 | 25.4 | 3.811 | 96.8 |
| TWF3.22/3.56 | 3.224 | 81.9 | 3.563 | 90.5 | 3.154 | 80.1 | 3.516 | 89.3 | 1.120 | 28.5 | 4.000 | 101.6 |
| TWF3.32/3.45 | 3.327 | 84.5 | 3.457 | 87.8 | 3.244 | 82.4 | 3.382 | 85.9 | 0.750 | 19.1 | 3.882 | 98.6 |
| TWF3.79/3.92 | 3.791 | 96.3 | 3.921 | 99.6 | 3.709 | 94.2 | 3.839 | 97.5 | 0.750 | 19.1 | 4.339 | 110.2 |
| TWF4.01/4.13 | 4.012 | 101.9 | 4.134 | 105.0 | 3.937 | 100.0 | 4.063 | 103.2 | 0.750 | 19.1 | 4.622 | 117.4 |
| TWF4.64/4.81 | 4.642 | 117.9 | 4.815 | 122.3 | 4.571 | 116.1 | 4.685 | 119.0 | 0.880 | 22.3 | 5.169 | 131.3 |
| TWF6.61/6.68 | 6.610 | 167.9 | 6.685 | 169.8 | 6.532 | 165.9 | 6.630 | 168.4 | 1.430 | 36.3 | 7.122 | 180.9 |

Cap




re Plug

XW Series - Thick Extra-Wide Flange Tapered Plug Caps


Tapered Caps & Plugs



- Featuring a Wider Flange than the TWF Series for Added Protection of External Surfaces
- Over-Sized Flanges and High-Visibility for Pre-Assembly Operation Removal
- Stocked Material: Yellow Low-Density Polyethylene (LDPE)
- Additional Colors:



Part #	(A) Small O.D.		(B) Large O.D.		(C) Small I.D.		(D) Large I.D.		(E) Length		(F) Flange O.D.	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
XW.628/.725	0.628	16.0	0.725	18.4	0.566	14.4	0.643	16.3	0.440	11.2	2.230	56.6
XW.755/.870	0.755	19.2	0.870	22.1	0.686	17.4	0.788	20.0	0.500	12.7	2.370	60.2
XW.867/.975	0.867	22.0	0.975	24.8	0.798	20.3	0.889	22.6	0.560	14.2	2.480	63.0
XW.984/1.10	0.984	25.0	1.105	28.1	0.909	23.1	1.014	25.8	0.660	16.8	2.610	66.3
XW1.11/1.25	1.110	28.2	1.253	31.8	1.046	26.6	1.171	29.7	0.660	16.8	2.730	69.3
XW1.23/1.38	1.237	31.4	1.382	35.1	1.171	29.7	1.291	32.8	0.660	16.8	2.880	73.2
XW1.31/1.46	1.312	33.3	1.465	37.2	1.243	31.6	1.375	34.9	0.660	16.8	2.970	75.4
XW1.45/1.60	1.452	36.9	1.603	40.7	1.387	35.2	1.519	38.6	0.660	16.8	3.100	78.7
XW1.58/1.71	1.580	40.1	1.714	43.5	1.513	38.4	1.624	41.2	0.660	16.8	3.210	81.5
XW1.73/1.90	1.735	44.1	1.900	48.3	1.673	42.5	1.838	46.7	0.720	18.3	4.000	101.6
XW1.92/2.05	1.927	48.9	2.058	52.3	1.867	47.4	1.973	50.1	0.660	16.8	3.560	90.4
XW2.12/2.29	2.120	53.8	2.290	58.2	2.036	51.7	2.210	56.1	1.000	25.4	3.790	96.3
XW2.39/2.60	2.395	60.8	2.602	66.1	2.322	59.0	2.530	64.3	1.130	28.7	4.100	104.1
XW2.63/2.79	2.638	67.0	2.795	71.0	2.547	64.7	2.670	67.8	1.130	28.7	4.260	108.2

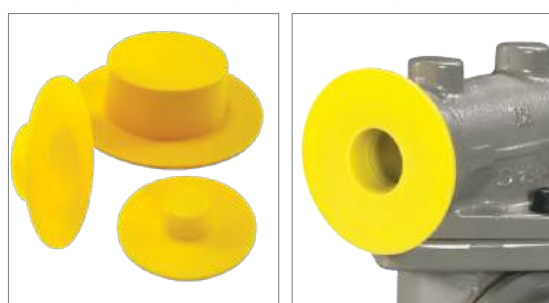

Tapered Caps & Plugs



- Additional Colors:

Tapered Caps & Plugs



- [illegible]

Part #	(A) Small O.D.		(B) Large O.D.		(C) Flange O.D.		(D) Length		(E) Tab Height		(F) Tab Width	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
CP.11/.18	0.116	2.9	0.182	4.6	0.310	7.9	0.380	9.6	0.380	9.6	0.120	3.1
CP.14/.20	0.145	3.7	0.205	5.2	0.410	10.4	0.380	9.6	0.380	9.6	0.150	3.8
CP.23/.30	0.236	6.0	0.302	7.7	0.440	11.2	0.380	9.6	0.380	9.6	0.240	6.1
CP.29/.36	0.299	7.6	0.365	9.3	0.500	12.7	0.380	9.6	0.380	9.6	0.302	7.7
CP.33/.39	0.330	8.4	0.396	10.1	0.530	13.5	0.380	9.6	0.380	9.6	0.252	6.4
CP.36/.42	0.361	9.2	0.427	10.9	0.560	14.2	0.380	9.6	0.380	9.6	0.256	6.5
CP.41/.48	0.419	10.6	0.485	12.3	0.630	16.0	0.380	9.6	0.380	9.6	0.315	8.0
CP.47/.54	0.471	12.0	0.547	13.9	0.690	17.5	0.440	11.2	0.380	9.6	0.374	9.5
CP.53/.60	0.532	13.5	0.608	15.4	0.750	19.1	0.440	11.2	0.310	7.9	0.394	10.0
CP.55/.63	0.550	14.0	0.631	16.0	0.750	19.1	0.470	11.9	0.250	6.4	0.394	10.0
CP.64/.72	0.640	16.3	0.727	18.5	0.880	22.3	0.500	12.7	0.250	6.4	0.472	12.0
CP.69/.78	0.690	17.5	0.788	20.0	0.940	23.9	0.560	14.2	0.250	6.4	0.512	13.0
CP.75/.84	0.750	19.1	0.848	21.5	1.000	25.4	0.560	14.2	0.250	6.4	0.512	13.0
CP.80/.91	0.802	20.4	0.911	23.1	1.060	26.9	0.630	16.0	0.250	6.4	0.512	13.0
CP.91/1.04	0.915	23.2	1.040	26.4	1.160	29.5	0.690	17.5	0.250	6.4	0.512	13.0
CP1.07/1.19	1.069	27.0	1.190	30.2	1.409	35.8	0.690	17.5	0.250	6.4	1.000	25.4
CP1.15/1.30	1.150	29.2	1.300	33.0	1.430	36.3	0.750	19.1	0.250	6.4	0.827	21.0
CP1.17/1.28	1.179	29.9	1.286	32.7	1.440	36.6	0.750	19.1	0.250	6.4	0.826	21.0
CP1.22/1.35	1.224	31.1	1.355	34.4	1.500	38.1	0.750	19.1	0.250	6.4	0.826	21.0





- | Part # | (A) Small O.D. | | (B) Large O.D. | | (C) Flange O.D. | | (D) Length | | (E) Tab Height | | (F) Tab Width | |
|-------------|----------------|------|----------------|------|-----------------|------|------------|------|----------------|-----|---------------|------|
| | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| CP1.23/1.36 | 1.235 | 31.4 | 1.360 | 34.5 | 1.530 | 38.9 | 0.750 | 19.1 | 0.250 | 6.4 | 0.826 | 21.0 |
| CP1.29/1.35 | 1.292 | 32.8 | 1.356 | 34.4 | 1.500 | 38.1 | 0.780 | 19.8 | 0.250 | 6.4 | 0.826 | 21.0 |
| CP1.31/1.46 | 1.312 | 33.3 | 1.465 | 37.2 | 1.620 | 41.1 | 0.750 | 19.1 | 0.250 | 6.4 | 0.826 | 21.0 |
| CP1.32/1.41 | 1.326 | 33.7 | 1.419 | 36.0 | 1.650 | 41.9 | 0.550 | 14.0 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP1.34/1.52 | 1.344 | 34.1 | 1.527 | 38.8 | 1.750 | 44.5 | 0.880 | 22.4 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP1.36/1.42 | 1.360 | 34.5 | 1.420 | 36.1 | 1.720 | 43.7 | 0.530 | 13.5 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP1.45/1.60 | 1.451 | 36.9 | 1.601 | 40.7 | 1.750 | 44.5 | 0.750 | 19.1 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP1.56/1.68 | 1.563 | 39.7 | 1.686 | 42.8 | 1.910 | 48.5 | 0.750 | 19.1 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP1.63/1.75 | 1.633 | 41.5 | 1.750 | 44.5 | 1.940 | 49.3 | 0.780 | 19.8 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP1.73/1.78 | 1.735 | 44.1 | 1.784 | 45.3 | 1.940 | 49.3 | 0.500 | 12.7 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP1.76/1.81 | 1.760 | 44.7 | 1.815 | 46.1 | 2.180 | 55.4 | 0.500 | 12.7 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP1.79/1.93 | 1.797 | 45.6 | 1.938 | 49.2 | 2.160 | 54.9 | 1.000 | 25.4 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP1.82/1.83 | 1.820 | 46.2 | 1.835 | 46.6 | 2.030 | 51.6 | 0.500 | 12.7 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP2.06/2.24 | 2.067 | 52.5 | 2.243 | 57.0 | 2.440 | 62.0 | 1.030 | 26.2 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP2.23/2.27 | 2.230 | 56.6 | 2.270 | 57.7 | 2.500 | 63.5 | 0.500 | 12.7 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP2.30/2.46 | 2.300 | 58.4 | 2.464 | 62.6 | 2.660 | 67.6 | 1.000 | 25.4 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP2.42/2.63 | 2.425 | 61.6 | 2.632 | 66.9 | 2.880 | 73.2 | 1.000 | 25.4 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP2.69/2.86 | 2.698 | 68.5 | 2.866 | 72.8 | 2.970 | 75.4 | 0.500 | 12.7 | 0.150 | 3.8 | 1.000 | 25.4 |
| CP2.85/2.98 | 2.850 | 72.4 | 2.982 | 75.7 | 3.280 | 83.3 | 0.750 | 19.1 | 0.250 | 6.4 | 1.000 | 25.4 |
| CP3.32/3.45 | 3.320 | 84.3 | 3.452 | 87.7 | 3.620 | 91.9 | 0.750 | 19.1 | 0.250 | 6.4 | 1.000 | 25.4 |




BGC Series - Threaded Caps for BSP/Gas Fittings

Threaded Caps & Plugs




- Knurled Grip for Easy Application
- Stocked Material: Red Low-Density Polyethylene (LDPE)
- Additional Colors:



Part #	To Fit BSP Thread	(B) Length		Rib Count
		in	mm	
BGC0125	1/8-28	0.378	9.6	4
BGC0250	1/4-19	0.433	11.0	4
BGC0375	3/8-19	0.445	11.3	4
BGC0500	1/2-14	0.531	13.5	6
BGC0625	5/8-14	0.618	15.7	6
BGC0750	3/4-14	0.697	17.7	6
BGC0875	7/8-14	0.768	19.5	6
BGC1000	1-11	0.756	19.2	6
BGC1250	1-1/4-11	0.780	19.8	8
BGC1500	1-1/2-11	0.807	20.5	8
BGC2000	2-11	0.827	21.0	8
BGC2250	2-1/4-11	0.984	25.0	8
BGC2500	2-1/2-11	1.087	27.6	8




Threaded Caps & Plugs

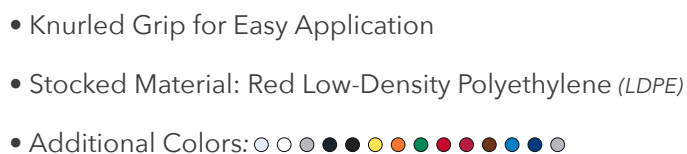

Part #	To Fit METRIC Thread	(B) Length		Rib Count
		in	mm	
CMT0810	M8x1	0.394	10.0	4
CMT1010	M10x1	0.394	10.0	4
CMT1210	M12x1	0.472	12.0	6
CMT1215	M12x1.5	0.472	12.0	6
CMT1415	M14x1.5	0.472	12.0	6
CMT1415L	M14x1.5	0.827	21.0	6
CMT1615	M16x1.5	0.472	12.0	6
CMT1615L	M16x1.5	0.827	21.0	6
CMT1815	M18x1.5	0.551	14.0	6
CMT2015	M20x1.5	0.551	14.0	6
CMT2215	M22x1.5	0.543	13.8	6
CMT2215L	M22x1.5	0.965	24.5	6
CMT2415	M24x1.5	0.551	14.0	6
CMT2515	M25x1.5	0.551	14.0	6
CMT2615	M26x1.5	0.551	14.0	6
CMT2815	M28x1.5	0.488	12.4	6
CMT3020	M30x2	0.492	12.5	8
CMT3620	M36x2	0.630	16.0	8
CMT4220	M42x2	0.630	16.0	8
CMT5220	M52x2	0.630	16.0	8



Threaded Caps & Plugs

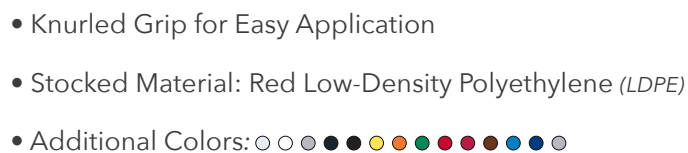

Threaded Caps & Plugs




- Designed with Five Complete Threads Plus an Integrated Sealing Lip for a Tight Fit
- Also Available with a Factory Fit Neoprene O-Ring when a Secure Seal is Required
- Stocked Materials: Red Polypropylene (PP) or Yellow Nylon
- Additional Colors: 


Threaded Caps & Plugs



- Designed with Five Complete Threads Plus an Integrated Sealing Lip for a Tight Fit
- Also Available with a Factory Fit Neoprene O-Ring when a Secure Seal is Required
- Stocked Materials: Red Polypropylene (PP) or Yellow Nylon
- Additional Colors: 




Part #	O-Ring	To Fit METRIC Thread	(A) Flange O.D.		(B) Stem Height		Color
			in	mm	in	mm	
SPM1010	n/a	M10 x 1.0	0.560	14.2	0.390	9.9	RED • YELLOW
SPM1010 NO	included	M10 x 1.0	0.560	14.2	0.390	9.9	RED • YELLOW
SPM1215	n/a	M12 x 1.5	0.680	17.3	0.390	9.9	RED • YELLOW
SPM1215 NO	included	M12 x 1.5	0.680	17.3	0.390	9.9	RED • YELLOW
SPM1415	n/a	M14 x 1.5	0.760	19.3	0.390	9.9	RED • YELLOW
SPM1415 NO	included	M14 x 1.5	0.760	19.3	0.390	9.9	RED • YELLOW
SPM1615	n/a	M16 x 1.5	0.870	22.1	0.390	9.9	RED • YELLOW
SPM1615 NO	included	M16 x 1.5	0.870	22.1	0.390	9.9	RED • YELLOW
SPM1815	n/a	M18 x 1.5	0.940	23.9	0.430	10.9	RED • YELLOW
SPM1815 NO	included	M18 x 1.5	0.940	23.9	0.430	10.9	RED • YELLOW
SPM2015	n/a	M20 x 1.5	1.020	25.9	0.550	14.0	RED • YELLOW
SPM2015 NO	included	M20 x 1.5	1.020	25.9	0.550	14.0	RED • YELLOW
SPM2215	n/a	M22 x 1.5	1.070	27.2	0.550	14.0	RED • YELLOW
SPM2215 NO	included	M22 x 1.5	1.070	27.2	0.550	14.0	RED • YELLOW
SPM2415	n/a	M24 x 1.5	1.240	31.5	0.550	14.0	RED • YELLOW
SPM2415 NO	included	M24 x 1.5	1.240	31.5	0.550	14.0	RED • YELLOW
SPM2615	n/a	M26 x 1.5	1.260	32.0	0.550	14.0	RED • YELLOW
SPM2615 NO	included	M26 x 1.5	1.260	32.0	0.550	14.0	RED • YELLOW
SPM2720	n/a	M27 x 2.0	1.270	32.3	0.550	14.0	RED • YELLOW
SPM2720 NO	included	M27 x 2.0	1.270	32.3	0.550	14.0	RED • YELLOW
SPM3320	n/a	M33 x 2.0	1.590	40.4	0.550	14.0	RED • YELLOW
SPM3320 NO	included	M33 x 2.0	1.590	40.4	0.550	14.0	RED • YELLOW

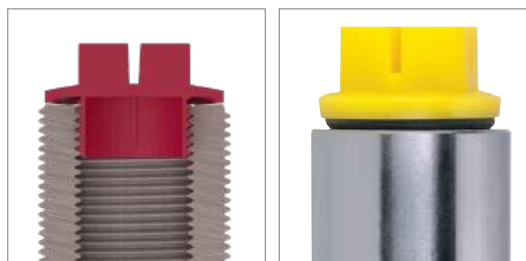

SPB Series - Sealing Plugs for BSP Threads


Threaded Caps & Plugs



- Designed with Five Complete Threads Plus an Integrated Sealing Lip for a Tight Fit
- Also Available with a Factory Fit Neoprene O-Ring when a Secure Seal is Required
- Stocked Materials: Red Polypropylene (PP) or Yellow Nylon
- Additional Colors:




Part #	O-Ring	To Fit BSP Thread	(A) Flange O.D.		(B) Stem Height		Color
			in	mm	in	mm	
SPB0250	n/a	G 1/4	0.760	19.3	0.390	9.9	RED • YELLOW
SPB0250 NO	included	G 1/4	0.760	19.3	0.390	9.9	RED • YELLOW
SPB0375	n/a	G 3/8	0.870	22.1	0.430	10.9	RED • YELLOW
SPB0375 NO	included	G 3/8	0.870	22.1	0.430	10.9	RED • YELLOW
SPB0500	n/a	G 1/2	1.070	27.2	0.510	12.9	RED • YELLOW
SPB0500 NO	included	G 1/2	1.070	27.2	0.510	12.9	RED • YELLOW
SPB0750	n/a	G 3/4	1.270	32.3	0.510	12.9	RED • YELLOW
SPB0750 NO	included	G 3/4	1.270	32.3	0.510	12.9	RED • YELLOW
SPB1000	n/a	G 1	1.570	39.9	0.550	14.0	RED • YELLOW
SPB1000 NO	included	G 1	1.570	39.9	0.550	14.0	RED • YELLOW
SPB1250	n/a	G 1-1/4	1.980	50.3	0.590	15.0	RED • YELLOW
SPB1250 NO	included	G 1-1/4	1.980	50.3	0.590	15.0	RED • YELLOW
SPB1500	n/a	G 1-1/2	2.180	55.4	0.590	15.0	RED • YELLOW
SPB1500 NO	included	G 1-1/2	2.180	55.4	0.590	15.0	RED • YELLOW
SPB2000	n/a	G 2	2.690	68.3	0.590	15.0	RED • YELLOW
SPB2000 NO	included	G 2	2.690	68.3	0.590	15.0	RED • YELLOW

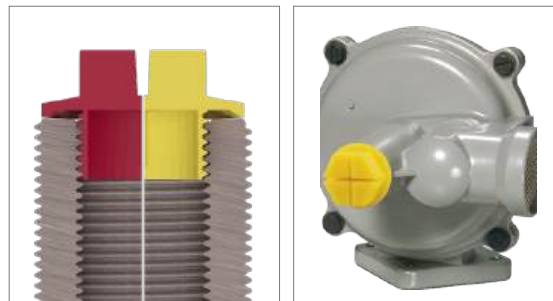

Threaded Caps & Plugs



- Designed for Maximum Flexibility to Fit Many Different Thread Types & Sizes with a Simple Push-In & Turn to Lock-In-Place
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #		To Fit . . .	(B) Length		(C) Bevel Length		(D) Stem Diameter	
			in	mm	in	mm	in	mm
U100	1/8" NPT, 7/16" UNF, 1/8" BSP, M10		0.530	13.5	0.260	6.6	0.434	11.0
U105	1/2" UNF, 1/4" BSP, M11-12		0.560	14.2	0.280	7.1	0.504	12.8
U110	1/4" NPT, 9/16" UNF, 1/4" BSP, M14		0.590	15.0	0.310	7.9	0.568	14.4
U115	3/4" UNF, 3/8" BSP, M16-20		0.670	17.0	0.390	9.9	0.774	19.7
U120	1" UNF, 1/2" - 5/8" BSP, M22-25		0.740	18.8	0.460	11.7	0.976	24.8
U125	3/4" NPT, 1-3/16" UNF, 3/4"-7/8" BSP, M30		0.910	23.1	0.560	14.2	1.216	30.9
U130	1-7/16" UNF, 7/8"-1" BSP, M36		0.980	24.9	0.560	14.2	1.480	37.6



Threaded Caps & Plugs




- Additional Colors:

Threaded Caps & Plugs




- Knurled Grip for Easy On-Off Application & Can be Used to Seal Boss-Type Fittings without Gaskets
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit STD Thread	(B) Length		(C) Flange O.D.		(D) Flange Thickness	
		in	mm	in	mm	in	mm
IFP300	5/16-28	0.220	5.6	0.440	11.2	0.190	4.8
IFP310	3/8-24	0.250	6.4	0.500	12.7	0.190	4.8
IFP320	7/16-24	0.270	6.9	0.630	16.0	0.190	4.8
IFP330	1/2-20	0.280	7.1	0.690	17.5	0.250	6.4
IFP340	5/8-18	0.310	7.9	0.810	20.6	0.250	6.4
IFP350	5/8-18	0.500	12.7	0.810	20.6	0.250	6.4
IFP360	11/16-18	0.310	7.9	0.870	22.1	0.250	6.4
IFP370	3/4-18	0.380	9.7	0.870	22.1	0.250	6.4
IFP380	1-1/16-16	0.430	10.9	1.190	30.2	0.250	6.4




Threaded Caps & Plugs

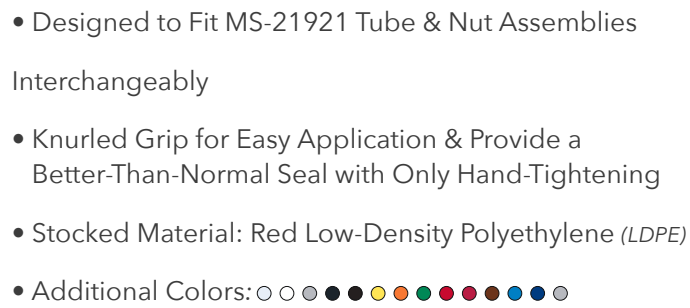

Threaded Caps & Plugs




- Knurled Head for Easy Use in Manual Assembly and Removal
- Stocked Material: Red Low-Density Polyethylene (*LDPE*)
- Additional Colors: 



Part #	To Fit STD Thread	Tube Size		(A) Length		(B) Flange O.D.	
		in	mm	in	mm	in	mm
FOP200	11/16-16	0.375	9.5	0.440	11.2	0.870	22.1
FOP210	13/16-16	0.500	12.7	0.500	12.7	0.940	23.9
FOP220	1-14	0.625	15.9	0.590	15.0	1.160	29.5
FOP230	1-3/16-12	0.750	19.1	0.630	16.0	1.330	33.8
FOP240	1-7/16-12	1.000	25.4	0.750	19.1	1.630	41.4



Threaded Caps & Plugs



- Designed to Protect BSP Threads and Fittings from Damage,
Dust, Debris and Contaminants
- Knurled Head and Slot for Easy On-Off Application
- Stocked Material: Red Polypropylene (PP)
- Additional Colors: 



Part #	To Fit BSP Thread	(B) Flange Thickness		(C) Length		(D) Flange O.D.	
		in	mm	in	mm	in	mm
GPB0125	G 1/8	0.200	5.1	0.350	8.9	0.830	21.1
GPB0250	G 1/4	0.200	5.1	0.350	8.9	0.830	21.1
GPB0375	G 3/8	0.240	6.1	0.390	9.9	0.910	23.1
GPB0500	G 1/2	0.240	6.1	0.470	11.9	1.100	27.9
GPB0625	G 5/8	0.240	6.1	0.470	11.9	1.200	30.5
GPB0750	G 3/4	0.240	6.1	0.550	14.0	1.350	34.3
GPB0875	G 7/8	0.300	7.6	0.550	14.0	1.500	38.1
GPB1000	G 1	0.300	7.6	0.550	14.0	1.600	40.6
GPB1250	G 1-1/4	0.300	7.6	0.550	14.0	2.000	50.8
GPB1500	G 1-1/2	0.350	8.9	0.590	15.0	2.150	54.6
GPB2000	G2	0.350	8.9	0.590	15.0	2.610	66.9
GPB3000	G3	0.400	10.2	0.750	19.1	3.730	94.7




GPM Series - General Purpose Plugs for Metric Threads

Threaded Caps & Plugs



- Designed to Protect Metric Threads and Fittings from Damage, Dust, Debris and Contaminants
- Knurled Head and Slot for Easy On-Off Application
- Stocked Material: Red Polypropylene (PP)
- Additional Colors:



Part #	To Fit METRIC Thread	(B) Flange Thickness		(C) Length		(D) Flange O.D.	
		in	mm	in	mm	in	mm
GPM0810	M8x1.0	0.200	5.1	0.350	8.9	0.650	16.5
GPM1010	M10x1.0	0.200	5.1	0.350	8.9	0.650	16.5
GPM1210	M12x1.0	0.200	5.1	0.350	8.9	0.830	21.1
GPM1215	M12x1.5	0.200	5.1	0.350	8.9	0.830	21.1
GPM1415	M14x1.5	0.200	5.1	0.350	8.9	0.830	21.1
GPM1615	M16x1.5	0.240	6.1	0.390	9.9	0.910	23.1
GPM1815	M18x1.5	0.240	6.1	0.390	9.9	0.910	23.1
GPM2015	M20x1.5	0.240	6.1	0.470	11.9	1.100	27.9
GPM2215	M22x1.5	0.240	6.1	0.470	11.9	1.100	27.9
GPM2415	M24x1.5	0.240	6.1	0.470	11.9	1.220	31.0
GPM2515	M25x1.5	0.240	6.1	0.470	11.9	1.220	31.0
GPM2615	M26x1.5	0.240	6.1	0.470	11.9	1.300	33.0
GPM5220	M52x2.0	0.350	8.9	0.590	15.0	2.400	61.0



Threaded Caps & Plugs



- Additional Colors:



Threaded Caps & Plugs




-
- Technical drawing of a stepped shaft. The top view shows a cross-section with dimensions: C (total width), E (height of the top step), B (height of the bottom step), and F (fillet radius). A detail view of the fillet is shown below, labeled "DETAIL".

Part #	To Fit STD Thread	(B) Length		(C) Flange O.D.		(E) Flange Thickness	
		in	mm	in	mm	in	mm
OPP0438	7/16-20	0.320	8.1	0.650	16.5	0.380	9.6
OPP0500	1/2-20	0.320	8.1	0.720	18.3	0.380	9.6
OPP0562	9/16-18	0.360	9.1	0.780	19.8	0.380	9.6
OPP0750	3/4-16	0.400	10.2	0.980	24.9	0.380	9.6
OPP0875	7/8-14	0.450	11.4	1.110	28.2	0.380	9.6
OPP1062	1-1/16-12	0.620	15.7	1.310	33.3	0.380	9.6
OPP1312	1-5/16-12	0.620	15.7	1.560	39.6	0.380	9.6
OPP1625	1-5/8-12	0.620	15.7	1.880	47.8	0.380	9.6



Threaded Caps & Plugs



- Additional Colors:



Part #	To Fit NPT Thread	(B) Stem Height		(C) Threaded Area Length		(D) Flange O.D.		(E) Head	
		in	mm	in	mm	in	mm	in	mm
SFPN0125	1/8-27	0.190	4.8	0.290	7.4	0.550	14.0	0.280	7.1
SFPN0250	1/4-18	0.250	6.4	0.350	8.9	0.670	17.0	0.430	10.9
SFPN0375	3/8-18	0.250	6.4	0.410	10.4	0.800	20.3	0.430	10.9
SFPN0500	1/2-14	0.250	6.4	0.470	11.9	0.980	24.9	0.560	14.2
SFPN0750	3/4-14	0.250	6.4	0.520	13.2	1.240	31.5	0.620	15.7



Threaded Caps & Plugs




-

Part #	To Fit NPT Thread	(B) Stem Height		(C) Threaded Area Length		(D) Length		(E) Head	
		in	mm	in	mm	in	mm	in	mm
SPN0125	1/8-27	0.250	6.4	0.290	7.4	0.370	9.4	0.280	7.1
SPN0250	1/4-18	0.250	6.4	0.350	8.9	0.430	10.9	0.380	9.7
SPN0375	3/8-18	0.250	6.4	0.420	10.7	0.490	12.4	0.440	11.2
SPN0500	1/2-14	0.250	6.4	0.470	11.9	0.550	14.0	0.560	14.2
SPN0750	3/4-14	0.250	6.4	0.520	13.2	0.640	16.3	0.620	15.7
SPN1000	1 - 11-1/2	0.250	6.4	0.590	15.0	0.700	17.8	0.810	20.6
SPN1250	1-1/4 - 11-1/2	0.380	9.7	0.830	21.1	0.980	24.9	1.000	25.4
SPN1500	1-1/2 - 11-1/2	0.380	9.7	0.830	21.1	0.980	24.9	1.250	31.8



Threaded Caps & Plugs



- Designed to Protect Threads from Dirt, Dust & Moisture During Low-Pressure Testing & In-Plant Handling
- Stocked Material: Red Polypropylene (PP)
- Additional Colors: 



Part #	To Fit NPT Thread	(B) Inside Diameter		(C) Inside Length		(D) Length	
		in	mm	in	mm	in	mm
HSPN0250	1/4-18	0.260	6.6	0.310	7.9	0.500	12.7
HSPN0375	3/8-18	0.330	8.4	0.380	9.7	0.566	14.4
HSPN0500	1/2-14	0.390	9.9	0.380	9.7	0.566	14.4
HSPN0750	3/4-14	0.570	14.5	0.470	11.9	0.610	15.5
HSPN1000	1 - 11-1/2	0.640	16.3	0.590	15.0	0.740	18.8




PIP Series - Push-In Plugs for SAE & NPT Threads

Threaded Caps & Plugs



- Designed to Simply Snap into Place to Protect Threads
- Stocked Material: Red Low-Density Polyethylene (LDPE)
- Additional Colors: 



Part #	To Fit NPT Thread	To Fit SAE Thread	(A) Diameter		(B) Length		(C) Flange O.D.	
			in	mm	in	mm	in	mm
PIP0250	---	1/4"	0.206	5.2	0.220	5.6	0.452	11.5
PIP0313	---	5/16"	0.262	6.7	0.235	6.0	0.527	13.4
PIPL0375	1/8"	3/8"	0.310	7.9	0.340	8.6	0.588	14.9
PIP0375	1/8"	3/8"	0.324	8.2	0.235	6.0	0.588	14.9
PIP0438	---	7/16"	0.380	9.7	0.270	6.9	0.656	16.7
PIP0500	1/4"	1/2"	0.437	11.1	0.270	6.9	0.724	18.4
PIPL0563	---	9/16"	0.480	12.2	0.360	9.1	0.835	21.2
PIP0563	---	9/16"	0.495	12.6	0.290	7.4	0.810	20.6
PIP0625	3/8"	5/8"	0.558	14.2	0.290	7.4	0.971	24.7
PIP0688	---	11/16"	0.610	15.5	0.290	7.4	1.008	25.6
PIP0750	---	3/4"	0.676	17.2	0.290	7.4	1.045	26.5
PIP0813	1/2"	13/16"	0.732	18.6	0.290	7.4	1.094	27.8
PIP0875	---	7/8"	0.798	20.3	0.295	7.5	1.172	29.8
PIP1000	3/4"	1"	0.922	23.4	0.290	7.4	1.305	33.1
PIP1062	---	1-1/16"	0.972	24.7	0.290	7.4	1.417	36.0
PIP1188	---	1-3/16"	1.090	27.7	0.340	8.6	1.518	38.6
PIP1250	---	1-1/4"	1.160	29.5	0.340	8.6	1.571	39.9
PIP1313	1"	1-5/16"	1.215	30.9	0.340	8.6	1.640	41.7
PIP1438	---	1-7/16"	1.360	34.5	0.460	11.7	1.803	45.8
PIP1500	---	1-1/2"	1.405	35.7	0.460	11.7	1.854	47.1
PIP1625	---	1-5/8"	1.525	38.7	0.460	11.7	1.982	50.3
PIP1750	---	1-3/4"	1.650	41.9	0.460	11.7	2.117	53.8
PIP1875	---	1-7/8"	1.775	45.1	0.460	11.7	2.216	56.3



MOCAP

- 

Part #	To Fit Flange Size		To Cover Flange Dash Size	(A) Small Outer Diameter		(B) Large Outer Diameter		(C) Flange Width		(D) Flange Height		(E) Length	
	in	mm		in	mm	in	mm	in	mm	in	mm	in	mm
SHF.750	0.750	12.0	-12	0.730	18.5	0.790	20.1	2.560	65.0	1.620	41.1	0.500	12.7
SHF1.000	1.000	16.0	-16	0.980	24.9	1.040	26.4	2.750	69.9	1.880	47.8	0.500	12.7
SHF1.250	1.250	20.0	-20	1.230	31.2	1.290	32.8	3.120	79.2	2.000	50.8	0.500	12.7
SHF1.500	1.500	24.0	-24	1.460	37.1	1.550	39.4	3.690	93.7	2.380	60.5	0.750	19.1
SHF2.000	2.000	32.0	-32	1.960	49.8	2.050	52.1	4.000	101.6	2.750	69.9	0.750	19.1
SHF2.500	2.500	40.0	-40	2.460	62.5	2.55	64.8	4.500	114.3	3.250	82.6	0.750	19.1





PC Series - Pipe Caps

Pipe & Flange Protection



- Designed to Protect Metric, BSP and NPT Male Pipe Threads from Damage and Contamination
- Stocked Material: Black Low-Density Polyethylene (LDPE)




Part #	To Fit Pipe O.D.	To Fit BSP Threads	To Fit NPT Threads	(L) Length	
	mm	in	in	in	mm
PC100	8.0	---	---	0.445	11.3
PC100A	9.7	G 1/8	---	0.492	12.5
PC100B	10.3	---	1/8	0.433	11.0
PC102	10.3	---	---	0.490	12.4
PC103	12.0	---	---	0.539	13.7
PC104	12.7	---	---	0.569	14.4
PC104A	13.2	G 1/4	---	0.626	15.9
PC104B	13.7	---	1/4	0.571	14.5
PC105	13.7	---	---	0.626	15.9
PC106	14.0	---	---	0.624	15.8
PC107	15.0	---	---	0.596	15.1
PC108	16.0	---	---	0.648	16.4
PC108A	16.7	G 3/8	---	0.693	17.6
PC108B	17.1	---	3/8	0.571	14.5
PC109	17.1	---	---	0.693	17.6
PC110	18.0	---	---	0.701	17.8
PC112	20.0	---	---	0.691	17.5
PC112A	21.0	G 1/2	---	0.677	17.2
PC112B	21.2	---	1/2	0.689	17.5
PC114	21.3	---	---	0.677	17.2
PC115	22.0	---	---	0.709	18.0
PC116	25.4	---	---	0.667	16.9
PC116A	26.6	G 3/4	3/4	0.693	17.6
PC117	26.7	---	---	0.695	17.6
PC118	28.0	---	---	0.709	18.0
PC119	30.0	---	---	0.656	16.6
PC120	31.8	---	---	0.793	20.1
PC120A	33.2	G 1	1	0.827	21.0
PC121	33.4	---	---	0.827	21.0
PC123	35.0	---	---	0.886	22.5
PC123A	37.9	G 1-1/8	---	0.866	22.0
PC124	38.1	---	---	0.868	22.0
PC125	40.0	---	---	0.768	19.5
PC125A	42.0	G 1-1/4	1-1/4	0.874	22.2
PC126	42.0	---	---	0.874	22.2
PC126A	44.3	G 1-3/8	---	0.807	20.5
PC127	45.0	---	---	0.805	20.4
PC127A	47.8	G 1-1/2	---	0.890	22.6
PC127B	48.1	---	1-1/2	0.890	22.6
PC128	48.3	---	---	0.890	22.6
PC129	50.0	---	---	1.008	25.6



MOCAP

(continued) Pipe Caps - **PC Series**
Pipe & Flange Protection



- Designed to Protect Metric, BSP and NPT Male Pipe Threads from Damage and Contamination
- Stocked Material: Black Low-Density Polyethylene (LDPE)



Part #	To Fit Pipe O.D.	To Fit BSP Threads	To Fit NPT Threads	(L) Length	
	mm	in	in	in	mm
PC130	50.8	---	---	0.892	22.6
PC130A	53.8	G 1-3/4	---	0.894	22.7
PC133	54.0	---	---	0.894	22.7
PC134	57.0	---	---	0.906	23.0
PC134A	59.6	G 2	---	0.965	24.5
PC134B	60.1	---	2	0.965	24.5
PC135	60.3	---	---	0.967	24.5
PC137	63.5	---	---	0.941	23.9
PC139	70.0	---	---	1.047	26.6
PC140	73.0	---	2-1/2	1.041	26.4
PC141	76.3	G2-1/2	---	0.992	25.2
PC142	82.0	G2-3/4	---	1.087	27.6
PC143	85.0	---	---	0.907	23.0
PC144	88.9	G 3	3	1.063	27.0
PC146	95.0	---	---	0.969	24.6
PC147	101.6	---	3-1/2	1.063	27.0
PC149	108.0	---	---	1.156	29.3
PC150	114.0	G4	4	1.035	26.3
PC151	121.0	---	---	1.071	27.2
PC152	127.0	G4-1/2	---	1.085	27.5
PC153	129.0	---	---	1.035	26.3
PC154	133.0	---	---	1.073	27.2
PC155	139.7	G5	5	1.035	26.3
PC157	152.0	G5-1/2	---	1.069	27.1
PC159	159.0	---	---	1.116	28.3
PC161	168.3	G6	6	1.205	30.6
PC167	219.0	G8	8	1.276	32.4
PC173	273.0	G10	10	1.35	34.3
PC178	323.9	G12	12	1.825	46.3
PC182	355.6	G14	14	1.85	47.0
PC186	406.4	G16	16	2.071	52.6
PC188	457.2	G18	18	1.929	49.0
PC190	508.0	G20	20	2.008	51.0
PC192	558.0	G22	22	2.087	53.0
PC193	610.0	G24	24	2.165	55.0
PC195	660.4	G26	26	2.421	61.5
PC196	711.2	G28	28	2.48	63.0
PC197	762.0	G30	30	2.953	75.0
PC198	812.8	G32	32	3.004	76.3
PC200	914.4	G36	36	3.189	81.0
PC201	1,016.0	G40	40	3.622	92.0




PP Series - Pipe Plugs

Pipe & Flange Protection



- Designed to Protect Metric, BSP and NPT Pipe from Damage and Contamination
- Stocked Material: Black Low-Density Polyethylene (LDPE)




Part #	To Fit Pipe O.D.	To Fit BSP	To Fit NPT
	mm	in	in
PP114	21.3	1/2	1/2
PP116	25.4	---	---
PP117	26.7	3/4	3/4
PP121	33.4	1	1
PP124	38.1	1-1/8	---
PP126	42.0	1-1/4	1-1/4
PP128	48.3	1-1/2	1-1/2
PP129	50.0	---	---
PP134	57.0	---	---
PP135	60.3	2	2
PP137	63.5	---	---
PP140	73.0	---	2-1/2
PP141	76.3	2-1/2	---
PP144	88.9	3	3
PP147	101.6	---	3-1/2
PP149	108.0	---	---
PP150	114.0	4	4
PP151	121.0	---	---
PP152	127.0	4-1/2	---
PP154	133.0	---	---
PP156	141.3	---	---
PP157	152.0	5-1/2	---
PP159	159.0	---	---
PP161	168.3	6	6
PP162	177.8	---	---



Push-In Flange Protectors - MPI Series

Pipe & Flange Protection



- Flexible Rings Allow for Easy Installation
- Designed to Protect Flange Faces from Damage and Contamination
- Stocked Material: Yellow Low-Density Polyethylene (LDPE)



Part #	To Fit Nominal Pipe Size	DIN Flange Size	(A) Diameter		(B) Flange O.D.		(C) Length	
	in		in	mm	in	mm	in	mm
MPI500	1/2	DN 15	0.748	19.0	3.543	90.0	0.591	15.0
MPI750	3/4	DN 20	0.945	24.0	3.937	100.0	0.591	15.0
MPI1000	1	DN 25	1.181	30.0	4.331	110.0	0.787	20.0
MPI1250	1-1/4	DN 32	1.535	39.0	5.354	136.0	0.787	20.0
MPI1500	1-1/2	DN 40	1.772	45.0	5.748	146.0	0.787	20.0
MPI2000	2	DN 50	2.205	56.0	6.299	160.0	0.787	20.0
MPI2500	2-1/2	DN 65	2.835	72.0	7.087	180.0	0.787	20.0
MPI3000	3	DN 80	3.346	85.0	7.717	196.0	0.984	25.0
MPI4000	4	DN 100	4.291	109.0	8.504	216.0	0.984	25.0
MPI5000	5	DN 125	5.276	134.0	9.685	246.0	0.984	25.0
MPI6000	6	DN 150	6.339	161.0	11.023	280.0	1.378	35.0
MPI8000	8	DN 200	8.268	210.0	13.228	336.0	1.378	35.0
MPI10000	10	DN 250	10.315	262.0	15.354	390.0	1.575	40.0
MPI12000	12	DN 300	12.520	318.0	17.717	450.0	1.890	48.0




MOF Series - Outside Fitting Flange Protectors

Pipe & Flange Protection



- Designed to Easily Snap Over the Full Face of the Flange for Maximum Protection
- Stocked Material: Yellow Low-Density Polyethylene (LDPE)




Part #	To Fit Nominal Pipe Size	Pipe Pressure Rating
	in	
MOF150500	1/2	#150
MOF300500	1/2	#300 - #600
MOF150750	3/4	#150
MOF1501000	1	#150
MOF3001000	1	#300 - #600
MOF1501500	1-1/2	#150
MOF1502000	2	#150
MOF3002000	2	#300
MOF1503000	3	#150
MOF1504000	4	#150
MOF1506000	6	#150
MOF15010000	10	#150



Bolt Hole Flange Protectors - MBH Series

Pipe & Flange Protection



- Designed to Snap-In Easily Without Additional Fasteners
- Stocked Material: Blue or Black Low-Density Polyethylene: Blue or Black, per Pipe Pressure Rating



Part #	To Fit Nominal Pipe Size in	Pipe Pressure Rating	Color
MBH150500MB1	1/2	#125 #150	BLUE
MBH300500BK1	1/2	#300 #400 #600	BLACK
MBH150750MB1	3/4	#125 #150	BLUE
MBH300750BK1	3/4	#300 #400 #600	BLACK
MBH1501000MB1	1	#125 #150	BLUE
MBH3001000BK1	1	#300 #400 #600	BLACK
MBH1501250MB1	1-1/4	#125 #150	BLUE
MBH3001250BK1	1-1/4	#300 #400 #600	BLACK
MBH1501500MB1	1-1/2	#125 #150	BLUE
MBH3001500BK1	1-1/2	#300 #400 #600	BLACK
MBH1502000MB1	2	#125 #150	BLUE
MBH3002000BK1	2	#300 #400 #600	BLACK
MBH1502500MB1	2-1/2	#125 #150	BLUE
MBH3002500BK1	2-1/2	#300 #400 #600	BLACK
MBH1503000MB1	3	#125 #150	BLUE
MBH3003000BK1	3	#300 #400 #600	BLACK
MBH1504000MB1	4	#125 #150	BLUE
MBH3004000BK1	4	#300	BLACK
MBH1505000MB1	5	#125 #150	BLUE
MBH3005000BK1	5	#300	BLACK
MBH1506000MB1	6	#125 #150	BLUE
MBH3006000BK1	6	#300	BLACK
MBH1508000MB1	8	#125 #150	BLUE
MBH3008000BK1	8	#300	BLACK
MBH15010000MB1	10	#125 #150	BLUE
MBH30010000BK1	10	#300	BLACK
MBH15012000MB1	12	#125 #150	BLUE
MBH30012000BK1	12	#300	BLACK



MOCAP

Free Samples


企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 110

RVG Series - Round Vinyl Grips

Grips



- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable*
- Can Be Sliced to Any Length
- Stocked Material: Black Vinyl (*glossy and textured*)
- Additional Colors: ○●●●●●●●●●●




Part #	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		Stocked Length
	in	mm	in	mm	in	mm	in	mm	
RVG9087	0.187	4.7	1.562	39.7	4.000	101.6	0.055	1.4	---
RVG9088	0.250	6.4	1.562	39.7	6.000	152.4	0.055	1.4	---
RVG9089	0.281	7.1	1.562	39.7	6.000	152.4	0.055	1.4	---
RVG9090	0.313	8.0	1.562	39.7	6.000	152.4	0.060	1.5	---
RVG9091	0.375	9.5	1.562	39.7	6.250	158.8	0.065	1.7	---
RVG9092	0.375	9.5	6.312	160.3	12.500	317.5	0.065	1.7	---
RVG9093	0.406	10.3	1.562	39.7	3.500	88.9	0.065	1.7	---
RVG9094	0.437	11.1	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9095	0.437	11.1	6.062	154.0	12.500	317.5	0.065	1.7	---
RVG9096	0.468	11.9	1.562	39.7	2.500	63.5	0.065	1.7	---
RVG4555	0.468	11.9	2.562	65.1	15.750	400.1	0.065	1.7	---
RVG9097	0.500	12.7	1.562	39.7	6.000	152.4	0.065	1.7	4.50
RVG0574	0.500	12.7	6.062	154.0	7.500	190.5	0.065	1.7	---
RVG2618	0.500	12.7	7.562	192.1	10.000	254.0	0.065	1.7	---
RVG9098	0.531	13.5	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9099	0.562	14.3	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9100	0.610	15.5	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9101	0.625	15.9	1.562	39.7	2.500	63.5	0.065	1.7	---
RVG9102	0.625	15.9	2.562	65.1	6.000	152.4	0.065	1.7	---
RVG3798	0.625	15.9	6.062	154.0	14.500	368.3	0.065	1.7	---
RVG4454	0.625	15.9	14.562	369.9	23.000	584.2	0.065	1.7	---
RVG9540	0.650	16.5	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9103	0.687	17.4	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9571	0.700	17.8	1.562	39.7	7.750	196.9	0.065	1.7	---
RVG0733	0.700	17.8	7.812	198.4	14.500	368.3	0.065	1.7	---
RVG4364	0.700	17.8	14.562	369.9	23.000	584.2	0.065	1.7	---
RVG9104	0.730	18.5	1.562	39.7	12.500	317.5	0.065	1.7	---
RVG9105	0.750	19.1	1.562	39.7	6.000	152.4	0.065	1.7	4.50
RVG0560	0.750	19.1	6.062	154.0	8.500	215.9	0.065	1.7	---
RVG0641	0.750	19.1	8.562	217.5	14.250	362.0	0.065	1.7	---
RVG0125	0.750	19.1	14.062	357.2	22.000	558.8	0.065	1.7	---
RVG9106	0.812	20.6	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG0944	0.812	20.6	6.062	154.0	13.500	342.9	0.065	1.7	---
RVG4266	0.812	20.6	13.625	346.1	22.750	577.9	0.065	1.7	---
RVG9107	0.845	21.5	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG9108	0.845	21.5	6.062	154.0	12.500	317.5	0.065	1.7	---
RVG9109	0.875	22.2	1.562	39.7	6.000	152.4	0.065	1.7	4.50
RVG2672	0.875	22.2	6.062	154.0	10.750	273.1	0.065	1.7	---
RVG5378	0.875	22.2	10.062	255.6	22.000	558.8	0.065	1.7	---

*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color



MOCAP



- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable*
- Stocked Material: Black Vinyl (*glossy and textured*)
- Additional Colors: ○●●●●●●●●●●



Part #	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		Stocked Length
	in	mm	in	mm	in	mm	in	mm	
RVG2182	0.926	23.5	1.562	39.7	8.500	215.9	0.065	1.7	---
RVG9110	0.937	23.8	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG4010	0.937	23.8	6.062	154.0	14.500	368.3	0.065	1.7	---
RVG4279	0.937	23.8	14.562	369.9	22.250	565.2	0.065	1.7	---
RVG9111	0.970	24.6	1.562	39.7	12.500	317.5	0.065	1.7	---
RVG9112	1.000	25.4	1.562	39.7	6.000	152.4	0.065	1.7	4.50
RVG4413	1.000	25.4	6.062	154.0	22.250	565.2	0.065	1.7	---
RVG9113	1.062	27.0	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG2301	1.062	27.0	6.062	154.0	8.500	215.9	0.065	1.7	---
RVG3826	1.062	27.0	8.562	217.5	14.750	374.7	0.065	1.7	---
RVG4387	1.062	27.0	14.812	376.2	22.500	571.5	0.065	1.7	---
RVG9114	1.125	28.6	1.562	39.7	6.000	152.4	0.065	1.7	---
RVG4126	1.125	28.6	6.062	154.0	8.500	215.9	0.065	1.7	---
RVG1685	1.125	28.6	8.562	217.5	15.500	393.7	0.065	1.7	---
RVG4213	1.125	28.6	15.562	395.3	22.500	571.5	0.065	1.7	---
RVG9115	1.187	30.1	1.562	39.7	3.250	82.6	0.065	1.7	---
RVG4159	1.187	30.1	3.312	84.1	8.500	215.9	0.065	1.7	---
RVG4355	1.187	30.1	8.562	217.5	13.250	336.6	0.065	1.7	---
RVG4032	1.187	30.1	13.312	338.1	22.500	571.5	0.065	1.7	---
RVG9116	1.230	31.2	1.562	39.7	12.500	317.5	0.065	1.7	---
RVG9117	1.250	31.8	1.562	39.7	6.000	152.4	0.065	1.7	4.50
RVG3219	1.250	31.8	6.062	154.0	7.000	177.8	0.065	1.7	---
RVG2393	1.250	31.8	7.062	179.4	20.500	520.7	0.065	1.7	---
RVG9320	1.313	33.4	1.562	39.7	7.000	177.8	0.065	1.7	---
RVG9118	1.375	34.9	1.562	39.7	3.000	76.2	0.065	1.7	---
RVG9325	1.375	34.9	3.062	77.8	7.000	177.8	0.065	1.7	---
RVG2004	1.437	36.5	1.562	39.7	5.000	127.0	0.065	1.7	---
RVG4442	1.437	36.5	5.062	128.6	22.500	571.5	0.065	1.7	---
RVG9044	1.500	38.1	1.562	39.7	3.000	76.2	0.060	1.5	---
RVG4022	1.500	38.1	3.062	77.8	14.500	368.3	0.065	1.7	---
RVG9421	1.540	39.1	1.562	39.7	9.500	241.3	0.065	1.7	---
RVG9119	1.687	42.8	1.562	39.7	1.750	44.5	0.065	1.7	---
RVG4923	1.687	42.8	1.812	46.0	22.000	558.8	0.065	1.7	---
RVG9120	1.750	44.5	1.562	39.7	3.000	76.2	0.065	1.7	---
RVG9363	2.000	50.8	1.562	39.7	5.500	139.7	0.065	1.7	---
RVG9053	2.750	69.9	1.562	39.7	3.500	88.9	0.065	1.7	---
RVG9365	3.000	76.2	1.562	39.7	5.500	139.7	0.065	1.7	---
RVG9269	4.000	101.6	1.562	39.7	3.500	88.9	0.065	1.7	---
RVG9121	4.530	115.1	1.562	39.7	5.000	127.0	0.065	1.7	---
RVG9123	4.625	117.5	1.562	39.7	4.000	101.6	0.065	1.7	---

*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color




FVG Series - Flat Rectangular Vinyl Grips

Grips




- Grips Feature either a Round End (RFVG) or a Flat End (FFVG)
- Flexible Yet Durable - Won't Split, Tear or Shred
- Printable*
- Available Colors:

RFVG Series Round End Grips



Inside Length Measured at
Center for RFVG Series

FFVG Series Flat End Grips




Part #	(A) Inside Height		(B) Inside Width		(C) End Style	(D) Min Inside Length		(E) Max Inside Length		(F) Wall Thickness	
	in	mm	in	mm		in	mm	in	mm	in	mm
RFVG9523	0.062	1.6	0.313	7.9	Round	0.188	4.8	1.750	44.5	0.055	1.4
RFVG9057	0.062	1.6	0.313	7.9	Round	1.812	46.0	4.000	101.6	0.055	1.4
RFVG9058	0.062	1.6	0.375	9.5	Round	0.188	4.8	4.000	101.6	0.055	1.4
RFVG9059	0.062	1.6	0.437	11.1	Round	0.188	4.8	4.000	101.6	0.055	1.4
FFVG9063	0.062	1.6	0.500	12.7	Flat	0.188	4.8	1.500	38.1	0.055	1.4
FFVG9061	0.062	1.6	0.500	12.7	Flat	1.562	39.7	4.000	101.6	0.055	1.4
RFVG9064	0.062	1.6	0.625	15.9	Round	0.188	4.8	4.000	101.6	0.060	1.5
FFVG9065	0.062	1.6	0.750	19.1	Flat	0.188	4.8	0.375	9.5	0.060	1.5
RFVG9066	0.062	1.6	0.750	19.1	Round	0.188	4.8	5.000	127.0	0.060	1.5
FFVG9067	0.062	1.6	1.250	31.8	Flat	0.188	4.8	4.000	101.6	0.060	1.5
FFVG9068	0.090	2.3	1.000	25.4	Flat	0.188	4.8	5.250	133.4	0.060	1.5
FFVG9327	0.090	2.3	1.563	39.7	Flat	0.188	4.8	2.250	57.2	0.060	1.5
RFVG9070	0.125	3.2	0.437	11.1	Round	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9071	0.125	3.2	0.500	12.7	Round	0.188	4.8	5.000	127.0	0.060	1.5
FFVG9072	0.125	3.2	0.563	14.3	Flat	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9073	0.125	3.2	0.625	15.9	Round	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9074	0.125	3.2	0.750	19.1	Round	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9332	0.125	3.2	0.875	22.2	Round	0.188	4.8	8.500	222.3	0.060	1.5
RFVG9326	0.125	3.2	1.000	25.4	Round	0.188	4.8	2.500	63.5	0.060	1.5
RFVG9075	0.125	3.2	1.000	25.4	Round	2.562	65.1	5.000	127.0	0.060	1.5
RFVG9383	0.125	3.2	1.000	25.4	Round	5.062	128.6	7.750	196.9	0.060	1.5
RFVG9076	0.125	3.2	1.250	31.8	Round	0.188	4.8	2.250	57.2	0.060	1.5
RFVG9077	0.125	3.2	1.563	39.7	Round	0.188	4.8	1.500	38.1	0.060	1.5
FFVG9078	0.125	3.2	2.000	50.8	Flat	0.188	4.8	3.000	76.2	0.060	1.5
FFVG9080	0.125	3.2	2.250	57.2	Flat	0.188	4.8	4.750	120.7	0.060	1.5
RFVG9079	0.125	3.2	2.250	57.2	Round	0.188	4.8	1.500	38.1	0.060	1.5
RFVG0598	0.187	4.7	0.500	12.7	Round	0.188	4.8	4.000	101.6	0.060	1.5
FFVG0894	0.187	4.7	0.625	15.9	Flat	0.188	4.8	4.000	101.6	0.060	1.5
RFVG0979	0.187	4.7	1.089	27.7	Round	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9316	0.187	4.7	1.375	34.9	Round	0.188	4.8	5.000	127.0	0.060	1.5
FFVG9082	0.187	4.7	3.000	76.2	Flat	0.188	4.8	1.750	44.5	0.060	1.5
FFVG9348	0.250	6.4	0.500	12.7	Flat	0.188	4.8	1.000	25.4	0.060	1.5
RFVG9083	0.250	6.4	0.750	19.1	Round	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9404	0.250	6.4	0.875	22.2	Round	0.188	4.8	1.500	38.1	0.060	1.5
FFVG9443	0.250	6.4	1.000	25.4	Flat	0.188	4.8	5.000	127.0	0.060	1.5
RFVG9084	0.250	6.4	1.000	25.4	Round	0.188	4.8	5.000	127.0	0.060	1.5
FFVG9447	0.250	6.4	1.250	31.8	Flat	0.188	4.8	6.000	152.4	0.060	1.5
RFVG9085	0.250	6.4	1.250	31.8	Round	0.188	4.8	5.000	127.0	0.060	1.5
RFVG1202	0.250	6.4	1.437	36.5	Round	0.188	4.8	5.000	127.0	0.060	1.5
FFVG9512	0.250	6.4	1.500	38.1	Flat	0.188	4.8	2.000	50.8	0.060	1.5
FFVG9263	0.250	6.4	1.500	38.1	Flat	2.062	52.4	7.000	177.8	0.060	1.5
FFVG9086	0.250	6.4	2.000	50.8	Flat	0.188	4.8	2.250	57.2	0.060	1.5
FFVG9264	0.250	6.4	2.000	50.8	Flat	2.312	58.7	8.000	203.2	0.060	1.5
FFVG9321	0.250	6.4	3.000	76.2	Flat	0.188	4.8	8.000	203.2	0.060	1.5
RFVG2546	0.313	8.0	0.500	12.7	Round	0.188	4.8	6.000	152.4	0.060	1.5
RFVG0235	0.313	8.0	1.500	38.1	Round	0.188	4.8	4.000	101.6	0.060	1.5
RFVG9544	0.375	9.5	1.250	31.8	Round	0.188	4.8	5.000	127.0	0.060	1.5

*Screen Printing for Round Vinyl Caps, Plugs and Grips are limited to one color

MOCAP

Vinyl Finger Nub Grips - MFG Series

Grips



- Stretches for a Snug Fit but Won't Split, Tear or Shred
- Ergonomic Design Allows for a Secure Hold
- Stocked Material: Black Vinyl
- Available Colors: ○●●●●●●●●●●




Part #	To Fit Diameter	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		Stocked in Length
		in	mm	in	mm	in	mm	in	mm	
MFG0293	5/8"	0.610	15.5	2.500	63.5	3.750	95.3	0.065	1.6	3.75
MFG0188	3/4"	0.730	18.5	3.500	88.9	4.500	114.3	0.065	1.6	4.50
MFG0072	7/8"	0.840	21.3	4.000	101.6	4.500	114.3	0.065	1.6	4.50
MFG0043	1"	0.960	24.4	3.500	88.9	4.500	114.3	0.065	1.6	4.50



MOCAP
Textured & Double Dip Grips

- Tough, Weather Resistant and Attractive
- Many Colors Available
- Glossy or Textured Materials



Textured Grips

Choose from Single or Double Dip Grips

- Available on Round or Flat Rectangular Sizes
- Allows for a Firm Non-Slip Hold
- Stretches for a Snug Fit but Won't Split, Tear or Shred
- Durable
- Material: Black Vinyl Please call for info on other colors



Double Dip Grips

Choose from Smooth/Glossy or Textured Grips

- Available on Round or Flat Rectangular Sizes
- Stretches for a Snug Fit but Won't Split, Tear or Shred
- Extra Durable
- Material: Black Vinyl Please call for info on other colors



Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 114


MOCAP

RVC-T Series - High-Temp Round Vinyl Caps

Masking



- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Withstands Up to 475°F (246°C)
- Flexible Yet Durable - Won't Split, Tear or Shred
- Available Colors: Black and Yellow




Part #	To Fit STD Thread	To Fit METRIC Thread	To Fit NPT Thread	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness	
				in	mm	in	mm	in	mm	in	mm
RVC9001T	1	---	---	0.062	1.6	0.188	4.8	0.500	12.7	0.022	0.6
RVC9002T	1 or 2	---	---	0.070	1.8	0.188	4.8	0.500	12.7	0.022	0.6
RVC9003T	2 or 3	---	---	0.080	2.0	0.188	4.8	0.625	15.9	0.028	0.7
RVC9004T	3 or 4	---	---	0.093	2.4	0.188	4.8	0.750	19.1	0.028	0.7
RVC9005T	4 or 5	---	---	0.112	2.8	0.188	4.8	1.000	25.4	0.030	0.8
RVC9006T	5 or 6	---	---	0.125	3.2	0.188	4.8	1.500	38.1	0.033	0.8
RVC9007T	---	M4	---	0.137	3.5	0.188	4.8	1.500	38.1	0.033	0.8
RVC9008T	8	M4	---	0.156	4.0	0.188	4.8	1.500	38.1	0.038	1.0
RVC9009T	10	M5	---	0.172	4.4	0.188	4.8	1.500	38.1	0.038	1.0
RVC9010T	---	M5	---	0.187	4.7	0.188	4.8	1.500	38.1	0.038	1.0
RVC9011T	12	---	---	0.207	5.3	0.188	4.8	1.500	38.1	0.038	1.0
RVC9012T	---	---	---	0.218	5.5	0.188	4.8	1.500	38.1	0.038	1.0
RVC9440T	1/4 - 20	M6	---	0.234	5.9	0.188	4.8	1.500	38.1	0.038	1.0
RVC9013T	1/4 - 20	---	---	0.250	6.4	0.188	4.8	1.500	38.1	0.038	1.0
RVC9014T	---	---	---	0.281	7.1	0.188	4.8	1.500	38.1	0.038	1.0
RVC9278T	5/16 - 24	M8	---	0.300	7.6	0.188	4.8	1.500	38.1	0.038	1.0
RVC9015T	5/16 - 24	M8	---	0.313	8.0	0.188	4.8	1.500	38.1	0.038	1.0
RVC9016T	---	---	---	0.320	8.1	0.188	4.8	1.000	25.4	0.038	1.0
RVC9017T	---	---	---	0.343	8.7	0.188	4.8	1.500	38.1	0.038	1.0
RVC9018T	3/8 - 24	---	---	0.364	9.2	0.188	4.8	1.500	38.1	0.038	1.0
RVC9019T	3/8 - 24	M10	---	0.375	9.5	0.188	4.8	1.500	38.1	0.038	1.0
RVC9542T	---	M10	1/8	0.390	9.9	0.188	4.8	2.000	50.8	0.055	1.4
RVC9021T	7/16 - 20	---	1/8	0.406	10.3	0.188	4.8	1.500	38.1	0.055	1.4
RVC9022T	7/16 - 20	M12	---	0.437	11.1	0.188	4.8	1.500	38.1	0.055	1.4
RVC9023T	---	---	1/4	0.500	12.7	0.188	4.8	1.500	38.1	0.060	1.5
RVC9024T	9/16 - 18	M14	1/4	0.531	13.5	0.188	4.8	1.500	38.1	0.060	1.5
RVC9025T	9/16 - 18	---	---	0.562	14.3	0.188	4.8	1.500	38.1	0.060	1.5
RVC9306T	5/8 - 18	M16	---	0.610	15.5	0.188	4.8	1.000	25.4	0.060	1.5

For Material Specifications, please see page 139.
Low-Temp Applications on pg. 13



MOCAP



- Sizes to Fit Straight, Metric, BSP & NPT Threads and Fittings
- Withstands Up to 475°F (246°C)
- Flexible Yet Durable - Won't Split, Tear or Shred
- Available Colors: Black and Yellow



Part #	To Fit STD Thread	To Fit METRIC Thread	To Fit NPT Thread	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness	
				in	mm	in	mm	in	mm	in	mm
RVC9034T	11/16 - 16	M16	3/8	0.625	15.9	0.188	4.8	1.500	38.1	0.060	1.5
RVC9035T	3/4 - 16	M18		0.687	17.4	0.188	4.8	1.500	38.1	0.060	1.5
RVC9036T	13/16 - 16	M20		0.750	19.1	0.188	4.8	1.500	38.1	0.060	1.5
RVC9037T	13/16 - 16	---	1/2	0.812	20.6	0.188	4.8	1.500	38.1	0.060	1.5
RVC9038T	7/8 - 14	M22	---	0.843	21.4	0.188	4.8	1.500	38.1	0.060	1.5
RVC9039T	7/8 - 14	---	---	0.875	22.2	0.188	4.8	1.500	38.1	0.060	1.5
RVC9040T	1 - 16	M24	---	0.937	23.8	0.188	4.8	1.500	38.1	0.060	1.5
RVC9041T	1-1/16 - 12	M26	3/4	1.000	25.4	0.250	6.4	1.500	38.1	0.060	1.5
RVC9397T	1-1/16 - 12	M27	---	1.062	27.0	0.250	6.4	1.500	38.1	0.060	1.5
RVC9273T	1-3/16 - 12	M30	---	1.125	28.6	0.250	6.4	1.500	38.1	0.060	1.5
RVC9042T	1-3/16 - 12	---	---	1.187	30.1	0.250	6.4	1.500	38.1	0.060	1.5
RVC9043T	1-5/16 - 12	M32	1	1.250	31.8	0.250	6.4	1.500	38.1	0.060	1.5
RVC9044T	1-5/8 - 12	M39 - M40	---	1.500	38.1	0.250	6.4	1.500	38.1	0.060	1.5
RVC9045T	1-11/16 - 12	M42	1-1/4	1.625	41.3	0.250	6.4	1.500	38.1	0.060	1.5
RVC9046T	1-7/8 - 12	M48	1-1/2	1.875	47.6	0.250	6.4	1.500	38.1	0.060	1.5
RVC9324T	1-7/8 - 12	---	---	1.937	49.2	0.250	6.4	2.000	50.8	0.060	1.5
RVC9047T	2	M52	---	2.000	50.8	0.250	6.4	1.750	44.5	0.060	1.5
RVC9048T	2-1/4 - 12	M52	---	2.125	54.0	0.250	6.4	1.500	38.1	0.060	1.5
RVC9049T	2-1/4 - 12	M58 - M60	2	2.250	57.2	0.250	6.4	1.500	38.1	0.060	1.5
RVC9050T	2-1/2 - 12	---	2	2.375	60.3	0.250	6.4	1.500	38.1	0.060	1.5
RVC9051T	2-1/2 - 12	M64	---	2.500	63.5	0.250	6.4	1.500	38.1	0.060	1.5
RVC9052T	---	M68	---	2.625	66.7	0.250	6.4	1.500	38.1	0.060	1.5
RVC9053T	---	M72	2-1/2	2.750	69.9	0.250	6.4	1.500	38.1	0.060	1.5
RVC9054T	---	M80	---	3.000	76.2	0.250	6.4	1.500	38.1	0.060	1.5
RVC9055T	---	M90	3	3.500	88.9	0.250	6.4	1.500	38.1	0.060	1.5
RVC9490T	---	M105	3-1/2	4.000	101.6	0.250	6.4	1.500	38.1	0.060	1.5
RVC9056T	---	---	---	6.000	152.4	0.250	6.4	1.750	44.5	0.060	1.5

For Material Specifications, please see page 139.

Low-Temp Applications on pg. 13




FPT-T Series - High-Temp Pull Tab Vinyl Caps

Masking



- Withstands Up to 475°F (246°C)
- Stretches for a Snug Fit but Won't Split, Tear or Shred
- Flat / Ergonomic Tab for Easy Removal
- Available Colors: Black and Yellow



Part #	(A) Inside Diameter		(B) Min Inside Length		(C) Max Inside Length		(D) Wall Thickness		(E) Tab Height	
	in	mm	in	mm	in	mm	in	mm	in	mm
FPT9617T	0.187	4.7	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7
FPT9618T	0.215	5.5	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7
FPT9619T	0.236	6.0	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7
FPT9620T	0.250	6.4	0.250	6.4	1.000	25.4	0.038	1.0	0.500	12.7
FPT9406T	0.313	8.0	0.250	6.4	1.500	38.1	0.038	1.0	0.655	16.6
FPT9507T	0.343	8.7	0.250	6.4	1.500	38.1	0.038	1.0	0.695	17.7
FPT9430T	0.375	9.5	0.250	6.4	1.500	38.1	0.055	1.4	0.695	17.7
FPT9422T	0.406	10.3	0.250	6.4	1.500	38.1	0.055	1.4	0.709	18.0
FPT9431T	0.437	11.1	0.250	6.4	1.500	38.1	0.055	1.4	0.725	18.4
FPT9435T	0.460	11.7	0.250	6.4	1.500	38.1	0.055	1.4	0.750	19.1
FPT9432T	0.500	12.7	0.250	6.4	1.500	38.1	0.060	1.5	0.752	19.1
FPT9433T	0.531	13.5	0.250	6.4	1.500	38.1	0.060	1.5	0.764	19.4
FPT9362T	0.562	14.3	0.250	6.4	1.500	38.1	0.060	1.5	0.613	15.6
FPT9429T	0.625	15.9	0.250	6.4	1.500	38.1	0.060	1.5	0.709	18.0
FPT9621T	0.655	16.6	0.250	6.4	1.500	38.1	0.060	1.5	0.812	20.6
FPT9436T	0.687	17.4	0.250	6.4	1.500	38.1	0.060	1.5	0.812	20.6
FPT9622T	0.750	19.1	0.250	6.4	1.500	38.1	0.060	1.5	0.826	21.0
FPT9623T	0.812	20.6	0.250	6.4	1.500	38.1	0.060	1.5	0.837	21.3
FPT9624T	0.843	21.4	0.250	6.4	1.500	38.1	0.060	1.5	0.846	21.5
FPT9434T	0.875	22.2	0.250	6.4	1.500	38.1	0.060	1.5	0.846	21.5
FPT9438T	0.937	23.8	0.250	6.4	1.500	38.1	0.060	1.5	0.853	21.7
FPT9439T	1.000	25.4	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8
FPT9625T	1.062	27.0	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8
FPT9626T	1.125	28.6	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8
FPT9627T	1.250	31.8	0.250	6.4	1.500	38.1	0.060	1.5	0.858	21.8


For Material Specifications, please see page 139.
Low-Temp Applications on pg. 16



MOCAP

High-Temp Vinyl Insertion Plugs - MCP-T Series

Masking



- Withstands Up to 475° F (246° C)
- Wide Flange for Easy Removal
- Flexible Yet Durable - Won't Split, Tear or Shred
- Stocked Material: Black High-Temp Vinyl
- Additional Colors: Yellow



Part #	To Fit STD Thread	To Fit METRIC Thread	To Fit NPT Thread	(A) Flange O.D.	
				in	mm
MCP9252T	1/4	M6	---	0.400	10.2
MCP9253T	5/16	M8	---	0.460	11.7
MCP9254T	3/8	M10	1/8	0.495	12.6
MCP9255T	7/16	M12	---	0.550	14.0
MCP9256T	1/2	M14	1/4	0.620	15.7
MCP9257T	9/16	M16	---	0.683	17.3
MCP9258T	5/8	M18	3/8	0.807	20.5
MCP9259T	3/4	M20	1/2	0.961	24.4
MCP9260T	7/8	M22/24	---	1.058	26.9
MCP9261T	1-1/16	M26/28	3/4	1.245	31.6
MCP9262T	1-1/8, 1-3/16, 1-1/4	M32/34	1	1.495	38.0

For Material Specifications, please see page 139.




TP-T Series - High-Temp Vinyl Tapered Plugs

Masking



- Withstands Up to 475°F (246°C)
- Flange for Easy Removal
- Flexible Yet Durable - Won't Split, Tear or Shred
- Stocked Material: Black High-Temp Vinyl
- Additional Colors: Yellow




Part #	To Fit STD Thread	To Fit METRIC Thread
TP9211T	6-32, 8-32, 10-24	M4, M5
TP9212T	1/4 - 20	M6, M7
TP9213T	5/16 - 18, 3/8 - 16	M8, M10

For Material Specifications, please see page 139.



Silicone Straight Caps - MSC Series

Masking



- Resists Temps to 600°F (316°C)
- Flexible for Masking Threaded and Smooth Studs
- Material: Iron Oxide Red Silicone



Part #	Suggested Applications	(A) Inside Diameter		(B) Inside Length		(C) Wall Thickness	
		in	mm	in	mm	in	mm
MSC.070-1	M2, 2-56	0.070	1.8	1.000	25.4	0.065	1.7
MSC.100-1	M3, 4-40	0.100	2.5	1.000	25.4	0.050	1.3
MSC.120-1	6-32, 1/8" tube	0.120	3.0	1.000	25.4	0.050	1.3
MSC.148-1	M4, 8-32	0.148	3.8	1.000	25.4	0.055	1.4
MSC.175-1	10-24, 3/16" tube	0.175	4.4	1.000	25.4	0.055	1.4
MSC.221-1	M6	0.221	5.6	1.000	25.4	0.060	1.5
MSC.223-1.5	M6	0.223	5.7	1.500	38.1	0.060	1.5
MSC.233-1.5	1/4-20, 1/4" tube	0.233	5.9	1.500	38.1	0.055	1.4
MSC.295-1.5	M8, 5/16-18, 5/16" tube	0.295	7.5	1.500	38.1	0.055	1.4
MSC.355-1.5	3/8-16, 3/8" tube	0.355	9.0	1.500	38.1	0.055	1.4
MSC.375-1.5	M10	0.375	9.5	1.500	38.1	0.055	1.4
MSC.415-1.5	7/16" tube/thread	0.415	10.5	1.500	38.1	0.055	1.4
MSC.456-1.5	M12	0.456	11.6	1.500	38.1	0.067	1.7
MSC.480-1.5	1/2" tube/thread	0.480	12.2	1.500	38.1	0.055	1.4
MSC.535-1.5	M14, 9/16" tube/thread	0.535	13.6	1.500	38.1	0.055	1.4
MSC.600-1.5	M16, 5/8" tube/thread	0.600	15.2	1.500	38.1	0.055	1.4
MSC.615-4	M16, 5/8" tube/thread	0.615	15.6	4.000	101.6	0.060	1.5
MSC.730-1.5	M19, 3/4" tube/thread	0.730	18.5	1.500	38.1	0.060	1.5
MSC.740-4	M19, 3/4" tube/thread	0.740	18.8	4.000	101.6	0.055	1.4
MSC.855-1.5	M22, 7/8" tube/thread	0.855	21.7	1.500	38.1	0.055	1.4
MSC.970-4	M25, 1" tube/thread	0.970	24.6	4.000	101.6	0.055	1.4
MSC.980-1.5	M25, 1" tube/thread	0.980	24.9	1.500	38.1	0.055	1.4
MSC1.062-1.75	1-1/16" tube/thread	1.062	27.0	1.750	44.5	0.062	1.6
MSC1.125-1.75	1-1/8" tube/thread	1.125	28.6	1.750	44.5	0.062	1.6
MSC1.187-1.75	1-3/16" tube/thread	1.187	30.1	1.750	44.5	0.062	1.6
MSC1.230-5	1-1/4" tube/thread	1.230	31.2	5.000	127.0	0.055	1.4
MSC1.250-1.75	1-1/4" tube/thread	1.250	31.8	1.750	44.5	0.062	1.6
MSC1.375-2	1-3/8" tube/thread	1.375	34.9	2.000	50.8	0.062	1.6
MSC1.500-2	1-1/2" tube/thread	1.500	38.1	2.000	50.8	0.062	1.6
MSC1.750-2	1-3/4" tube/thread	1.750	44.5	2.000	50.8	0.062	1.6
MSC1.875-2	1-7/8" tube/thread	1.875	47.6	2.000	50.8	0.062	1.6
MSC2.000-2	2" tube/thread	2.000	50.8	2.000	50.8	0.062	1.6

For Material Specifications, please see page 139.



Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 120

MOCAP

MSP Series - Silicone Tapered Plugs

Masking



- Resists Temps to 600°F (316°C)
- Larger Sizes also Available with a Hollow End for Cost Savings - MHSP Series
- Tapered Design Allows for Masking of Various Hole Diameters
- Material: Iron Oxide Red Silicone



Part #	Suggested Applications	(A) Small Diameter		(B) Large Diameter		(C) Length	
		in	mm	in	mm	in	mm
MSP.062/187	M3, 5-40, 8-32	0.062	1.6	0.187	4.7	0.750	19.1
MSP.125/250	M4, M5, 10-24, 12-48	0.125	3.2	0.250	6.4	1.000	25.4
MSP.187/343	M6, M7, M8, 1/4 -20, 5/16	0.187	4.7	0.343	8.7	1.000	25.4
MSP.250/437	M10, 3/8, 7/16	0.250	6.4	0.437	11.1	1.000	25.4
MSP.313/562	M12, M14, 1/2, 9/16	0.313	8.0	0.562	14.3	1.125	28.6
MSP.437/687	M16, 5/8	0.437	11.1	0.687	17.4	1.000	25.4
MSP.562/750	M18, 3/4	0.562	14.3	0.750	19.1	1.000	25.4
MSP.625/800	M20, 7/8	0.625	15.9	0.800	20.3	1.000	25.4
MSP.750/925	M22, M24, 1	0.750	19.1	0.925	23.5	1.000	25.4
MSP.827/1.063 *	---	0.827	21.0	1.063	27.0	1.113	28.3
MSP1.036/1.246 *	---	1.036	26.3	1.246	31.6	1.000	25.4
MSP1.187/1.437 *	---	1.187	30.1	1.437	36.5	1.000	25.4
MSP1.306/1.622 *	---	1.306	33.2	1.622	41.2	1.000	25.4
MSP1.469/1.750 *	---	1.469	37.3	1.750	44.5	1.000	25.4
MSP1.621/1.973 *	---	1.621	41.2	1.973	50.1	1.000	25.4
MSP1.881/2.198 *	---	1.881	47.8	2.168	55.1	1.000	25.4
MSP2.000/2.469 *	---	2.000	50.8	2.469	62.7	1.000	25.4
MSP2.118/2.506 *	---	2.118	53.8	2.506	63.7	1.000	25.4
MSP2.272/2.697 *	---	2.272	57.7	2.697	68.5	1.000	25.4
MSP2.437/2.953 *	---	2.437	61.9	2.953	75.0	1.375	34.9
MSP2.750/3.500 *	---	2.750	69.9	3.500	88.9	1.500	38.1
MSP3.250/4.000 *	---	3.250	82.6	4.000	101.6	1.500	38.1
MSP3.500/5.000 *	---	3.500	88.9	5.000	127.0	2.000	50.8

For Material Specifications, please see page 139.

* Also Available as Hollow Plugs; Please Specify MHSP Prefix When Ordering.

MHSP Series *
Hollow Silicone Plugs




MOCAP's Hollow Silicone Plugs are
a Lower Cost Option to Solid.

MOCAP



Silicone Pull Plugs - **MSPP Series**


Masking



- Resists Temps to 600° F (316°C)
- Convenient Handle and Parallel Design for Masking of Through-Holes
- Material: Iron Oxide Red Silicone



Part #	Suggested Applications	(A) Diameter		(B) Stem Diameter		(C) Length		(D) Bevel Length		(E) Stem Height	
		in	mm	in	mm	in	mm	in	mm	in	mm
MSPP.109	4-40	0.109	2.8	0.060	1.5	0.625	15.9	0.118	3.0	0.625	15.9
MSPP.130	6-32	0.130	3.3	0.082	2.1	0.625	15.9	0.118	3.0	0.625	15.9
MSPP.141	M4	0.141	3.6	0.086	2.2	0.625	15.9	0.078	2.0	0.551	14.0
MSPP.156	8-32	0.156	4.0	0.082	2.1	0.625	15.9	0.118	3.0	0.625	15.9
MSPP.180	10-24	0.180	4.6	0.110	2.8	0.625	15.9	0.118	3.0	0.625	15.9
MSPP.217	M6	0.217	5.5	0.125	3.2	0.984	25.0	0.118	3.0	0.866	22.0
MSPP.225	1/4-20	0.225	5.7	0.125	3.2	1.000	25.4	0.118	3.0	1.000	25.4
MSPP.275	M8, 5/16-18	0.275	7.0	0.130	3.3	1.000	25.4	0.118	3.0	1.000	25.4
MSPP.335	3/8-16	0.335	8.5	0.157	4.0	1.000	25.4	0.118	3.0	1.000	25.4
MSPP.355	M10	0.355	9.0	0.157	4.0	0.984	25.0	0.118	3.0	0.866	22.0
MSPP.445	1/2	0.445	11.3	0.157	4.0	1.000	25.4	0.196	5.0	1.000	25.4

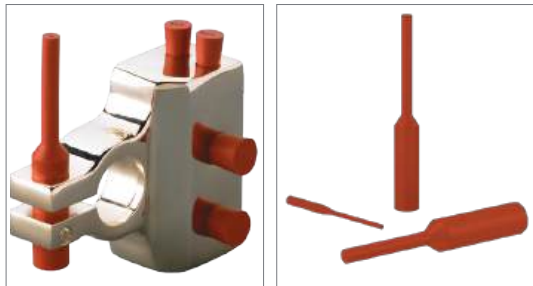


For Material Specifications, please see page 139.

MSWP Series - Silicone Washer Plugs

Masking



- Resists Temps to 600° F (316° C)
- Features a Flange for Masking the Area Around a Hole
- Material: Iron Oxide Red Silicone




Part #	(A) Stem Diameter		(B) Plug Small Diameter		(C) Plug Large Diameter		(D) Flange O.D.		(E) Length		(F) Bevel Length		(G) Stem Height		(H) Flange Thickness	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
MSWP3	0.156	4.0	0.060	1.5	0.094	2.4	0.393	10.0	0.098	2.5	0.156	4.0	0.590	15.0	0.118	3.0
MSWP4	0.156	4.0	0.078	2.0	0.141	3.6	0.472	12.0	0.125	3.2	0.156	4.0	0.590	15.0	0.118	3.0
MSWP5	0.156	4.0	0.110	2.8	0.177	4.5	0.472	12.0	0.137	3.5	0.216	5.5	0.590	15.0	0.118	3.0
MSWP6	0.196	5.0	0.118	3.0	0.208	5.3	0.511	13.0	0.137	3.5	0.255	6.5	0.590	15.0	0.118	3.0
MSWP8	0.196	5.0	0.156	4.0	0.283	7.2	0.590	15.0	0.156	4.0	0.313	8.0	0.590	15.0	0.118	3.0
MSWP10	0.236	6.0	0.177	4.5	0.346	8.8	0.787	20.0	0.156	4.0	0.472	12.0	0.590	15.0	0.118	3.0
MSWP12	0.236	6.0	0.216	5.5	0.417	10.6	0.866	22.0	0.156	4.0	0.551	14.0	0.590	15.0	0.118	3.0

For Material Specifications, please see page 139.



Silicone Rubber Tubing - SRT Series

Masking



- Stocked in 50 Ft./100 Ft. Lengths
- Resists Temperatures to 500°F (260°C)
- Material: Iron Oxide Red Silicone



Part #	(A) Inside Diameter		(B) Wall Thickness		Roll Length	
	in	mm	in	mm	feet	meters
SRT104	0.104	2.6	0.040	1.0	100	30.5
SRT110	0.110	2.8	0.040	1.0	100	30.5
SRT130	0.130	3.3	0.040	1.0	100	30.5
SRT149	0.149	3.8	0.040	1.0	100	30.5
SRT163	0.163	4.1	0.040	1.0	100	30.5
SRT181	0.181	4.6	0.040	1.0	100	30.5
SRT224	0.224	5.7	0.040	1.0	100	30.5
SRT239	0.239	6.1	0.040	1.0	100	30.5
SRT302	0.302	7.7	0.060	1.5	100	30.5
SRT330	0.330	8.4	0.060	1.5	100	30.5
SRT363	0.363	9.2	0.060	1.5	100	30.5
SRT380	0.380	9.6	0.060	1.5	100	30.5
SRT420	0.420	10.7	0.060	1.5	100	30.5
SRT460	0.460	11.7	0.060	1.5	100	30.5
SRT485	0.485	12.3	0.060	1.5	50	15.2
SRT535	0.535	13.6	0.060	1.5	50	15.2
SRT609	0.609	15.5	0.060	1.5	50	15.2
SRT727	0.727	18.5	0.060	1.5	50	15.2
SRT853	0.853	21.7	0.060	1.5	50	15.2
SRT915	0.915	23.2	0.060	1.5	50	15.2
SRT975	0.975	24.8	0.060	1.5	50	15.2

For Material Specifications, please see page 139.




MEC Series - EPDM Straight Caps

Masking



- Resists Chemicals and Temps to 300°F (149°C)
- Flexible for Masking Threaded and Smooth Studs
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)



Part #	Suggested Applications	(A) Inside Diameter		(B) Inside Length		(C) Wall Thickness	
		in	mm	in	mm	in	mm
MEC.070-1	M2, 2-56	0.070	1.8	1.000	25.4	0.065	1.7
MEC.100-1	M3, 4-40	0.100	2.5	1.000	25.4	0.050	1.3
MEC.120-1	6-32, 1/8" tube	0.120	3.0	1.000	25.4	0.050	1.3
MEC.148-1	M4, 8-32	0.148	3.8	1.000	25.4	0.055	1.4
MEC.175-1	10-24, 3/16" tube	0.175	4.4	1.000	25.4	0.055	1.4
MEC.221-1	M6	0.221	5.6	1.000	25.4	0.060	1.5
MEC.223-1.5	M6	0.223	5.7	1.500	38.1	0.060	1.5
MEC.233-1.5	1/4-20 1/4" tube	0.233	5.9	1.500	38.1	0.055	1.4
MEC.295-1.5	M8, 5/16-18, 5/16" tube	0.295	7.5	1.500	38.1	0.055	1.4
MEC.355-1.5	3/8-16, 3/8" tube	0.355	9.0	1.500	38.1	0.055	1.4
MEC.375-1.5	M10	0.375	9.5	1.500	38.1	0.055	1.4
MEC.415-1.5	7/16" tube/thread	0.415	10.5	1.500	38.1	0.055	1.4
MEC.456-1.5	M12	0.456	11.6	1.500	38.1	0.067	1.7
MEC.480-1.5	1/2" tube/thread	0.480	12.2	1.500	38.1	0.055	1.4
MEC.535-1.5	M14, 9/16" tube/thread	0.535	13.6	1.500	38.1	0.055	1.4
MEC.600-1.5	M16, 5/8" tube/thread	0.600	15.2	1.500	38.1	0.055	1.4
MEC.615-4	M16, 5/8" tube/thread	0.615	15.6	4.000	101.6	0.060	1.5
MEC.730-1.5	M19, 3/4" tube/thread	0.730	18.5	1.500	38.1	0.060	1.5
MEC.740-4	M19, 3/4" tube/thread	0.740	18.8	4.000	101.6	0.055	1.4
MEC.855-1.5	M22, 7/8" tube/thread	0.855	21.7	1.500	38.1	0.055	1.4
MEC.970-4	M25, 1" tube/thread	0.970	24.6	4.000	101.6	0.055	1.4
MEC.980-1.5	M25, 1" tube/thread	0.980	24.9	1.500	38.1	0.055	1.4
MEC1.062-1.75	1-1/16" tube/thread	1.062	27.0	1.750	44.5	0.062	1.6
MEC1.125-1.75	1-1/8" tube/thread	1.125	28.6	1.750	44.5	0.062	1.6
MEC1.187-1.75	1-3/16" tube/thread	1.187	30.1	1.750	44.5	0.062	1.6
MEC1.230-5	1-1/4" tube/thread	1.230	31.2	5.000	127.0	0.055	1.4
MEC1.250-1.75	1-1/4" tube/thread	1.250	31.8	1.750	44.5	0.062	1.6
MEC1.375-2	1-3/8" tube/thread	1.375	34.9	2.000	50.8	0.062	1.6
MEC1.500-2	1-1/2" tube/thread	1.500	38.1	2.000	50.8	0.062	1.6
MEC1.750-2	1-3/4" tube/thread	1.750	44.5	2.000	50.8	0.062	1.6
MEC1.875-2	1-7/8" tube/thread	1.875	47.6	2.000	50.8	0.062	1.6
MEC2.000-2	2" tube/thread	2.000	50.8	2.000	50.8	0.062	1.6



For Material Specifications, please see page 139.


MOCAP

125www.mocap.com.cn | 4006-4006-49 | 企业微信号 13802665016


Free Samples

EPDM Tapered Plugs - MEP Series

Masking



- Resists Chemicals and Temps to 300°F (149°C)
- Tapered Design Allows for Masking of Various Hole Diameters
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)



Part #	Suggested Applications	(A) Small Diameter		(B) Large Diameter		(C) Length	
		in	mm	in	mm	in	mm
MEP.062/187	M3, 5-40, 8-32	0.062	1.6	0.187	4.7	0.750	19.1
MEP.125/250	M4, M5, 10-24, 12-48	0.125	3.2	0.250	6.4	1.000	25.4
MEP.187/343	M6, M7, M8, 1/4 -20, 5/16	0.187	4.7	0.343	8.7	1.000	25.4
MEP.250/437	M10, 3/8, 7/16	0.250	6.4	0.437	11.1	1.000	25.4
MEP.313/562	M12, M14, 1/2, 9/16	0.313	8.0	0.562	14.3	1.125	28.6
MEP.437/687	M16, 5/8	0.437	11.1	0.687	17.4	1.000	25.4
MEP.562/750	M18, 3/4	0.562	14.3	0.750	19.1	1.000	25.4
MEP.625/800	M20, 7/8	0.625	15.9	0.800	20.3	1.000	25.4
MEP.750/925	M22, M24, 1	0.750	19.1	0.925	23.5	1.000	25.4
MEP.827/1.063	---	0.827	21.0	1.063	27.0	1.113	28.3
MEP1.036/1.246	---	1.036	26.3	1.246	31.6	1.000	25.4
MEP1.187/1.437	---	1.187	30.1	1.437	36.5	1.000	25.4
MEP1.306/1.622	---	1.306	33.2	1.622	41.2	1.000	25.4
MEP1.469/1.750	---	1.469	37.3	1.750	44.5	1.000	25.4
MEP1.621/1.973	---	1.621	41.2	1.973	50.1	1.000	25.4
MEP1.881/2.198	---	1.881	47.8	2.168	55.1	1.000	25.4
MEP2.000/2.469	---	2.000	50.8	2.469	62.7	1.000	25.4
MEP2.118/2.506	---	2.118	53.8	2.506	63.7	1.000	25.4
MEP2.272/2.697	---	2.272	57.7	2.697	68.5	1.000	25.4
MEP2.437/2.953	---	2.437	61.9	2.953	75.0	1.375	34.9
MEP2.750/3.500	---	2.750	69.9	3.500	88.9	1.500	38.1
MEP3.250/4.000	---	3.250	82.6	4.000	101.6	1.500	38.1
MEP3.500/5.000	---	3.500	88.9	5.000	127.0	2.000	50.8

For Material Specifications, please see page 139.




MEPP Series - EPDM Pull Plugs

Masking



- Resists Chemicals and Temps to 300°F (149°C)
- Convenient Handle and Parallel Design for Masking of Through-Holes
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)




Part #	Suggested Applications	(A) Diameter		(B) Stem Diameter		(C) Length		(D) Bevel Length		(E) Stem Height	
		in	mm	in	mm	in	mm	in	mm	in	mm
MEPP.109	4-40	0.109	2.8	0.060	1.5	0.625	15.9	0.118	3.0	0.625	15.9
MEPP.130	6-32	0.130	3.3	0.082	2.1	0.625	15.9	0.118	3.0	0.625	15.9
MEPP.141	M4	0.141	3.6	0.086	2.2	0.625	15.9	0.078	2.0	0.551	14.0
MEPP.156	8-32	0.156	4.0	0.082	2.1	0.625	15.9	0.118	3.0	0.625	15.9
MEPP.180	10-24	0.180	4.6	0.110	2.8	0.625	15.9	0.118	3.0	0.625	15.9
MEPP.217	M6	0.217	5.5	0.125	3.2	0.984	25.0	0.118	3.0	0.866	22.0
MEPP.225	1/4-20	0.225	5.7	0.125	3.2	1.000	25.4	0.118	3.0	1.000	25.4
MEPP.275	M8, 5/16-18	0.275	7.0	0.130	3.3	1.000	25.4	0.118	3.0	1.000	25.4
MEPP.335	3/8-16	0.335	8.5	0.157	4.0	1.000	25.4	0.118	3.0	1.000	25.4
MEPP.355	M10	0.355	9.0	0.157	4.0	0.984	25.0	0.118	3.0	0.866	22.0
MEPP.445	1/2	0.445	11.3	0.157	4.0	1.000	25.4	0.196	5.0	1.000	25.4

For Material Specifications, please see page 139.



EPDM Washer Plugs - **MEWP Series**

Masking



- Resists Chemicals and Temps to 300°F (149°C)
- Features a Flange for Masking the Area Around a Hole
- Material: Black Ethylene Propylene Diene Monomer (EPDM Rubber)




Part #	(A) Stem Diameter		(B) Plug Small Diameter		(C) Plug Large Diameter		(D) Flange O.D.		(E) Length		(F) Bevel Length		(G) Stem Height		(H) Flange Thickness	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
MEWP3	0.156	4.0	0.060	1.5	0.094	2.4	0.393	10.0	0.098	2.5	0.156	4.0	0.590	15.0	0.118	3.0
MEWP4	0.156	4.0	0.078	2.0	0.141	3.6	0.472	12.0	0.125	3.2	0.156	4.0	0.590	15.0	0.118	3.0
MEWP5	0.156	4.0	0.110	2.8	0.177	4.5	0.472	12.0	0.137	3.5	0.216	5.5	0.590	15.0	0.118	3.0
MEWP6	0.196	5.0	0.118	3.0	0.208	5.3	0.511	13.0	0.137	3.5	0.255	6.5	0.590	15.0	0.118	3.0
MEWP8	0.196	5.0	0.156	4.0	0.283	7.2	0.590	15.0	0.156	4.0	0.313	8.0	0.590	15.0	0.118	3.0
MEWP10	0.236	6.0	0.177	4.5	0.346	8.8	0.787	20.0	0.156	4.0	0.472	12.0	0.590	15.0	0.118	3.0
MEWP12	0.236	6.0	0.216	5.5	0.417	10.6	0.866	22.0	0.156	4.0	0.551	14.0	0.590	15.0	0.118	3.0




For Material Specifications, please see page 139.

MCT620 Series - Polyester Tape


Masking




- Widths from 3/16" to 18"
- Withstands Up to 425°F (218°C) for 1 hour
- Adhesive Leaves No Residue After Removal
- Material: Green Polyester



Part #	Tape Width		Roll Length	
	in	mm	feet	meters
MCT-620-3/16	0.187	4.8	216.0	65.8
MCT-620-1/4	0.250	6.4	216.0	65.8
MCT-620-1/2	0.500	12.7	216.0	65.8
MCT-620-5/8	0.625	15.9	216.0	65.8
MCT-620-3/4	0.750	19.1	216.0	65.8
MCT-620-7/8	0.875	22.2	216.0	65.8
MCT-620-1	1.000	25.4	216.0	65.8
MCT-620-1.5	1.500	38.1	216.0	65.8
MCT-620-2	2.000	50.8	216.0	65.8
MCT-620-3	3.000	76.2	216.0	65.8
MCT-620-4	4.000	101.6	216.0	65.8
MCT-620-5	5.000	127.0	216.0	65.8
MCT-620-6	6.000	152.4	216.0	65.8

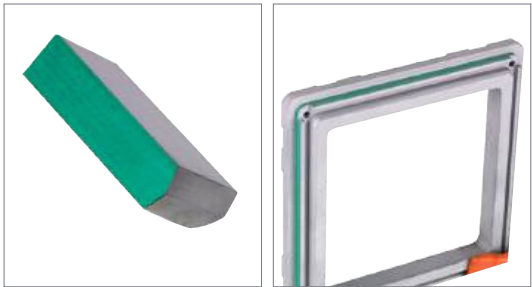


Polyester Discs - **MCD-PE Series**
Masking



- Diameters from 3/16" to 1-3/4" *Please call for info on other sizes*
- Withstands Up to 425°F (218°C) for 1 hour
- Split Backing Saves Labor Time
- Adhesive Leaves No Residue After Removal
- Material: Green Polyester



Part #	(A) Diameter		QTY Per Roll
	in	mm	
POLY-DOT-.187	0.187	4.8	5000
POLY-DOT-.250	0.250	6.4	5000
POLY-DOT-.313	0.313	7.9	5000
POLY-DOT-.375	0.375	9.5	5000
POLY-DOT-.437	0.437	11.1	5000
POLY-DOT-.500	0.500	12.7	2500
POLY-DOT-.562	0.562	14.3	2000
POLY-DOT-.625	0.625	15.9	2000
POLY-DOT-.750	0.750	19.1	2000
POLY-DOT-.875	0.875	22.2	2000
POLY-DOT-1.00	1.000	25.4	2000
POLY-DOT-1.125	1.125	28.6	1000
POLY-DOT-1.187	1.187	30.2	1000
POLY-DOT-1.250	1.250	31.8	1000
POLY-DOT-1.500	1.500	38.1	1000
POLY-DOT-1.750	1.750	44.5	1000




Custom Shapes Available

MCT800 Series - Polyimide Tape


Masking



- Widths from 3/16" to 18"
- Withstands Up to 500° F (260°C) for 1 hour
- Adhesive Leaves No Residue After Removal
- Material: Amber Polyimide




Part #	Tape Width		Roll Length	
	in	mm	feet	meter
MCT-800-3/16	0.187	4.8	108	32.9
MCT-800-1/4	0.250	6.4	108	32.9
MCT-800-1/2	0.500	12.7	108	32.9
MCT-800-5/8	0.625	15.9	108	32.9
MCT-800-3/4	0.750	19.1	108	32.9
MCT-800-7/8	0.875	22.2	108	32.9
MCT-800-1	1.000	25.4	108	32.9
MCT-800-1.5	1.500	38.1	108	32.9
MCT-800-2	2.000	50.8	108	32.9
MCT-800-3	3.000	76.2	108	32.9
MCT-800-4	4.000	101.6	108	32.9
MCT-800-5	5.000	127.0	108	32.9
MCT-800-6	6.000	152.4	108	32.9



Polyimide Discs - MCD-PI Series

Masking



- Diameters from 3/16" to 1-3/4" *Please call for info on other sizes*
- Withstands Up to 500°F (260°C) for 1 hour
- Split Backing Saves Labor Time
- Adhesive Leaves No Residue After Removal
- Material: Amber Polyimide




Part #	(A) Diameter		QTY Per Roll
	in	mm	
PMIDE-DOT-187	0.187	4.8	5000
PMIDE-DOT-250	0.250	6.4	5000
PMIDE-DOT-313	0.313	7.9	5000
PMIDE-DOT-375	0.375	9.5	5000
PMIDE-DOT-437	0.437	11.1	5000
PMIDE-DOT-500	0.500	12.7	2500
PMIDE-DOT-562	0.562	14.3	2500
PMIDE-DOT-625	0.625	15.9	2000
PMIDE-DOT-750	0.750	19.1	2000
PMIDE-DOT-875	0.875	22.2	2000
PMIDE-DOT-1.00	1.000	25.4	2000
PMIDE-DOT-1.12	1.125	28.6	1000
PMIDE-DOT-1.18	1.187	30.2	1000
PMIDE-DOT-1.25	1.250	31.8	1000
PMIDE-DOT-1.50	1.500	38.1	1000
PMIDE-DOT-1.75	1.750	44.5	1000




MCN Series - Plastic Netting for Superior Protection

Mesh Netting



- Open Design Prevents Corrosion
- Flexible to Fit Irregular Shapes
- Sold in Rolls, but can be Sliced to Length
- Material: Low-Density Polyethylene in Specific Colors Per Size

Part #V	Color	APPROXIMATE DIAMETER RANGE		LENGTH (per roll)	
		in	mm	ft	m
MCN 3	RED	1/4 to 3/8	6.35 to 9.53	820	249.94
MCN 3A	RED	1/4 to 3/8	6.35 to 9.53	1500	457.20
MCN 4	ORANGE	3/8 to 5/8	9.53 to 15.88	820	249.94
MCN 4A	ORANGE	3/8 to 5/8	9.53 to 15.88	1500	457.20
MCN 5	BLUE	5/8 to 1	15.88 to 25.40	820	249.94
MCN 5A	BLUE	5/8 to 1	15.88 to 25.40	1500	457.20
MCN 6	YELLOW	1 to 2	25.40 to 50.80	164	49.99
MCN 6A	YELLOW	1 to 2	25.40 to 50.80	1500	457.20
MCN 7	RED	2 to 4	50.80 to 101.60	164	49.99
MCN 7A	RED	2 to 4	50.80 to 101.60	1500	457.20
MCN 8	GREEN	4 to 6	101.60 to 152.40	164	49.99
MCN 9	BROWN	6 to 8	152.40 to 203.20	164	49.99
MCN 10	CRYSTAL	8 to 10	203.20 to 254.00	164	49.99
MCN 11	GREEN	10 to 12	254.00 to 304.80	164	49.99



Printing, Punching, Slicing, Assembly - Secondary Operations

When your application requires something more than a standard part, **MOCAP** offers several secondary operations to convert, enhance or improve your product. We can create custom sleeves, rings, slots, covers, masks, and punch outs at the most economical prices.

Printing can add your logo or other valuable information to most dip molded vinyl plastic caps, plugs and grips. Multi-color and consecutive number printing are also available.

Punching can add a hole or custom shape not possible through conventional molding processes

Slicing to remove a portion of the part creating a custom fit or specialized function.

Slitting adds a slot or thin opening on almost any surface

Assembly to create products from components, or add packaging to your product



Printing Assembly Punching & Slicing

Customized to Fit Your Specifications



Standard Ink Colors



Additional Colors Available

For More Information, Please Contact Sales at
4006-4006-49

MOCAP

Free Samples

企业微信号 13802665016 | 4006-4006-49 | www.mocap.com.cn 134

NEW SELECTION OF PLASTIC CAPS & PLUGS

Now offering more size, shape, material and color options than ever before!

New Tubing Plug
Sizes, Shapes & Profiles

Expanded Straight
Cap Offerings

New Offset Pull Tab Options
OP SERIES



MOCAP has again expanded its product lines by adding styles of Polyethylene Plastic Caps and Plastic Plugs including NEW Tubing Plug shapes and profiles. We also have expanded our line of S Series Straight Caps to include NEW SK Series Caps in LDPE and NOW Thermoplastic Elastomer material to better fit your application needs. Our NEW OP Series offers an Offset Pull Tab to allow for easier removal and increased production rates.

MOCAP has also added many new sizes to our current tapered, straight and threaded cap product lines. If you do not see a **MOCAP** part to fit your application, please contact our sales department for assistance and we will work with you to find a *Solution that Fits®*.

Smaller Quantity Micro-Packs Now Available!

Offering the Lowest Minimum Order Quantity with the Highest Stocking Levels in the Industry

BECKETT PACKAGING

Packaging Solutions from **MOCAP**

**Quality Plastic Tubes & Containers
for Cutting Tools and More!**




Telescopic Packaging

Telescopic Length
Available With and Without Hanger
Many Colors and Sizes
Large Stocked Inventory and Quick Delivery
Application: Drills, Milling Cutters, Wood Cutters,
Cutter Bar, Saw Blade, Electrode,
Carbide Cutters



Insert Boxes - IB Series

Foam Inserts Available for Most sizes
Many Colors and Sizes
Indexing Lid Opens in Either Direction
Snap Stacking
Custom Molded with Your Company Logo or Message
Large Stocked Inventory and Quick Delivery
Application: Inserts, Turing/Grooving Tool

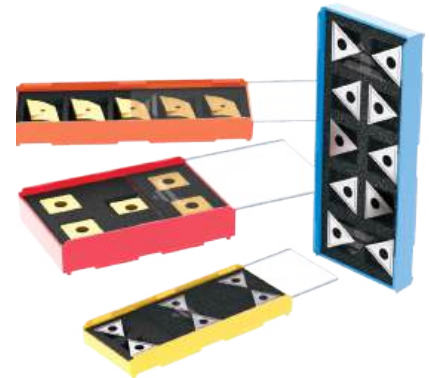

GRIP PAKS and CENTER GRIP PAKS

Grip Pak - GRP Series

Clear Cap and Colorful Base
Plug Base Securely Holds Tool in Place
Large Stocked Inventory and Quick Delivery
Application: Drills, Milling Cutters, Carbide Cutters
with Round Shank

Grip Pak Centered - GRC Series

Ratchet-style Length Adjustment
Center Tools Regardless of Diameter
Center Plug and Beveled Cap Hold Tool in Place at Both Ends
Application: Drills, Milling Cutters, Carbide Cutters
with Round Shank



Printing and Label Services

Screen Printing Services for Direct-Print Applications
Custom Label Services
Standard Warning Message on Most Products
Custom Embossing Available - Custom Text or Logos!



beckett@mocap.com.cn



4006-4006-49



beckettpackaging.com.cn

Silicone **X-TREME TAPE®**

A Division of **MOCAP**

Self-Fusing Silicone Tape



Originally developed for U.S. Military applications, X-Treme Tape has been tested and proven in the most extreme conditions and environments. It is the most versatile and easy-to-use quick-fix emergency rescue repair tape available. X-Treme Tape withstands extremes in temperature, pressure, voltage, moisture, corrosion and contaminants



Household Repairs

Save money on expensive service calls, parts and fittings. X-Treme Tape can rescue you from many problems at home. Its low water absorption and high continuous temperature range make it perfectly suited for home projects, renovations and maintenance, such as:

*Dishwasher Hoses • Dryer Vents • Washing Machine Drain Hoses
Vacuum Cleaner Hoses • Leaky P-traps • Cracked Drain Pipes
Garden Hoses and Fittings • Power Cords • Electrical Repairs*



Automotive

X-Treme Tape is so versatile there should be a roll in every glove compartment! It can make electrical connections air & water tight or seal a leaking exhaust pipe. It's the perfect self-fusing wrap for automotive and truck applications like:

*Radiator Hoses • Air Hoses • Air Conditioning Lines • Exhaust Systems
Wire Bundling/Protection*



Electrical

Because X-Treme Tape has a dielectric strength of 400 volts per .001" thickness, it can effectively insulate up to 8000 volts for a single .020" thick layer wrap. Silicone X-Treme Tape is UL listed, and a safe and effective electrical insulator, perfect for:

*Electrical Connections • Jumper Cable Grips • Motor Coils
Transformers • Power Tools • Power Leads and Cords • Terminal Splicing*



Marine

X-Treme Tape withstands salt water and UV rays and can be applied and fused at a depth of over 1000 feet, making it the perfect self-fusing tape for any marine environment. Ideally suited for quick fix marine repairs, like:

*Water Hoses • Drainage Lines • Exhausts • Rigging • Wiring
Fishing Equipment • Boat Rails • Scuba Gear*



sales@mocap.com.cn



4006-4006-49




xtremetape.com.cn



Silicone **X-TREME TAPE®**

Self Fusing Silicone Tape

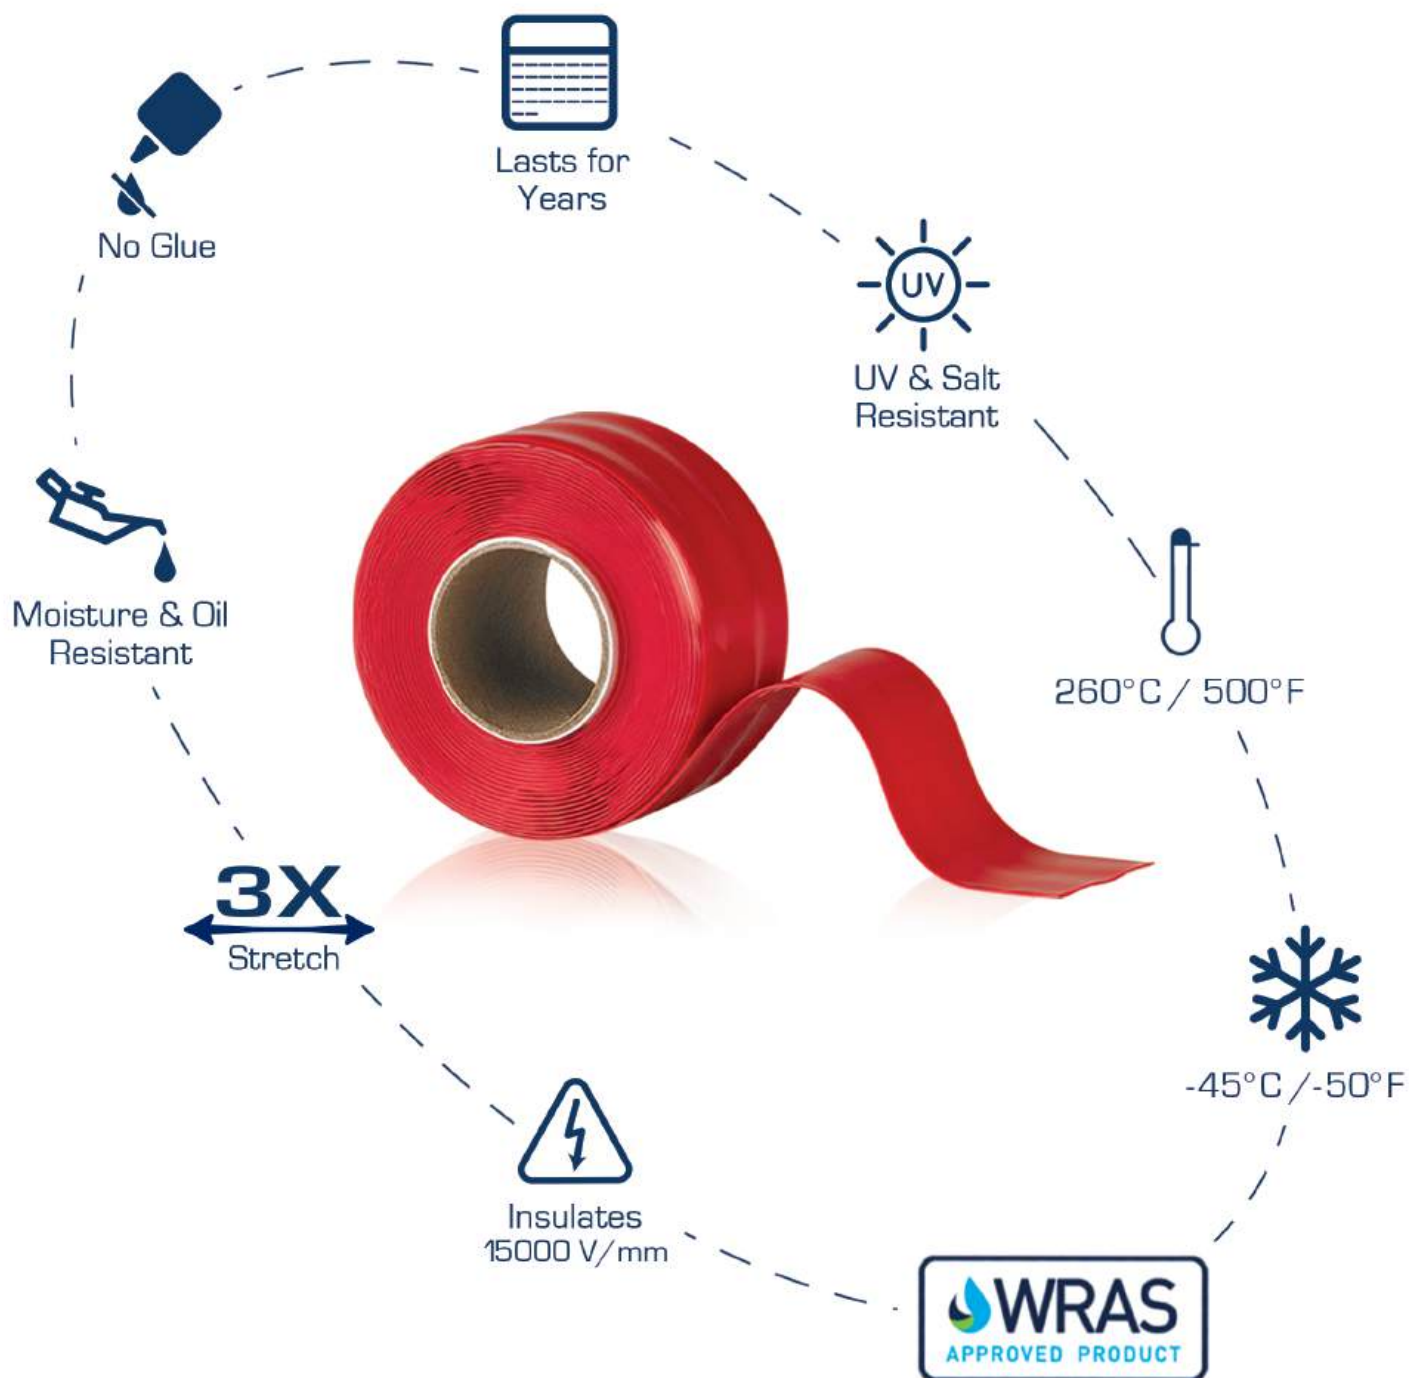

sales@mocap.com.cn



4006-4006-49



xtremetape.com.cn

Material Specs

Characteristics, Temperature and Tolerance Information

MOCAP

0760-22836188

www.mocap.com.cn

	Material	General Description	Hardness (Shore A)	Tensile Strength (PSI)	Elongation (%)	Tear Strength (PPI)	Operating Temperature				Electrical Insulation
							Low °F	Low °C	High °F	High °C	
Dip Molded Vinyl	9500	General Purpose, Glossy	73	1520	380	200	-20	-29	300	149	Good
	9250	High -Temp Resistant (HT-201)	84	2500	350	250	0	-18	475	246	Good
	9700	Low Exudation	73	1500	300	150	+20	-7	250	121	Good
	9400	FDA Acceptable	58	1800	500	270	-20	-29	140	60	---
	9240	Semi-Rigid, Glossy	86	2200	260	250	+20	-7	250	121	Good
	9238	Non-Copper Staining	75	1750	300	200	-20	-29	250	121	Good
	9222	Flame Retardant, Matte	73	620	230	80	0	-18	280	138	Very Good
	9100	Textured	60	850	300	100	-20	-29	150	66	---
	4610	General Purpose, Matte	65	600	175	45	+20	-7	175	79	---
	4406	Anti-Static	70	1200	250	200	-20	-29	250	121	Good
	3810	Extended U.V. Resistant	75	1750	300	250	-20	-29	250	121	Good
	1219	Gas & Oil Resistant, Glossy	70	1500	250	150	-20	-29	300	149	Good
Rubber	1217	Textured	45	500	250	95	-20	-29	150	66	---
	Silicone	Ultra High-Temp Resistant	50-60	800	200	75	-104	-76	600	316	---
Resins	EPDM	High-Temp Chemical Resistant	50	1015	300	200	-67	-55	300	149	---
	LDPE	Low-Density Polyethylene	---	1600	---	---	-94	-70	175	79	---
	HDPE	High-Density Polyethylene	---	3100-5500	---	---	0	-18	215	102	---
	PP	Polypropylene	---	3300-5300	---	---	-94	-70	250	121	---
	TPE	Thermoplastic Elastomer	---	985	---	---	-76	-60	194	90	---
	NYLON	Nylon PA6	---	10741	---	---	-40	-40	250	121	---
	Paper	Tan Recycled Paper	---	---	---	---	---	---	400	204	---

Additional Formulas, Compounds & Resins Available, Please Contact Sales.

Material Maximum Temperature Specifications

Material	9400	9100 • 1217	4610 • LDPE	TPE	HDPE	3810 • 4406 9238 • 9240 9700 • PP • NYLON	9222	9500 • EPDM 1219	PAPER	9250	SILICONE
Temp	140° F 60° C	150° F 66° C	175° F 79° C	194° F 90° C	215° F 102° C	250° F 121° C	275° F 135° C	300° F 149° C	400° F 204° C	475° F 246° C	600° F 316° C

Temperatures shown are guidelines. Please request a **FREE** sample for your testing.

9500 Formula Vinyl Color Options



Plastic Color Options



Tolerances

VINYL PRODUCTS

- Minimum Length = 3/16" (4.75mm)
- Length is variable in 1/16" (1.58mm) increments
 - Inside length tolerance is +/- 1/16" (1.58mm)
 - Length measured along inside wall, not from center, with the exception of the RFVG Series.
- Wall thickness as noted, unless special request
 - Wall tolerance +/- .010" (.25mm)
 - Wall measured approximately 1/4" (6.35mm) from open end, with wall increasing slightly towards the closed end of cap
- Specify Standard Formulation 9500 or High-Temp 9250 (Additional formulations are available).

POLY PRODUCTS

- Typical tolerance for part dimension:
 - 0.000"-3.000": ± 0.010" (0mm to 76.2mm : ± .25mm)
 - 3.001"-5.000": ± 0.015" (76.23mm to 127mm : ± .38mm)
 - 5.001" and up: ± 0.020" (127.1mm and up : ± .51mm)
- On SMR Series parts 1-1/16" and larger, the tolerance for dimension "A" is +0.018"/-0.010" (+0.45mm/- .25mm)

RUBBER PRODUCTS

All Thermoset Rubber Products are manufactured to RMA® "A3" Commercial tolerances



Contact Us

MOCAP Office and Production Locations

World Headquarters:

MOCAP®

409 Parkway Drive
Park Hills, MO 63601 • USA
314.543.4000
314.543.4111 (fax)
[Sales & Manufacturing Location]

www.mocap.com
800.633.6775
sales@mocap.com
customerservice@mocap.com



902 Progress Drive
Farmington, MO 63640
314.543.4000
314.543.4111 (fax)
[Warehouse Location]

MOCAP® Canada
Tel: 800.633.6775
Fax: 314.543.4111
en.mocap-canada.com (English)
fr.mocap-canada.com (French)
sales@mocap.com

International Offices:

MOCAP® China 茂凯

ZHONGSHAN MOCAP INDUSTRY CO., LTD
Building A-1, 3 Industry Avenue North
Xiaolan Town • Zhongshan
Guangdong, China 528415
Tel: +86 760-22836188
Fax: +86 760-22836177
www.mocap.com.cn
sales@mocap.com.cn
[Sales & Manufacturing Location]



MOCAP® Mexico

Burocratas 410, Cumbres 2nd. Sector
Monterrey, NL 64610
México
Tel: +52 (81) 8344-1843
Fax: +52 (81) 8340-0984
www.mocap.com.mx
ventas@mocap.com
[Sales Location]

MOCAP® United Kingdom
MOCAP LTD
Hortonwood 35
Telford, Shropshire TF1 7YW
Great Britain

Tel: +44 1952 670247
Fax: +44 1952 670241
www.mocap.co.uk
sales@mocap.co.uk
[Sales & Manufacturing Location]



MOCAP® United Kingdom

MOCAP LTD
Unit 9 Tinsley Industrial Park
Shepcote Way
Sheffield, South Yorkshire S9 1TH
Tel: +44 1952 670247
Fax: +44 1952 670241
[Manufacturing Location]

MOCAP® Poland

MOCAP SP. Z O.O
BGO Park Poznań
Skladowa 6
62-023 Żerniki
Poland
[Sales & Warehouse Location]

MOCAP® France

Tel: +33 182 88 58 31
Fax: +33 176 75 33 34
www.mocap-france.com
info@mocap-france.com

MOCAP® Italy

Tel: +39 035 0460169
Fax: +39 035 0460170
mocap.it
info@mocap.it

MOCAP® Spain

Tel: +34 868 48 01 13
Fax: +34 868 48 01 14
mocap.com.es
ventas@mocap.com.es

MOCAP® Germany

Tel: +49 231 4461693
Fax: +49 231 4461694
mocap-deutschland.de
info@mocap-deutschland.de

MOCAP® Poland

Tel: +48 22 397 15 80
Fax: +48 22 397 17 89
mocap.com.pl
info@mocap.com.pl



MOCAP® has manufacturing and sales facilities located around the world so we may provide our customers with the best products, service and prices available.

We have continually expanded our product line by adding additional series of Polyethylene Plastic Caps and Plugs including Tapered Plug Caps, Outside Pull Tapered Plugs, Barrel Plugs with Flanges, Flanged Caps, Straight Caps, as well as Domed, Angled and Pyramid Top Tubing Plugs.

MOCAP®'s extensive line of protective caps and plugs are stocked for immediate shipment, and if we don't stock exactly what you are looking for, we offer the ability to buy a customized plastic part directly from our online store as well! Contact us for your Free Sample today!



Free Samples

企业微信号 13802665016 | 4006-4006-49 | mocap.com.cn

MOCAP®

Solutions that Fit®

MOCAP offers more Caps, Plugs, Grips, Tapes, Tubing and Netting to satisfy your Product Protection, Masking and Finishing needs.

For over 40 years, MOCAP has been the Industry Leader in manufacturing quality Dip Molded Vinyl, Injection Molded Plastic and Injection Molded Rubber Caps and products for virtually every market.

Manufacturer of Quality Plastic & Rubber Products

优质橡塑产品制造商



MOCAP® China 茂凯

Building A-1, 3 Industry Avenue North
Xiaolan Town • Zhongshan
Guangdong, China 528415

Tel: +86 760-22836188

Fax: +86 760-22836177

企业微信号 13802665016

www.mocap.com.cn

sales@mocap.com.cn

(Sales & Manufacturing Location)

