



[www.qdrisingstar.com](http://www.qdrisingstar.com)



[sales01@qdrisingstar.com](mailto:sales01@qdrisingstar.com)



+86 18765951797 / +86 13863914968



+86 18765951797 / +86 13863914968



+86 18765951797 / +86 13863914968



Jilan Road, Bei An Subdistrict,  
Jimo District, Qingdao City, Shandong, China.

1



## SOURCE FACTORY

Full-process in-house production with direct control over manufacturing. Most core components are produced using our own molds.

2



## OEM CUSTOMIZATION SERVICES

Comprehensive OEM customization services. We previously manufactured for a well-known U.S. brand for 8 years.

3



## HONDA OEM PARTNER

Authorized OEM partner of Honda Power Products.

4



## GLOBAL EXPORT EXPERIENCE

Our machines are widely sold in the U.S. & Canada, Australia, Europe, the Middle East, and many other countries and regions.

## OUR CERTIFICATES

INTERNATIONAL STANDARDS · RELIABLE QUALITY



CE Certification  
(2006/42/EC Machinery Directive)



Noise Directive Certification  
(2000/14/EC)



High-Tech Enterprise Certificate



Honda OEM Authorization



# RIDE ON POWER TROWEL

HIGH EFFICIENCY | STABLE PERFORMANCE | IDEAL FOR LARGE AREA CONCRETE FLOOR



## RST-AH1046

Hydraulic Ride On Power Trowel

Powered by an American original imported Briggs & Stratton engine, available in two power options: 35 HP / 40 HP. The machine has a total weight of 520 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with double row friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and stronger torque output.

The machine adopts a pilot hydraulic control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Briggs&Stratton



**Disc diameter**  
2\*1175mm



**Power**  
40/35HP



**Working width**  
2380mm



**Blade speed**  
160rpm



**Machine weight**  
520kg



**Number of blades**  
10



**Packing size**  
2585\*1330\*1460mm

## DETAILS PRESENTATION



**01** Engine



**02** Gearbox



**03** Hydraulic hand valve



**04** Clutch



**05** Hydrocylinder



**06** Gear Pump



**07** Transmission shaft



**08** Carrier

**RISINGSTAR®**

# RST-N1046

## RIDE ON POWER TROWEL

High Efficiency Finishing Solution  
for Large Concrete Floors



## RST-N1046

RST-N1046 Ride On Power Trowel

Powered by an American original imported Briggs & Stratton engine, available in two power options: 35 HP or 40 HP. The machine has a total weight of 460 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with double row friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and strong torque output. With flexible steering, excellent floor finishing flatness, and outstanding concrete slurry extracting and compaction performance, it is an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Briggs&Stratton



**Disc diameter**  
2\*1175mm



**Power**  
40/35HP



**Working width**  
2380mm



**Blade speed**  
160rpm



**Machine weight**  
460kg



**Number of blades**  
10



**Packing size**  
215\*1300\*1265mm

## Details Presentation



01

Engine



02

Gearbox



03

Worm gear



04

Belt pulley



05

Gates belt



06

Transmission  
shaft



07

Spider



08

Carrier

**RISNGSTAR**

# RST-NH836

## HYDRAULIC RIDE ON POWER TROWEL



**POWERFUL  
PERFORMANCE**



**SMOOTH  
FINISHING**



**BUILT FOR  
HEAVY-DUTY  
PROJECTS**



# RST-NH836

## Hydraulic Ride On Power Trowel

Powered by a Honda GX690 engine, delivering stable and reliable performance. The machine has a total weight of 380 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with doublerow friction plates and two belt grooves, equipped with two genuine Gates belts from the USA. This results in lower power transmission loss and strong torque output. The machine adopts a pilot hydraulic control system, offering flexible steering, excellent floor finishing flatness, and outstanding concrete slurry extracting and compaction performance. It is an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Honda Gx690



**Disc diameter**  
2\*940mm



**Power**  
24HP



**Working width**  
1900mm



**Blade speed**  
160rpm



**Machine weight**  
380kg



**Number of blades**  
8



**Packing size**  
2030\*1080\*1350mm

## Details Presentation



**01** Engine



**02** Gearbox



**03** Clutch



**04** Hydraulic hand valve



**05** Hydrocylinder



**06** Overflow valve



**07** Connector



**08** Oil pump

# RST-PH836

## Hydraulic Ride On Power Trowel



### RST-PH836

#### Hydraulic Ride On Power Trowel

Powered by a Honda GX690 engine, delivering stable and reliable performance. The machine has a total weight of 360 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with double row friction plates and two belt grooves, equipped with two genuine Gates belts from the USA. This results in lower power transmission loss and strong torque output. The machine adopts a pilot hydraulic control system, offering flexible steering, excellent floor finishing flatness, and outstanding concrete slurry extracting and compaction performance. It is an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Honda Gx690



**Disc diameter**  
2\*940mm



**Power**  
24HP



**Working width**  
1900mm



**Blade speed**  
160rpm



**Machine weight**  
360kg



**Number of blades**  
8



**Packing size**  
2060\*1110\*1050mm

## Details Presentation



01

Engine



02

Gearbox



03

Clutch



04

Hydraulic hand valve



05

Hydrocylinder



06

Overflow valve



07

Connector



08

Oil pump

# RST-836 PLUS

## Mechanical Ride On Power Trowel

Powered by a Honda GX690 engine, with a total machine weight of 345 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with double-row friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and greater torque output. The machine adopts a mechanical control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Honda Gx690



**Disc diameter**  
2\*940mm



**Power**  
24HP



**Working width**  
1900mm



**Blade speed**  
160rpm



**Machine weight**  
345kg



**Number of blades**  
8



**Packing size**  
2030\*1080\*1070mm

## Details Presentation



**01** Engine




**02** Belt and pulley



**03** Worm gear



**04** Spider



**05** Clutch



**06** Gearbox



**07** Carrier



**08** Attachment




STABLE  
PERFORMANCE



HIGH  
EFFICIENCY



IDEAL FOR  
LARGE AREA  
FLOORS

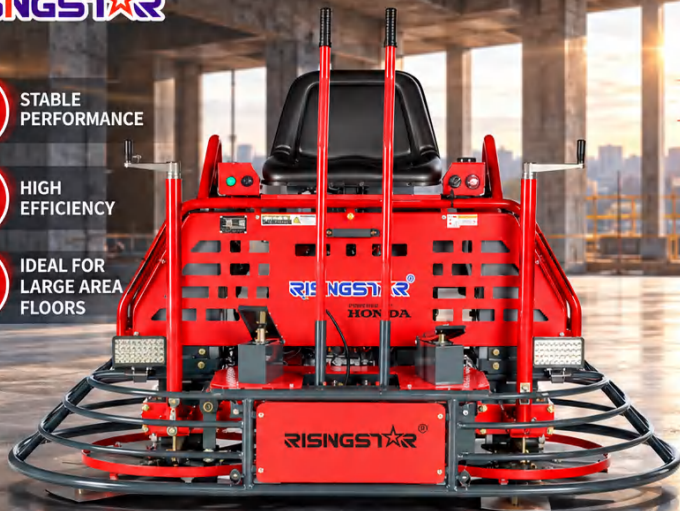

# RST-A836

## MECHANICAL RIDE ON POWER TROWEL

Powered by a Honda Gx690 engine, with a total machine weight of 360 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with double row friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and greater torque output. The machine adopts a mechanical control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Honda Gx690



**Disc diameter**  
2\*940mm



**Power**  
24HP



**Working width**  
1900mm



**Blade speed**  
160rpm



**Machine weight**  
360kg



**Number of blades**  
8




**Packing size**  
2030\*1080\*1180mm

## Details Presentation



**01** Engine



**02** Belt and pulley



**03** Worm gear



**04** Spider




**05** Clutch



**06** Gearbox



**07** Carrier



**08** Attachment



**STABLE AND  
RELIABLE**



**HIGH  
EFFICIENCY**



**IDEAL FOR  
LARGE AREAS**



# RST-N836

## MECHANICAL RIDE ON POWER TROWEL

Powered by a Honda GX690 engine, with a total machine weight of 350 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with doublerow friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and greater torque output. The machine adopts a mechanical control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and highend floor construction projects.



**Engine brand**  
Honda Gx690



**Disc diameter**  
2\*940mm



**Power**  
24HP



**Working width**  
1900mm



**Blade speed**  
160rpm



**Machine weight**  
350kg



**Number of blades**  
8



**Packing size**  
2030\*1080\*1180mm

## Details Presentation



**01** Engine



**02** Belts and pulley



**03** Gearbox



**04** Clutch




**05** Transmission shaft



**06** Tool arm



**07** Gates belt



**08** Water pump



# RST-P836

## Mechanical Ride On Power Trowel



Powered by a Honda GX690 engine, with a total machine weight of 310 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with doublerow friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and greater torque output. The machine adopts a mechanical control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and high end floor construction projects.

**Engine brand**

Honda Gx690

**Disc diameter**

2\*940mm

**Power**

24HP

**Working width**

1900mm

**Blade speed**

160rpm

**Machine weight**

310kg

**Number of blades**

8

**Packing size**

2060\*1110\*980mm

## Details Presentation

**01**

Engine

**02**

Belt and pulley

**03**

Worm gear

**04**

Spider

**05**


Clutch

**06**

Gearbox

**07**

Carrier

**08**

Attachment

# RST-836 PRO+

## Mechanical Ride On Power Trowel

### RST-836 PRO+

#### Mechanical Ride On Power Trowel

Powered by a Honda GX690 engine, with a total machine weight of 330 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with doublerow friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and greater torque output. The machine adopts a mechanical control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Honda Gx690



**Disc diameter**  
2\*940mm



**Power**  
24HP



**Working width**  
1900mm



**Blade speed**  
160rpm



**Machine weight**  
330kg



**Number of blades**  
8



**Packing size**  
2030\*1080\*1180mm

## Details Presentation



**01** Engine



**02** Belt and pulley



**03** Worm gear



**04** Spider



**05** Clutch



**06** Gearbox



**07** Carrier



**08** Attachment



# RST-P830

## Mechanical Ride On Power Trowel



### RST-P830

#### Mechanical Ride On Power Trowel

Powered by a Honda GX690 engine, with a total machine weight of 230 kg and a blade rotation speed of 160 r/min. It features an enlarged gearbox, and the clutch is designed with double-row friction plates and three belt grooves, equipped with three genuine Gates belts from the USA. This results in lower power transmission loss and greater torque output. The machine adopts a mechanical control system, offering flexible steering and excellent floor finishing flatness. Its slurry extracting and compaction performance on concrete is outstanding, making it an ideal choice for large area factory floors and high end floor construction projects.



**Engine brand**  
Briggs&Stratton



**Disc diameter**  
2\*815mm



**Power**  
13.5HP



**Working width**  
1580mm



**Blade speed**  
160rpm



**Machine weight**  
230kg



**Number of blades**  
8



**Packing size**  
1760\*900\*890mm

## Details Presentation



**01** Engine



**02** Belt and pulley



**03** Worm gear



**04** Spider



**05** Clutch



**06** Gearbox



**07** Carrier



**08** Attachment



Factories, warehouses,  
floors, industrial sites



## TECHNICAL SPECIFICATIONS



|              |                                                      |
|--------------|------------------------------------------------------|
| Travel Drive | Servo Drive Motor                                    |
| Travel Mode  | Manual Adjustment, Stepless Speed                    |
| Travel Speed | 0 – 20 m/min                                         |
| Travel Tires | Solid Anti-Slip Puncture-Proof Tires (Narrow + Wide) |



|                |        |
|----------------|--------|
| Machine Weight | 280 Kg |
|----------------|--------|

## LASER CONCRETE SCREED

# RST-30

High-precision laser control, efficient leveling, ideal for large-area concrete floor construction.



### Automatic Laser Control

Level, slope or double slope (3D)



### Hydraulic Auger Paving System

Smooth and even concrete surface



### High Efficiency and Stable

Strong power & reliable structure




### Wide Application

Suitable for factories, warehouses, roads and large-area construction



## TECHNICAL SPECIFICATIONS

| POWER CONFIGURATION |                                                   | LASER SYSTEM         |                                                      | LEVELLING SYSTEM      |                        |
|---------------------|---------------------------------------------------|----------------------|------------------------------------------------------|-----------------------|------------------------|
| Model               | RST-30                                            | Laser Transmitter    | Leica (Switzerland) / Topview Transmitter (Optional) | Paving Method         | Hydraulic Auger Paving |
| Engine Model        | Briggs & Stratton / LONCIN / Honda 690 (Optional) | Laser Receiver       | Leica (Switzerland) / Topview Receiver (Optional)    | Suspension Type       | Fixed Type             |
| Engine Power        | 22 KW / 30 ps                                     | Laser Control System | Danfoss Control System                               | Screed Plate Width    | 2525 mm / 2955 mm      |
| Engine Oil Capacity | 1.8 L                                             | Control Effect       | Level, Slope or Double Slope (3D)                    | Levelling Thickness   | 50 – 250 mm            |
| Fuel Capacity       | 37 L                                              | Control Mode         | Automatic laser micro-system control, self-levelling | Vibration Force       | 2000 N                 |
|                     |                                                   |                      |                                                      | Vibration Motor Speed | 3600 rpm               |
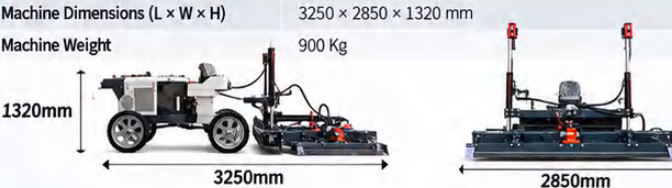
| TRAVEL SYSTEM              |                                                       | DIMENSIONS & WEIGHT                                                                  |                       |
|----------------------------|-------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------|
| Travel Drive               | Low-speed High-torque Reducer + Hydraulic Drive Motor | Machine Dimensions (L × W × H)                                                       | 3250 × 2850 × 1320 mm |
| Intelligent Travel Control | One-key Cruise Control                                | Machine Weight                                                                       | 900 Kg                |
| Travel Speed               | 0 – 55 m/min                                          |  |                       |
| Working Speed              | 4 – 20 m/min (Adjustable Speed)                       |                                                                                      |                       |
| Travel Tires               | Solid Anti-Slip Puncture-Proof Narrow Tires           |                                                                                      |                       |

# RST-31

## SELF-LEVELING CONCRETE PAVER

HIGH EFFICIENCY | PRECISE LEVELING | DURABLE & RELIABLE



### PRECISION CONTROL

Level / Slope / Double Slope



### 4-LEG

### SELF-LEVELING OUTRIGGERS

Fast Setup, High Stability



### HYDRAULIC AUGER PAVING

Stable & Efficient



### 4WD HYDRAULIC DRIVE

Strong Power, Smooth Travel



### YANMAR

63.9kW / 2500rpm



### WORKING SPEED

22 m/min



### PAVING WIDTH

4375 mm



### SCREED HEIGHT

560 mm ( $\pm 1.5$  mm)



### FUEL TANK CAPACITY

150 L



### 01 YANMAR DIESEL ENGINE

- 63.9kW / 2500rpm
- Water-Cooled, 4-Cylinder
- 10.2L Engine Oil Capacity
- High Power & Fuel Efficient



### 02 SOLID ANTI-SLIP TIRES

- 4WD Hydraulic Drive
- Non-Slip Tires
- Strong Traction
- Suitable for Various Job Sites



### 03 HYDRAULIC AUGER PAVING

- Auger Power: 3000N
- Vibration: 60Hz
- Paving Width: 4375mm
- Stable & Uniform Paving



### 04 AUTOMATIC LEVELING CONTROL

- Microcomputer Controlled Scanning
- Level / Slope / Double Slope
- High Precision
- Stable and Reliable

# RST-32

## SELF-LEVELING CONCRETE PAVER

HIGH EFFICIENCY | PRECISE LEVELING | DURABLE & RELIABLE



### PRECISION CONTROL

Level / Slope / Double Slope



### HYDRAULIC AUGER PAVING

Stable & Efficient



### 4-LEG

### SELF-LEVELING OUTRIGGERS

Fast Setup, High Stability



### 4WD HYDRAULIC DRIVE

Strong Power, All-Terrain



### YANMAR ENGINE

35 kW / 3000 r/min



### TRAVEL SPEED

0-6 km/h



### PAVING WIDTH

5135 mm



### LEVELLING ACCURACY

±1.5 mm



### MACHINE WEIGHT

5500 kg




### 01 MOBA LASER TRANSMITTER

- Brand: MOBA (Germany)
- Automatic Level / Slope / Double Slope
- High Precision
- Stable and Reliable



### 02 MOBA LASER RECEIVER

- Brand: MOBA (Germany)
- High Sensitivity Receiving
- Anti-Interference
- For Precise Leveling



### 03 HYDRAULIC LIFT CYLINDER

- Double Lifting Cylinders
- Stable Lifting
- Strong Power
- Precise Control



### 04 YANMAR DIESEL ENGINE

- Brand: Yanmar
- 35 kW / 3000 r/min
- Diesel, 4-Stroke, Water-Cooled, 4 Cylinders
- Reliable and Fuel Efficient



The RST-160 is a red and black concrete cutting machine with a large black engine and a black cutting head. It is shown on a wet concrete surface at a construction site.

## RST-160

### CONCRETE CUTTING MACHINE

|                                                                                   |                                 |                       |
|-----------------------------------------------------------------------------------|---------------------------------|-----------------------|
|  | Blade Size (mm)                 | 245 (10") - 500 (20") |
|  | Max. Cutting Depth (mm)         | 50 - 170              |
|  | Blade Shaft Diameter (mm)       | 25.4                  |
|  | Cutting Depth Adjustment Method | Manual Screw Type     |
|  | Walking Method                  | Hand-push Type        |
|  | Water Tank Capacity (L)         | 46                    |
|  | Dimensions (mm)                 | 1050 * 530 * 910      |
|  | Weight (kg)                     | 136                   |



The RSL-220 is a red and teal concrete cutting machine with a red engine and a red cutting head. It is shown on a wet concrete surface at a construction site.

## RSL-220

### CONCRETE CUTTING MACHINE

|                                                                                   |                                 |                       |
|-----------------------------------------------------------------------------------|---------------------------------|-----------------------|
|  | Blade Size (mm)                 | 245 (10") - 500 (20") |
|  | Max. Cutting Depth (mm)         | 50 - 170              |
|  | Blade Shaft Diameter (mm)       | 50                    |
|  | Cutting Depth Adjustment Method | Manual Screw Type     |
|  | Walking Method                  | Semi-automatic        |
|  | Water Tank Capacity (L)         | 46                    |
|  | Dimensions (mm)                 | 1050 * 530 * 910      |
|  | Weight (kg)                     | 136                   |



The RST-220 is a red concrete cutting machine with a black engine and a red cutting head. It is shown on a wet concrete surface at a construction site.

## RST-220

### CONCRETE CUTTING MACHINE

|                                                                                     |                                 |                       |
|-------------------------------------------------------------------------------------|---------------------------------|-----------------------|
|  | Blade Size (mm)                 | 245 (10") - 500 (20") |
|  | Max. Cutting Depth (mm)         | 50 - 170              |
|  | Blade Shaft Diameter (mm)       | 50                    |
|  | Cutting Depth Adjustment Method | Manual Screw Type     |
|  | Walking Method                  | Hand-push Type        |
|  | Water Tank Capacity (L)         | 46                    |
|  | Dimensions (mm)                 | 1050 * 530 * 910      |
|  | Weight (kg)                     | 136                   |



## RST-D436



**Engine**  
Honda GX160  
Briggs&Stratton 170



**Power**  
5.5HP



**Weight**  
107kg



**Blade Speed**  
160r/min



**Working Diameter**  
940mm



**Disc Diameter**  
940mm



**Blade**  
350\*150\*2.2



**Blade Adjustment**  
Turning knob



## RST-S436



**Engine**  
Honda GX160  
Briggs&Stratton 170



**Power**  
5.5HP



**Weight**  
110kg



**Blade Speed**  
160r/min



**Working Diameter**  
940mm



**Disc Diameter**  
940mm



**Blade**  
350\*150\*2.2



**Blade Adjustment**  
Turning knob



## RST-N436



**Engine**  
Honda GX160  
Briggs&Stratton 170



**Power**  
5.5HP



**Weight**  
82kg



**Blade Speed**  
160r/min



**Working Diameter**  
940mm



**Disc Diameter**  
940mm



**Blade**  
350\*150\*2.2



**Blade Adjustment**  
Turning knob



## RST-A424



**Engine**  
Honda  
Briggs&Stratton



**Power**  
5.5HP



**Weight**  
63kg



**Blade Speed**  
130r/min



**Working Diameter**  
610mm



**Disc Diameter**  
610mm



**Blade**  
230\*120\*1.6



**Blade Adjustment**  
Turning knob

# SUPPORT CUSTOMIZATION

Just provide the size and picture,  
we can customize it!



Any size  
can be made




Provide drawing  
or sample



Professional  
production



Stable quality  
and durable

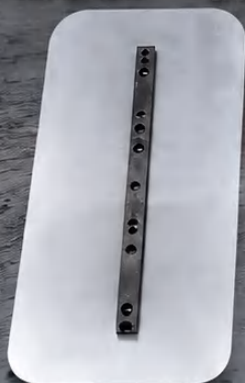

## 1046 series

455\*150\*2.0mm  
SK5 Steel  
1set(5pcs/set)



## 836 series and 436 series

355\*195\*2.0mm  
SK5 Steel  
1set(4pcs/set)



## 836 series and 436 series

350\*150\*2.0mm  
SK5 Steel  
1set(4pcs/set)



## 830 series

295\*145\*2.0mm  
SK5 Steel  
1set(4pcs/set)



## 424 series

228.5\*120\*1.3mm  
SK5 Steel  
1set(4pcs/set)

## CUSTOMIZATION PROCESS



1. Provide size



2. Provide picture  
or sample



3. Confirm details



4. Production  
and delivery

# SUPPORT CUSTOMIZATION

Just provide the size and picture,  
we can customize it!



**TROWEL DISC / BUCKLE**  
FOR POWER TROWEE



Any size  
can be made



Provide drawing  
or sample



Professional  
production



Stable quality  
and durable



## 1046 series

Description: Buckle 10pcs  
Material: 65Mn Steel  
Size: 1175\*3mm



## 836 series and 436 series

Description: Buckle 8pcs  
Material: 65Mn Steel  
Size: 940\*3mm



## 830 series

Description: Buckle 8pcs  
Material: 65Mn Steel  
Size: 815\*3mm



## 424 series

Description: Buckle 4pcs  
Material: 65Mn Steel  
Size: 600\*2mm

## CUSTOMIZATION PROCESS



1. Provide size



2. Provide picture  
or sample



3. Confirm details



4. Production  
and delivery

# MATERIAL SPREADER



**LARGE  
WORKING WIDTH**



**DURABLE  
STRUCTURE**



**UNIFORM  
SPREADING**



**EASY  
OPERATION**



**WEIGHT  
57 KG**



**WORKING WIDTH  
1000 mm**



**SIZE  
1350\*940\*888 mm**



**VOLUME  
100 L**

# GASOLINE TAMPING RAMMER



**HCR90**



**HCR80A**



**HCR80**

| Parameter                                                                                           | HCR90          | HCR80A         | HCR80       |
|-----------------------------------------------------------------------------------------------------|----------------|----------------|-------------|
|  Output power     | 5.5HP          | 5.5HP          | 5.5HP       |
|  Weight           | 80kg           | 75 kg          | 80kg        |
|  Advancing speed  | 10-15m/min     | 10-15m/min     | 10-15m/min  |
|  Plate size       | 275X330mm      | 275X330mm      | 275X330mm   |
|  Impact energy    | 80N.m          | 70N.m          | 70N.m       |
|  Packaging size   | 80X45X112cm    | 80X45X112cm    | 80X45X112cm |
|  Gearbox material | Aluminum Alloy | Aluminum Alloy | Cast Iron   |

# PLATE COMPACTOR

A WIDE SELECTION OF POWER TROWELS.

HZR90 Diesel

HZR90 Gasoline

HZR90 Electric

| Parameter                                                                                          | 90 Diesel  | 90 Gasoline | 90 Electric   |
|----------------------------------------------------------------------------------------------------|------------|-------------|---------------|
|  Output power    | 5.5HP      | 5.5HP       | 2.5KW         |
|  Weight          | 90Kg       | 80 Kg       | 85Kg          |
|  Advancing speed | 20-30m/min | 20-30m/min  | 20-30m/min    |
|  Plate size      | 50X50cm    | 50X50cm     | 65X42cm       |
|  Impact energy   | 15 KN      | 15 KN       | 15 KN         |
|  Packaging size  | 85X57X74cm | 85X57X74cm  | 85X50X70cm    |
|  Rammed board    | Cast Steet | Cast Steet  | Plate Welding |



**QINGDAO RISING STAR**  
**ENGINEERING MACHINERY CO., LTD**

**15+**

Years  
Experience



Professional  
R&D Team



Reliable  
Product Quality



Global  
Market Service


**OUR PRODUCTS  
ARE EXPORTED TO  
THE WORLD**



**WELDING PROCESS**



**CNC MACHINING CENTER**

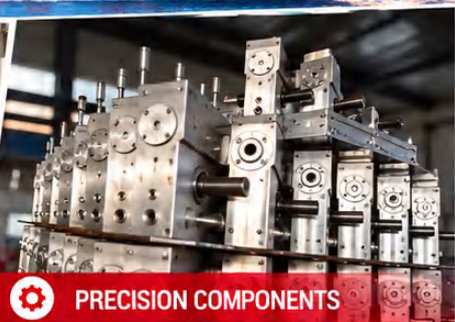

**PRECISION COMPONENTS**



**BENDING PROCESS**



**LASER CUTTING**



**PRODUCTION LINE**



**STRICT  
QUALITY CONTROL**



**PROFESSIONAL  
MANUFACTURING**



**FAST  
DELIVERY**



**GLOBAL  
PARTNERSHIP**