河北恩亚橡塑制品有限公司

HEBEI ENYA RUBBER AND PLASTIC PRODUCTS CO., LTD

恩亚橡塑



专注品质·做好产品

Focus on quality · Make a good product

河北恩亚橡塑制品有限公司

HEBEI ENYA RUBBER AND PLASTIC PRODUCTS CO., LTD.

地址：景县张戈侯橡塑基地667号

手机：15610913211　13253229795

电话：0318-4523111

传真：0318-4523111

邮箱：1627369831@qq. com

No. 667,rubber and plastic base, Zhang Ge Hou, Jingxian County

15610913211　13253229795

0318-4523111

0318-4523111

1627369831@qq.com

企业宣传片　快手官方账号　抖音官方账号

诚信·创新·共赢·发展

Integrity Innovation win-win Development

恩亚橡塑

ENTERPRISE INTRODUCTION
企业简介 >>>

河北恩亚橡塑制品有限公司是一家集研发、生产、加工为一体的科技企业。本公司地处华北平原、毗邻京津，地理位置优越、交通便利，为您提供方便可靠的供货保障。公司生产的螺旋保护套是一种以 PP、PE、PA 为原料采用热态、缠绕定型挤出工艺制成的螺旋状护套（别名：胶管保护套）电线电缆保护套、软管护套等，螺旋保护套约于 2002 年引入我国，现已广泛用于挖掘机、装载机、压路机、摊捕机、叉车、吊车、自卸车等工程机械和注塑机设备。主要安装于液压胶管、电线、电缆等产品外部，其功能是增强液压胶管、电线、电缆等内部产品的耐磨、抗老化、抗静电和抗紫外线性能，在各种恶劣环境下对液压胶管等内部产品起到安全保护作用。液压胶管、电线、电缆等产品安装螺旋保护套不但可以提高美观度，而且可以使内部产品的寿命延长 3 年以上，胶管保护套安装简便耐磨性好，抗老化、抗腐蚀性能强，更能有力的对液压胶管、电线、电缆等产品外表面进行防老化和抗磨擦保护具有更优异、更便捷、更环保节能的效果，此外，螺旋保护套还具有良好的耐高低温、耐油、抗紫外线、抗静电、抗冲击、抗拉伸等性能。公司遵循“质量为基石，诚信为根本”的企业理念，为广大客户提供优质的产品和服务。



领航未来

Hebei Enya rubber and Plastic Products Co. , Ltd. is a technologyenterprise integrating R&D, production and processing. Our factory is located in the North China Plain, adjacent to Beijing and Tianjin, with superior geographical locationand convenient transportation, providing you with convenient and reliable supplyguarantee. he spiral protective sheath produced by the company is made of PP, PE and PA by hot and winding extrusion process. Helical sheath (alias: hose sheath), wire and cable sheath, hose sheath and so on. Helical sheath was introduced in 2002. In China.it has been widely used in excavators, loaders, roller, spreaders, forklifts, cranes, dumptrucks and other construction machinery. And injection molding machine equipment, It ismainly installed outside the hydraulic hose, wire, cable and other products, its functionis to enhance hydraulic hose. The anti-wear, anti-aging, anti-static and anti-ultravioletproperties of the internal products such as wires, cables and so on, which can beapplied in various harsh environments. Hydraulic hose and other internal products playa role of safety protection. Hydraulic hose, wire, cable and other products installed spiralprotection sleeve.It can improve the aesthetics and prolong the life of the internalproducts for more than 3 vears. The rubber hose protective sleeve is easy to install andhas good wear resistance. Anti-aging, anti-corrosion performance more powerful forhydraulic hoses, wires, cables and other products on the surface of anti-aging and anti-corrosionFriction protection has more excellent, more convenient, moreenvironmentally friendly and energy-saving effect, In addition, spiral protective sleevealso has good resistance to high and low. Temperature, oil resistance, UV resistance, antistatic, impact resistance, stretch and other properties.

CATALOGUE 目录

01 企业资质 ENTERPRISE QUALIFICATION
03 螺旋保护套 SPIRAL PROTECTIVE SLEEVE
04 螺旋保护套规格 SCREW SLEEVE SPECIFICATIONS
06 矿用电缆规格 SPECIFICATIONS FOR MINING CABLES
07 煤矿阻燃抗静电护套 FLAME RETARDANT AND ANTI-STATIC SHEATH FOR COAL MINES
09 液压支柱保护套 PROTECTIVE SLEEVE FOR HYDRAULIC PROP
10 矿用柱窝填充物 PIT FILLERS FOR MINES
11 钢丝护簧比重表 STEEL WIRE GUARD SPRING GRAVITY METER
12 平面护皮 FLAT SKIN PROTECTION
13 阻燃与普通螺旋保护套对比图 COMPARISON OF FLAME RETARDANT AND NORMAL SPIRAL PROTECTION SLEEVE
13 产品质量对比图 PRODUCT QUALITY COMPARISON CHART
14 源头工厂品质信赖 THE QUALITY OF THE ORIGINAL FACTORY IS
14 使用用途 USAGE
15 测压软管及总成 PRESSURE HOSE AND ASSEMBLY
16 尼龙帆布护套 NYLON CANVAS SHEATH
16 耐高温防火护套 HIGH TEMPERATURE RESISTANT FIRE PROTECTION SHEATH


质量管理体系认证证书

证书编号：18524Q10499R0S

兹证明：

河北恩亚橡塑制品有限公司

统一社会信用代码：91131127MA0D9A0W7H

质量管理体系符合：

GB/T19001-2016 / ISO9001:2015 标准

证书覆盖范围：

螺旋保护套、胶管保护套的生产

注册地址/审核地址：河北省衡水市景县张戈侯橡塑管业辅导基地 667 号

颁证日期：2024 年 04 月 12 日
有效期至：2027 年 04 月 11 日

证书签发人

IAF CNAS 中国认可 国际互认 管理体系 MANAGEMENT SYSTEM CNAS C185-M

证书有效性以右侧二维码扫描内容为准

本证书信息可在国家认证认可监督管理委员会官方网站(www.cnca.gov.cn)查询
中标联合（北京）认证有限公司网址：www.ccnsi.cn

中标联合（北京）认证有限公司

中国 · 北京 · 朝阳区八里庄西里100号1幢东区17层9号（100025）

NO:IZ


职业健康安全管理体系认证证书

证书编号：18524S10281R0S

兹证明：

河北恩亚橡塑制品有限公司

统一社会信用代码：91131127MA0D9A0W7H

职业健康安全管理体系符合：

GB/T45001-2020 / ISO45001:2018 标准

证书覆盖范围：

螺旋保护套、胶管保护套的生产及相关管理活动

注册地址/审核地址：河北省衡水市景县张戈侯橡塑管业辅导基地 667 号

颁证日期：2024 年 04 月 12 日
有效期至：2027 年 04 月 11 日

证书签发人

IAF CNAS 中国认可 国际互认 管理体系 MANAGEMENT SYSTEM CNAS C185-M

证书有效性以右侧二维码扫描内容为准

本证书信息可在国家认证认可监督管理委员会官方网站(www.cnca.gov.cn)查询
中标联合（北京）认证有限公司网址：www.ccnsi.cn

中标联合（北京）认证有限公司

中国 · 北京 · 朝阳区八里庄西里100号1幢东区17层9号（100025）

NO:IZ


环境管理体系认证证书

证书编号：18524E10303R0S

兹证明：

河北恩亚橡塑制品有限公司

统一社会信用代码：91131127MA0D9A0W7H

环境管理体系符合：

GB/T24001-2016 / ISO14001:2015 标准

证书覆盖范围：

螺旋保护套、胶管保护套的生产及相关管理活动

注册地址/审核地址：河北省衡水市景县张戈侯橡塑管业辅导基地 667 号

颁证日期：2024 年 04 月 12 日
有效期至：2027 年 04 月 11 日

证书签发人

IAF CNAS 中国认可 国际互认 管理体系 MANAGEMENT SYSTEM CNAS C185-M

证书有效性以右侧二维码扫描内容为准

本证书信息可在国家认证认可监督管理委员会官方网站(www.cnca.gov.cn)查询
中标联合（北京）认证有限公司网址：www.ccnsi.cn

中标联合（北京）认证有限公司

中国 · 北京 · 朝阳区八里庄西里100号1幢东区17层9号（100025）

NO:IZ

ENTERPRISE QUALIFICATION
企业资质 »»

以实力铸就信赖，用专业赢得未来

选择我们，不仅是选择资质齐全的合作伙伴，更是选择值得托付的行业担当。让专业资质为您的信任保驾护航，携手共拓高质量发展新篇章！


企业资信等级证书
河北恩亚橡塑制品有限公司
AAA


质量服务诚信单位
河北恩亚橡塑制品有限公司
AAA


企业信用等级证
河北恩亚橡塑制品有限公司
AAA


重合同守信用企业
河北恩亚橡塑制品有限公司
AAA


诚信经营示范单位
河北恩亚橡塑制品有限公司
AAA


企业信用评价AAA级信用企业
ENTERPRISE CREDIT EVALUATION
公司名称：河北恩亚橡塑制品有限公司
信用编码：HXZC2025040157
有效日期：2025年04月02日至2028年04月01日
公示查询：商务诚信公共服务平台
(www.315gsxy.cn)
诚企信用信息公共服务平台
(www.sgxy.org.cn)
中国信用招标采购网
(www.credittobidding.org.cn)
华夏众诚（北京）国际信用评价有限公司


重质量守信用单位
河北恩亚橡塑制品有限公司
AAA


重服务守信用企业
河北恩亚橡塑制品有限公司
AAA


诚信经理人
Integrity Manage
河北恩亚橡塑制品有限公
倪亚杰 诚信经理人


诚信企业家
Integrity Entrepreneur
河北恩亚橡塑制品有限公司
倪亚杰 诚信企业家


企业信用等级证
河北恩亚橡塑制品有限公司
AAA


绿色低碳诚信示范创建企业
GREEN LOW-CARBON ENTERPRISE CREDIT DEMONSTRATION CERTIFICATION
河北恩亚橡塑制品有限公司：
信用编码：HXZC2025040164
颁证日期：2025年04月02日
有效期至：2028年04月01日
公示查询：www.315gsxy.cn
www.sgxy.org.cn
www.creditbidding.org.cn
华夏众诚（北京）国际信用评价有限公司


商标注册证

第 39348048 号

鑫恩亚

核定使用商品/服务项目（国际分类：35）

第 35 类：广告；市场营销；人事管理咨询；职业介绍；商业企业迁移；文字处理；为推销优化搜索引擎；网站流量优化；会计；为商业或广告目的编制网页索引（截止）

注 册 人 河北恩亚橡塑制品有限公司

注册人地址 河北省衡水市景县张戈侯橡塑管业辅导基地667号

注册日期 2020年03月28日 有效期至 2030年03月27日

局 长 发证机关


商标注册证

第 39347920 号

鑫恩亚

核定使用商品/服务项目（国际分类：17）

第 17 类：生橡胶或半成品橡胶；合成橡胶；再生橡胶；密封环；橡胶制减震缓冲器；非金属软管；纺织材料制软管；绝缘、隔热、隔音用材料；塑料板；橡胶或塑料制填充材料（截止）

注 册 人 河北恩亚橡塑制品有限公司

注册人地址 河北省衡水市景县张戈侯橡塑管业辅导基地667号

注册日期 2020年03月28日 有效期至 2030年03月27日

局 长 发证机关


产品认证证书

证书编号：CMAC06230269

申请人名称：	河北恩亚橡塑制品有限公司
申请人注册地址：	河北省衡水市景县张戈侯橡塑管业辅导基地 667 号
制造商名称：	河北恩亚橡塑制品有限公司
制造商注册地址：	河北省衡水市景县张戈侯橡塑管业辅导基地 667 号
生产厂名称：	河北恩亚橡塑制品有限公司
生产厂地址：	河北省衡水市景县张戈侯橡塑管业辅导基地 667 号
产品名称：	煤矿井下用塑料护套
系列/规格/型号：	SL-H-30、35、40、50、60、70、75、80、90、100、110、120 (LSZ)
品 牌：	/
依据标准/技术要求：	MT/T 181-1988
认证模式：	技术审查+产品检验+工厂检查+获证后监督

上述产品符合 CMAC18-3699901-01-2023 认证规则要求，特发此证。

发证日期：2023 年 8 月 9 日 有效期至：2028 年 8 月 8 日

备注： 严格按煤矿安全有关规定使用。

（本证书的有效性需通过发证机构持证后监督获得保证，可登录
www.aqbz.org 查询确认本证书的有效性。

签发人： 签发机构：

安标国家矿用产品安全标志中心有限公司

北京市朝阳区和平里青年沟路 5 号安科大厦（100013）
http://www.aqbz.org


产品认证证书

证书编号：CMAC06230268

申请人名称：	河北恩亚橡塑制品有限公司
申请人注册地址：	河北省衡水市景县张戈侯橡塑管业辅导基地 667 号
制造商名称：	河北恩亚橡塑制品有限公司
制造商注册地址：	河北省衡水市景县张戈侯橡塑管业辅导基地 667 号
生产厂名称：	河北恩亚橡塑制品有限公司
生产厂地址：	河北省衡水市景县张戈侯橡塑管业辅导基地 667 号
产品名称：	煤矿井下用塑料护套
系列/规格/型号：	SL-H-30、35、40、50、60、70、75、80、90、100、110、120
品 牌：	/
依据标准/技术要求：	MT/T 181-1988
认证模式：	技术审查+产品检验+工厂检查+获证后监督

上述产品符合 CMAC18-3699901-01-2023 认证规则要求，特发此证。

发证日期：2023 年 8 月 9 日 有效期至：2028 年 8 月 8 日

备注： 严格按煤矿安全有关规定使用。

（本证书的有效性需通过发证机构持证后监督获得保证，可登录
www.aqbz.org 查询确认本证书的有效性。


签发人： 签发机构：

安标国家矿用产品安全标志中心有限公司

北京市朝阳区和平里青年沟路 5 号安科大厦（100013）
http://www.aqbz.org

恩亚橡塑
ENYA RUBBER PLASTIC

螺旋保护套
SPIRAL PROTECTIVE SLEEVE
煤安证、产品检验报告齐全

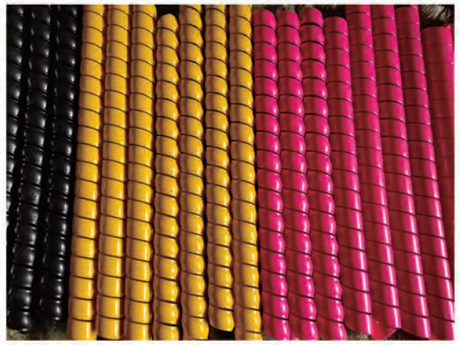
产品名称：螺旋保护套
产品颜色：黑、红、绿、蓝、黄等
适用规格：10mm - 150mm
产品材质：PE PP
产品品牌：恩亚
产品型号：8mm - 200mm
产品包装：塑料膜加编织袋、纸箱
特殊说明：此产品常为黑色彩色需定做
产品优点：无需牵引器，安装便捷，节能环保
产品性能：螺旋保护套为螺旋状，具有很好的弹力、拉伸力，可以对液压胶管、电线、电缆清洗机管等内部产品起到很好的保护作用，目前国内采用的原材料为聚丙烯（PP）、聚乙烯（PE）或尼龙（PA），使用产品具有很好的耐磨作用。此外，螺旋保护套还具有良好的耐高低温，耐油、抗紫外线、抗静电、阻燃、抗冲击、抗拉伸等性能。

注明：本产品可根据客户要求定做各种规格、型号、颜色及长度。

Product Name: spiral protective sleeve
Product brand: Enya
Product color: black, red, green, blue, yellow, etc
Product model: 8mm-200mm
Applicable specification: 10mm-150mm
Product packaging: plastic film plus woven bags, carton
Product material: PE PP
Special instructions: This product is usually black color and needs to be customized
Product advantages: No need for tracer, convenient installation, energy saving and environmental protection.
Product performance: The spiral protective sleeve is spiral and has good elasticity and tensile force. It can protecthydraulic hose, wire, cable, cleaning machine pipe and other internal products. At present, the raw materials used in China are polypropylene (PP), polyethylene (PE) or nylon (PA), and the products have good wear resistance. Inaddition, the spiral sheath also has good high and low temperature resistance, oil resistance, ultraviolet, flame retardant resistanceantistatic, impact resistance, tensile resistance and other properties

Note: This product can be customized according to customer requirements of various specifications, models, colorsand lengths.



螺旋保护套规格
SCREW SLEEVE SPECIFICATIONS

名称 Name	规格 Specification	适用外径 Outside diameter	名称 Name	规格 Specification	适用外径 Outside diameter
螺旋保护套 Spiral sleeve	8mm	8-10mm	螺旋保护套 Spiral sleeve	35mm	35-38mm
	10mm	10-12mm		38mm	38-42mm
	12mm	12-14mm		42mm	42-45mm
	14mm	14-16mm		45mm	45-60mm
	16mm	16-18mm		60mm	60-74mm
	18mm	18-20mm		74mm	74-80mm
	20mm	20-22mm		80mm	80-88mm
	21mm	21-25mm		88mm	88-100mm
	25mm	25-28mm		100mm	100-130mm
	28mm	28-30mm		130mm	130-150mm
	30mm	30-32mm		150mm	150-200mm
	32mm	32-35mm		200mm	200-300mm







矿用电缆选型推荐型号
RECOMMENDED MODELS FOR MINING CABLE SELECTION

矿用电缆 Mine cable	规格 (mm) Specification	适用规格 (mm) 胶管外径 Outside diameter	宽度 (mm) Breadth	厚度 (mm)Thickness	
				中心 Centre	边缘 Edge
2.5^2	BHT-10	10-12	9.5	1.2	0.4
10^2	BHT-20	20-23	18.5	2.0	0.5
16^2	BHT-35	35-38	25.5	3.5	1.0
25^2	BHT-38	38-42	26.0	3.0	1.0
35^2	BHT-42	42-45	25.0	4.0	1.0
50^2	BHT-45	45-48	25.5	4.0	1.0
70^2	BHT-50	50-56	29.5	4.5	1.5
95^2	BHT-60	60-73	31.0	4.5	2.0

注：仅此凭销售经验做推荐，最终以测量实际电缆外径为准（电缆外径多大选择多大规格保护套）
Note: Only based on sales experience to make recommendations, the final measurement of the actual cable outer diameter shall prevail (the size of the cable outer diameter to choose the size of the protective sleeve)

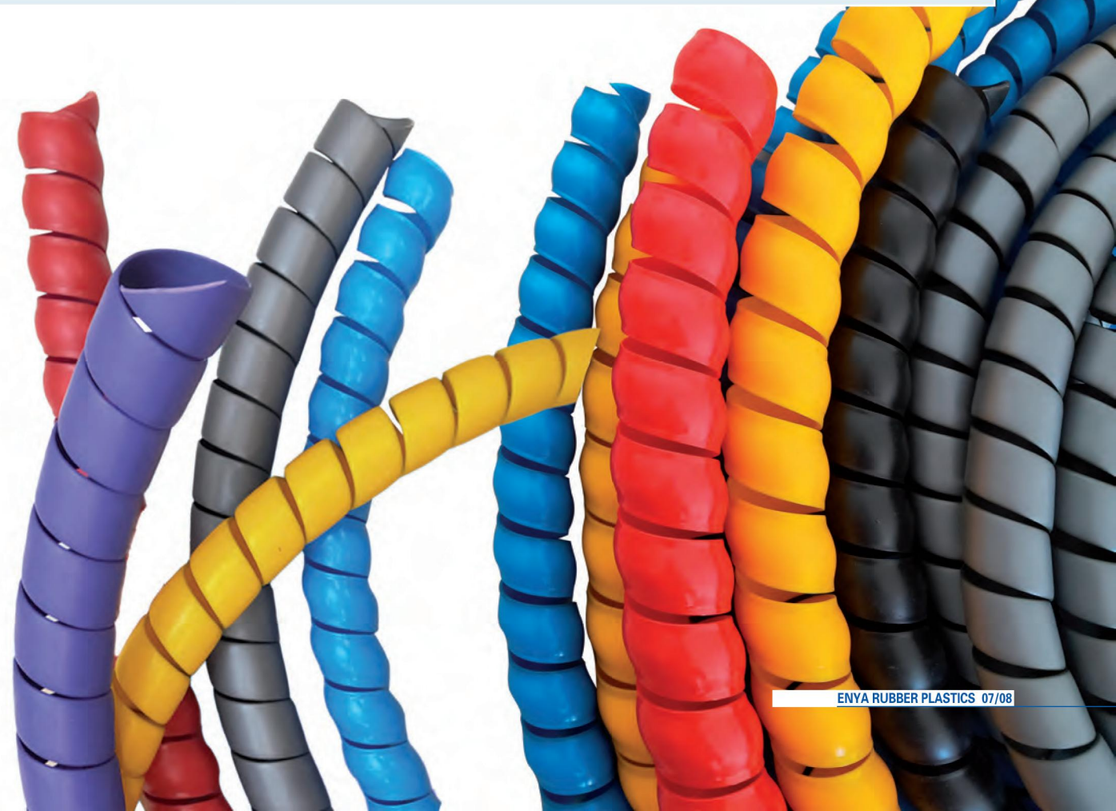

煤矿阻燃抗静电护套

FLAME RETARDANT AND ANTI-STATIC SHEATH FOR COAL MINES

煤安证、产品检验报告齐全







煤矿井下用阻燃胶管护套用途多样，可以用于液压支架胶管保护套和煤矿井下移动电缆的保护，亦可用于其他管线易磨损部位的保护。煤矿井下用阻燃胶管护套是井下机械设备的关键部件，是输送液体压力能的通道；由于井下工作条件的情况，液压支架胶管外层不可避免受到砸、磨、碰、 刮，使胶管耐压钢丝层暴露、损坏，导致液压胶管承压能力下降造成设备不能正常运行影响安全和煤炭生产，为了不使液压胶管外层受到砸、磨、碰、刮，避免胶管耐压钢丝层暴露、损坏，所以安装液压支架胶管保护套保障了煤炭安全生产。

he flame-retardant rubber tube sheath used in coal mine has a variety of uses, which can be used for the protection of hydraulic support hose and mobile cable in coal mine, and can also be used for the protection of other easily worn parts of pipelines. The flame-retardant rubber tube sheath used in coal mine is the key component of underground mechanical equipment and the channel for conveying liquid pressure energy. Due to underground working conditions, the outer layer of the hydraulic support hose is inevitably smashed, ground, touched and scraped, exposing and damaging the pressure resistant steel wire layer of the hose, resulting in reduced pressure bearing capacity of the hydraulic hose, resulting in abnormal operation of the equipment and affecting safety and coal production. In order to prevent the outer layer of the hydraulic hose from being smashed, ground, touched and scraped, and avoid exposure and damage to the pressure resistant steel wire layer of the hose, Therefore, the installation of hydraulic support rubber hose protective cover ensures the safety of coal production.

产品名称 Name	产品规格 Specification	适用胶管型号 Applicable hose type	单边厚度（mm） Unilateral thickness
煤矿抗静电阻燃护套 Coal mine anti-static flame retardant jacket	Φ30	DN10	4-5
	Φ40	DN20	4-5
	Φ50	DN25	4-5
	Φ60	DN32	4-5
	Φ70	DN38	4-5
	Φ80	DN50	5-8
	Φ90	DN50S	5-8
	Φ100	DN63	5-8
	Φ114	DN63S	5-8


煤炭工业徐州劳动防护技术服务公司
国家安全生产徐州劳动防护用品检测检验中心
检 验 报 告
No：2023ZY-021
产品名称 煤矿井下用塑料护套
型号规格 SL-H-120
生产单位 河北恩亚橡塑制品有限公司
检验类别 安全认证定型检验
210016349359
苏煤监2101
注 意 事 项
检验项目和检验结论
煤矿井下用塑料护套主要零（元）部件及重要原材料明细表
样品描述
1.颜色：绿色。
2.产品与申查备案的技术文件一致。

液压支柱保护套
PROTECTIVE SLEEVE FOR HYDRAULIC PROP



产品名称：液压支柱保护套


产品材质：液压支柱保护套由阻燃、抗静电的 pvc 涂覆布缝制而成内穿碳素弹簧钢丝数道，外加白色或黄色夜光条两道用尼龙粘带封口，按等距离在封口处订上不锈钢折钮。液压支柱保护套制作工序复杂，技术含量很高，每道工序都必须认真操作，特别在运输过程中，不能挤压不能横放，以免造成碳素钢丝弯曲，护套变形。


产品性能：用于煤矿中的液压支柱上，具有保护液压支柱，防尘，防冲撞，延长液压支柱使用寿命的功能。

Product Name: hydraulic strut protective sleeve
Product Material: hydraulic strut protective sleeve by flame retardant, anti-static pvc coated cloth sewn from the internal wear carbon spring steel wire several ways, plus white or yellow luminous strip two with nylon sticky tape sealing, according to the same distance in the sealing of the stainless steel folding knob stapled. Hydraulic strut protective sleeve production process is complex, high technology, each process must be carefully operated, especially in the transportation process, can not be extruded can not be placed horizontally, so as not to cause carbon steel wire bending, sheath deformation.
Product performance: used in coal mines on hydraulic pillars, with the protection of hydraulic pillars, dustproof, anti-collision, to extend the service life of hydraulic pillars
Translated with DeepL.com (free version)







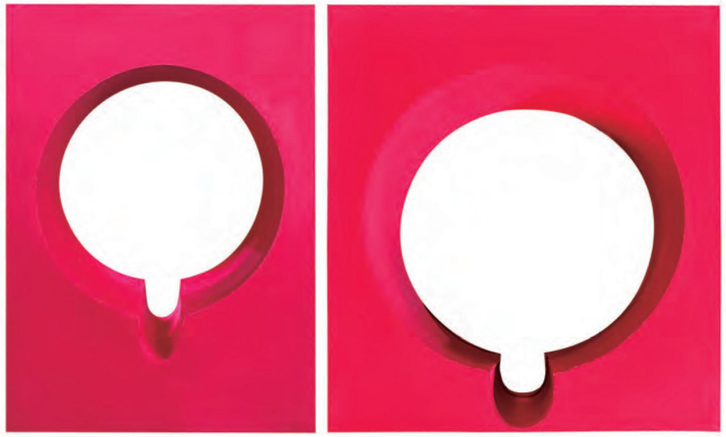

矿用柱窝填充物
PIT FILLERS FOR MINES

产品名称：矿用柱窝填充物

产品性能：该产品可以减少支架立柱柱窝浮煤的积淀，减少柱窝清理，方便立柱的更换与维护。使用填充物后，液压支架在升降过程中，立柱前后摆动自如，从而防止因积煤过多而产生的立柱水平横销被切断。该填充物具备良好的弹性，在支架升降时不易产生立柱下腔的管路被挤压变形和切断，提高设备使用寿命，填充物与支架底座呈水平面，从而提高操作人员在工作中的安全系数。

产品优点：1、减少支架立柱柱窝浮煤的积淀，减少柱窝清理，更方便立柱的更换与维护；2、由于使用填充物，液压支架在升降过程中，使立柱前后摆动自如，从而防止因积煤过多而产生的立柱水平横销被切断；3、由于该填充物具备良好的弹性功能，所以在支架升降时不易产生立柱下腔的管路被挤压变形和切断，提高设备使用寿命；4、由于填充物与支架底座呈水平面，从而提高操作人员在行进中的安全系数；5、该填充物具有阻燃、抗静电、耐腐蚀、不易破损等优点因此该填充物可重复利用，减少成本支出，提高企业经济效益，符合环保要求。

Product Name: Mining Pillar Nest Filler
Product Performance: This product can reduce the accumulation of floating coal in the pillar nest of the stent column, reduce the cleaning of the column nest, and facilitate the replacement and maintenance of the column. After using the filler, the hydraulic support in the process of lifting and lowering, the column swing back and forth freely, so as to prevent the horizontal cross pin of the column from being cut off due to the accumulation of too much coal. The filler has good elasticity, so it is not easy for the pipeline in the lower chamber of the column to be squeezed and cut off during the lifting and lowering of the stand, which improves the service life of the equipment, and the filler and the bottom of the stand seat are in the horizontal plane, which improves the safety coefficient of the operators in the work.
Advantages: 1. Reduce the accumulation of floating coal in the column nest of the stent, reduce the cleaning of the column nest, and make it more convenient for the replacement and maintenance of the column; 2. Due to the use of the filler, the hydraulic stent can swing freely back and forth during the lifting process of the stent, thus preventing the horizontal horizontal pin of the stent from being cut off due to the accumulation of too much coal; 3. Due to the elasticity of this filler, it is not easy to squeeze deformation and cut off the pipeline of the lower chamber of the column during the lifting process of the stent. As the filler has good elasticity, it is not easy to produce the pipe in the lower chamber of the column to be extruded and cut off when the stent is lifted, so as to improve the service life of the equipment; 4. As the filler and the base of the stent are in the horizontal plane, so as to improve the safety coefficient of the operator in the traveling; 5. The filler has the advantages of flame retardant, antistatic, corrosion-resistant, not easy to be damaged, etc., so that it can be reused to reduce the cost expenditure and increase the enterprise's economic benefit, and in line with the requirements of environmental protection.

钢丝护簧比重表
STEEL WIRE GUARD SPRING GRAVITY METER

胶管规格 Hose Specifications	护簧规格 Spring guard specifications	比重 (kg/m) Specific gravity	胶管规格 Hose Specifications	护簧规格 Spring guard specifications	比重 (kg/m) Specific gravity
Φ32*4	Φ50*2.5	5.6	Φ13*2	Φ 26.5*1.6	2
Φ32*2	Φ47*2.5	5.5	Φ13*1	Φ25*1.6	1.8
Φ32*4	Φ50*2.8	7	Φ13*2 进口	Φ23.5*1.5	1.4
Φ25*4	Φ41*2.8	5	Φ10*2	Φ22.5*1.5	1.3
	Φ41*2.5	4.5	Φ10*1	Φ20.5*1.5	1.2
	Φ41*2.3	4	Φ10*1 进口	Φ19.5*1.5	1.2
Φ25*2	Φ40*2.5	4.4	Φ6*2	Φ18*1.3	1
	Φ40*2.3	4.2	Φ6*1	Φ16*1.3	0.9
	Φ40*2	3.6	Φ38*6	Φ60*3	10
Φ25*1	Φ37*2	3.2	Φ51*6	Φ74*3.5	12
Φ19*4	Φ35*2	3.1	Φ10*2	Φ21.5*1.5	1.3
Φ19*2	Φ33*2	3	Φ38*4	Φ57*2.8	8
Φ19*1	Φ31*2	2.8			
Φ16*2	Φ29.5*1.8	2.5			
Φ16*1	Φ28*1.8	2.3			











平面护皮
FLAT SKIN PROTECTION

产品名称： 平面护皮
产品品牌： 恩亚
产品颜色： 黑、红、绿、蓝、黄等
产品型号： 8mm - 30mm
适用规格： 8mm - 50mm
产品包装： 塑料膜加编织袋
产品材质： PA PE PP
产品优点： 无需牵引器，安装便捷、节能环保
产品性能： 平面螺旋护套，均采用原包材料生产制做，产品光泽度强，耐酸碱、耐油、抗冲击均达标。该生产主要用于管路线路的保护，广泛用于汽车线路，工程机械管路，空调管路，注塑机等设备。产品具有抗静电、耐磨性能强，在各种恶劣环境下起到安全保护作用。

注明：本产品可根据客户要求定做各种规格、型号、颜色及长度。

Product Name: flat skin protection
Product brand: Enya
Product color: black, red, green, blue, yellow, etc.
Product model: 8mm-30mm
Applicable specification: 8mm-50mm
Product packaging: Plastic film plus woven bags
Product material: PA PE PP
Product advantages: No need for tracer, convenient installation, energy saving and environmental protection.
Product performance: Planar spiral sheaths are manufactured from raw materials. The products have high gloss, acid and alkali resistance, oil resistance and impact resistance. The production is mainly used for pipeline protection, widely used in automobile lines, construction machinery pipelines, air conditioning pipelines, injectionmoulding machines and other equipment. The products have strong antistatic and wear-resistant properties, and play a safety protection role under all kinds of harsh environments.

Note: This product can be customized according to customer requirements of various specifications, models, colorsand lengths.

阻燃与普通螺旋保护套对比图
COMPARISON OF FLAME RETARDANT AND NORMAL SPIRAL PROTECTION SLEEVE





阻燃等级 /Flame retardant grade：V-2、V-1、V-0

HB: HB:UL94 标准中最低的阻燃等级。要求对于 3 到 13 毫米厚的样品，燃烧速度小于 40 毫米每分钟；小于 3 毫米厚的样品，燃烧速度小于 70 毫米每分钟；或者在 100 毫米的标志前地大。

V2: 对样品进行两次 10 秒的燃烧测试后，火焰在 60 秒内熄灭。有滴落物，滴落物可以引燃样品下面的脱脂棉。

V1: 对样品进行两次 10 秒的燃烧测试后，火焰在 60 秒内熄灭。有滴落物，滴落物不能引燃样品下面的脱脂棉。

Vo: 对样品进行两次 10 秒的燃烧测试后，火焰在 30 秒内熄灭。不能有燃烧物掉下。

HB: The lowest flame retardant rating in the UL94 standard. Requirements For samples 3 to 13 millimeters thick, the burning speed is less than 40 millimeters per minute; samples less than 3 millimeters thick, the burning speed is less than 70 millimeters per minute; or in 100 millimeters before the sign of the ground large.

V2: After two 10-second burn tests on the sample, the flame extinguished within 60 seconds. There are drips and the drips can ignite the skimmed cotton underneath the sample.

V1: Flame extinguished within 60 seconds after two 10-second burn tests were performed on the sample. With drippings, the drippings cannot ignite the degreasing cotton underneath the sample.

Vo: Flame extinguished within 30 seconds after two 10 second burn tests on the sample. There must be no droplets of burning material.

注：长度：2 米、10 米、50 米、100 米、200 米等；支持客户个性化定制。
Note: Length: 2m, 10m, 50m, 100m, 200m, etc.; support customer personalization.

产品质量对比图
PRODUCT QUALITY COMPARISON CHART



螺旋保护套光泽度好，表面光滑无颗粒，采用原包料聚丙烯环保、无异味
Spiral protector with good gloss, smooth surface without particles, using the original package material polypropylene environmental protection, no odor

劣质的产品表面暗淡凹凸不平有颗粒原料为次生聚丙烯，有异味
Inferior products have a dull uneven surface with particles The raw material is secondary polypropylene and has an odor.

我们的产品有标准的碑硬度弹性和柔韧性，安装方便
Our products have standard monumental hardness elasticity and flexibility and are easy to install.

内壁凹凸不平，有针眼外表面翘边
Uneven inner wall, with pinholes outer surface warped edge

源头工厂品质信赖
THE QUALITY OF THE ORIGINAL FACTORY IS RELIABLE



大型自有厂房 Large own plant



生产设备完善
Well-equipped production facilities


严格把控原料
Strict control of raw materials


品质管控严格 Strict quality control

使用用途
USAGE

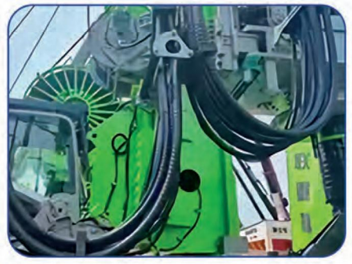


工程机械 Construction machinery




充电桩线路保护
Charging pile line protection


洗车机管线保护
Car wash line protection


日常理线
Routine



测压软管及总成
PRESSURE HOSE AND ASSEMBLY











尼龙帆布护套
NYLON CANVAS SHEATH







耐高温防火护套
HIGH TEMPERATURE
RESISTANT FIRE PROTECTION SHEATH

