



Wechat QR of BRUCE



Wechat QR of VIVIAN



上海西哲流体科技有限公司
SHANGHAI XZT FLUID TECHNOLOGY CO., LTD

地 址：上海市宝山区高境镇殷高西路518号1216室 邮编：200439
Office: Room1216, No.518, Yingao Xilu, Gaojing, Baoshan, Shanghai, China
Tel/Fax: 0086 21 66870125
Website: WWW.XZT.CN.COM WWW.XZT-TOOL.COM

上海西哲流体科技有限公司
SHANGHAI XZT FLUID TECHNOLOGY CO.,LTD

企业简介

上海西哲流体科技有限公司是一家专注于液压系统测压工具的研发、生产和销售的公司。

公司主要产品包括：压力表，液压测试工具，氮气充气工具和测压工具。产品广泛运用于液压流体传动系统、液压设备维修，工程机械行业、机床润滑等。目前产品已销往：中国、东南亚、中东、欧洲、南美、北美。

公司自成立以来，一直坚持“质量第一，服务及时”的经营理念。随着对市场反馈信息的收集和自身技术的不断积累，公司根据客户新的需求，陆续开发出一些新的工具，来适应客户的要求。

目前，公司已经拥有多台检测设备，以及多名经验丰富的技术人员。公司完备的加工能力和技术实力，使得产品的品质和交期得到保证；丰富的液压测试工具开发能力，为客户带来便捷。

上海西哲流体科技有限公司将不断创新，和客户建立稳定友好的合作关系，并不断为客户创造更高的价值而努力。

Brief introduction

Shanghai XZT Fluid Technology Co., Ltd. is a company that focus on the research, development, production and sales of hydraulic system pressure measuring tools.

XZT main products include: pressure gauges, hydraulic test tools, nitrogen gas charging and test tools. Products are widely used in hydraulic fluid transmission systems, hydraulic equipment maintenance, construction machinery industry, machine tool lubrication. At present, the products have been sold to: China, Southeast Asia, Middle East, Europe, South America, North America.

Since its establishment, the company has always adhered to the business philosophy of "quality first, timely service". With the collection of market feedback information and the continuous accumulation of its own technology, the company has developed some new tools to meet the requirements of customers according to the new needs of customers.

At present, the company already has multiple testing equipment and many experienced technicians. The company's complete processing capability and technical strength ensure the quality and delivery of the products. The rich hydraulic testing tools development capabilities bring convenience to customers.

Shanghai XZT Fluid Technology Co., Ltd. will continue to innovate, establish stable and friendly cooperative relations with customers, and constantly strive to create higher value for customer.

目录

CONTENTS

□

1、微型测压系统 Mini Hydraulic Test System 01

1.1 测压软管性能简介和规格参数 Description And Application

1.2 HF系列测压软管总成的订购和接头型号 HF Series Of Test Hose Assembly And Fittings

1.2.1 HF系列软管总成的订购 How To Order

1.2.2 HF系列测压软管接头型号 Fittings

1.3 PT系列微型测压头 PT Series Test Couplings

□

2、液压测试套装及配件系列 Hydraulic Test Kit and Parts Series 13

2.1 三通 Swivel Run Tees

2.2 堵头和帽子 Plug And Caps

2.3 快换接头 Quick Release Coupling

2.4 工程机械液压测试盒 Hydraulic Test Kit For Excavator

2.5 手钳式液压泵 Hydraulic Pressure Test Pump

□

3、流量测试系列 Flow Tester Series 43

3.1 XZFK 系列数字式流量测试仪 XZFK Series Digital Hydraulic Flow Meter

3.2 XZFS 系列涡轮流量计 XZFS Series Turbine Flow Meter

3.3 XZGS 系列带信号输出齿轮流量计 XZGS Series Gear Flow Meter with Signal Output

□

4、压力表系列 Pressure Gauge Series 49

4.1 机械压力表 Analog Pressure Gauges

4.2 数字压力表 Digital Pressure Gauge

4.3 数字压力控制器 Digital Pressure Controller

4.4 蓝牙数字压力表 Bluetooth Digital Gauge Series

4.5 蓝牙数字温度传感器 Bluetooth Digital Temperature Sensor

□

5、氮气充气套装及配件系列 Nitrogen Gas Charging Kit and Parrs Series 69

5.1 蓄能器充气工具 Accumulator Gas Charging Kit

5.2 氮气充气工具 Nitrogen Gas Charging Kit for

5.3 液压破碎锤充气工具和配件 Hydraulic Breaker Gas Charging Kit And Parts

5.3.1 充气和测压工具 Gas Kit

5.3.2 充气阀 Gas Charging Valve

5.4 减震器氮气充气测压工具 Hydraulic Accumulator Nitrogen Gas Kit For Shock

□

6、集中润滑软管和接头 Grease Lubrication Hose And Fittings 80

6.1 集中润滑软管 Grease Lubrication Hose

6.2 集中润滑接头 Grease Lubrication Fittings

微型测压系统

Mini Hydraulic Test System

测压软管性能简介和规格参数 Description and application



微型高压软管用于微液压系统，液压系统中各点压力的检测。作为传导流体介质的管道，具有重量轻、耐磨、抗冲击性强、弹性良好、膨胀率极低、使用简便等特性。该软管可适用于：矿物油、水、酒精、汽油、乳化液、气体等介质。

Test pressure hose is applied in micro hydraulic system and testing pressure in hydraulic system.It's specification includes,light weight,wear resistance,strong impact resistance,good flexibility,friendly use,and so on.


Suit for: mineral oil, water, alcohol, gasoline, water-oil emulsions, gas, etc.

技术参数 (Technical information)

Name	Unit	DN2—400	DN2—630	DN3—630	DN4—500
软管内径 inside diameter	mm	2	2	3	4
软管外径 outer diameter	mm	5	5	6	8
最大静态压力 Max. quiescent pressure	Bar	400	630	630	500
最小爆破压力 Min. burst pressure	Bar	1200	1890	1890	1500
最小弯曲半径 Min. bending radius	mm	20	20	25	35
重量 weight	g	20	20	27	47
适用温度 temperature range	℃	-40~+100	-40~+100	-40~+100	-40~+100
软管内层材质 core material		聚脲胺(PA)			
增强层材质 reinforcement material		Fiber or Kevlar			
软管外层材质 cover material		聚脲胺(PA) or 聚胺脂(PU)			



HF系列测压软管总成的订购 How to order

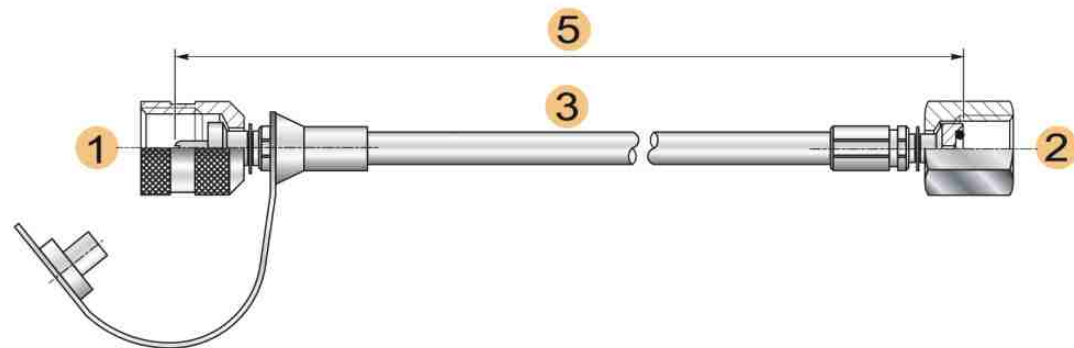

订购型号说明

HF 1-2-3-P*-5

HF 微型压力软管总成缩写

HF Abbreviation of micro high pressure flexible hose assembly

1 软管一端接头型号

Fitting model of one end

2 软管另一端接头型号

Fitting model of the other end

3 软管型号 (2=DN2, 3=DN3, 4=DN4)

Hose type (2=DN2, 3=DN3, 4=DN4)

P* 压力等级 (P40=400bar, P60=630bar)

Pressure class (P40=400bar, P60=630bar)

5 软管长度: mm

Hose length: mm

1、例如: 用户欲订购一端为连接测压点接头, 其螺纹为M16×2, 另一端为接压力表接头, 其螺纹为M14×1.5, 软管规格为: DN3, 压力等级为: 600BAR(60MPa), 软管长度为: 1500mm, 则订货型号为: HFH0200-P0100-3-P60-1500。


For example: One end with quick fitting of connecting thread is M16×2. The other is connected to the pressure gauge pressure gauge, and the connecting thread is M14×1.5. The hose type is DN3, the pressure class is 600BAR(60MPa), the hose length is 1500mm, then the model of this is: HFH0200-P0100-3-P60-1500.

2、订购直接接压力表形式的软管总成时, 若用户需要带压力表时, 则要在订单上说明压力表的量程和表盘直径等。


When you want to order the hose assembly with pressure gauge, you should clearly describe pressure gauge in order, such as the pressure range, gauge diameter or other special requirement.

HF系列测压软管接头型号 Fittings type

连接测压点母螺纹接头 Test coupling threaded female fitting: H series




G	Ch	代号/Code
M12×1.25		H0100
M16×2.0		H0200
M14×1.5		H0300
M16×1.5		H0400




G	Ch	代号/Code
M12×1.25		H0190
M16×2.0		H0290
M14×1.5		H0390
M16×1.5		H0490

连接测压点带外六角母螺纹接头 Test coupling threaded female fitting with hexagonal nut: H series

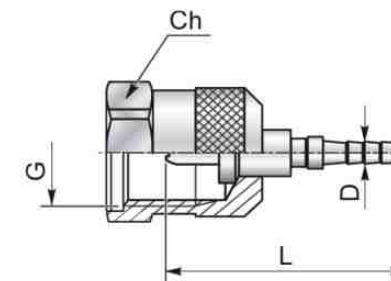


G	Ch	代号/Code
M12×1.25	19	H0100-1
M16×2.0	19	H0200-1
M14×1.5	19	H0300-1
M16×1.5	19	H0400-1

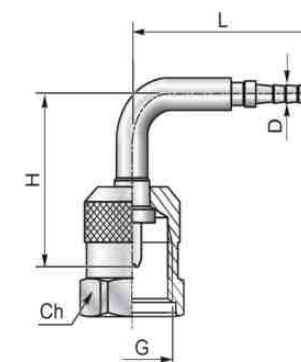


G	Ch	代号/Code
M12×1.25	19	H0190-1
M16×2.0	19	H0290-1
M14×1.5	19	H0390-1
M16×1.5	19	H0490-1

压力表螺纹接头 Gauges threaded fitting : P series




G	Ch	代号/Code
M14×1.5	17	P0100
M20×1.5	24	P0200
G1/4"	17	P0300
G1/2"	27	P0400




G	Ch	代号/Code
M14×1.5	17	P0190
M20×1.5	24	P0290
G1/4"	17	P0390
G1/2"	27	P0490

压力表螺纹接头 Gauges threaded fitting(without O-Ring) : A series




G	Ch	代号/Code
M14×1.5	17	A01
M20×1.5	24	A02
G1/4"	17	A03
G1/2"	27	A04

压力表螺纹接头 Gauges threaded fitting : W series




G	Ch	代号/Code
1/4" -18NPTF	19	W01
1/2" -14NPTF	24	W02

活动螺母连接D型60° 锥面密封式 Swivel female fitting 60° cone connection : D series

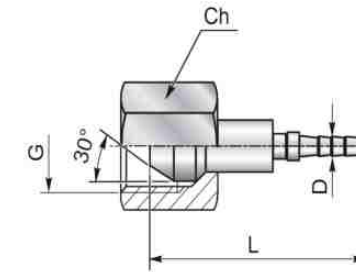


G	Ch	代号/Code
G1/8"	12	D01
G1/4"	17	D02

活动螺母连接24° 锥面密封 Swivel female fitting 24° cone connection: Q series

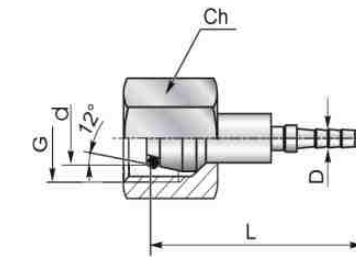


G	d	Ch	代号/Code
M08×1.0	4	10	Q0100
M10×1.0	6	12	Q0200
M12×1.5	6	14	Q0300
M14×1.5	6	17	Q0400
M14×1.5	8	17	Q0500
M16×1.5	8	19	Q0600
M16×1.5	10	19	Q0700
M18×1.5	10	22	Q0800
M18×1.5	12	22	Q0900
M20×1.5	12	24	Q1000




G	d	Ch	代号/Code
M08×1.0	4	10	Q0190
M10×1.0	6	12	Q0290
M12×1.5	6	14	Q0390
M14×1.5	6	17	Q0490
M14×1.5	8	17	Q0590
M16×1.5	8	19	Q0690
M16×1.5	10	19	Q0790
M18×1.5	10	22	Q0890
M18×1.5	12	22	Q0990
M20×1.5	12	24	Q1090

直插式 Plug-in connection: T series

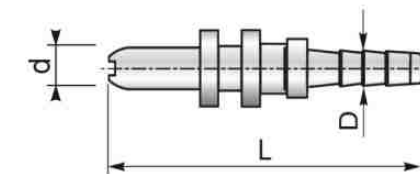


d	L	代号/Code
3.3	27	T01

活动螺母连接JIC37° 锥面密封系列 Swivel female fitting JIC 37° connection: C series

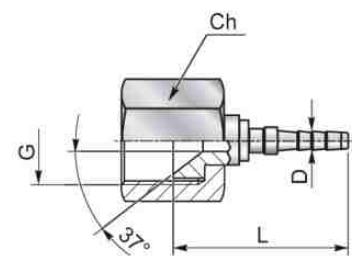


G	Ch	代号/Code
7/16-20UNF	14	C01
1/2-20UNF	17	C02
9/16-18UNF	19	C03
3/4-16UNF	24	C04

卡套杆式 Standpipe fitting: B series

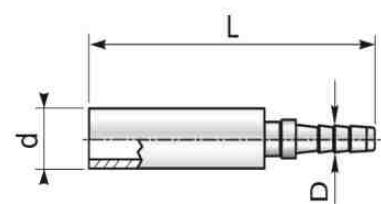


d	L	代号/Code
4.0	36	B0100
6.0	36	B0200
8.0	37.5	B0300

卡套杆式 Standpipe fitting: B series




d	L	H	代号/Code
4.0	33	25.5	B0190
6.0	33	28.0	B0290
8.0	41	37.0	B0390

铰接式 Banjo fitting and banjo screw: J series

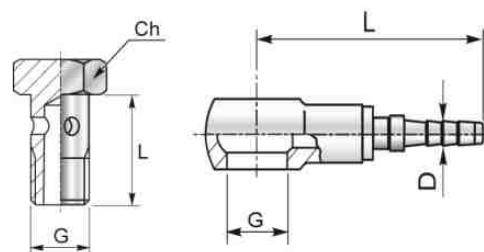


G	代号/Code
M08×1.00	J01
M10×1.00	J02
M14×1.50	J03
G1/4"	J04

外螺纹密封式 Male fittings: E series




G	Ch	代号/Code
M8×1	12	E01
M10×1	14	E02
M12×1.5	14	E03
M14×1.5	17	E04
M16×1.5	19	E05
G1/8"	14	E06
G1/4"	17	E07
7/16-20UNF	12	E08

锥螺纹密封式 Male fittings: Z series



G	Ch	代号/Code
R1/8"-28	12	Z01
R1/4"-19	17	Z02
1/8"-27NPT	12	Z03
1/4"-18NPT	17	Z04
R3/8"-19	19	Z05
3/8"-18NPT	19	Z06

套筒 Ferrule



DA	DI	L	代号/Code
8.0	5.5	15.0	F02
9.0	6.5	15.0	F03


测压软管总成示例 Sample of test hose assembly




PT系列微型测压头 PT series test couplings for pressure checking

密封类型 Sealing Type

- Type **A** O-ring sealing O型圈密封
Type **B** metal sealing edge 金属边密封
Type **C** flat gasket sealing 平垫圈密封
Type **D** sealing by thread 螺纹密封
Type **E** UNF O-ring sealing UNF O型圈密封

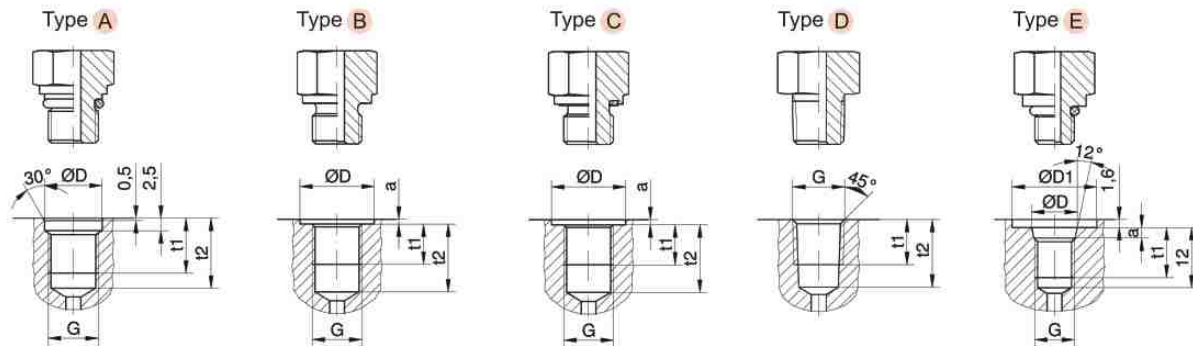


G	ΦD	t1	t2	G	ΦD	a	t1	t2	G	ΦD	a	t1	t2	G	t1	t2	G	ΦD1	ΦD	a	t1	t2
M 08x1	9.5	11	15.5	M 08x1	13	1	8	10	M 10x1	15	1	8	10	1/8 NPT	6.9	11.6	5/16-24 UNF	17	9.1	1.9	10	12
M 10x1	11.5	12	16.5	M 10x1	15	1	8	10	M 10x1.25	18	1.5	10	15	1/4 NPT	10	16.4	7/16-20 UNF	21	12.4	2.4	11.5	14
M 10x1.25	11	12	16.5	M 12x1.5	18	1.5	12	15	M 12x1.5	18	1.5	12	15	3/8 NPT	10.3	17.6	9/16-18 UNF	25	15.7	2.5	12.7	15.5
M 14x1.5	15.8	12	18	M 14x1.5	20	1.5	12	15	M 14x1.5	20	1.5	12	15									
				M 16x1.5	23	1.5	12	15	M 16x1.5	23	1.5	12	15	R 1/8	5.5	9.5						
				M 18x1.5	25	2	12	15	M 18x1.5	25	2	12	15	R 1/4	8.5	13.5						
				M 20x1.5	27	2	14	17	M 20x1.5	27	2	14	17	R 3/8	12	20						
				M 22x1.5	28	2.5	14	17	M 22x1.5	28	2.5	14	17									
				M 26x1.5	32	2.5	16	19	M 26x1.5	32	2.5	16	19									
				M 27x2	33	2.5	16	20	M 27x2	33	2.5	16	20									
				M 33x2	40	2.5	18	22	M 33x2	40	2.5	18	22									
				M 42x2	50	2.5	20	24	M 42x2	50	2.5	20	24									
				M 48x2	56	2.5	22	26	M 48x2	56	2.5	22	26									
				G 1/8	15	1	8	10.5	G 1/8	15	1	8	10.5									
				G 1/4	20	1.5	12	15.5	G 1/4	20	1.5	12	15.5									
				G 3/8	23	2	12	15.5	G 3/8	23	2	12	15.5									
				G 1/2	28	2.5	14	18.5	G 1/2	28	2.5	14	18.5									
				G 3/4	33	2.5	16	20	G 3/4	33	2.5	16	20									
				G1	40	2.5	18	23	G1	40	2.5	18	23									
				G 1 1/4	50	2.5	20	25	G 1 1/4	50	2.5	20	25									
				G 1 1/2	56	2.5	22	27	G 1 1/2	56	2.5	22	27									

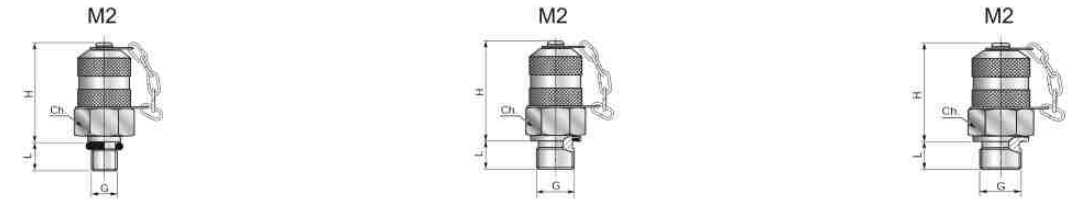


代号/Code	G	M2	Ch	L	H	密封形式 Sealing type
PT-01	M08×1.00	M16×2	17	8.0	37.0	C
PT-02	M10×1.00	M16×2	17	8.0	37.0	C
PT-021	M10×1.25	M16×2	17	8.0	37.0	C
PT-03	M12×1.50	M16×2	17	10.0	37.0	C
PT-04	M14×1.50	M16×2	19	12.0	37.0	C
PT-05	M16×1.50	M16×2	22	12.0	37.0	C
PT-06	G1/8"	M16×2	17	10.0	37.0	C
PT-07	G1/4"	M16×2	19	12.0	37.0	C
PT-08	G3/8"	M16×2	22	14.0	37.0	C
PT-09	G1/2"	M16×2	27	15.0	37.0	C
PT-10	5/16"-20UNF	M16×2	17	10.0	37.0	E
PT-11	7/16"-20UNF	M16×2	17	10.0	37.0	E
PT-12	1/2"-20UNF	M16×2	17	10.0	37.0	E
PT-13	9/16"-18UNF	M16×2	19	10.0	37.0	E


备注：如需要排气型测压点，请在订购代码前加“P”。例：PPT-01
If you need test coupling with exhaust, the code will be PPT-★, such as PPT-01.



代号/Code	G	M2	Ch	L	H	可选密封形式 Choice sealing type
PT-15	R1/8"	M16×2	17	10.0	37.0	D
PT-16	R1/4"	M16×2	19	12.0	37.0	D
PT-17	R3/8"	M16×2	22	14.0	37.0	D
PT-18	1/8"-27NPTF	M16×2	17	10.0	37.0	D
PT-19	1/4"-18NPTF	M16×2	19	14.0	37.0	D
PT-20	3/8"-18NPTF	M16×2	22	16.0	37.0	D




代号/Code	G	M2	Ch	L	H	密封形式 Sealing type
PT- 14	G1/4"	M12.65×1.5	17	8.0	37.0	B
PT- 141	M10×1	M12×1.25	17	8.0	37.0	B




代号/Code	G	ØD	M2	Ch.1	H	可选密封形式 Choice sealing type
PTQ-01	M12×1.50	06L	M16×2	14	54.0	
PTQ-02	M14×1.50	06S	M16×2	17	54.0	
PTQ-03	M14×1.50	08L	M16×2	17	54.0	
PTQ-04	M16×1.50	08S	M16×2	19	59.0	
PTQ-05	M16×1.50	10L	M16×2	19	59.0	
PTQ-06	M18×1.50	10S	M16×2	22	59.0	
PTQ-07	M18×1.50	12L	M16×2	22	59.0	
PTQ-08	M20×1.50	12S	M16×2	24	59.0	
PTQ-09	M22×1.50	14S	M16×2	27	59.0	
PTQ-10	M22×1.50	15L	M16×2	27	59.0	
PTQ-11	M24×1.50	16S	M16×2	30	59.0	
PTQ-12	M26×1.50	18L	M16×2	32	59.0	
PTQ-13	M30×2.00	20S	M16×2	36	59.0	
PTQ-14	M30×2.00	22L	M16×2	36	62.0	
PTQ-15	M36×2.00	28L	M16×2	41	60.0	
PTQ-16	M36×2.00	25S	M16×2	46	65.0	
PTQ-17	M42×2.00	30S	M16×2	50	65.0	
PTQ-18	M45×2.00	35L	M16×2	50	62.0	
PTQ-19	M52×2.00	38S	M16×2	60	65.0	
PTQ-20	M52×2.00	42L	M16×2	60	65.0	


备注：如需要排气型测压点，请在订购代码前加“P”。例：PPTQ-01
If you need test coupling with exhaust,the code will be PPTQ-★,such as PPTQ-01.




代号/Code	G	M2	Ch	S max	H	可选密封形式 Choice sealing type
PTG-01	7/16"-20UNF	M16×2	32	9	68.0	
PTG-02	1/2"-20UNF	M16×2	32	9	68.0	
PTG-03	9/16"-18UNF	M16×2	32	9	69.0	

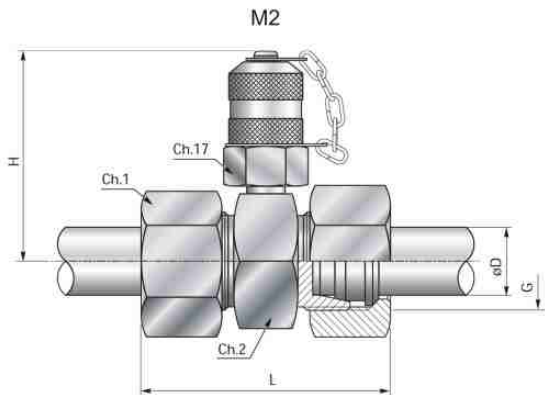

代号/Code	G	ØD	M2	Ch.1	H	可选密封形式 Choice sealing type
PTT-01	M12×1.50	06L	M16×2	14	54.0	
PTT-02	M14×1.50	06S	M16×2	17	54.0	
PTT-03	M14×1.50	08L	M16×2	17	54.0	
PTT-04	M16×1.50	08S	M16×2	19	59.0	
PTT-05	M16×1.50	10L	M16×2	19	59.0	
PTT-06	M18×1.50	10S	M16×2	22	59.0	
PTT-07	M18×1.50	12L	M16×2	22	59.0	
PTT-08	M20×1.50	12S	M16×2	24	59.0	
PTT-09	M22×1.50	14S	M16×2	27	59.0	
PTT-10	M22×1.50	15L	M16×2	27	59.0	
PTT-11	M24×1.50	16S	M16×2	30	59.0	
PTT-12	M26×1.50	18L	M16×2	32	59.0	
PTT-13	M30×2.00	20S	M16×2	36	59.0	
PTT-14	M30×2.00	22L	M16×2	36	62.0	
PTT-15	M36×2.00	28L	M16×2	41	60.0	
PTT-16	M36×2.00	25S	M16×2	46	65.0	
PTT-17	M42×2.00	30S	M16×2	50	65.0	
PTT-18	M45×2.00	35L	M16×2	50	62.0	
PTT-19	M52×2.00	38S	M16×2	60	65.0	
PTT-20	M52×2.00	42L	M16×2	60	65.0	

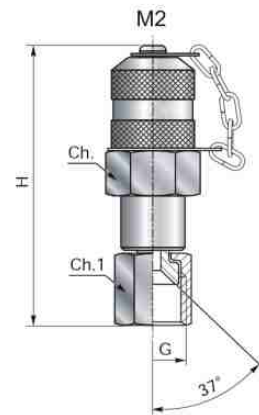

代号/Code	G	M2	H	Ch	Ch.1	可选密封形式 Choice sealing type
PTJ-01	7/16"-20 UNF	M16×2	64	17	14	
PTJ-02	1/2"-20 UNF	M16×2	65	17	17	
PTJ-03	9/16"-18 UNF	M16×2	67	17	19	
PTJ-04	3/4"-16 UNF	M16×2	70	17	24	

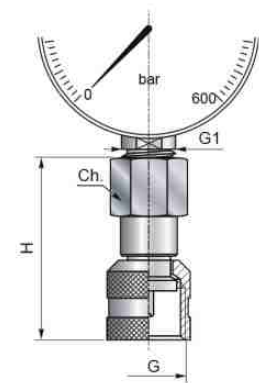

代号/Code	G1	G	H	Ch	Ch.1	可选密封形式 Choice sealing type
PTA-01	1/4"-18 NPT	M16×2	50	19	19	
PTA-02	1/2"-14 NPT	M16×2	55	27	19	
PTA-03	G1/4"-19	M16×2	50	19	19	
PTA-04	G1/2"-14	M16×2	55	27	19	

接头示例 Sample of Test Couplings



液压测试套装及配件系列
Hydraulic Test Kit and Parts Series

三通 Swivel Run Tees



三通 Swivel Run Tees (SAE JIC37°)

序号/NO.	订购码/Order Code	DASH SIZE	REMARK
1	SAE JIC37°-7/16UNF	1/4"	
2	SAE JIC37°-1/2UNF	5/16"	
3	SAE JIC37°-9/16UNF	3/8"	
4	SAE JIC37°-3/4UNF	1/2"	
5	SAE JIC37°-7/8UNF	5/8"	
6	SAE JIC37°-1-1/16UNF	3/4"	
7	SAE JIC37°-1-5/16UNF	1"	



三通 Swivel Run Tees (ORFS)

序号/NO.	订购码/Order Code	DASH SIZE	REMARK
1	ORFS-9/16-18UNF	1/4"	
2	ORFS-11/16-16UNF	3/8"	
3	ORFS-13/16-16UNF	1/2"	
4	ORFS-1-14UNF	5/8"	
5	ORFS-1 3/16-12UNF	3/4"	
6	ORFS-1 7/16-12UNF	1"	
7	ORFS-1 11/16-12UNF	1"1/4"	



三通 Swivel Run Tees (BSPP)

序号/NO.	订购码/Order Code	DASH SIZE	REMARK
1	BSPP-1/4"	1/4"	
2	BSPP-3/8"	3/8"	
3	BSPP-1/2"	1/2"	
4	BSPP-5/8"	5/8"	
5	BSPP-3/4"	3/4"	
6	BSPP-1"	1"	

三通 Swivel Run Tees



三通 Swivel Run Tees (JIS30° -Komatsu)

序号/NO.	订购码/Order Code	DASH SIZE	REMARK
1	JIS30°(Komatsu)-M10*1.25	1/8"	
2	JIS30°(Komatsu)-M14*1.5	1/4"	
3	JIS30°(Komatsu)-M18*1.5	3/8"	
4	JIS30°(Komatsu)-M22*1.5	1/2"	
5	JIS30°(Komatsu)-M24*1.5	5/8"	
6	JIS30°(Komatsu)-M30*1.5	3/4"	



三通 Swivel Run Tees (JIS30° BSPP-Kobelco)

序号/NO.	订购码/Order Code	DASH SIZE	REMARK
1	JIS30°BSPP(Kobelco)-BSP1/4"	1/4"	
2	JIS30°BSPP(Kobelco)-BSP3/8"	3/8"	
3	JIS30°BSPP(Kobelco)-BSP1/2"	1/2"	
4	JIS30°BSPP(Kobelco)-BSP3/4"	3/4"	



三通 Swivel Run Tees (DKO)

序号/NO.	订购码/Order Code	DASH SIZE	REMARK
1	DKOM14*1.5-06S(T)		
2	DKOM14*1.5-08L(T)		
3	DKOM16*1.5-08S(T)		
4	DKOM16*1.5-10L(T)		
5	DKOM18*1.5-10S(T)		
6	DKOM18*1.5-12L(T)		
7	DKOM20*1.5-12S(T)		
8	DKOM22*1.5-15L(T)		
9	DKOM22*1.5-14S(T)		
10	DKOM24*1.5-16S(T)		
11	DKOM26*1.5-18L(T)		

堵头和螺帽 Plug and Caps

堵头和螺帽 Plug and Caps for JIC 37°



序号/NO.	订购码/Order Code	订购码/Order Code
1	Plug-JIC37-7/16UNF	Cap-JIC37-7/16 UNF
2	Plug-JIC37-1/2 UNF	Cap-JIC37-1/2 UNF
3	Plug-JIC37-9/16 UNF	Cap-JIC37-9/16 UNF
4	Plug-JIC37-3/4 UNF	Cap-JIC37-3/4 UNF
5	Plug-JIC37-7/8 UNF	Cap-JIC37-7/8 UNF
6	Plug-JIC37-1-1/16 UNF	Cap-JIC37-1-1/16 UNF
7	Plug-JIC37-1-5/16 UNF	Cap-JIC37-1-5/16 UNF

堵头和螺帽 Plug and Caps for ORFS



序号/NO.	订购码/Order Code	订购码/Order Code
1	Plug-ORFS-9/16 UNF	Cap-ORFS-9/16 UNF
2	Plug-ORFS-11/16 UNF	Cap-ORFS-11/16 UNF
3	Plug-ORFS-13/16 UNF	Cap-ORFS-13/16 UNF
4	Plug-ORFS-1 UNF	Cap-ORFS-1 UNF
5	Plug-ORFS-1-3/16 UNF	Cap-ORFS-1-3/16 UNF
6	Plug-ORFS-1-7/16 UNF	Cap-ORFS-1-7/16 UNF

堵头和螺帽 Plug and Caps for BSPP



序号/NO.	订购码/Order Code	订购码/Order Code
1	Plug-BSPP-1/4 "	Cap-BSPP-1/4 "
2	Plug-BSPP-3/8"	Cap-BSPP-3/8"
3	Plug-BSPP-1/2 "	Cap-BSPP-1/2 "
4	Plug-BSPP-5/8"	Cap-BSPP-5/8"
5	Plug-BSPP-3/4"	Cap-BSPP-3/4"
6	Plug-BSPP-1"	Cap-BSPP-1"

堵头和螺帽 Plug and Caps

堵头和螺帽 Plug and Caps for JIS30(Komatsu)



序号/NO.	订购码/Order Code	订购码/Order Code
1	Plug-JIS30(Komatsu)-M10*1.25	Cap-JIS30(Komatsu)-M10*1.25
2	Plug-JIS30(Komatsu)-M14*1.5	Cap-JIS30(Komatsu)-M14*1.5
3	Plug-JIS30(Komatsu)-M18*1.5	Cap-JIS30(Komatsu)-M18*1.5
4	Plug-JIS30(Komatsu)-M22*1.5	Cap-JIS30(Komatsu)-M22*1.5
5	Plug-JIS30(Komatsu)-M24*1.5	Cap-JIS30(Komatsu)-M24*1.5
6	Plug-JIS30(Komatsu)-M30*1.5	Cap-JIS30(Komatsu)-M30*1.5

堵头和螺帽 Plug and Caps for JIS30(Kobelco)



序号/NO.	订购码/Order Code	订购码/Order Code
1	Plug-JIS30(Kobelco)-BSPP1/4"	Cap-JIS30(Kobelco)-BSPP1/4"
2	Plug-JIS30(Kobelco)-BSPP3/8"	Cap-JIS30(Kobelco)-BSPP3/8"
3	Plug-JIS30(Kobelco)-BSPP1/2"	Cap-JIS30(Kobelco)-BSPP1/2"
4	Plug-JIS30(Kobelco)-BSPP3/4"	Cap-JIS30(Kobelco)-BSPP3/4"

堵头和螺帽 Plug and Caps for DKO 24°



序号/NO.	订购码/Order Code	订购码/Order Code
1	Plug-DKO-M14*1.5-08L	Cap-DKO-M14*1.5-08L
2	Plug-DKO-M16*1.5-10L	Cap-DKO-M16*1.5-10L
3	Plug-DKO-M18*1.5-12L	Cap-DKO-M18*1.5-12L
4	Plug-DKO-M22*1.5-15L	Cap-DKO-M22*1.5-15L
5	Plug-DKO-M14*1.5-06S	Cap-DKO-M14*1.5-06S
6	Plug-DKO-M16*1.5-08S	Cap-DKO-M16*1.5-08S
7	Plug-DKO-M18*1.5-10S	Cap-DKO-M18*1.5-10S
8	Plug-DKO-M20*1.5-12S	Cap-DKO-M20*1.5-12S
9	Plug-DKO-M22*1.5-14S	Cap-DKO-M22*1.5-14S

快换接头 Quick Release Coupling

卡特快速接头 Quick Release for Caterpillier Case ETC

序号/NO.	图片/Picture	订购码/Order Code	材质 Material	备注Remark
1		Cat female-0-G1/8F	Steel	Compatible Parker PT series quick couplings
2		Cat female-0-NPT1/8F	Steel	
3		Cat female-0-NPT1/4F	Steel	
4		Cat female-0-NPT1/8M	Steel	
5		Cat female-0-NPT1/4M	Steel	
6		Cat Male-0-G1/8F	Steel	Compatible Parker PT series quick couplings
7		Cat Male-0-NPT1/8M	Steel	
8		Cat Male-0-NPT1/4M	Steel	
9		Cat Male-0-UNF7/16M	Steel	
10		Cat Male-0-UNF9/16M	Steel	

小松快速接头 Quick Release for Komatsu Hitachi

序号/NO.	图片/Picture	订购码/Order Code	材质 Material	备注Remark
1		Komatsu Female-0-G1/4F	Steel	
2		Komatsu Female-0-M14*1.5F	Steel	
3		Komatsu Female-0-M20*1.5F	Steel	
4		Komatsu Female-90-M14*1.5F	Steel	
5		Komatsu Male-0-G1/4F	Steel	
6		Komatsu Male-0-R1/8M	Steel	
7		Komatsu Male-0-M14*1.5M	Steel	

快换接头 Quick Release Coupling

沃尔沃快速接头 Quick Release for Volvo

序号/NO.	图片/Picture	订购码/Order Code	材质 Material	备注Remark
1		Volvo female-0-G1/8M	Steel	
2		Volvo male-0-G1/8M	Steel	

三星快速接头 Quick Release for Samsung, Samsung-Volvo

序号/NO.	图片/Picture	订购码/Order Code	材质 Material	备注Remark
1		Samsung female (M16X1.5) -M16X2M	Steel	


大宇快速接头 Quick Release for Daewoo, Kawasaki

序号/NO.	图片/Picture	订购码/Order Code	材质 Material	备注Remark
1		Daewoo female (M12.65X1.5) -M16X2M	Steel	

JCB 快速接头 Quick Release for JCB

序号/NO.	图片/Picture	订购码/Order Code	材质 Material	备注Remark
1		JCB female-G1/4M	Steel	

700BAR Digital Gauge+1.5m+Quick Adapter

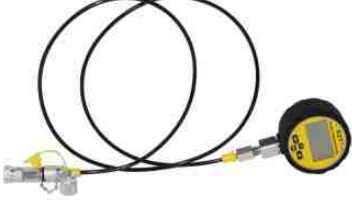No.	Picture	Order Code	Suit Follow Brand Equipment
1		XZTK-DC	         
2		XZTK-DK	 
3		XZTK-DV	 
4		XZTK-DS	  
5		XZTK-DH	  
6		XZTK-DJ	

700BAR Bluetooth Digital Gauge +Quick Adapter

No.	Picture	Order Code	Suit Follow Brand Equipment
1		XZTK-DCW	
2		XZTK-DKW	
3		XZTK-DVW	
4		XZTK-DSW	
5		XZTK-DHW	
6		XZTK-DJW	

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK -40



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 6\text{MPa}/60\text{BAR}/900\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 40\text{MPa}/400\text{BAR}/6000\text{PSI}$	1
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1500mm	2
测试接头 Test Coupling	
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M14 $\times$ 1.5	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: R1/4	1

型号 (Order Code) : XZTK -60



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 25\text{MPa}/250\text{BAR}/3700\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 40\text{MPa}/400\text{BAR}/6000\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 60\text{MPa}/600\text{BAR}/9000\text{PSI}$	1
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1500mm	3
测试接头 Test Coupling	
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M14 $\times$ 1.5	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: R1/4	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: NPT1/4-18	1

备注：测压盒可以根据客户的要求进行配置 Remark: Pressure gauge and test couplings can be changed according to customer

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-60M



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 2.5\text{MPa}/25\text{BAR}/360\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 25\text{MPa}/250\text{BAR}/3700\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 40\text{MPa}/400\text{BAR}/6000\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 60\text{MPa}/600\text{BAR}/9000\text{PSI}$	1
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1500mm	4
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4-18	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere	1
快换接头 Quick connector for Komatsu/HITACHI	1

型号 (Order Code) : XZTK-70M



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
数显压力表 Digital Gauge: $\phi 80\text{mm} \sim 70\text{MPa}/700\text{BAR}/10000\text{PSI}$	2
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1.5m	2
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere	1
快换接头 Quick connector for Komatsu/HITACHI	1

备注：测压盒可以根据客户的要求进行配置 Remark: Pressure gauge and test couplings can be changed according to customer

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70MT



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
Digital Different Pressure Gauge: $\phi 80\text{mm} \sim 70\text{MPa}/700\text{BAR}/10000\text{PSI}$ With Protector	1
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1.5m	2
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4	1
微型测压头 Test coupling: JIC37-7/16UNF Female	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Catpelier/CASE/John Deere-(BSP1/8F)	1
快换接头 Quick connector for Komatsu/HITACHI-(M14*1.5F)	1

型号 (Order Code) : XZTK-70MW



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
Digital Bluetooth Gauge: $\phi 60\text{mm} \sim 70\text{MPa}/700\text{BAR}/10000\text{PSI}$ With Protector	2
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1.5m	2
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere	1
快换接头 Quick connector for Komatsu/HITACHI	1

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-60P



Suit



配置描述 Description			
压力表 Pressure Gauge		Quantity: PCS	
压力表 Analog Pressure Gauge: $\phi 63\text{mm}$ ~10BAR/150PSI/1MPa		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm}$ ~60BAR/900PSI/6MPa		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm}$ ~160BAR/2300PSI/16MPa		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm}$ ~400BAR/6000PSI/40MPa		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm}$ ~600BAR/9000PSI/60MPa		1	
测压软管总成 Test Hose Assembly		Quantity: PCS	
测压软管 Test hose: Length=1.5m/5FT		2	
测压软管 Test hose: Length=3.0m/10FT		1	
测试接头 Test Coupling		QTY	QTY
微型测压头 Test coupling: G1/8	2	微型测压头 Test coupling: UNF5/16-20	1
微型测压头 Test coupling: G1/4	2	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M8*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: R1/8	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: R1/4	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: NPT1/8	1
微型测压头 Test coupling: M14*1.5	1	微型测压头 Test coupling: NPT1/4	1
微型测压头 Test coupling: M16*1.5	1	微型测压头 Test coupling: JIC37-UNF7/16	1
快速接头 Quick Release Coupling		QTY	
快换接头 B Quick connector for Bobcat/Catpelier/CASE/JohnDeere		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70PT



Suit



配置描述 Description			
压力表 Pressure Gauge		Quantity: PCS	
Digital Different Pressure Gauge: $\phi 80\text{mm}$ ~ 16MPa/160BAR/2300PSI With Protector		1	
Digital Different Pressure Gauge: $\phi 80\text{mm}$ ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly		Quantity: PCS	
测压软管 Test hose: Length=1.5m/5FT		2	
测压软管 Test hose: Length=3.0m/10FT		1	
测试接头 Test Coupling		QTY	QTY
微型测压头 Test coupling: G1/8	2	微型测压头 Test coupling: UNF5/16-20	1
微型测压头 Test coupling: G1/4	2	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M8*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: R1/8	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: R1/4	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: NPT1/8	1
微型测压头 Test coupling: M14*1.5	1	微型测压头 Test coupling: NPT1/4	1
微型测压头 Test coupling: M16*1.5	1	微型测压头 Test coupling: JIC37-UNF7/16	1
快速接头 Quick Release Coupling		QTY	
快换接头 B Quick connector for Bobcat/Catpelier/CASE/JohnDeere		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	

型号 (Order Code) : XZTK-70P



Suit



配置描述 Description			
压力表 Pressure Gauge		Quantity: PCS	
数字式压力表 Digital Pressure Gauge: $\phi 80\text{mm}$ ~160BAR/2300PSI/16MPa-BSP		1	
数字式压力表 Digital Pressure Gauge: $\phi 80\text{mm}$ ~700BAR/10000PSI/70MPa-BSP		2	
测压软管总成 Test Hose Assembly		Quantity: PCS	
测压软管 Test hose: Length=1.5m/5FT		2	
测压软管 Test hose: Length=3.0m/10FT		1	
测试接头 Test Coupling		QTY	QTY
微型测压头 Test coupling: G1/8	2	微型测压头 Test coupling: UNF5/16-20	1
微型测压头 Test coupling: G1/4	2	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M8*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: R1/8	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: R1/4	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: NPT1/8	1
微型测压头 Test coupling: M14*1.5	1	微型测压头 Test coupling: NPT1/4	1
微型测压头 Test coupling: M16*1.5	1	微型测压头 Test coupling: JIC37-UNF7/16	1
快速接头 Quick Release Coupling		QTY	
快换接头 B Quick connector for Bobcat/Catpelier/CASE/JohnDeere		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	

型号 (Order Code) : XZTK-70PW



Suit



配置描述 Description			
压力表 Pressure Gauge		Quantity: PCS	
Digital Bluetooth Gauge: $\phi 60\text{mm}$ ~ 70MPa/700BAR/10000PSI With Protector		3	
测压软管总成 Test Hose Assembly		Quantity: PCS	
测压软管 Test hose: Length=1.5m/5FT		2	
测压软管 Test hose: Length=3.0m/10FT		1	
测试接头 Test Coupling		QTY	QTY
微型测压头 Test coupling: G1/8	2	微型测压头 Test coupling: UNF5/16-20	1
微型测压头 Test coupling: G1/4	2	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M8*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: R1/8	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: R1/4	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: NPT1/8	1
微型测压头 Test coupling: M14*1.5	1	微型测压头 Test coupling: NPT1/4	1
微型测压头 Test coupling: M16*1.5	1	微型测压头 Test coupling: JIC37-UNF7/16	1
快速接头 Quick Release Coupling		QTY	
快换接头 B Quick connector for Bobcat/Catpelier/CASE/JohnDeere		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-60MC



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 2.5\text{MPa}/25\text{BAR}/370\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 25\text{MPa}/250\text{BAR}/3700\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 40\text{MPa}/400\text{BAR}/6000\text{PSI}$	1
压力表 Pressure Gauge: $\phi 63\text{mm} \sim 60\text{MPa}/600\text{BAR}/9000\text{PSI}$	1
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1.5m	3
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere	1
快换接头 Quick connector for Komatsu/HITACHI	1
沃尔沃快换接头 Quick connector for Volvo	1
三星快换接头 Quick connector for Samsung-Volvo	1
大字快换接头 Quick connector for Daewoo/Kawasaki	1
JCB 快换接头 Quick connector for JCB	1

型号 (Order Code) : XZTK-70MC



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
数显压力表 Digital Gauge: $\phi 80\text{mm} \sim 70\text{MPa}/700\text{BAR}/10000\text{PSI}$	2
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1.5m	2
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere	1
快换接头 Quick connector for Komatsu/HITACHI	1
沃尔沃快换接头 Quick connector for Volvo	1
三星快换接头 Quick connector for Samsung-Volvo	1
大字快换接头 Quick connector for Daewoo/Kawasaki	1
JCB 快换接头 Quick connector for JCB	1

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70MCW



Suit



配置描述 Description	数量Quantity: PCS
压力表 Pressure Gauge	
Digital Bluetooth Gauge: $\phi 60\text{mm} \sim 70\text{MPa}/700\text{BAR}/10000\text{PSI}$ With Protector	2
测压软管总成 Test Hose Assembly	
测压软管 Test hose: Length = 1.5m	2
测试接头 Test Coupling	
微型测压头 Test coupling: G1/8	1
微型测压头 Test coupling: G1/4	1
微型测压头 Test coupling: G3/8	1
微型测压头 Test coupling: M10*1	1
微型测压头 Test coupling: M10*1.25	1
微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: NPT1/4	1
快速接头 Quick Release Coupling	
快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere	1
快换接头 Quick connector for Komatsu/HITACHI	1
沃尔沃快换接头 Quick connector for Volvo	1
三星快换接头 Quick connector for Samsung-Volvo	1
大字快换接头 Quick connector for Daewoo/Kawasaki	1
JCB 快换接头 Quick connector for JCB	1

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-60K



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
压力表 Analog Pressure Gauge: φ63mm ~ 10BAR/150PSI/1MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 60BAR/900PSI/6MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 160BAR/2300PSI/16MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 400BAR/6000PSI/40MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 600BAR/9000PSI/60MPa		1	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 1.5m		5	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: JIC37°-7/16UNF		1	
快速接头 Quick Release Coupling			
快换接头Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		1	
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)		1	
三通测试接头 Swivel Run Tees			
BSPP-1/4	1	DKO-M14*1.5-08L	1
BSPP-3/8	1	DKO-M16*1.5-10L	1
SAE JIC37-7/16UNF	1	DKO-M18*1.5-12L	1
SAE JIC37-9/16UNF	1	JIS30(Komatsu)-M14*1.5	1
ORFS-9/16-18UNF	1	JIS30(Komatsu)-M18*1.5	1
ORFS-11/16-16UNF	1	JIS30(Kobelco)-BSPP1/4	1
ORFS-13/16-16UNF	1	JIS30(Kobelco)-BSPP3/8	1

型号 (Order Code) : XZTK-70K



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
数显压力表Digital Gauge: ϕ 80mm ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 3.0m / 10FT		2	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4			
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M10*1			
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: JIC37°-7/16UNF		1	
快速接头 Quick Release Coupling			
快换接头Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		1	
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)		1	
三通测试接头 Swivel Run Tees			
BSPP-1/4	1	DKO-M14*1.5-08L	1
BSPP-3/8	1	DKO-M16*1.5-10L	1
SAE JIC37-7/16UNF	1	DKO-M18*1.5-12L	1
SAE JIC37-9/16UNF	1	JIS30(Komatsu)-M14*1.5	1
ORFS-9/16-18UNF	1	JIS30(Komatsu)-M18*1.5	1
ORFS-11/16-16UNF	1	JIS30(Kobelco)-BSPP1/4	1
ORFS-13/16-16UNF	1	JIS30(Kobelco)-BSPP3/8	1

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-60U



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
压力表 Pressure Gauge: Ø63mm ~ 25MPa/250BAR/3700PSI		1	
压力表 Pressure Gauge: Ø63mm ~ 40MPa/400BAR/6000PSI		1	
压力表 Pressure Gauge: Ø63mm ~ 60MPa/600BAR/9000PSI		1	
测压软管总成 Test Hose Assembly			
测压软管 Test hose: Length = 1.5m		3	
测试接头 Test Coupling			
微型测压头 Test coupling: G1/8	1	微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: G1/4	1	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: NPT1/4-18	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: R1/4-19	1
微型测压头 Test coupling: JIC37°-7/16UNF	1		
快速接头 Quick Release Coupling			
卡特凯斯快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere			1
小松日立快换接头 Quick connector for Komatsu/HITACHI			1
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	ORFS-1"-14UNF	1
SAE JIC-37°-1/2UNF	1	ORFS-1 3/16-12UNF	1
SAE JIC-37°-9/16UNF	1	ORFS-1 7/16-12UNF	1
SAE JIC-37°-3/4UNF	1	BSPP-1/4"	1
SAE JIC-37°-7/8UNF	1	BSPP-3/8"	1
SAE JIC-37°-1-1/16UNF	1	BSPP-1/2"	1
SAE JIC-37°-1-5/16UNF	1	BSPP-5/8"	1
ORFS-9/16-18UNF	1	BSPP-3/4"	1
ORFS-11/16"-16UNF	1	BSPP-1"	1
ORFS-13/16"-16UNF	1		

型号 (Order Code) : XZTK-70U



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
数显压力表 Digital Gauge: 80mm ~ 70MPa/700BAR/10000PSI		2	
测压软管总成 Test Hose Assembly			
测压软管 Test hose: Length = 1.5m		2	
测试接头 Test Coupling			
微型测压头 Test coupling: G1/8	1	微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: G1/4	1	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: NPT1/4-18	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: R1/4-19	1
微型测压头 Test coupling: JIC37°-7/16UNF	1		
快速接头 Quick Release Coupling			
卡特凯斯快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere			1
小松日立快换接头 Quick connector for Komatsu/HITACHI			1
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	ORFS-1"-14UNF	1
SAE JIC-37°-1/2UNF	1	ORFS-1 3/16-12UNF	1
SAE JIC-37°-9/16UNF	1	ORFS-1 7/16-12UNF	1
SAE JIC-37°-3/4UNF	1	BSPP-1/4"	1
SAE JIC-37°-7/8UNF	1	BSPP-3/8"	1
SAE JIC-37°-1-1/16UNF	1	BSPP-1/2"	1
SAE JIC-37°-1-5/16UNF	1	BSPP-5/8"	1
ORFS-9/16-18UNF	1	BSPP-3/4"	1
ORFS-11/16"-16UNF	1	BSPP-1"	1
ORFS-13/16"-16UNF	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70UT



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
Digital Different Pressure Gauge: φ80mm ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly			
测压软管 Test hose: Length = 1.5m		2	
测试接头 Test Coupling			
微型测压头 Test coupling: G1/8	1	微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: G1/4	1	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: NPT1/4-18	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: R1/4-19	1
微型测压头 Test coupling: JIC37°-7/16UNF	1		
快速接头 Quick Release Coupling			
卡特凯斯快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere		1	
小松日立快换接头 Quick connector for Komatsu/HITACHI		1	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	ORFS-1"-14UNF	1
SAE JIC-37°-1/2UNF	1	ORFS-1 3/16-12UNF	1
SAE JIC-37°-9/16UNF	1	ORFS-1 7/16-12UNF	1
SAE JIC-37°-3/4UNF	1	BSPP-1/4"	1
SAE JIC-37°-7/8UNF	1	BSPP-3/8"	1
SAE JIC-37°-1-1/16UNF	1	BSPP-1/2"	1
SAE JIC-37°-1-5/16UNF	1	BSPP-5/8"	1
ORFS-9/16-18UNF	1	BSPP-3/4"	1
ORFS-11/16"-16UNF	1	BSPP-1"	1
ORFS-13/16"-16UNF	1		

型号 (Order Code) : XZTK-70UW



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
Digital Bluetooth Gauge: φ60mm ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly			
测压软管 Test hose: Length = 1.5m		2	
测试接头 Test Coupling			
微型测压头 Test coupling: G1/8	1	微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: G1/4	1	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: NPT1/4-18	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: R1/4-19	1
微型测压头 Test coupling: JIC37°-7/16UNF	1		
快速接头 Quick Release Coupling			
卡特凯斯快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere			1
小松日立快换接头 Quick connector for Komatsu/HITACHI			1
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	ORFS-1"-14UNF	1
SAE JIC-37°-1/2UNF	1	ORFS-1 3/16-12UNF	1
SAE JIC-37°-9/16UNF	1	ORFS-1 7/16-12UNF	1
SAE JIC-37°-3/4UNF	1	BSPP-1/4"	1
SAE JIC-37°-7/8UNF	1	BSPP-3/8"	1
SAE JIC-37°-1-1/16UNF	1	BSPP-1/2"	1
SAE JIC-37°-1-5/16UNF	1	BSPP-5/8"	1
ORFS-9/16-18UNF	1	BSPP-3/4"	1
ORFS-11/16"-16UNF	1	BSPP-1"	1
ORFS-13/16"-16UNF	1		

型号 (Order Code) : XZTK-60C



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
压力表 Analog Pressure Gauge: φ63mm ~ 10BAR/150PSI/1MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 60BAR/900PSI/6MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 160BAR/2300PSI/16MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 400BAR/6000PSI/40MPa		1	
压力表 Analog Pressure Gauge: φ63mm ~ 600BAR/9000PSI/60MPa		1	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 1.5m / 5 FT		2	
测压软管Test hose: Length = 3.0m / 10FT		1	
测试接头 Test Coupling			
微型测压头 Test coupling: G1/8	1	微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: G1/4	1	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: NPT1/4-18	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: R1/4-19	1
微型测压头 Test coupling: JIC37°-7/16UNF	1		
快速接头 Quick Release Coupling			
卡特凯斯快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere			1
小松日立快换接头 Quick connector for Komatsu/HITACHI			1
沃尔沃快换接头 Quick connector for Volvo			1
三星快换接头 Quick connector for Samsung-Volvo			1
大宇快换接头 Quick connector for Daewoo/Kawasaki			1
JCB 快换接头 Quick connector for JCB			1
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	BSPP-1/2"	1
SAE JIC-37°-1/2UNF	1	BSPP-5/8"	1
SAE JIC-37°-9/16UNF	1	BSPP-3/4"	1
SAE JIC-37°-3/4UNF	1	BSPP-1"	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-1-5/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
ORFS-9/16-18UNF	1	JIS30°(Komatsu)-M22*1.5	1
ORFS-11/16"-16UNF	1	JIS30°(Komatsu)-M24*1.5	1
ORFS-13/16"-16UNF	1	JIS30°(Komatsu)-M30*1.5	1
ORFS-1"-14UNF	1	JIS30°BSPP(Kobelco)-BSP1/4"	1
ORFS-1 3/16-12UNF	1	JIS30°BSPP(Kobelco)-BSP3/8"	1
ORFS-1 7/16-12UNF	1	JIS30°BSPP(Kobelco)-BSP1/2"	1
BSPP-1/4"	1	JIS30°BSPP(Kobelco)-BSP3/4"	1
BSPP-3/8"	1		

型号 (Order Code) : XZTK-70C



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
数显压力表Digital Gauge: φ80mm ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly			
测压软管 Test hose: Length = 1.5m		2	
测压软管Test hose: Length = 3.0m / 10FT		1	
测试接头 Test Coupling			
微型测压头 Test coupling: G1/8	1	微型测压头 Test coupling: M14*1.5	1
微型测压头 Test coupling: G1/4	1	微型测压头 Test coupling: UNF7/16-20	1
微型测压头 Test coupling: G3/8	1	微型测压头 Test coupling: UNF1/2-20	1
微型测压头 Test coupling: M10*1	1	微型测压头 Test coupling: UNF9/16-18	1
微型测压头 Test coupling: M10*1.25	1	微型测压头 Test coupling: NPT1/4-18	1
微型测压头 Test coupling: M12*1.5	1	微型测压头 Test coupling: R1/4-19	1
微型测压头 Test coupling: JIC37°-7/16UNF	1		
快速接头 Quick Release Coupling			
卡特凯斯快换接头 Quick connector for Bobcat/Catpelier/CASE/JohnDeere			1
小松日立快换接头 Quick connector for Komatsu/HITACHI			1
沃尔沃快换接头 Quick connector for Volvo			1
三星快换接头 Quick connector for Samsung-Volvo			1
大宇快换接头 Quick connector for Daewoo/Kawasaki			1
JCB 快换接头 Quick connector for JCB			1
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	BSPP-1/2"	1
SAE JIC-37°-1/2UNF	1	BSPP-5/8"	1
SAE JIC-37°-9/16UNF	1	BSPP-3/4"	1
SAE JIC-37°-3/4UNF	1	BSPP-1"	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-1-5/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
ORFS-9/16-18UNF	1	JIS30°(Komatsu)-M22*1.5	1
ORFS-11/16"-16UNF	1	JIS30°(Komatsu)-M24*1.5	1
ORFS-13/16"-16UNF	1	JIS30°(Komatsu)-M30*1.5	1
ORFS-1"-14UNF	1	JIS30°BSPP(Kobelco)-BSP1/4"	1
ORFS-1 3/16-12UNF	1	JIS30°BSPP(Kobelco)-BSP3/8"	1
ORFS-1 7/16-12UNF	1	JIS30°BSPP(Kobelco)-BSP1/2"	1
BSPP-1/4"	1	JIS30°BSPP(Kobelco)-BSP3/4"	1
BSPP-3/8"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70CT



Suit



It can display the pressure one side or two side , also can display the pressure difference on both sides immediately



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
Digital Different Pressure Gauge: φ80mm ~ 70MPa/700BAR/10000PSI With Protector			1
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 1.5m		2	
测压软管Test hose: Length = 3.0m		2	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF1/2-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: R1/4-19		1	
微型测压头Test coupling: JIC37°-7/16UNF		1	
快速接头 Quick Release Coupling			
快换接头Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		1	
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)		1	
快换接头Quick Connector for Volvo		1	
快换接头Quick Connector for Sumsung/Sumsung-Volvo		1	
快换接头Quick Connector for Daewoo,Kawasaki		1	
快换接头Quick Connector for JCB,Timco		1	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1/2UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-9/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
SAE JIC-37°-3/4UNF	1	JIS30°(Komatsu)-M22*1.5	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M24*1.5	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M30*1.5	1
SAE JIC-37°-1-5/16UNF	1	JIS30°BSPP(Kobelco)-BSP1/4"	1
ORFS-9/16-18UNF	1	JIS30°BSPP(Kobelco)-BSP3/8"	1
ORFS-11/16"-16UNF	1	JIS30°BSPP(Kobelco)-BSP1/2"	1
ORFS-13/16"-16UNF	1	JIS30°BSPP(Kobelco)-BSP3/4"	1
ORFS-1"-14UNF	1		
ORFS-1 3/16-12UNF	1		
ORFS-1 7/16-12UNF	1		
BSPP-1/4"	1		
BSPP-3/8"	1		
BSPP-1/2"	1		
BSPP-5/8"	1		
BSPP-3/4"	1		
BSPP-1"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70CW



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
Digital Bluetooth Gauge: φ60mm ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 1.5m		2	
测压软管Test hose: Length = 3.0m		2	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF1/2-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: R1/4-19		1	
微型测压头Test coupling: JIC37°-7/16UNF		1	
快速接头 Quick Release Coupling			
快换接头Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		1	
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)		1	
快换接头Quick Connector for Volvo		1	
快换接头Quick Connector for Sumsung/Sumsung-Volvo		1	
快换接头Quick Connector for Daewoo,Kawasaki		1	
快换接头Quick Connector for JCB,Timco		1	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1/2UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-9/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
SAE JIC-37°-3/4UNF	1	JIS30°(Komatsu)-M22*1.5	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M24*1.5	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M30*1.5	1
SAE JIC-37°-1-5/16UNF	1	JIS30°BSPP(Kobelco)-BSP1/4"	1
ORFS-9/16-18UNF	1	JIS30°BSPP(Kobelco)-BSP3/8"	1
ORFS-11/16"-16UNF	1	JIS30°BSPP(Kobelco)-BSP1/2"	1
ORFS-13/16"-16UNF	1	JIS30°BSPP(Kobelco)-BSP3/4"	1
ORFS-1"-14UNF	1		
ORFS-1 3/16-12UNF	1		
ORFS-1 7/16-12UNF	1		
BSPP-1/4"	1		
BSPP-3/8"	1		
BSPP-1/2"	1		
BSPP-5/8"	1		
BSPP-3/4"	1		
BSPP-1"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-60A



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
压力表 Analog Pressure Gauge: $\phi 63\text{mm} \sim 10\text{BAR}/150\text{PSI}/1\text{MPa}$		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm} \sim 60\text{BAR}/900\text{PSI}/6\text{MPa}$		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm} \sim 160\text{BAR}/2300\text{PSI}/16\text{MPa}$		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm} \sim 250\text{BAR}/3600\text{PSI}/25\text{MPa}$		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm} \sim 400\text{BAR}/6000\text{PSI}/40\text{MPa}$		1	
压力表 Analog Pressure Gauge: $\phi 63\text{mm} \sim 600\text{BAR}/9000\text{PSI}/60\text{MPa}$		1	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 3.0m / 10FT		3	
测压软管Test hose: Length = 1.5m / 5 FT		3	
测试接头 Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M08*1		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: M16*1.5		1	
微型测压头Test coupling: UNF5/16-20		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF1/2-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/8-27		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: R1/8-28		1	
微型测压头Test coupling: R1/4-19		1	
微型测压头Test coupling: JIC37°-7/16UNF Female		1	
快速接头 Quick Release Coupling			
快换接头Quick connector for Catpeller/CASE/John Deere-(BSP1/8 F)		2	
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	
快换接头Quick Connector for Volvo		1	
快换接头Quick Connector for Sumsung/Sumsung-Volvo		1	
快换接头Quick Connector for Daewoo,Kawasaki		1	
快换接头Quick Connector for JCB		1	
快换接头Adapter to Gauge Connector		4	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1/2UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-9/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
SAE JIC-37°-3/4UNF	1	JIS30°(Komatsu)-M22*1.5	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M24*1.5	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M30*1.5	1
SAE JIC-37°-1-5/16UNF	1	DKO-M14*1.5-08L	1
ORFS-9/16-18UNF	1	DKO-M16*1.5-10L	1
ORFS-11/16"-16UNF	1	DKO-M18*1.5-12L	1
ORFS-13/16"-16UNF	1	DKO-M22*1.5-15L	1
ORFS-1"-14UNF	1	DKO-M14*1.5-06S	1
ORFS-1 3/16-12UNF	1	DKO-M16*1.5-08S	1
ORFS-1 7/16-12UNF	1	DKO-M18*1.5-10S	1
BSPP-1/4"	1	DKO-M20*1.5-12S	1
BSPP-3/8"	1	DKO-M22*1.5-14S	1
BSPP-1/2"	1		
BSPP-5/8"	1		
BSPP-3/4"	1		
BSPP-1"	1		
堵头和螺帽 Hydraulic Plug and Caps			
Plug and Caps of SAE JIC-37°-7/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M10*1.25	1
Plug and Caps of SAE JIC-37°-1/2UNF	1	Plug and Caps of JIS30°(Komatsu)-M14*1.5	1
Plug and Caps of SAE JIC-37°-9/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M18*1.5	1
Plug and Caps of SAE JIC-37°-3/4UNF	1	Plug and Caps of JIS30°(Komatsu)-M22*1.5	1
Plug and Caps of SAE JIC-37°-7/8UNF	1	Plug and Caps of JIS30°(Komatsu)-M24*1.5	1
Plug and Caps of SAE JIC-37°-1-1/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M30*1.5	1
Plug and Caps of SAE JIC-37°-1-5/16UNF	1	Plug and Caps of DKO-M14*1.5-08L	1
Plug and Caps of ORFS-9/16-18UNF	1	Plug and Caps of DKO-M16*1.5-10L	1
Plug and Caps of ORFS-11/16"-16UNF	1	Plug and Caps of DKO-M18*1.5-12L	1
Plug and Caps of ORFS-13/16"-16UNF	1	Plug and Caps of DKO-M22*1.5-15L	1
Plug and Caps of ORFS-1"-14UNF	1	Plug and Caps of DKO-M14*1.5-06S	1
Plug and Caps of ORFS-1 3/16-12UNF	1	Plug and Caps of DKO-M16*1.5-08S	1
Plug and Caps of ORFS-1 7/16-12UNF	1	Plug and Caps of DKO-M18*1.5-10S	1
Plug and Caps of BSPP-1/4"	1	Plug and Caps of DKO-M20*1.5-12S	1
Plug and Caps of BSPP-3/8"	1	Plug and Caps of DKO-M22*1.5-14S	1
Plug and Caps of BSPP-1/2"	1		
Plug and Caps of BSPP-5/8"	1		
Plug and Caps of BSPP-3/4"	1		
Plug and Caps of BSPP-1"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70A



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
数显压力表Digital Gauge: φ80mm ~ 70MPa/700BAR/10000PSI With Protector		2	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 3.0m / 10FT		2	
测压软管Test hose: Length = 1.5m / 5 FT		2	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M08*1		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: M16*1.5		1	
微型测压头Test coupling: UNF5/16-20		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF1/2-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/8-27		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: R1/8-28		1	
微型测压头Test coupling: R1/4-19		1	
微型测压头Test coupling: JIC37°-7/16UNF Female		1	
快速接头 Quick Release Coupling			
快换接头 B Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	
快换接头 D Quick Connector for Volvo		1	
快换接头 E Quick Connector for Sumsung/Sumsung-Volvo		1	
快换接头 F Quick Connector for Daewoo,Kawasaki		1	
快换接头 G Quick Connector for JCB		1	
快换接头 Adapter to Gauge Connector		4	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1/2UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-9/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
SAE JIC-37°-3/4UNF	1	JIS30°(Komatsu)-M22*1.5	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M24*1.5	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M30*1.5	1
SAE JIC-37°-1-5/16UNF	1	DKO-M14*1.5-08L	1
ORFS-9/16-18UNF	1	DKO-M16*1.5-10L	1
ORFS-11/16"-16UNF	1	DKO-M18*1.5-12L	1
ORFS-13/16"-16UNF	1	DKO-M22*1.5-15L	1
ORFS-1"-14UNF	1	DKO-M14*1.5-06S	1
ORFS-1 3/16-12UNF	1	DKO-M16*1.5-08S	1
ORFS-1 7/16-12UNF	1	DKO-M18*1.5-10S	1
BSPP-1/4"	1	DKO-M20*1.5-12S	1
BSPP-3/8"	1	DKO-M22*1.5-14S	1
BSPP-1/2"	1		
BSPP-5/8"	1		
BSPP-3/4"	1		
BSPP-1"	1		
堵头和螺帽 Hydraulic Plug and Caps			
Plug and Caps of SAE JIC-37°-7/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M10*1.25	1
Plug and Caps of SAE JIC-37°-1/2UNF	1	Plug and Caps of JIS30°(Komatsu)-M14*1.5	1
Plug and Caps of SAE JIC-37°-9/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M18*1.5	1
Plug and Caps of SAE JIC-37°-3/4UNF	1	Plug and Caps of JIS30°(Komatsu)-M22*1.5	1
Plug and Caps of SAE JIC-37°-7/8UNF	1	Plug and Caps of JIS30°(Komatsu)-M24*1.5	1
Plug and Caps of SAE JIC-37°-1-1/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M30*1.5	1
Plug and Caps of SAE JIC-37°-1-5/16UNF	1	Plug and Caps of DKO-M14*1.5-08L	1
Plug and Caps of ORFS-9/16-18UNF	1	Plug and Caps of DKO-M16*1.5-10L	1
Plug and Caps of ORFS-11/16"-16UNF	1	Plug and Caps of DKO-M18*1.5-12L	1
Plug and Caps of ORFS-13/16"-16UNF	1	Plug and Caps of DKO-M22*1.5-15L	1
Plug and Caps of ORFS-1"-14UNF	1	Plug and Caps of DKO-M14*1.5-06S	1
Plug and Caps of ORFS-1 3/16-12UNF	1	Plug and Caps of DKO-M16*1.5-08S	1
Plug and Caps of ORFS-1 7/16-12UNF	1	Plug and Caps of DKO-M18*1.5-10S	1
Plug and Caps of BSPP-1/4"	1	Plug and Caps of DKO-M20*1.5-12S	1
Plug and Caps of BSPP-3/8"	1	Plug and Caps of DKO-M22*1.5-14S	1
Plug and Caps of BSPP-1/2"	1		
Plug and Caps of BSPP-5/8"	1		
Plug and Caps of BSPP-3/4"	1		
Plug and Caps of BSPP-1"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70AT



Suit



It can display the pressure one side or two side , also can display the pressure difference on both sides immediately




配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
Digital Different Pressure Gauge: φ80mm ~ 70MPa/700BAR/10000PSI With Protector		1	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 3.0m / 10FT		2	
测压软管Test hose: Length = 1.5m / 5 FT		2	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M08*1		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: M16*1.5		1	
微型测压头Test coupling: UNF5/16-20		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF1/2-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/8-27		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: R1/8-28		1	
微型测压头Test coupling: R1/4-19		1	
微型测压头Test coupling: JIC37°-7/16UNF Female		1	
快速接头 Quick Release Coupling			
快换接头 B Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	
快换接头 D Quick Connector for Volvo		1	
快换接头 E Quick Connector for Sumsung/Sumsung-Volvo		1	
快换接头 F Quick Connector for Daewoo,Kawasaki		1	
快换接头 G Quick Connector for JCB		1	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1/2UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-9/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
SAE JIC-37°-3/4UNF	1	JIS30°(Komatsu)-M22*1.5	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M24*1.5	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M30*1.5	1
SAE JIC-37°-1-5/16UNF	1	DKO-M14*1.5-08L	1
ORFS-9/16-18UNF	1	DKO-M16*1.5-10L	1
ORFS-11/16"-16UNF	1	DKO-M18*1.5-12L	1
ORFS-13/16"-16UNF	1	DKO-M22*1.5-15L	1
ORFS-1"-14UNF	1	DKO-M14*1.5-06S	1
ORFS-1 3/16-12UNF	1	DKO-M16*1.5-08S	1
ORFS-1 7/16-12UNF	1	DKO-M18*1.5-10S	1
BSPP-1/4"	1	DKO-M20*1.5-12S	1
BSPP-3/8"	1	DKO-M22*1.5-14S	1
BSPP-1/2"	1		
BSPP-5/8"	1		
BSPP-3/4"	1		
BSPP-1"	1		
堵头和螺帽 Hydraulic Plug and Caps			
Plug and Caps of SAE JIC-37°-7/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M10*1.25	1
Plug and Caps of SAE JIC-37°-1/2UNF	1	Plug and Caps of JIS30°(Komatsu)-M14*1.5	1
Plug and Caps of SAE JIC-37°-9/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M18*1.5	1
Plug and Caps of SAE JIC-37°-3/4UNF	1	Plug and Caps of JIS30°(Komatsu)-M22*1.5	1
Plug and Caps of SAE JIC-37°-7/8UNF	1	Plug and Caps of JIS30°(Komatsu)-M24*1.5	1
Plug and Caps of SAE JIC-37°-1-1/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M30*1.5	1
Plug and Caps of SAE JIC-37°-1-5/16UNF	1	Plug and Caps of DKO-M14*1.5-08L	1
Plug and Caps of ORFS-9/16-18UNF	1	Plug and Caps of DKO-M16*1.5-10L	1
Plug and Caps of ORFS-11/16"-16UNF	1	Plug and Caps of DKO-M18*1.5-12L	1
Plug and Caps of ORFS-13/16"-16UNF	1	Plug and Caps of DKO-M22*1.5-15L	1
Plug and Caps of ORFS-1"-14UNF	1	Plug and Caps of DKO-M14*1.5-06S	1
Plug and Caps of ORFS-1 3/16-12UNF	1	Plug and Caps of DKO-M16*1.5-08S	1
Plug and Caps of ORFS-1 7/16-12UNF	1	Plug and Caps of DKO-M18*1.5-10S	1
Plug and Caps of BSPP-1/4"	1	Plug and Caps of DKO-M20*1.5-12S	1
Plug and Caps of BSPP-3/8"	1	Plug and Caps of DKO-M22*1.5-14S	1
Plug and Caps of BSPP-1/2"	1		
Plug and Caps of BSPP-5/8"	1		
Plug and Caps of BSPP-3/4"	1		
Plug and Caps of BSPP-1"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-70AW



Suit



配置描述 Description		数量Quantity: PCS	
压力表 Pressure Gauge			
Digital Bluetooth Gauge: φ60mm ~ 70MPa/700BAR/10000PSI With Protector		1	
测压软管总成 Test Hose Assembly			
测压软管Test hose: Length = 3.0m / 10FT		2	
测压软管Test hose: Length = 1.5m / 5 FT		2	
测试接头Test Coupling			
微型测压头Test coupling: G1/8		1	
微型测压头Test coupling: G1/4		1	
微型测压头Test coupling: G3/8		1	
微型测压头Test coupling: M08*1		1	
微型测压头Test coupling: M10*1		1	
微型测压头Test coupling: M10*1.25		1	
微型测压头Test coupling: M12*1.5		1	
微型测压头Test coupling: M14*1.5		1	
微型测压头Test coupling: M16*1.5		1	
微型测压头Test coupling: UNF5/16-20		1	
微型测压头Test coupling: UNF7/16-20		1	
微型测压头Test coupling: UNF1/2-20		1	
微型测压头Test coupling: UNF9/16-18		1	
微型测压头Test coupling: NPT1/8-27		1	
微型测压头Test coupling: NPT1/4-18		1	
微型测压头Test coupling: R1/8-28		1	
微型测压头Test coupling: R1/4-19		1	
微型测压头Test coupling: JIC37°-7/16UNF Female		1	
快速接头 Quick Release Coupling			
快换接头 B Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F)		2	
快换接头 C Quick connector for Komatsu/HITACHI-(BSP1/4 F)		2	
快换接头 D Quick Connector for Volvo		1	
快换接头 E Quick Connector for Sumsung/Sumsung-Volvo		1	
快换接头 F Quick Connector for Daewoo,Kawasaki		1	
快换接头 G Quick Connector for JCB		1	
三通测试接头 Swivel Run Tees			
SAE JIC-37°-7/16UNF	1	JIS30°(Komatsu)-M10*1.25	1
SAE JIC-37°-1/2UNF	1	JIS30°(Komatsu)-M14*1.5	1
SAE JIC-37°-9/16UNF	1	JIS30°(Komatsu)-M18*1.5	1
SAE JIC-37°-3/4UNF	1	JIS30°(Komatsu)-M22*1.5	1
SAE JIC-37°-7/8UNF	1	JIS30°(Komatsu)-M24*1.5	1
SAE JIC-37°-1-1/16UNF	1	JIS30°(Komatsu)-M30*1.5	1
SAE JIC-37°-1-5/16UNF	1	DKO-M14*1.5-08L	1
ORFS-9/16-18UNF	1	DKO-M16*1.5-10L	1
ORFS-11/16"-16UNF	1	DKO-M18*1.5-12L	1
ORFS-13/16"-16UNF	1	DKO-M22*1.5-15L	1
ORFS-1"-14UNF	1	DKO-M14*1.5-06S	1
ORFS-1 3/16-12UNF	1	DKO-M16*1.5-08S	1
ORFS-1 7/16-12UNF	1	DKO-M18*1.5-10S	1
BSPP-1/4"	1	DKO-M20*1.5-12S	1
BSPP-3/8"	1	DKO-M22*1.5-14S	1
BSPP-1/2"	1		
BSPP-5/8"	1		
BSPP-3/4"	1		
BSPP-1"	1		
堵头和螺帽 Hydraulic Plug and Caps			
Plug and Caps of SAE JIC-37°-7/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M10*1.25	1
Plug and Caps of SAE JIC-37°-1/2UNF	1	Plug and Caps of JIS30°(Komatsu)-M14*1.5	1
Plug and Caps of SAE JIC-37°-9/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M18*1.5	1
Plug and Caps of SAE JIC-37°-3/4UNF	1	Plug and Caps of JIS30°(Komatsu)-M22*1.5	1
Plug and Caps of SAE JIC-37°-7/8UNF	1	Plug and Caps of JIS30°(Komatsu)-M24*1.5	1
Plug and Caps of SAE JIC-37°-1-1/16UNF	1	Plug and Caps of JIS30°(Komatsu)-M30*1.5	1
Plug and Caps of SAE JIC-37°-1-5/16UNF	1	Plug and Caps of DKO-M14*1.5-08L	1
Plug and Caps of ORFS-9/16-18UNF	1	Plug and Caps of DKO-M16*1.5-10L	1
Plug and Caps of ORFS-11/16"-16UNF	1	Plug and Caps of DKO-M18*1.5-12L	1
Plug and Caps of ORFS-13/16"-16UNF	1	Plug and Caps of DKO-M22*1.5-15L	1
Plug and Caps of ORFS-1"-14UNF	1	Plug and Caps of DKO-M14*1.5-06S	1
Plug and Caps of ORFS-1 3/16-12UNF	1	Plug and Caps of DKO-M16*1.5-08S	1
Plug and Caps of ORFS-1 7/16-12UNF	1	Plug and Caps of DKO-M18*1.5-10S	1
Plug and Caps of BSPP-1/4"	1	Plug and Caps of DKO-M20*1.5-12S	1
Plug and Caps of BSPP-3/8"	1	Plug and Caps of DKO-M22*1.5-14S	1
Plug and Caps of BSPP-1/2"	1		
Plug and Caps of BSPP-5/8"	1		
Plug and Caps of BSPP-3/4"	1		
Plug and Caps of BSPP-1"	1		

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-W25CK



Suit



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Digital Pressure Sensor with Bluetooth: XZW25.700R-70MPa/700BAR/10000PSI	4
快速接头 Quick Release Coupling	
快换接头Female Quick Connector for M16*2 Female --(BSP1/4 F)	2
快换接头Female Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F) Compatible Parker PD 2** Series Test Port Couplings	2
快换接头Male Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F) Compatible Parker PD 3** Series Test Port Couplings	2
快换接头Female Quick connector for Komatsu/HITACHI-(BSP1/4 F)	2
转换接头 Adapter BSP1/4" Female to BSP1/8" male	2

Remark: If you have any special requirements, please contact sales team

型号 (Order Code) : XZTK-W25MC



Suit



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Digital Pressure Sensor with Bluetooth: XZW25.700R-70MPa/700BAR/10000PSI	4
快速接头 Quick Release Coupling	
快换接头Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F) Compatible Parker PD 2** Series Test Port Couplings	1
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)	1
快换接头Quick Connector for Volvo	1
快换接头Quick Connector for Sumsung/Sumsung-Volvo	1
快换接头Quick Connector for Daewoo,Kawasaki	1
快换接头Quick Connector for JCB	1
快换接头Quick Connector for M16*2 Female	1
转换接头 Adapter: BSP1/4" Female to BSP1/8" male	2

Remark: If you have any special requirements, please contact sales team

工程机械液压测试盒 Hydraulic Test Kit For Excavator

型号 (Order Code) : XZTK-W60CK



Suit



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Digital Pressure Gauge with Bluetooth: XZW60.700R-70MPa/700BAR/10000PSI	2
快速接头 Quick Release Coupling	
快换接头Female Quick Connector for M16*2 Female --(BSP1/4 F)	2
快换接头Female Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F) Compatible Parker PD 2** Series Test Port Couplings	2
快换接头Male Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F) Compatible Parker PD 3** Series Test Port Couplings	2
快换接头Female Quick connector for Komatsu/HITACHI-(BSP1/4 F)	2
转换接头 Adapter: BSP1/4" Female to BSP1/8" male	2

Remark: If you have any special requirements, please contact our sales team

型号 (Order Code) : XZTK-W60MC



Suit



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Digital Pressure Gauge with Bluetooth: XZW60.700R-70MPa/700BAR/10000PSI	2
快速接头 Quick Release Coupling	
快换接头Quick connector for Catpelier/CASE/John Deere-(BSP1/8 F) Compatible Parker PD 2** Series Test Port Couplings	1
快换接头Quick connector for Komatsu/HITACHI-(BSP1/4 F)	1
快换接头Quick Connector for Volvo	1
快换接头Quick Connector for Sumsung/Sumsung-Volvo	1
快换接头Quick Connector for Daewoo,Kawasaki	1
快换接头Quick Connector for JCB	1
快换接头Quick Connector for M16*2 Female	1
转换接头 Adapter: BSP1/4" Female to BSP1/8" male	2

Remark: If you have any special requirements, please contact our sales team

手钳式液压泵 Hydraulic Pressure Test Pump

型号 (Order Code) : XZTK-TV1



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Bluetooth Digital Pressure Gauge with: XZW80.-001R -0.1MPa/1BAR/15PSI~+0.1MPa/1BAR/15PSI, ACC=0.1%	1
液压泵 Hydraulic Pump Body	1
液压软管 Hydraulic Hose: 1m/3FT	1
转换接头 Adapter 1: M20*1.5 male to BSP 1/8" Female	1
转换接头 Adapter 2: M20*1.5 male to BSP 1/4" Female	1
转换接头 Adapter 3: M20*1.5 male to BSP 1/2" Female	1
转换接头 Adapter 4: M20*1.5 male to NPT 1/8" Female	1
转换接头 Adapter 5: M20*1.5 male to NPT 1/4" Female	1
转换接头 Adapter 6: M20*1.5 male to NPT 1/2" Female	1
附件 Accessories	
活动扳手 Adjustable Spanner	2
橡胶垫圈组 Rubber Washer Set	1

备注 Remark:
1 测试介质为空气; The test medium is air;
2 如果需要选择0.05%精度的压力表, 则订购代码为: XZTK-TV1-0.05
If you need gauge of Acc. 0.05%, then part number will be: XZTK-TV1-0.05

型号 (Order Code) : XZTK-T40



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Bluetooth Digital Pressure Gauge with: XZW80.040R-4MPa/40BAR/600PSI, ACC=0.1%	1
液压泵 Hydraulic Pump Body	1
液压软管 Hydraulic Hose: 1m/3FT	1
转换接头 Adapter 1: M20*1.5 male to BSP 1/8" Female	1
转换接头 Adapter 2: M20*1.5 male to BSP 1/4" Female	1
转换接头 Adapter 3: M20*1.5 male to BSP 1/2" Female	1
转换接头 Adapter 4: M20*1.5 male to NPT 1/8" Female	1
转换接头 Adapter 5: M20*1.5 male to NPT 1/4" Female	1
转换接头 Adapter 6: M20*1.5 male to NPT 1/2" Female	1
附件 Accessories	
活动扳手 Adjustable Spanner	2
橡胶垫圈组 Rubber Washer Set	1

备注 Remark:
1 测试介质为空气; The test medium is air;
2 如果需要选择0.05%精度的压力表, 则订购代码为: XZTK-T40-0.05
If you need gauge of Acc. 0.05%, then part number will be: XZTK-T40-0.05

手钳式液压泵 Hydraulic Pressure Test Pump

型号 (Order Code) : XZTK-T700



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Bluetooth Digital Pressure Gauge: XZW80.700R-70MPa/700BAR/10000PSI,ACC=0.1%	1
液压泵 Hydraulic Pump Body	1
液压软管 Hydraulic Hose: 1m/3FT	1
转换接头 Adapter 1: M20*1.5 male to BSP 1/8" Female	1
转换接头 Adapter 2: M20*1.5 male to BSP 1/4" Female	1
转换接头 Adapter 3: M20*1.5 male to BSP 1/2" Female	1
转换接头 Adapter 4: M20*1.5 male to NPT 1/8" Female	1
转换接头 Adapter 5: M20*1.5 male to NPT 1/4" Female	1
转换接头 Adapter 6: M20*1.5 male to NPT 1/2" Female	1
附件 Accessories	
活动扳手 Adjustable Spanner	2
橡胶垫圈组 Rubber Washer Set	1

备注 Remark:
1 测试介质建议使用ISO VG 20 或者 32液压油;
It is recommended to use ISO VG 20 or 32 hydraulic oil;
2 如果需要选择0.05%精度的压力表, 则订购代码为: XZTK-T700-0.05
If you need gauge of Acc. 0.05%, then part number will be: XZTK-T700-0.05

型号 (Order Code) : XZTK-T1000



配置描述 Description	
压力表 Pressure Gauge	Quantity: PCS
Bluetooth Digital Pressure Gauge: XZW80.1000R-100MPa/1000BAR/15000PSI,ACC=0.1%	1
液压泵 Hydraulic Pump Body	1
液压软管 Hydraulic Hose: 1m/3FT	1
转换接头 Adapter 1: M20*1.5 male to BSP 1/8" Female	1
转换接头 Adapter 2: M20*1.5 male to BSP 1/4" Female	1
转换接头 Adapter 3: M20*1.5 male to BSP 1/2" Female	1
转换接头 Adapter 4: M20*1.5 male to NPT 1/8" Female	1
转换接头 Adapter 5: M20*1.5 male to NPT 1/4" Female	1
转换接头 Adapter 6: M20*1.5 male to NPT 1/2" Female	1
附件 Accessories	
活动扳手 Adjustable Spanner	2
橡胶垫圈组 Rubber Washer Set	1

备注 Remark:
1 测试介质建议使用ISO VG 20 或者 32液压油;
It is recommended to use ISO VG 20 or 32 hydraulic oil;
2 如果需要选择0.05%精度的压力表, 则订购代码为: XZTK-T1000-0.05;
If you need gauge of Acc. 0.05%, then part number will be: XZTK-T1000-0.05

流量测试系列 Flow Tester Series

XZFK 系列数字式流量测试仪 XZFK Series Digital Hydraulic Flow Meter



- 流量400升/分或800升/分
- 压力420巴
- 双向测量
- 操作简易

XZFK数字式测试仪能够精确测量流量、压力、温度。测试仪能够方便快速的测试液压泵、马达、阀和静液传动装置。

本设备使用简单，控制简易，能精确诊断出液压系统故障点，从而可以减少停工时间并且有助于预防性维护。

测试仪包含涡轮流量块和数字显示器。数字显示器显示流量、压力及温度，数值清晰、易于读取。

测试仪内置加载阀，可以模拟机器正常运行时的工作压力。在超压情况下，内置式安全阀可以使液压油在内部安全地经旁路绕过加载阀，而不会引起液压回路的液压油泄漏，从而保护机器和操作人员，免除不必要的清洁成本和环境危害。

性能

- 流量、压力、温度的单位可以切换；
- 精确测量流量、压力和温度；
- 测量双向流量都很安全， 在超压时无需担心，有内部液压油旁路保护系统；
- 双向测试可使连接自如， 测试简单；
- 快速检查泵、马达、阀、液压缸和静液传动装置；
- 操作控制简单；
- 经济实惠，普通电池功耗低，有自动断电功能；
- 便携式重量轻，倾斜式设计更利于察看和清洁。

This tester can test Flow, Pressure and Temperature

- Up to 400 LPM or 800 LPM
- Up to 420 BAR
- Bi-Directional
- Simplified Controls

The Digital Testers accurately measure flow, pressure and temperature.The Testers are designed to conveniently check the performance of hydraulic pumps, motors, valves and hydrostatic transmissions.

This easy to use diagnostic tester has simplified controls and can pin point hydraulic system faults, reducing downtime and helping in preventive maintenance.

The tester comprises a turbine flow block and a large easy to read digital display which indicates both flow and temperature.

Tester has a built-in loading valve to simulate the working pressure during normal machine operation. The built-in safety discss protect the machine and operator in event of excessive pressure, allowing oil to safely bypass the loading valve INTERNALLY with no spillage of oil from the hydraulic circuit, eliminating clean-up costs and environmental hazards.

- Features
- Flow、Pressure、Temperature unit can be changed.
 - ACCURATE measurement of flow, pressure and temperature.
 - SAFE to use in both directions of flow. Interna oil by-pass protects system and operator against overpressure.
 - Bi-DIRECTIONAL for unrestricted connection and simplified testing.
 - FAST checks on pumps, motors, valves cylinders, hydrostatic transmissions.
 - EASY to operate controls. Simply "Switch on" and connect into the hydraulic system.
 - ECONOMICAL low power consumption from standard battery. Automatic "Power Off" feature.
 - PORTABLE AND LEIGHTWEIGHT with angled case for easier viewing and cleaning.

测试范围 / Flow Meter Test Range:

型号/Model	流量范围/Flow Range	压力范围/Pressure Range	流体温度范围/Fluid Temperature Range	使用温度/Working Temperature
XZFK-404	10-400L/Min	0-420BAR	0-105℃	-20~60℃
XZFK-408	20-800L/Min	0-420BAR	0-105℃	-20~60℃

主机外形参数 / Flow Meter Shape Parameters:

型号/Model	宽/Width/mm	高/Height /mm	深/Depth/ mm	净重/N.W./ kg	入口/出口螺纹/Thread of Inlet/Outlet
XZFK-404	250	200	200	6.00	G1"/BSPP1" Female
XZFK-408	250	230	200	9.50	G1-1/4 "/BSPP1-1/4 "Female



XZFS 系列涡轮流量计 XZFS Series Turbine Flow Meter



带独立显示的涡轮流量计 Flow Meter with display

独立数显式涡轮流量计，专为液压系统检测量身打造，集流量、压力、温度三参数精准测量于一体，助力快速排查故障、提升维护效率，为液压设备稳定运行保驾护航。

核心参数

- 最大流量：800L/M，满足多种液压场景检测需求
- 额定压力：420巴，适配高压液压系统
- 双向测量：支持正反油路检测，适配复杂工况
- 独立数显：流量、压力、温度实时显示，读数清晰直观

产品优势

- 精准可靠：三参数同步检测，数据精准，为故障诊断提供有力支撑
- 便捷易用：操作简单、控制简易，无需专业技能即可快速上手
- 广泛适配：可快速测试液压泵、马达、阀、液压缸及静液传动装置
- 高效运维：精准定位故障点，减少设备停工时间，助力预防性维护
- 经济便携：功耗低、性价比高，坚固包装设计，便于现场携带使用

产品构成

整机由涡轮流量块与数字显示器组成，实测数据直接通过表盘数字化呈现，无需复杂调试，现场检测更高效。

Turbine Flow Meter with Independent Digital Display is specially designed for hydraulic system testing. Integrating accurate measurement of flow, pressure and temperature, it helps quickly troubleshoot faults, improve maintenance efficiency, and ensure the stable operation of hydraulic equipment.

Core Specifications

- Max Flow Rate: 800 LPM, meeting the testing needs of various hydraulic scenarios
- Working Pressure: 420 Bar, suitable for high-pressure hydraulic systems
- Bi-directional Measurement: Supports positive and negative oil circuit detection, adapting to complex working conditions
- Independent Digital Display: Real-time display of flow, pressure and temperature with clear and intuitive reading

Product Features

- Precise and Reliable: Synchronous detection of three parameters with accurate data, providing strong support for fault diagnosis
- Easy to Use: Simple operation and control, no professional skills required for quick start-up
- Widely Applicable: Can quickly test hydraulic pumps, motors, valves, cylinders and hydrostatic transmissions
- Efficient Operation & Maintenance: Accurately locate fault points, reduce equipment downtime, and facilitate preventive maintenance
- Economical and Portable: Low power consumption, high cost performance, sturdy packaging design, easy to carry for on-site use

Product Composition

The whole machine consists of a turbine flow block and a digital display. The measured data is directly presented digitally through the dial, no complex debugging is required, and on-site testing is more efficient.

测试范围 / Flow Meter Test Range:

型号/Model	流量范围/Flow Range	压力范围/Pressure Range	流体温度范围/Fluid Temperature Range	使用温度/Working Temperature
XZFS-404D	10-400L/Min	0-420BAR	0-105℃	-20~60℃
XZFS-408D	20-800L/Min	0-420BAR	0-105℃	-20~60℃

主机外形参数 / Flow Meter Shape Parameters:

型号/Model	宽/Width/mm	高/Height/mm	深/Depth/mm	净重/N.W./kg	入口/出口螺纹/Thread of Inlet/Outlet
XZFS-404D	180	220	80	5	G1"/BSPP1"Female
XZFS-408D	180	220	80	5.5	G1-1/4"/BSPP1-1/4"Female



XZFS 系列涡轮流量计 XZFS Series Turbine Flow Meter



带模拟信号输出的流量传感器 Flow Sensor with 4-20mA Analog Signal

XZFS带模拟信号输出流量传感器，标准4-20mA模拟信号输出，可直接无缝接入客户自有测试系统，无需额外适配调试，快速融入现有检测链路，大幅提升液压测试的灵活性与便捷性，适配各类工业液压检测场景。

设备兼具高精度与易用性，可精准采集流量、压力、温度三大核心参数，轻松完成液压泵、马达、阀门、液压缸及静液传动装置的性能检测。操作流程简化、控制便捷，能快速精准定位液压系统故障点位，有效缩短设备停工时间，为设备预防性维护提供可靠数据支撑，降低运维成本。

性能优势

- 精准监测：同步测量流量、压力、温度，输出标准4-20mA模拟信号，数据传输稳定，误差小、可信度高
- 双向兼容：支持双向流量测量，适配复杂液压工况，满足多场景检测需求
- 便捷高效：连接方式简单，操作门槛低，无需专业技能，快速上手完成测试
- 故障速查：可快速检测各类液压核心部件，精准排查故障，减少停工损耗
- 经济节能：性价比出众，功耗低，长期使用可有效控制运维成本
- 便携耐用：包装坚固抗损，体积适中便于携带，适配户外、现场等各类测试环境

XZFS Flow Sensor with analog signal output features standard 4-20mA analog signal output, which can be directly and seamlessly connected to the customer's own test system without additional adaptation and debugging. It quickly integrates into the existing detection link, greatly improving the flexibility and convenience of hydraulic testing, and is suitable for various industrial hydraulic detection scenarios.

With both high precision and ease of use, the device can accurately collect three core parameters: flow, pressure and temperature, and easily complete the performance detection of hydraulic pumps, motors, valves, hydraulic cylinders and hydrostatic transmissions. The operation process is simplified and the control is convenient. It can quickly and accurately locate the fault points of the hydraulic system, effectively reduce the equipment downtime, provide reliable data support for the preventive maintenance of equipment, and reduce the operation and maintenance costs.

Core Features

- Precise Monitoring: Synchronously measure flow, pressure and temperature, output standard 4-20mA analog signal with stable data transmission, small error and high reliability
- Bidirectional Compatibility: Supports bidirectional flow measurement, adapts to complex hydraulic working conditions, and meets multi-scenario detection needs
- Convenient & Efficient: Simple connection method, low operation threshold, no professional skills required, quick to get started to complete testing
- Fast Fault Checking: Can quickly detect various hydraulic core components, accurately troubleshoot faults, and reduce downtime losses
- Economical & Energy-Saving: Excellent cost performance, low power consumption, and effective control of operation and maintenance costs for long-term use
- Portable & Durable: Sturdy and damage-resistant packaging, moderate size for easy carrying, suitable for various testing environments such as outdoor and on-site

流量传感器外形参数 / Flow Meter Shape Parameters:

型号/Model	宽/Width/mm	高/Height/mm	深/Depth/mm	净重/N.W./kg	入口/出口螺纹/Thread of Inlet/Outlet
XZFS-404A	180	220	80	5	G1"/BSPP1"Female
XZFS-408A	180	220	80	5.5	G1-1/4"/BSPP1-1/4"Female

流量传感器信号参数 / Flow Sensor Information:

	Output Signal type	Connector Pin Information	Sensor Accuracy	XZFS-404A Sensor Range	XZFS-408A Sensor Range
Flow	4-20mA (2 line)		1%	0-400L/Min	0-800L/Min
Pressure	4-20mA (2 line)		0.5%	0-600BAR	0-600BAR
Temperature	4-20mA (2 line)		1%	-20~+120℃	-20~+120℃

多通道液压测试套装 Multi Channel Hydraulic Test Kit: XZMK-T12



解锁液压测试新效率！XZMK-T12测试套件，多通道同步采集流量、压力、温度三大核心参数，彻底简化繁琐测试流程，让每一次检测都高效便捷。

搭载12路信号采集器，精准捕捉4~20mA电流信号并完成模拟转换，蓝牙无线传输无缝衔接Little Blue APP，手机、平板随时查看测试数据，摆脱有线束缚，现场操作更灵活。

APP内置数据记录、智能分析、曲线可视化功能，支持数据查询、导出、分享一键操作，数据管理更高效，测试结果可追溯、可留存。

操作简单、精度出众，快速定位液压系统故障点，适配液压泵、马达、阀门及静液传动装置等多种设备测试，有效缩短停机时间，助力设备预防性维护，降低运维成本。

一台套件，搞定全流程液压测试，省时、省力、更省心！

Unlock new efficiency in hydraulic testing! The XZMK-T12 Test Kit synchronously collects three core parameters: multi-channel flow, pressure and temperature, completely simplifying cumbersome testing processes and making every detection efficient and convenient.

Equipped with a 12-channel signal collector, it accurately captures 4~20mA current signals and completes analog conversion. Bluetooth wireless transmission seamlessly connects to the Little Blue APP, allowing you to view test data on mobile phones or tablets anytime, free from wired restrictions and more flexible on-site operation.

The APP has built-in functions of data recording, intelligent analysis and curve visualization, supporting one-click data query, export and sharing. Data management is more efficient, and test results are traceable and storable.

With simple operation and excellent precision, it quickly locates hydraulic system fault points, suitable for testing various equipment such as hydraulic pumps, motors, valves and hydrostatic transmissions. It effectively reduces downtime, facilitates equipment preventive maintenance and lowers operation and maintenance costs.

One kit handles the entire hydraulic testing process, saving time, effort and worry!

XZMK-T2 Test Kit Include follow accessories:

NO.	Photos	Description	Part Number	Unit	Quantity
1		Industrial-Grade Rugged tablet (optional) Customers can use Pad or Mobile Phone	XZPD-A100	PC	1
2		Signal Transmitter	XZMK-12A	PC	1
3		Flow Sensor/ 0-400L Accuracy=1.0% Pressure Sensor/0-600BAR Accuracy=0.5% Temperature Sensor/-20+120℃ Accuracy=1.0%	XZFS-404A	SET	1

NO.	Photos	Description	Part Number	Unit	Quantity
4		Flow Sensor/0-800L Accuracy=1.0% Pressure Sensor/0-600BAR Accuracy=0.5% Temperature Sensor/-20+120℃ Accuracy=1.0%	XZFS-408A	SET	1
5		Pressure Sensor 0-600BAR Accuracy=0.5%	XZPT.600R	PC	4
6		Pressure Sensor 0-40BAR Accuracy=0.5%	XZPT.040R	PC	2
7		Signal Cable -6m/20FT	XZSW-6000	PC	6
8		power adapter		PC	2
9		Suitcase		PC	1

Remark: If you need costomerize,please contact our sales

XZGS 系列带信号输出齿轮流量计 XZGS Series Gear Flow Meter with Signal Output



XZGS 系列齿轮流量计基于齿轮马达原理研发，属于容积式精密流量仪表，可连续或间歇精准测量管道内液体流量。擅长各类高粘度介质计量，微小流量亦可精准捕捉，适配液压油、树脂、胶水、油墨等多种工业流体，是工业流体测控、液压系统检测、精密配料的核心优选设备。

工作原理

流体流入计量腔，依靠压差驱动内部啮合齿轮旋转；齿轮与腔体形成固定标准容积，每旋转一周定量输送固定体积介质。内置非接触式传感器实时采集运转信号，经前置放大器转换为标准电信号，快速计算出瞬时流量与累积流量。安装无需直管段，结构简洁计量稳定。

结构特点

1. 齿轮无接触运转，搭配低摩擦轴承，运行静音耐磨
2. 传感腔与计量腔隔离设计，抗压防干扰，使用寿命长久
3. 非接触式检测，无机械磨损，长期使用精度稳定
4. 紧凑一体式结构，现场安装便捷，适配狭小空间

核心优势

- 超高耐压：耐压可达 400BAR/6000PSI，适配高压液压工况
- 无惧高粘：测量几乎不受介质粘度影响，各类粘稠流体通用
- 微流精准：超低流量区间依旧保持高测量精度，重复性极佳
- 宽温适配：-60℃~+150℃全域稳定工作，信号不受温度影响 低压降损耗小，不影响管路流体正常输送
- 多信号输出：支持脉冲、4-20mA 三线制、RS485，轻松对接各类采集设备 型号齐全，量程覆盖面广，满足多种工业工况需求

应用领域

液压油、润滑油、油脂流量检测 油墨、涂料、油漆定量计量 树脂、聚氨酯、硅胶、胶水流体测量 燃料油、刹车油、工业流体管控 冷却液、化工溶剂流量监测 油缸位移流量测试 各类高粘度工业流体精准配比

输出信号

脉冲信号、4-20mA 三线制电流信号、RS485 信号可选

Developed based on gear motor principle, XZGS series is a high-precision positive displacement flow meter. It realizes continuous and intermittent liquid flow measurement in pipelines. Perfect for high-viscosity media, it ensures accurate metering even at ultra-low flow rates. Widely used for hydraulic oil, resin, adhesive, ink and other industrial fluids, it is the preferred choice for fluid monitoring, hydraulic testing and precision batching.

Working Principle

Fluid enters the measuring chamber and drives meshed gears to rotate via pressure difference. Gears and housing form fixed volumetric space to deliver fixed-volume medium per rotation. Built-in non-contact sensor captures operating signals, which are converted into standard electric signals by pre-amplifier to calculate instantaneous flow and total flow. No straight pipe section is required for installation.

Structural Features

1. Contactless gear operation with low-friction bearings, quiet and wear-resistant
2. Isolated sensor and measuring chamber, pressure-resistant and anti-interference
3. Non-contact detection design, no mechanical loss, stable long-term accuracy
4. Compact integrated structure, easy installation, suitable for narrow space

Core Advantages

- Super high pressure resistance: Max 400BAR/6000PSI, suitable for high-pressure hydraulic system
- Viscosity independent: Accurate measurement for all kinds of viscous fluids
- Micro-flow high precision: Excellent accuracy and repeatability at low flow rate
- Wide temperature adaption: Stable operation from -60℃ to +150℃ Low pressure drop, no impact on normal fluid delivery
- Multiple signal outputs: Pulse, 4-20mA (3-wire), RS485 available Complete models & wide flow range, meet diverse industrial demands

Applications

Hydraulic oil, lubricant & grease flow testing Ink, coating & paint quantitative measurement Resin, polyurethane, silica gel & adhesive metering Fuel oil, brake fluid & industrial fluid monitoring Coolant & chemical solvent flow detection Oil cylinder displacement flow measurement Precise proportioning of all high-viscosity fluids

Output Signal

Optional: Pulse signal, 4-20mA 3-wire signal, RS485 signal

技术参数 Specifications

型号 Model	流量范围 Flow Range (L/min)	压力等级 Pressure	工作温度 Temperature	连接螺纹 Connector	介质粘度 Viscosity Range	重量 Weight (Kg)
XZGS-4002	0.005~2	400BAR/6000PSI	-60~+150℃	G1/4	1~100k cSt	1.4
XZGS-4007	0.05~7	400BAR/6000PSI	-60~+150℃	G1/4	1~100k cSt	2.0
XZGS-4020	0.2~20	400BAR/6000PSI	-60~+150℃	G1/2	1~10k cSt	3.0
XZGS-4050	0.3~50	400BAR/6000PSI	-60~+150℃	G3/4	1~8k cSt	8.0
XZGS-4100	0.5~100	400BAR/6000PSI	-60~+150℃	G1	1~8k cSt	15.0

压力表系列
Pressure Gauge Series

XZA60 系列机械压力表 XZA60 Series Analog Gauge



XZA60系列机械压力表，内部采用波登管机芯，能够准确的显示压力，具有较好的精度、稳定性好的特点。该款压力表外壳采用304不锈钢材质，内部充甘油（或硅油），连接部件为铜材质（或不锈钢材质），抗震性好，能够测量气体、液体、油等无腐蚀性的介质。

- 可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化。
- 精度等级：AC1.6%
- 液体介质：甘油或硅油
- 尺 寸：表盘直径63mm 厚度33mm
- 测量介质：水、油、气体对不锈钢无腐蚀的介质
- 使用温度：05-55℃（表内充甘油适用）
 -25-55℃（表内硅油适用）
- 相对湿度：≤85%

XZA60 series analog pressure gauge with Bourdon tube movement inside, which can accurately display pressure, with good precision and good stability. The pressure gauge case is made of 304 stainless steel, filled with glycerin (or silicone oil), and the connecting parts are made of copper (or stainless steel). It has good shock resistance and can measure gas, liquid, oil and other non-corrosive media.

- Can be used in: mechanical and electronic industry, instrumentation, pressure laboratory, engineering machinery automation.
- Accuracy: AC 1.6 %
- Liquid medium: glycerin or silicone oil
- Dimension Size: out diameter 63mm, thickness 33mm
- Measuring medium: water, oil, gas, non-corrosive medium for stainless steel
- Operating temperature: 05-55 °C (applicable to glycerin in the table)
 -25-55 °C (applicable to silicone oil in the table)
- Relative humidity: ≤85%

BSP1/4			NPT1/4		
Range (Unit:MPa/BAR/PSI)			Range (Unit:MPa/BAR/PSI)		
-0.1/1/15...0	XZA060.-001R	XZA060.-001RB	-0.1/1/15...0	XZA060.-001RN	XZA060.-001RNB
0...0.1/1/15	XZA060.V10R	XZA060.V10RB	0...0.1/1/15	XZA060.V10RN	XZA060.V10RNB
0...0.16/1.6/24	XZA060.V16R	XZA060.V16RB	0...0.16/1.6/24	XZA060.V16RN	XZA060.V16RNB
0...0.25/2.5/37	XZA060.V25R	XZA060.V25RB	0...0.25/2.5/37	XZA060.V25RN	XZA060.V25RNB
0...0.4/4/60	XZA060.004R	XZA060.004RB	0...0.4/4/60	XZA060.004RN	XZA060.004RNB
0...0.6/6/90	XZA060.006R	XZA060.006RB	0...0.6/6/90	XZA060.006RN	XZA060.006RNB
0...1/10/150	XZA060.010R	XZA060.010RB	0...1/10/150	XZA060.010RN	XZA060.010RNB
0...1.6/16/240	XZA060.016R	XZA060.016RB	0...1.6/16/240	XZA060.016RN	XZA060.016RNB
0...2.5/25/370	XZA060.025R	XZA060.025RB	0...2.5/25/370	XZA060.025RN	XZA060.025RNB
0...4/40/600	XZA060.040R	XZA060.040RB	0...4/40/600	XZA060.040RN	XZA060.040RNB
0...6/60/900	XZA060.060R	XZA060.060RB	0...6/60/900	XZA060.060RN	XZA060.060RNB
0...10/100/1500	XZA060.100R	XZA060.100RB	0...10/100/1500	XZA060.100RN	XZA060.100RNB
0...16/160/2400	XZA060.160R	XZA060.160RB	0...16/160/2400	XZA060.160RN	XZA060.160RNB
0...25/250/3700	XZA060.250R	XZA060.250RB	0...25/250/3700	XZA060.250RN	XZA060.250RNB
0...40/400/6000	XZA060.400R	XZA060.400RB	0...40/400/6000	XZA060.400RN	XZA060.400RNB
0...60/250/9000	XZA060.600R	XZA060.600RB	0...60/600/9000	XZA060.600RN	XZA060.600RNB
0...100/1000/15000	XZA060.1000R	XZA060.1000RB	0...100/1000/15000	XZA060.1000RN	XZA060.1000RNB



XZA100 系列机械压力表 XZA100 Series Analog Gauge



XZA100系列机械压力表，内部采用波登管机芯，能够准确的显示压力，具有较好的精度、稳定性好的特点。该款压力表外壳采用304不锈钢，内部机芯均采用304不锈钢或者铜，内部充甘油（或硅油），连接部件为304不锈钢。具有抗震性好，耐腐蚀，能够测量气体、液体、油等等无腐蚀性的介质。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化。

精度等级：AC1.6%

液体介质：甘油或硅油

尺寸：表盘直径100mm 厚度50mm

测量介质：水、油、气体对不锈钢无腐蚀的介质

使用温度：05-55℃（表内充甘油适用）
-25-55℃（表内硅油适用）

相对湿度：≤85%

XZA100 series analog pressure gauge, with Bourdon tube movement inside, can accurately display pressure, with good precision and good stability. The pressure gauge case is made of 304 stainless steel, the internal movement is made of 304 stainless steel or copper, the interior is filled with glycerin (or silicone oil), and the connecting part is 304 stainless steel. It has good shock resistance, corrosion resistance and can measure non-corrosive media such as gas, liquid and oil.

Can be used in: mechanical and electronic industry, instrumentation, pressure laboratory, engineering machinery automation.

Accuracy class: AC 1.6 %

Liquid medium: glycerin or silicone oil

Size: Dial diameter 100mm, thickness 50mm

Measuring medium: Water, oil, gas, non-corrosive medium for stainless steel

Operating temperature: 05-55 °C (applicable to glycerin in the table)
-25-55 °C (applicable to silicone oil in the table)

Relative humidity: ≤85%

BSP1/2			NPT1/2		
Range (Unit:MPa/BAR/PSI)			Range (Unit:MPa/BAR/PSI)		
-0.1/1/15...0	XZA100.-001R	XZA100.-001RB	-0.1/1/15...0	XZA060.-001RN	XZA060.-001RNB
0...0.1/1/15	XZA100.V10R	XZA100.V10RB	0...0.1/1/15	XZA060.V10RN	XZA060.V10RNB
0...0.16/1.6/24	XZA100.V16R	XZA100.V16RB	0...0.16/1.6/24	XZA060.V16RN	XZA060.V16RNB
0...0.25/2.5/37	XZA100.V25R	XZA100.V25RB	0...0.25/2.5/37	XZA060.V25RN	XZA060.V25RNB
0...0.4/4/60	XZA100.004R	XZA100.004RB	0...0.4/4/60	XZA060.004RN	XZA060.004RNB
0...0.6/6/90	XZA100.006R	XZA100.006RB	0...0.6/6/90	XZA060.006RN	XZA060.006RNB
0...1/10/150	XZA100.010R	XZA100.010RB	0...1/10/150	XZA060.010RN	XZA060.010RNB
0...1.6/16/240	XZA100.016R	XZA100.016RB	0...1.6/16/240	XZA060.016RN	XZA060.016RNB
0...2.5/25/370	XZA100.025R	XZA100.025RB	0...2.5/25/370	XZA060.025RN	XZA060.025RNB
0...4/40/600	XZA100.040R	XZA100.040RB	0...4/40/600	XZA060.040RN	XZA060.040RNB
0...6/60/900	XZA100.060R	XZA100.060RB	0...6/60/900	XZA060.060RN	XZA060.060RNB
0...10/100/1500	XZA100.100R	XZA100.100RB	0...10/100/1500	XZA060.100RN	XZA060.100RNB
0...16/160/2400	XZA100.160R	XZA100.160RB	0...16/160/2400	XZA060.160RN	XZA060.160RNB
0...25/250/3700	XZA100.250R	XZA100.250RB	0...25/250/3700	XZA060.250RN	XZA060.250RNB
0...40/400/6000	XZA100.400R	XZA100.400RB	0...40/400/6000	XZA060.400RN	XZA060.400RNB
0...60/250/9000	XZA100.600R	XZA100.600RB	0...60/250/9000	XZA060.600RN	XZA060.600RNB
0...100/1000/1500	XZA100.1000R	XZA100.1000RB	0...100/1000/1500	XZA100.1000RN	XZA100.1000RNB
0...160/1600/24000	XZA100.1600R	XZA100.1600RB	0...160/1600/24000	XZA100.1600RN	XZA100.1600RNB
0...250/2500/37000	XZA100.2500R	XZA100.2500RB	0...250/2500/37000	XZA100.2500RN	XZA100.2500RNB
0...300/3000/45000	XZA100.3000R	XZA100.3000RB	0...300/3000/45000	XZA100.3000RN	XZA100.3000RNB
0...400/4000/60000	XZA100.4000R	XZA100.4000RB	0...400/4000/60000	XZA100.4000RN	XZA100.4000RNB

XZD60 系列数字压力表 XZD60 Series Digital Gauge



XZD60系列智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换功能，操作简单，安装方便。

产品采用304不锈钢壳体和接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。

适用于便携式压力测量、设备配套、校验设备等压力测量领域。可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化。

精度等级：AC 0.5%

显示位数：4位LCD显示

背 光：白色背光

尺 寸：直径60mm 厚度40mm

供 电：3V（两节7号电池）

功 耗：0.001W

测量介质：水、油、气体对不锈钢无腐蚀的介质

电池更换：通常每6个月更换一次电池
（以实际使用耗电量为准）

功 能：1.自动休眠 2.一键清零

使用环境：测试温度：(5 ~ 40)℃
存储温度：(-20 ~ 70)℃
相对湿度：< 85%

Specification:

Pressure Connection: BSP1/4(G1/4) or NPT1/4;

Display Unit: Bar, PSI, Mpa, Kg/cm2;

Overload Capacity: 150%;

Accuracy: 0.5FS;

Input Voltage: 3V(two 1.5V AAA batteries);

Working Temperature: -20C-70C;

Footer Material and Pressure Connection: 304 Stainless Steel;

Protection Class: Ip65

Outline Dimension: 60mm(2.59");

Thickness: 40mm(1.57");

Features:

Button Description:

Power button:

1:Long press power button to Turn Off or Short Press to Turn On;

2:shortly press power button to change the unit;

LIGHT button:

1: press Light button shortly to turn on or turn off the light, will be closed automatically after 20 seconds.

2:Long Press Light button to Zero Cleaning

Package Content:

1 x Digital Pressure Gauge;

1 x Manual.

Connector: BSP1/4		Connector: NPT1/4	
Range(Unit:MPa/BAR/PSI)		Range(Unit:MPa/BAR/PSI)	
-0.1/1/15...0	XZD060.-001R	-0.1/1/15...0	XZD060.-001RN
0...0.1/1/15	XZD060.V10R	0...0.1/1/15	XZD060.V10RN
0...0.16/1.6/24	XZD060.V16R	0...0.16/1.6/24	XZD060.V16RN
0...0.25/2.5/37	XZD060.V25R	0...0.25/2.5/37	XZD060.V25RN
0...0.4/4/60	XZD060.004R	0...0.4/4/60	XZD060.004RN
0...0.6/6/90	XZD060.006R	0...0.6/6/90	XZD060.006RN
0...1/10/150	XZD060.010R	0...1/10/150	XZD060.010RN
0...1.6/16/240	XZD060.016R	0...1.6/16/240	XZD060.016RN
0...2.5/25/370	XZD060.025R	0...2.5/25/370	XZD060.025RN
0...4/40/600	XZD060.040R	0...4/40/600	XZD060.040RN
0...6/60/900	XZD060.060R	0...6/60/900	XZD060.060RN
0...10/100/1500	XZD060.100R	0...10/100/1500	XZD060.100RN
0...16/160/2400	XZD060.160R	0...16/160/2400	XZD060.160RN
0...25/250/3700	XZD060.250R	0...25/250/3700	XZD060.250RN
0...40/400/6000	XZD060.400R	0...40/400/6000	XZD080.400RN
0...60/600/9000	XZD060.600R	0...60/600/9000	XZD080.600RN
0...70/700/10000	XZD060.700R	0...70/700/10000	XZD080.700RN

XZD60Z 系列数字压力表 / 轴向电池款表 XZD60Z Series Digital Gauge



XZD60Z智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能,操作简单,安装方便。
产品采用304不锈钢壳体和接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。
智能数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

精度等级：AC 0.5%
显示位数：4位LCD显示
背 光：白色背光
尺 寸：直径60mm 厚度48mm
供 电：3V（两节7号电池）
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
使用环境：测试温度：(5~40)℃；
存储温度：(-20~70)℃
相对湿度：<85%；

Specification:
Display Unit: Bar, PSI, MPa, Kg/cm²;
Record the highest pressure
Overload Capacity: 150%;
Accuracy: AC0.5%;
Input Voltage: 3V (two 1.5V AAA batteries);
Working Temperature: -20C-70C;
Footer Material and Pressure Connection: 304 Stainless Steel;
Protection Class: Ip65
Outline Dimension: 60mm(2.5inch); Thickness: 46mm(1.81inch);

Features:
Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX;
Short press "unit" button, switch according to the minimum MIN. Again short press "unit", then quit the records show.
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.

Connector Thread: BSP1/4 male Accuracy=0.5%		Connector Thread: NPT1/4 male Accuracy=0.5%	
Range(Unit:MPa/BAR/PSI)	Part Number	Range(Unit:MPa/BAR/PSI)	Part Number
-0.1/1/15...0	XZD060Z.-001R	-0.1/1/15...0	XZD060Z.-001RN
0...0.1/1/15	XZD060Z.001R	0...0.1/1/15	XZD060Z.001RN
0...0.16/1.6/24	XZD060Z.V16R	0...0.16/1.6/24	XZD060Z.V16RN
0...0.25/2.5/37	XZD060Z.V25R	0...0.25/2.5/37	XZD060Z.V25RN
0...0.4/4/60	XZD060Z.004R	0...0.4/4/60	XZD060Z.004RN
0...0.6/6/90	XZD060Z.006R	0...0.6/6/90	XZD060Z.006RN
0...1/10/150	XZD060Z.010R	0...1/10/150	XZD060Z.010RN
0...1.6/16/240	XZD060Z.016R	0...1.6/16/240	XZD060Z.016RN
0...2.5/25/370	XZD060Z.025R	0...2.5/25/370	XZD060Z.025RN
0...4/40/600	XZD060Z.040R	0...4/40/600	XZD060Z.040RN
0...6/60/900	XZD060Z.060R	0...6/60/900	XZD060Z.060RN
0...10/100/1500	XZD060Z.100R	0...10/100/1500	XZD060Z.100RN
0...16/160/2400	XZD060Z.160R	0...16/160/2400	XZD060Z.160RN
0...25/250/3700	XZD060Z.250R	0...25/250/3700	XZD060Z.250RN
0...40/400/6000	XZD060Z.400R	0...40/400/6000	XZD060Z.400RN
0...60/600/9000	XZD060Z.600R	0...60/600/9000	XZD060Z.600RN
0...70/700/10000	XZD060Z.700R	0...70/700/10000	XZD060Z.700RN
0...100/1000/15000	XZD060Z.1000R	0...100/1000/15000	XZD060Z.1000RN

Remark: If you need panel mounting, please add "P" letter in part number end

XZW60系列 蓝牙数字压力表 XZW60 Series Bluetooth Digital Gauge Series



XZW60系列数字压力表是一款高精度带蓝牙功能的智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换等多种功能,操作简单,安装方便。
本产品壳体采用塑料壳体，螺纹连接部分采用不锈钢材质，抗震性好，整体密封防水性达IP65。能够测量气体、液体、油等对不锈钢无腐蚀的介质；
本数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。
可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

特点：
精度等级：AC 0.5% or 0.2%
单位可换：MPa BAR PSI Kg/KPa mH₂O
内置存储：可存储1000K条数据
显示位数：5位LCD显示
数据输出：配合软件，通过蓝牙输出数据；或者直接通过Type C口输出
背 光：白色背光
防水等级：Ip65
供 电：3.0V（两节7号电池），或者 USB供电
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
功 能：1.蓝牙数据连接 2.数据记录/分析/分享
使用环境：工作温度：-20~65℃； 存储温度：-20~70℃；
相对湿度：<85%；

Specification:
Accuracy: AC 0.5% or 0.2%
Unit Changeable: MPa BAR PSI Kg/KPa mH₂O
Memory: 1000K pcs data in Gauge body
Display digit: 5-digit LCD display
Data output: output data via Bluetooth; Or output directly by Type C port

Backlight: White Backlight
Waterproof rating: Ip65
Power supply: 3.0V (1.5V AAA batteries*2), or USB power supply
Measuring media: water, oil, and gas that are non corrosive to stainless steel
Battery replacement is usually done every 12 months (based on actual power consumption)
Function: 1. Bluetooth data connection 2. Data Record/Analysis/Share

Connector Thread: BSP1/4 male			Connector Thread: NPT1/4 male		
PRESSURE Range (Unit:MPa/BAR/PSI)	Part Number 1	Part Number 2	Pressure Range (Unit:MPa/BAR/PSI)	Part Number 1	Part Number 2
	ACC=0.5%	ACC=0.2%		ACC=0.5%	ACC=0.2%
-0.1/1/15...0	XZW060.-001R0.5	XZW060.-001R0.2	-0.1/1/15...0	XZW060.-001RN0.5	XZW060.-001RN0.2
0...0.1/1/15	XZW060.001R0.5	XZW060.001R0.2	0...0.1/1/15	XZW060.001RN0.5	XZW060.001RN0.2
0...0.16/1.6/24	XZW060.V16R0.5	XZW060.V16R0.2	0...0.16/1.6/24	XZW060.V16RN0.5	XZW060.V16RN0.2
0...0.25/2.5/37	XZW060.V25R0.5	XZW060.V25R0.2	0...0.25/2.5/37	XZW060.V25RN0.5	XZW060.V25RN0.2
0...0.4/4/60	XZW060.004R0.5	XZW060.004R0.2	0...0.4/4/60	XZW060.004RN0.5	XZW060.004RN0.2
0...0.6/6/90	XZW060.006R0.5	XZW060.006R0.2	0...0.6/6/90	XZW060.006RN0.5	XZW060.006RN0.2
0...1/10/150	XZW060.010R0.5	XZW060.010R0.2	0...1/10/150	XZW060.010RN0.5	XZW060.010RN0.2
0...1.6/16/240	XZW060.016R0.5	XZW060.016R0.2	0...1.6/16/240	XZW060.016RN0.5	XZW060.016RN0.2
0...2.5/25/370	XZW060.025R0.5	XZW060.025R0.2	0...2.5/25/370	XZW060.025RN0.5	XZW060.025RN0.2
0...4/40/600	XZW060.040R0.5	XZW060.040R0.2	0...4/40/600	XZW060.040RN0.5	XZW060.040RN0.2
0...6/60/900	XZW060.060R0.5	XZW060.060R0.2	0...6/60/900	XZW060.060RN0.5	XZW060.060RN0.2
0...10/100/1500	XZW060.100R0.5	XZW060.100R0.2	0...10/100/1500	XZW060.100RN0.5	XZW060.100RN0.2
0...16/160/2400	XZW060.160R0.5	XZW060.160R0.2	0...16/160/2400	XZW060.160RN0.5	XZW060.160RN0.2
0...25/250/3700	XZW060.250R0.5	XZW060.250R0.2	0...25/250/3700	XZW060.250RN0.5	XZW060.250RN0.2
0...40/400/6000	XZW060.400R0.5	XZW060.400R0.2	0...40/400/6000	XZW060.400RN0.5	XZW060.400RN0.2
0...60/600/9000	XZW060.600R0.5	XZW060.600R0.2	0...60/600/9000	XZW060.600RN0.5	XZW060.600RN0.2
0...70/700/10000	XZW060.700R0.5	XZW060.700R0.2	0...70/700/10000	XZW060.700RN0.5	XZW060.700RN0.2
0...100/1000/15000	XZW060.1000R0.5	XZW060.1000R0.2	0...100/1000/15000	XZW060.1000RN0.5	XZW060.1000RN0.2

XZD80 系列数字压力表 XZD80 Series Digital Gauge



XZD80系列智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能，操作简单，安装方便。
产品采用304不锈钢壳体和接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。
智能数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。
精度等级：AC 0.5%
显示位数：4位LCD显示
背 光：白色背光
尺 寸：直径80mm 厚度48mm
供 电：3V（两节7号电池）
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
使用环境：测试温度：（5~40）℃
存储温度：（-20~70）℃
相对湿度：<85%

Specification:
Display Unit: Bar, PSI, MPa, Kg/cm²;
Record the highest pressure
Overload Capacity: 150%;
Accuracy: AC 0.5%;
Input Voltage: 3V (two 1.5V AAA batteries);
Working Temperature: -20C-70C;
Footer Material and Pressure Connection: 304 Stainless Steel;
Protection Class: Ip65
Thickness: 46mm(1.81inch);
Outline Dimension: 80mm(3.15inch);
Length:120mm(4.72inch).

Features:
Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX;
Short press "unit" button, switch according to the minimum MIN.
Again short press "unit", then quit the records show.
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.

Connector : BSP1/4		Connector : NPT1/4	
Range(Unit:MPa/BAR/PSI)		Range(Unit:MPa/BAR/PSI)	
-0.1/1/15...0	XZD080.-001R	-0.1/1/15...0	XZD080.-001RN
0...0.1/1/15	XZD080.V10R	0...0.1/1/15	XZD080.V10RN
0...0.16/1.6/24	XZD080.V16R	0...0.16/1.6/24	XZD080.V16RN
0...0.25/2.5/37	XZD080.V25R	0...0.25/2.5/37	XZD080.V25RN
0...0.4/4/60	XZD080.004R	0...0.4/4/60	XZD080.004RN
0...0.6/6/90	XZD080.006R	0...0.6/6/90	XZD080.006RN
0...1/10/150	XZD080.010R	0...1/10/150	XZD080.010RN
0...1.6/16/240	XZD080.016R	0...1.6/16/240	XZD080.016RN
0...2.5/25/370	XZD080.025R	0...2.5/25/370	XZD080.025RN
0...4/40/600	XZD080.040R	0...4/40/600	XZD080.040RN
0...6/60/900	XZD080.060R	0...6/60/900	XZD080.060RN
0...10/100/1500	XZD080.100R	0...10/100/1500	XZD080.100RN
0...16/160/2400	XZD080.160R	0...16/160/2400	XZD080.160RN
0...25/250/3700	XZD080.250R	0...25/250/3700	XZD080.250RN
0...40/400/6000	XZD080.400R	0...40/400/6000	XZD080.400RN
0...60/600/9000	XZD080.600R	0...60/600/9000	XZD080.600RN
0...70/700/10000	XZD080.700R	0...70/700/10000	XZD080.700RN
0...100/1000/15000	XZD080.1000R	0...100/1000/15000	XZD080.1000RN

XZD80Z 系列数字压力表 XZD80Z Series Digital Gauge



XZT80Z智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能,操作简单,安装方便。
产品采用304不锈钢壳体和接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。
智能数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表
精度等级：AC 0.5%
显示位数：4位LCD显示
背 光：白色背光
尺 寸：直径80mm 厚度48mm
供 电：3V（两节7号电池）
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
使用环境：测试温度：（5~40）℃
存储温度：（-20~70）℃
相对湿度：<85%;

Specification:
Display Unit: Bar, PSI, MPa, Kg/cm²;
Record the highest pressure
Overload Capacity: 150%;
Accuracy: AC0.4;
Input Voltage: 3V (two 1.5V AAA batteries);
Working Temperature: -20C-70C;
Footer Material and Pressure Connection: 304 Stainless Steel;
Protection Class: Ip65
Thickness: 46mm(1.81inch);
Outline Dimension: 80mm(3.15inch); /100mm(3.94inch);
Length:120mm(4.72inch).

Features:
Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX;
Short press "unit" button, switch according to the minimum MIN.
Again short press "unit", then quit the records show.
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.

Connector Thread: BSP1/4 male Accuracy=0.5%		Connector Thread: NPT1/4 male Accuracy=0.5%	
Range(Unit:MPa/BAR/PSI)	 Part Number	Range(Unit:MPa/BAR/PSI)	 Part Number
-0.1/1/15...0	XZD080Z.-001R	-0.1/1/15...0	XZD080Z.-001RN
0...0.1/1/15	XZD080Z.001R	0...0.1/1/15	XZD080Z.001RN
0...0.16/1.6/24	XZD080Z.V16R	0...0.16/1.6/24	XZD080Z.V16RN
0...0.25/2.5/37	XZD080Z.V25R	0...0.25/2.5/37	XZD080Z.V25RN
0...0.4/4/60	XZD080Z.004R	0...0.4/4/60	XZD080Z.004RN
0...0.6/6/90	XZD080Z.006R	0...0.6/6/90	XZD080Z.006RN
0...1/10/150	XZD080Z.010R	0...1/10/150	XZD080Z.010RN
0...1.6/16/240	XZD080Z.016R	0...1.6/16/240	XZD080Z.016RN
0...2.5/25/370	XZD080Z.025R	0...2.5/25/370	XZD080Z.025RN
0...4/40/600	XZD080Z.040R	0...4/40/600	XZD080Z.040RN
0...6/60/900	XZD080Z.060R	0...6/60/900	XZD080Z.060RN
0...10/100/1500	XZD080Z.100R	0...10/100/1500	XZD080Z.100RN
0...16/160/2400	XZD080Z.160R	0...16/160/2400	XZD080Z.160RN
0...25/250/3700	XZD080Z.250R	0...25/250/3700	XZD080Z.250RN
0...40/400/6000	XZD080Z.400R	0...40/400/6000	XZD080Z.400RN
0...60/600/9000	XZD080Z.600R	0...60/600/9000	XZD080Z.600RN
0...70/700/10000	XZD080Z.700R	0...70/700/10000	XZD080Z.700RN
0...100/1000/15000	XZD080Z.1000R	0...100/1000/15000	XZD080Z.1000RN

Remark: If you need panel mounting, please add "P" letter in part number end

XZW80系列 蓝牙数字压力表 XZW80 Series Bluetooth Digital Gauge Series



XZW80系列数字压力表是一款高精度带蓝牙功能的智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换等多种功能,操作简单,安装方便。压力表头部支持330° 旋转，便于用户在更合适的位置观察数据；
本产品壳体采用合金压铸壳体，螺纹连接部分采用不锈钢材质，抗震性好，整体密封防水性达IP65。能够测量气体、液体、油等对不锈钢无腐蚀的介质；
本数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。
可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

- 特点：
- 1、精度等级：AC0.1% or 0.05%
 - 2、单位可换：MPa BAR PSI KgF KPa mH2O
 - 3、显示位数：5位LCD显示
 - 4、数据输出：配合软件，通过蓝牙输出数据；或者直接通过Type C口输出
 - 5、背 光：白色背光
 - 6、防水等级：IP65
 - 7、供 电：4.5V（三节7号电池），或者 USB供电
 - 8、功 耗：0.001W
 - 9、测量介质：水、油、气体对不锈钢无腐蚀的介质
 - 10、电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
 - 11、功 能：1.蓝牙数据连接 2.最大最小值记录 3.一键清零
 - 12、使用环境：工作温度：-20~65℃； 存储温度：-20 ~ 70℃；
相对湿度：< 85%；

- Specification:
- 1、Accuracy: AC0.1% or 0.05%
 - 2、Unit Changeable: MPa BAR PSI KgF KPa mH2O
 - 3、Display digit 5-digit LCD display
 - 4、Data output: output data via Bluetooth; Or output directly by Type C port
 - 5、Backlight: White Backlight
 - 6、Waterproof rating: Ip65
 - 7、Power supply: 4.5V (three 7th batteries), or USB power supply
 - 8、Measuring media: water, oil, and gas that are non corrosive to stainless steel
 - 9、Battery replacement is usually done every 12 months (based on actual power consumption)

- Function
- 1. Bluetooth data connection
 - 2. Maximum and minimum value record
 - 3. One click reset
- Button Description:
- Power button: Short press to Turn on; Long Press to Turn Off;
- UNIT/MENU button: shortly press Unit button to change the unit; Long press for 3 seconds,into set process
- MODE/ZERO button: Short Press Zero button to display temperature ,Max Pressure ,Min Pressure Long Press Button for 3 seconds to zero clearing; Short Press Button to change setting when setting Processing
- SET/REC button: Long Press Button to record the data enable or disable

Connector Thread: BSP1/4 male			Connector Thread: NPT1/4 male		
Pressure Range (Unit:MPa/BAR/PSI)	Part Number 1 ACC=0.1%	Part Number 2 ACC=0.05%	Pressure Range (Unit:MPa/BAR/PSI)	Part Number 1 ACC=0.1%	Part Number 2 ACC=0.05%
-0.1/1/15...0	XZW080-.001R0.1	XZW080-.001R0.05	-0.1/1/15...0	XZW080-.001RN0.1	XZW080-.001RN0.05
0...0.1/1/15	XZW080.001R0.1	XZW080.001R0.05	0...0.1/1/15	XZW080.001RN0.1	XZW080.001RN0.05
0...0.16/1.6/24	XZW080.V16R0.1	XZW080.V16R0.05	0...0.16/1.6/24	XZW080.V16RN0.1	XZW080.V16RN0.05
0...0.25/2.5/37	XZW080.V25R0.1	XZW080.V25R0.05	0...0.25/2.5/37	XZW080.V25RN0.1	XZW080.V25RN0.05
0...0.4/4/60	XZW080.004R0.1	XZW080.004R0.05	0...0.4/4/60	XZW080.004RN0.1	XZW080.004RN0.05
0...0.6/6/90	XZW080.006R0.1	XZW080.006R0.05	0...0.6/6/90	XZW080.006RN0.1	XZW080.006RN0.05
0...1/10/150	XZW080.010R0.1	XZW080.010R0.05	0...1/10/150	XZW080.010RN0.1	XZW080.010RN0.05
0...1.6/16/240	XZW080.016R0.1	XZW080.016R0.05	0...1.6/16/240	XZW080.016RN0.1	XZW080.016RN0.05
0...2.5/25/370	XZW080.025R0.1	XZW080.025R0.05	0...2.5/25/370	XZW080.025RN0.1	XZW080.025RN0.05
0...4/40/600	XZW080.040R0.1	XZW080.040R0.05	0...4/40/600	XZW080.040RN0.1	XZW080.040RN0.05
0...6/60/900	XZW080.060R0.1	XZW080.060R0.05	0...6/60/900	XZW080.060RN0.1	XZW080.060RN0.05
0...10/100/1500	XZW080.100R0.1	XZW080.100R0.05	0...10/100/1500	XZW080.100RN0.1	XZW080.100RN0.05
0...16/160/2400	XZW080.160R0.1	XZW080.160R0.05	0...16/160/2400	XZW080.160RN0.1	XZW080.160RN0.05
0...25/250/3700	XZW080.250R0.1	XZW080.250R0.05	0...25/250/3700	XZW080.250RN0.1	XZW080.250RN0.05
0...40/400/6000	XZW080.400R0.1	XZW080.400R0.05	0...40/400/6000	XZW080.400RN0.1	XZW080.400RN0.05
0...60/600/9000	XZW080.600R0.1	XZW080.600R0.05	0...60/600/9000	XZW080.600RN0.1	XZW080.600RN0.05
0...70/700/10000	XZW080.700R0.1	XZW080.700R0.05	0...70/700/10000	XZW080.700RN0.1	XZW080.700RN0.05
0...100/1000/15000	XZW080.1000R0.1	XZW080.1000R0.05	0...100/1000/15000	XZW080.1000RN0.1	XZW080.1000RN0.05

XZD80R系列 数字压力表/带防爆壳体 XZD80Z Series Digital Pressure Gauge/with Explosion-proof Housing



XZT80R智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能,操作简单,安装方便。

产品采用304不锈钢壳体和接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。
智能数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表

- 精度等级：AC 0.5%
防水等级：IP 67
显示位数：4位LCD显示
背 光：白色背光
供 电：3V（两节7号电池）
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
使用环境：
测试温度：(5 ~ 40)℃； 存储温度：(-20 ~ 70)℃ 相对湿度：< 85%；

- Specification:
- Display Unit: Bar, PSI ,MPa, Kg/cm2;
Record the highest pressure
Overload Capacity: 150%;
Accuracy: AC0.4;
IP Rating: IP67
Input Voltage: 3V (two 1.5V AAA batteries);
Working Temperature: -20C-70C;
Footer Material and Pressure Connection: 304 Stainless Steel;
Protection Class: Ip65
Thickness: 46mm(1.81inch);

- Features:
- Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX;
Short press "unit" button, switch according to the minimum MIN.
Again short press "unit",then quit the records show.
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light,will be closed automatically after 70 seconds.

Connector Thread: BSP1/4 male Accuracy=0.5%		Connector Thread: NPT1/4 male Accuracy=0.5%	
Range(Unit:MPa/BAR/PSI)	Part Number	Range(Unit:MPa/BAR/PSI)	Part Number
-0.1/1/15...0	XZD080R-.001R	-0.1/1/15...0	XZD080R-.001RN
0...0.1/1/15	XZD080R.001R	0...0.1/1/15	XZD080R.001RN
0...0.16/1.6/24	XZD080R.V16R	0...0.16/1.6/24	XZD080R.V16RN
0...0.25/2.5/37	XZD080R.V25R	0...0.25/2.5/37	XZD080R.V25RN
0...0.4/4/60	XZD080R.004R	0...0.4/4/60	XZD080R.004RN
0...0.6/6/90	XZD080R.006R	0...0.6/6/90	XZD080R.006RN
0...1/10/150	XZD080R.010R	0...1/10/150	XZD080R.010RN
0...1.6/16/240	XZD080R.016R	0...1.6/16/240	XZD080R.016RN
0...2.5/25/370	XZD080R.025R	0...2.5/25/370	XZD080R.025RN
0...4/40/600	XZD080R.040R	0...4/40/600	XZD080R.040RN
0...6/60/900	XZD080R.060R	0...6/60/900	XZD080R.060RN
0...10/100/1500	XZD080R.100R	0...10/100/1500	XZD080R.100RN
0...16/160/2400	XZD080R.160R	0...16/160/2400	XZD080R.160RN
0...25/250/3700	XZD080R.250R	0...25/250/3700	XZD080R.250RN
0...40/400/6000	XZD080R.400R	0...40/400/6000	XZD080R.400RN
0...60/600/9000	XZD080R.600R	0...60/600/9000	XZD080R.600RN
0...70/700/10000	XZD080R.700R	0...70/700/10000	XZD080R.700RN
0...100/1000/15000	XZD080R.1000R	0...100/1000/15000	XZD080R.1000RN

XZD80E 系列数字压力表 XZD80E Series Digital Gauge



XZD80E系列智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能，操作简单，安装方便。
产品采用304不锈钢壳体 and 接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。
智能数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

精度等级：0.5%
过载能力：150%
显示位数：4位LCD显示
背 光：白色背光
尺 寸：直径80mm 厚度48mm
供 电：24VDC 110VAC 220VAC 380VAC
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
使用环境：测试温度：(5~40)℃
存储温度：(-20~70)℃
相对湿度：<85%

Specification:
Display Unit: Bar, PSI, MPa, Kg/cm²;
Record the highest pressure
Overload Capacity: 150%;
Accuracy: AC0.4;
Input Voltage: 24VDC 110VAC 220VAC 380VAC;
Working Temperature: -20C-70C;
Footer Material and Pressure Connection: 304 Stainless Steel;
Protection Class: Ip65
Thickness: 46mm(1.8inch);
Outline Dimension: 80mm(3.15inch);

Features:
Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX;
Short press "unit" button, switch according to the minimum MIN.
Again short press "unit", then quit the records show.
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.

Connector : BSP1/4		Connector : NPT1/4	
Range(Unit:MPa/BAR/PSI)		Range(Unit:MPa/BAR/PSI)	
-0.1/1/15...0	XZD080E.-001R	-0.1/1/15...0	XZD080E.-001RN
0...0.1/1/15	XZD080E.V10R	0...0.1/1/15	XZD080E.V10RN
0...0.16/1.6/24	XZD080E.V16R	0...0.16/1.6/24	XZD080E.V16RN
0...0.25/2.5/37	XZD080E.V25R	0...0.25/2.5/37	XZD080E.V25RN
0...0.4/4/60	XZD080E.004R	0...0.4/4/60	XZD080E.004RN
0...0.6/6/90	XZD080E.006R	0...0.6/6/90	XZD080E.006RN
0...1/10/150	XZD080E.010R	0...1/10/150	XZD080E.010RN
0...1.6/16/240	XZD080E.016R	0...1.6/16/240	XZD080E.016RN
0...2.5/25/370	XZD080E.025R	0...2.5/25/370	XZD080E.025RN
0...4/40/600	XZD080E.040R	0...4/40/600	XZD080E.040RN
0...6/60/900	XZD080E.060R	0...6/60/900	XZD080E.060RN
0...10/100/1500	XZD080E.100R	0...10/100/1500	XZD080E.100RN
0...16/160/2400	XZD080E.160R	0...16/160/2400	XZD080E.160RN
0...25/250/3700	XZD080E.250R	0...25/250/3700	XZD080E.250RN
0...40/400/6000	XZD080E.400R	0...40/400/6000	XZD080E.400RN
0...60/600/9000	XZD080E.600R	0...60/600/9000	XZD080E.600RN
0...70/700/10000	XZD080E.700R	0...70/700/10000	XZD080E.700RN
0...100/1000/15000	XZD080E.1000R	0...100/1000/15000	XZD080E.1000RN

XZD80C 系列智能数字差压压力表 XZD80C Series Differential Pressure Gauge



XZD80C系列智能数字压差压力表，是一款高精度智能型数字压力表，内置高精度压力传感器，不仅能够准确的显示单侧的实时压力，而且可以实时显示两端压力的压差值。具有一表两用的功能。该表精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、电池电量显示等多种功能,操作简单,安装方便。
壳体和接头材质采用304不锈钢，耐腐蚀，抗震性好。能够测量气体、液体、油等对不锈钢无腐蚀的介质。
广泛运用于液压与气动系统，工程机械维修，实验室，机电设备，仪器仪表等行业。

特点：
1、精度等级：0.5%FS
2、过载压力：>150%(正过压)；
3、单边最大压力：70MPa/700BAR/10000PSI
4、压力单位可切换：BAR, PSI,MPa,Kgf/cm²;
5、显示位数：4位LCD显示
6、背 光：白色背光
7、尺 寸：直径80mm 厚度48mm
8、供 电：3V (两节7号电池)
9、功 耗：0.001W
10、测量介质：水、油、气体等对不锈钢无腐蚀的介质
11、电池更换：通常每12个月更换一次电池 (以实际使用耗电量为准)
12、功 能：1.自动休眠 2.一键清零
13、使用环境：测试温度：+5℃~+40℃； 存储温度：-20℃~+70℃
相对湿度：<85%；

Specification:
1. It can display the pressure one side or two side □ also can display the pressure difference on both sides immediately
2. Accuracy class 0.5% FS
3. Overload pressure: >150% (positive overpressure);
4. Unilateral maximum pressure: 5MPa / 50BAR / 700PSI
5. 5 pressure units can be changed: KPa Bar, PSI, MPa, Kg / cm²;
6. Display digits 4 digits LCD display
7. Back Light White backlight
8. Ruler inch inch diameter 80mm thickness 48mm
9. Power supply 3V (two AAA batteries)
10. Power consumption 0.001W
11. Measuring medium Water, oil, gas and other non-corrosive media to stainless steel
12. Battery replacement The battery is usually replaced every 12 months (subject to actual power consumption)
13. Function a. Automatic sleep b. One-key reset
14. Use environment: Test temperature: +5℃~ +40℃; Storage temperature: -20℃~ +70℃ Relative humidity: <85%;

Features:
Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT/ZERO button: shortly press Unit button to change the unit;
pressure UNIT/ZERO button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light,will be closed automatically after 70 seconds.

Connector : BSP1/4 male		Connector : NPT1/4 male	
Range(Unit:MPa/BAR/PSI)	Part Number	Range(Unit:MPa/BAR/PSI)	Part Number
-0.1/1/15...0	XZD080C.-001R	-0.1/1/15...0	XZD080C.-001N
0...0.1/1/15	XZD080C.V10R	0...0.1/1/15	XZD080C.V10N
0...0.16/1.6/24	XZD080C.V16R	0...0.16/1.6/24	XZD080C.V16N
0...0.25/2.5/37	XZD080C.V25R	0...0.25/2.5/37	XZD080C.V25N
0...0.4/4/60	XZD080C.V40R	0...0.4/4/60	XZD080C.V40N
0...0.6/6/90	XZD080C.V60R	0...0.6/6/90	XZD080C.V60N
0...1/10/150	XZD080C.010R	0...1/10/150	XZD080C.010N
0...1.6/16/240	XZD080C.016R	0...1.6/16/240	XZD080C.016N
0...2.5/25/370	XZD080C.025R	0...2.5/25/370	XZD080C.025N
0...4/40/600	XZD080C.040R	0...4/40/600	XZD080C.040N
0...6/60/900	XZD080C.060R	0...6/60/900	XZD080C.060N
0...10/100/1500	XZD080C.100R	0...10/100/1500	XZD080C.100N
0...16/160/2400	XZD080C.160R	0...16/160/2400	XZD080C.160N
0...25/250/3700	XZD080C.250R	0...25/250/3700	XZD080C.250N
0...40/400/6000	XZD080C.400R	0...40/400/6000	XZD080C.400N
0...60/600/9000	XZD080C.600R	0...60/600/9000	XZD080C.600N
0...70/700/10000	XZD080C.700R	0...70/700/10000	XZD080C.700N

XZD80G 系列智能数字隔膜压力表 XZD80G Series Digital Diaphragm-seal Pressure Gauge



是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的显示实时压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能，操作简单，安装方便。
产品采用304不锈钢壳体 and 接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。
广泛运用于：应用于PCB电路板行业，金属蚀刻机及PCB/LCD清洗液体过滤泵浦，耐腐蚀，可测量高粘度液体、气体，广泛用于化工行业各类化工机械。

- 特点：
- 1、精度等级：0.5%FS
 - 2、压力单位可切换：KPa, BAR, PSI, MPa, Kg/cm²;
 - 3、显示位数：4位LCD显示
 - 4、背 光：白色背光
 - 5、尺 寸：直径80mm 厚度48mm
 - 6、供 电：3V (两节7号电池)
 - 7、功 耗：0.001W
 - 8、测量介质：水、油、气体等对不锈钢无腐蚀的介质
 - 9、电池更换：通常每12个月更换一次电池 (以实际使用耗电量为准)
 - 10、功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
 - 11、使用环境：
 - 测试温度：+5℃ ~ +40℃;
 - 存储温度：-20℃ ~ +70℃;
 - 相对湿度：<85%;

Specification:

1. Accuracy class 0.5% FS
2. pressure units can be changed: KPa Bar, PSI, MPa, Kg / cm²;
3. Display digits 4 digits LCD display
4. Back Light White backlight
5. Ruler inch inch diameter 80mm thickness 48mm
6. Power supply 3V (two AAA batteries)
7. Power consumption 0.001W
8. Measuring medium Water, oil, gas and other non-corrosive media to stainless steel
9. Battery replacement The battery is usually replaced every 12 months (subject to actual power consumption)
10. Function a. Automatic sleep b. One-key reset c. Maximum and minimum recording function
11. Use environment:
 - Test temperature: +5℃ ~ +40℃; Storage temperature: -20℃ ~ +70℃ Relative humidity: <85%;

Features:

Button Description:

Power button: press power button continuously for 3 seconds to Turn On or Turn Off;

UNIT button: shortly press Unit button to change the unit; Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX; Short press "unit" button, switch according to the minimum MIN. Again short press "unit", then quit the records show.

ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;

LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.

Range(Unit:KPa/BAR/MPa/PSI)	Part Number
0...10/0.1/0.01/1.5	XZD080G.10
0...25/0.25/0.025/3.6	XZD080G.25
0...40/0.4/0.04/6	XZD080G.40
0...60/0.6/0.06/9	XZD080G.60
0...100/1/0.1/15	XZD080G.100
0...250/2.5/0.25/36	XZD080G.250
0...400/4/0.4/60	XZD080G.400
0...600/6/0.6/90	XZD080G.600
0...1000/10/1/150	XZD080G.1000
0...1600/16/1.6/230	XZD080G.1600
0...2500/25/2.5/360	XZD080G.2500

XZPC80 系列数字压力控制器 XZPC80 Series Digital Controller



XZPC80系列压力控制器是一款集压力测量、显示、控制于一体的高精度智能数显控制器，实现的主要功能是低压闭合、高压断开 (或低压断开、高压闭合) 功能；在系统功能中，可以设定密码保护、反向控制、漏压保护、时间保护、延时动作等功能，是一款真正意义上的智能压力控制器。

- 技术指标：
- 压力范围：0-1.6MPa/16BAR, 0-1MPa/10BAR 0-0.6MPa/6BAR
- 压力单位：三种压力单位可供切换 (PSI, BAR, Mpa)
- 显 示：4位LED实时数显压力值，便于用户观察
- 过载能力：150%
- 输出形式：继电器输出，常开或者常闭
- 输出继电器容量：220V AC 5A
- 供电电源：24V DC; 110V AC; 220V AC; 380V AC
- 设置范围：全量程段可以设置控制点，防波动回差设置
- 精 度：0.5% FS
- 测量介质：气体、水、油
- 使用温度：-20 ~ 65℃
- 接口尺寸：G1/4, NPT1/4
- 应 用 于：1、水泵和空气压缩机；2、机电自动化；3、气动和液压系统，工程设备

XZPC controller is a intelligent digital pressure switch automotive pressure switch setting pressure measurement, pressure display, control in one professional unit. It has followed features: easy operation, good shock resistance, high precision, control range adjustable, long-term stability. It is widely used in water supply of building, air compressor, automatic machinery. The product uses ceramic sensor chip to keep it good quality.

FEATURES:

Pressure Range: 0-1.6MPa/16BAR, 0-1MPa/10BAR 0-0.6MPa/6BAR

Pressure Unit: Three pressure units available (PSI, BAR, Mpa)

Display: 4 digit LED to show pressure in real time

Over Pressure: 150%

Accuracy: ±0.5%FS

Alarm Point: Alarm point be set discretionarily within the range

Alarm Type: Relay signal

Long-term Stability: Typical: ±1%FS/year

Operating Temperature: -20~ 80℃

Compensation Temperature: -10 ~60℃

Electric Protection: Short-circuit protection, reverse protection, anti-electromagnetic interference

Sampling Frequency: 5 times/sec

Measurement Medium: Gas, water, oil

Pressure Connection: BSP1/4, NPT1/4

Connector Material: 304SS

Shell: Engineering Plastic

Supply Power: 24VDC, 110VAC, 220VAC, 380VAC

Weight: 0.3Kg

Dimension: 3.2"/80mm

APPLICATION: 1. Pump Control 2. Air Compressor 3. Automatic Machinery

Connector : BSP1/4		Connector : NPT1/4	
Range(Unit:MPa/BAR/PSI)		Range(Unit:MPa/BAR/PSI)	
-0.1/1/15...0	XZPC080.-001R	-0.1/1/15...0	XZPC080.-001RN
0...0.1/1/15	XZPC080.V10R	0...0.1/1/15	XZPC080.V10RN
0...0.16/1.6/24	XZPC080.V16R	0...0.16/1.6/24	XZPC080.V16RN
0...0.25/2.5/37	XZPC080.V25R	0...0.25/2.5/37	XZPC080.V25RN
0...0.4/4/60	XZPC080.004R	0...0.4/4/60	XZPC080.004RN
0...0.6/6/90	XZPC080.006R	0...0.6/6/90	XZPC080.006RN
0...1/10/150	XZPC080.010R	0...1/10/150	XZPC080.010RN
0...1.6/16/240	XZPC080.016R	0...1.6/16/240	XZPC080.016RN
0...2.5/25/370	XZPC080.025R	0...2.5/25/370	XZPC080.025RN
0...4/40/600	XZPC080.040R	0...4/40/600	XZPC080.040RN
0...6/60/900	XZPC080.060R	0...6/60/900	XZPC080.060RN
0...10/100/1500	XZPC080.100R	0...10/100/1500	XZPC080.100RN
0...16/160/2400	XZPC080.160R	0...16/160/2400	XZPC080.160RN
0...25/250/3700	XZPC080.250R	0...25/250/3700	XZPC080.250RN
0...40/400/6000	XZPC080.400R	0...40/400/6000	XZPC080.400RN
0...60/600/9000	XZPC080.600R	0...60/600/9000	XZPC080.600RN

XZPC80E 系列智能压力控制器 XZPC80E series Digital Pressure Controller



XZPC80E 系列智能压力控制器是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的显示实时压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能，操作简单，安装方便。产品采用304不锈钢壳体 and 接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。广泛运用于：应用于PCB电路板行业，金属蚀刻机及PCB/LCD清洗液体过滤泵浦，耐腐蚀，可量测高粘度液体、气体。广泛用于化工行业各类化工机械。

- 1、精度等级：0.5%FS
- 2、压力单位可调：KPa Bar, PSI, MPa, Kg/cm²;
- 3、显示位数：4位LCD显示
- 4、背 光：白色背光
- 5、尺 寸：直径80mm 厚度48mm
- 6、供 电：3V (两节7号电池)
- 7、功 耗：0.001W
- 8、测量介质：水、油、气体等对不锈钢无腐蚀的介质
- 9、电池更换：通常每12个月更换一次电池 (以实际使用耗电量为准)
- 10、功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
- 11、使用环境：
测试温度：+5℃ ~ +40℃;
存储温度：-20℃ ~ +70℃
相对湿度：< 85%;

Specification:

1. Accuracy class 0.5% FS
2. pressure units can be changed: KPa Bar, PSI, MPa, Kg / cm²;
3. Display digits 4 digits LCD display
4. Back Light White backlight
5. Ruler inch diameter 80mm thickness 48mm
6. Power supply 3V (two AAA batteries)
7. Power consumption 0.001W
8. Measuring medium Water, oil, gas and other non-corrosive media to stainless steel
9. Battery replacement The battery is usually replaced every 12 months (subject to actual power consumption)
10. Function a. Automatic sleep b. One-key reset c. Maximum and minimum recording function
11. Use environment:
Test temperature: +5℃ ~ +40℃; Storage temperature: -20℃ ~ +70℃
Relative humidity: <85%;

Features:

- Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
Long press "unit" button for 5 seconds, the display after the last reset record maximum MAX;
Short press "unit" button, switch according to the minimum MIN.
Again short press "unit", then quit the records show.
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.

Connector : BSP1/4 male		Connector : NPT1/4 male	
Range(Unit:MPa/BAR/PSI)	Part Number	Range(Unit:MPa/BAR/PSI)	Part Number
-0.1/1/15...0	XZPC80E.-001R	-0.1/1/15...0	XZPC80E.-001N
0...0.1/1/15	XZPC80E.V10R	0...0.1/1/15	XZPC80E.V10N
0...0.16/1.6/24	XZPC80E.V16R	0...0.16/1.6/24	XZPC80E.V16N
0...0.25/2.5/37	XZPC80E.V25R	0...0.25/2.5/37	XZPC80E.V25N
0...0.4/4/60	XZPC80E.V40R	0...0.4/4/60	XZPC80E.V40N
0...0.6/6/90	XZPC80E.V60R	0...0.6/6/90	XZPC80E.V60N
0...1/10/150	XZPC80E.010R	0...1/10/150	XZPC80E.010N
0...1.6/16/240	XZPC80E.016R	0...1.6/16/240	XZPC80E.016N
0...2.5/25/370	XZPC80E.025R	0...2.5/25/370	XZPC80E.025N
0...4/40/600	XZPC80E.040R	0...4/40/600	XZPC80E.040N
0...6/60/900	XZPC80E.060R	0...6/60/900	XZPC80E.060N
0...10/100/1500	XZPC80E.100R	0...10/100/1500	XZPC80E.100N
0...16/160/2400	XZPC80E.160R	0...16/160/2400	XZPC80E.160N
0...25/250/3700	XZPC80E.250R	0...25/250/3700	XZPC80E.250N
0...40/400/6000	XZPC80E.400R	0...40/400/6000	XZPC80E.400N
0...60/600/9000	XZPC80E.600R	0...60/600/9000	XZPC80E.600N
0...70/700/10000	XZPC80E.700R	0...70/700/10000	XZPC80E.700N

XZD100 系列数字压力表 XZD100 Series Digital Gauge



XZD100系列智能数字压力表是一款高精度智能型数字压力表，内置高精度压力传感器，能够准确的实时显示压力，并且具有精度高、长期稳定性好的特点。该款数字压力表配备大尺寸LCD液晶显示，具有清零、背光、开关机、单位切换、低电压报警等多种功能，操作简单，安装方便。产品采用304不锈钢壳体 and 接头，抗震性好，能够测量气体、液体、油等对不锈钢无腐蚀的介质。

可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

- 精度等级：0.5%
显示位数：4位LCD显示
背 光：白色背光
尺 寸：直径80mm 厚度48mm
供 电：3V (两节7号电池)
功 耗：0.001W
测量介质：水、油、气体对不锈钢无腐蚀的介质
电池更换：通常每12个月更换一次电池 (以实际使用耗电量为准)
功 能：1.自动休眠 2.一键清零 3.最大最小值记录功能
使用环境：测试温度：(5 ~ 40)℃
存储温度：(-20 ~ 70)℃
相对湿度：< 85%

Specification:

- Pressure Range: 0-700BAR/10000PSI/70MPa;
Pressure Connection: NPT1/2;
Display Unit: Bar, PSI, Mpa, Kg/cm²;
Overload Capacity: 150%;
Accuracy: 0.4%FS;
Long-term Stability: 0.4%FS/year;
Input Voltage: 3V(two 1.5V AAA batteries);
Working Temperature: -20C-70C;
Footer Material and Pressure Connection: 304 Stainless Steel;
Protection Class: Ip65
Thickness: 46mm(1.8 inch);
Outline Dimension: 100mm(4 inch);
Length: 140mm(5.5inch).

Features:

- Button Description:
Power button: press power button continuously for 3 seconds to Turn On or Turn Off;
UNIT button: shortly press Unit button to change the unit;
ZERO button: pressure Zero button continuously for 3 seconds for zero clearing;
LIGHT button: press Light button shortly to turn on or turn off the light, will be closed automatically after 70 seconds.
Package Content:
1 x Digital Pressure Gauge;
1 x Manual.

Connector : BSP1/2		Connector : NPT1/2	
Range(Unit:MPa/BAR/PSI)		Range(Unit:MPa/BAR/PSI)	
-0.1/1/15...0	XZD100.-001R	-0.1/1/15...0	XZD100.-001RN
0...0.1/1/15	XZD100.V10R	0...0.1/1/15	XZD100.V10RN
0...0.16/1.6/24	XZD100.V16R	0...0.16/1.6/24	XZD100.V16RN
0...0.25/2.5/37	XZD100.V25R	0...0.25/2.5/37	XZD100.V25RN
0...0.4/4/60	XZD100.004R	0...0.4/4/60	XZD100.004RN
0...0.6/6/90	XZD100.006R	0...0.6/6/90	XZD100.006RN
0...1/10/150	XZD100.010R	0...1/10/150	XZD100.010RN
0...1.6/16/240	XZD100.016R	0...1.6/16/240	XZD100.016RN
0...2.5/25/370	XZD100.025R	0...2.5/25/370	XZD100.025RN
0...4/40/600	XZD100.040R	0...4/40/600	XZD100.040RN
0...6/60/900	XZD100.060R	0...6/60/900	XZD100.060RN
0...10/100/1500	XZD100.100R	0...10/100/1500	XZD100.100RN
0...16/160/2400	XZD100.160R	0...16/160/2400	XZD100.160RN
0...25/250/3700	XZD100.250R	0...25/250/3700	XZD100.250RN
0...40/400/6000	XZD100.400R	0...40/400/6000	XZD100.400RN
0...60/600/9000	XZD100.600R	0...60/600/9000	XZD100.600RN
0...70/700/10000	XZD100.700R	0...70/700/10000	XZD100.700RN
0...100/1000/15000	XZD100.1000R	0...100/1000/15000	XZD100.1000RN

XZD100H 系列高精度数字压力表 XZD100H Series High Accuracy Digital Pressure Gauge



本系列压力表采用了高精度ADC和高速微处理器,设计超大尺寸液晶屏,分为主屏和副屏;分别显示实时压力和现场温度、压力最大值、压力最小值等数值。可切换10种压力单位,压力采集速率可调,电池电量显示,同时配备了USB外供电和电池双供电模式。具有定时自动关机功能;
适用于便携式压力测量、设备配套、校验设备等压力测量领域。可运用于:机械电子行业、仪器仪表配套、压力实验室、工程机械自动化。

技术指标:
压力范围: 0~1.6MPa/16BAR, 0~1MPa/10BAR 0~0.6MPa/6BAR
压力单位: MPa/ kPa/PSI/BAR/Pa/ mBAR/mmHg/mH 2 O/ Torr/ kgf/cm²
显示: 4位LED实时数显压力值,便于用户观察
过载能力: 150%
输出形式: 继电器输出,常开或者常闭
输出继电器容量: 220V AC 5A
供电电源: 24V DC; 220V AC; 380V AC
设置范围: 全量程段可以设置控制点,防波动回差设置。
精度: 1% FS
测量介质: 气体、水、油
使用温度: -20~65℃
接口尺寸: G1/4, NPT1/4
应用于: 1、水泵和空气压缩机; 2、机电自动化; 3、气动和液压系统, 工程设备。

This series of pressure gauges adopts high-precision ADC and high-speed microprocessor, and is designed with a large-sized LCD screen, divided into a main screen and a sub screen; Display real-time pressure and on-site temperature, maximum pressure value, minimum pressure value, and other numerical values separately. 10 pressure units can be switched, pressure collection rate can be adjusted, battery level display is available, and both USB external power supply and battery dual power supply modes are equipped. Equipped with timed automatic shutdown function;
Suitable for portable pressure measurement, equipment matching, calibration equipment and other pressure measurement fields. Can be applied to: mechanical and electronic industry, instrument and meter matching, pressure laboratory, engineering machinery automation

Specification:
1. Pressure Range: -1~ 0BAR, 0~.1000BAR
2. Unit: MPa/ kPa/PSI/BAR/Pa/ mBAR/mmHg/mH 2 O/ Torr/ kgf/cm²
3. Accuracy: 0.2% or 0.1%
4. Temperature accuracy: better than 0.5℃
5. Operating temperature: -10~50℃
6. Compensation temperature: 0~40℃
7. Power: AA batteries *3 or USB supply
8. Sampling rate: 1-10 times / sec, adjustable
9. Dial diameter: 105mm / 3.2"
10. Thread of Connector: G1/4, NPT1/4 or others
11. Cover material: Ss304
12. Measuring medium: oil, water and gas
13. Storage conditions:
14. Temperature: -20~60℃ ; Humidity: 0~95% RH
15. Product weight: 260g
16. The package contains: Pressure gauge, rubber protective cover, standard power cord USB interface, power adapter, plastic packaging box

Connector : BSP1/4			Connector : NPT1/4		
Range(Unit:MPa/BAR/PSI)			Range(Unit:MPa/BAR/PSI)		
	Accuracy 0.2%	Accuracy 0.1%		Accuracy 0.2%	Accuracy 0.1%
-0.1/1/15...0	XZD100H.-001R02	XZD100H.-001R01	-0.1/1/15...0	XZD100H.-001RN02	XZD100H.-001RN01
0...0.1/1/15	XZD100H.001R02	XZD100H.001R01	0...0.1/1/15	XZD100H.001RN02	XZD100H.001RN01
0...0.16/1.6/24	XZD100H.V16R02	XZD100H.V16R01	0...0.16/1.6/24	XZD100H.V16RN02	XZD100H.V16RN01
0...0.25/2.5/37	XZD100H.V25R02	XZD100H.V25R01	0...0.25/2.5/37	XZD100H.V25RN02	XZD100H.V25RN01
0...0.4/4/60	XZD100H.004R02	XZD100H.004R01	0...0.4/4/60	XZD100H.004RN02	XZD100H.004RN01
0...0.6/6/90	XZD100H.006R02	XZD100H.006R01	0...0.6/6/90	XZD100H.006RN02	XZD100H.006RN01
0...1/10/150	XZD100H.010R02	XZD100H.010R01	0...1/10/150	XZD100H.010RN02	XZD100H.010RN01
0...1.6/16/240	XZD100H.016R02	XZD100H.016R01	0...1.6/16/240	XZD100H.016RN02	XZD100H.016RN01
0...2.5/25/370	XZD100H.025R02	XZD100H.025R01	0...2.5/25/370	XZD100H.025RN02	XZD100H.025RN01
0...4/40/600	XZD100H.040R02	XZD100H.040R01	0...4/40/600	XZD100H.040RN02	XZD100H.040RN01
0...6/60/900	XZD100H.060R02	XZD100H.060R01	0...6/60/900	XZD100H.060RN02	XZD100H.060RN01
0...10/100/1500	XZD100H.100R02	XZD100H.100R01	0...10/100/1500	XZD100H.100RN02	XZD100H.100RN01
0...16/160/2400	XZD100H.160R02	XZD100H.160R01	0...16/160/2400	XZD100H.160RN02	XZD100H.160RN01
0...25/250/3700	XZD100H.250R02	XZD100H.250R01	0...25/250/3700	XZD100H.250RN02	XZD100H.250RN01
0...40/400/6000	XZD100H.400R02	XZD100H.400R01	0...40/400/6000	XZD100H.400RN02	XZD100H.400RN01
0...60/250/9000	XZD100H.600R02	XZD100H.600R01	0...60/250/9000	XZD100H.600RN02	XZD100H.600RN01
0...70/700/10000	XZD100H.700R02	XZD100H.700R01	0...70/700/10000	XZD100H.700RN02	XZD100H.700RN01
0...100/1000/15000	XZD100H.1000R02	XZD100H.1000R01	0...100/1000/15000	XZD100H.1000RN02	XZD100H.1000RN01

XZPS 系列数字压力开关 XZPS Series Digital Pressure Switch



XZPS系列智能压力开关,采用国际先进的压阻式传感技术,信号经由后端处理后,转化成标准的工业信号,输出触发信号。全不锈钢金属外壳设计,高亮度LED4位数字显示,320°旋转,能保证在不同的安装角度下获得最佳的观察视角。体积小,功率低,精度高。

产品特点和应用: 1. 紧凑的设计 2. 可旋转320° 3. 4位LED显示屏
4. 一键误差清零
5. 2路开关量 (PNP或NPN) 和1路模拟量4~20mA输出
6. 卓越的抗震和抗冲击性能
7. 温漂小 低功耗 高精度 寿命长 性能稳定可靠

广泛运用于: 液压与气动系统 机床 船舶 食品 石油化工 矿山 高压清洗和锅炉设备
规格参数:
范围范围: -1~0BAR, 0~ 1000bar; 压力精度: 0.5%FS
压力过载范围: 1.5xFS 非线性: 0.5%FS
工作温度范围: -20至+ 85℃; 可靠性: 0.2%FS
补偿温度范围: -10至+ 70℃; 外壳: 304不锈钢
输出信号: 4~20mA; 0~5VDC 隔膜: 316L不锈钢
电源 (Vs): 12~36VDC 宽电压输入 防水等级: IP65 (标准)
连接螺纹: 1 / 4BSP, 1 / 4NPT或客户设计

XZPS series intelligent pressure switch adopts international advanced piezoresistive sensing technology. After the signal is processed through the back end, it is converted into a standard industrial signal and outputs a trigger signal. All stainless steel metal shell design, high-brightness LED 4-digit display, 320° rotation, to ensure the best viewing angle at different installation angles. Small size, low power and high precision.

Product features and applications:
1 compact design
2 can be rotated 320°
3 4-digit LED display
4 One-key error is cleared,
5 2-way switch (PNP or NPN) and 1 analog 4-20mA output
6 Excellent shock and impact resistance
7 low temperature drift, low power consumption, high precision, long life, stable and reliable performance

Widely used in:
Hydraulic & Pneumatic Systems Machine Tools Ship Food Petrochemical Mines
High Pressure Cleaning and Boiler Equipment

Specifications:
Range: -1-0BAR, 0-1000bar;
Pressure overload range: 1.5xFS
Operating temperature range: -20 to + 85℃ ;
Compensation temperature range: -10 to + 70℃ ;
Output signal: 4-20mA; 0-5VDC
Power (Vs): 12-36VDC wide voltage input
Pressure accuracy: 0.5% FS
Nonlinear: 0.5% FS
Reliability: 0.2% FS
Housing: 304 stainless steel
Diaphragm: 316L stainless steel
Waterproof rating: IP65 (standard)
Connection thread: 1 / 4BSP, 1 / 4 NPT or customer design

Connector : BSP1/4		Connector : NPT1/4	
Range(Unit:MPa/BAR/PSI)		Range(Unit:MPa/BAR/PSI)	
-0.1/1/15...0	XZPS.-001R	-0.1/1/15...0	XZPS.-001RN
0...0.1/1/15	XZPS.V10R	0...0.1/1/15	XZPS.V10RN
0...0.16/1.6/24	XZPS.V16R	0...0.16/1.6/24	XZPS.V16RN
0...0.25/2.5/37	XZPS.V25R	0...0.25/2.5/37	XZPS.V25RN
0...0.4/4/60	XZPS.004R	0...0.4/4/60	XZPS.004RN
0...0.6/6/90	XZPS.006R	0...0.6/6/90	XZPS.006RN
0...1/10/150	XZPS.010R	0...1/10/150	XZPS.010RN
0...1.6/16/240	XZPS.016R	0...1.6/16/240	XZPS.016RN
0...2.5/25/370	XZPS.025R	0...2.5/25/370	XZPS.025RN
0...4/40/600	XZPS.040R	0...4/40/600	XZPS.040RN
0...6/60/900	XZPS.060R	0...6/60/900	XZPS.060RN
0...10/100/1500	XZPS.100R	0...10/100/1500	XZPS.100RN
0...16/160/2400	XZPS.160R	0...16/160/2400	XZPS.160RN
0...25/250/3700	XZPS.250R	0...25/250/3700	XZPS.250RN
0...40/400/6000	XZPS.400R	0...40/400/6000	XZPS.400RN
0...60/600/9000	XZPS.600R	0...60/600/9000	XZPS.600RN
0...70/700/10000	XZPS.700R	0...70/700/10000	XZPS.700RN
0...100/1000/15000	XZPS.1000R	0...100/1000/15000	XZPS.1000RN

XZPT 系列压力变送器 XZPT Series Pressure Transmitter



XZPT系列通用型压力变送器是有高测量要求用户的理想解决方案。该型号变送器具有非常好的准确度，不仅坚固耐用而且具有多种规格，可满足各种的应用要求。XZPT系列通用型压力变送器采用耐用型设计，品质卓越，能够满足各式应用要求，即使在恶劣的环境下也能正常工作。我们可提供本数据资料中列举的变送器型号，并可在短时间内完成交付，满足客户迫切的应用需求。

- 特点：
- 1、高稳定性，长期可靠
 - 2、电流 电压流 输出型号可选
 - 3、采用进口压力芯片
 - 4、304不锈钢外壳

广泛应用于：
机械制造、液压系统、设备自动化、石油、化工、冶金、供水、医疗等行业

The XZPT series universal pressure transmitter is an ideal solution for users with high measurement requirements. characteristic:

- 1.High stability, long-term reliability
- 2.current, voltage, and current output models are optional
- 3.Imported pressure chips are used
- 4.304 stainless steel shell

Apply to:
Mechanical manufacturing,Hydraulic system,Equipment automation,Petroleum,Chemical,Metallurgical,Water supply, Medical,etc

Technical Parameter

Pressure range: -0.1~1... 2.5... 6... 16.25... 40... 100MPa
Overload pressure: 200% < 25MPa, 150% ≥ 25MPa Pressure fittings: G1/4, NPT1/4, G1/2, M20 * 1.5
Accuracy level: 0.5%, 0.25% Long term stability: ≤ 0.2% FS/year
Supply voltage: 24VDC (12-28VDC) 5VDC 3.3VDC
Output signal: 4-20mA 0.5-4.5V 0.5-2.5V 0-5V 0-10V
Working temperature: -20~80 °C
Zero temperature coefficient: Typical: ± 0.02% FS/ °C; Maximum: ± 0.05% FS/ °C Sensitivity Temperature coefficient: Typical: ± 0.02% FS/ °C; Maximum: ± 0.05% FS/ °C Measurement medium: Non corrosive media such as air, water, oil, etc. for stainless steel
Electrical interface: M12
Insulation resistance:>100M Ω under 500Vdc excitation;
Anti vibration: ≤± 0.1% FS (X, Y, Z axis, 200Hz/g)
Impact resistance: 100g, back peak sawtooth half sine trapezoid, lasting for 6ms

Range (Unit:MPa/BAR/PSI)	BSP1/4	NPT1/4	Range (Unit:MPa/BAR/PSI)	BSP1/4	NPT1/4
-0.1/10/15-0	XZPT.-001R	XZPT.-001RN	0...4/40/600	XZPT.040R	XZPT.040RN
0...0.1/1/15	XZPT.001R	XZPT.001RN	0...6/60/900	XZPT.060R	XZPT.060RN
0...0.16/1.6/24	XZPT.V16R	XZPT.V16RN	0...10/100/1500	XZPT.100R	XZPT.100RN
0...0.25/2.5/37	XZPT.V25R	XZPT.V25RN	0...16/160/2400	XZPT.160R	XZPT.160RN
0...0.4/4/60	XZPT.004R	XZPT.004RN	0...25/250/3700	XZPT.250R	XZPT.250RN
0...0.6/6/90	XZPT.006R	XZPT.006RN	0...40/400/6000	XZPT.400R	XZPT.400RN
0...1/10/150	XZPT.010R	XZPT.010RN	0...70/700/10000	XZPT.700R	XZPT.700RN
0...1.6/16/240	XZPT.016R	XZPT.016RN	0...100/1000/14500	XZPT.1000R	XZPT.1000RN
0...2.5/25/370	XZPT.025R	XZPT.025RN			

XZW25系列 蓝牙数字压力表 XZW25 Series Bluetooth Digital Gauge Series



XZW25系列数字压力表是一款高精度带蓝牙功能的智能型数字压力传感器，内置高精度压力传感器，能够准确的测量压力，并且具有精度高、长期稳定性好的特点。该款数字压力传感器体积小，配合“Little Orange”软件使用，具有清零、背光、开关机、单位切换等多种功能。操作简单，安装方便。本产品壳体采用塑料壳体，螺纹连接部分采用不锈钢材质，抗震性好，整体密封防水性达IP54。能够测量气体、液体、油等对不锈钢无腐蚀的介质；本数字压力表适用于便携式压力测量、设备配套、校验设备等压力测量领域。可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

- 特点：
- 精度等级：AC 0.5%
 - 单位可换：MPa BAR PSI KgF KPa mH2O 需配合软件使用
 - 显示位数：无显示
 - 数据输出：配合软件，通过蓝牙输出数据；
 - 背光：无
 - 防水等级：Ip54
 - 供电：纽扣电池CR2032
 - 功耗：0.001W
 - 测量介质：水、油、气体对不锈钢无腐蚀的介质
 - 电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
 - 功能：1.蓝牙数据连接 2.数据记录/分析/分享
 - 使用环境：工作温度：-20~65℃； 存储温度：-20 ~ 70℃；
相对湿度：<85%；

Specification:
Accuracy: 0.5%
Unit Changeable: MPa BAR PSI KgF KPa mH2O on Little Orange APP
Display: no
Data output: output data via Bluetooth;
Backlight: White Backlight
Waterproof rating: Ip54

Power supply: Cell Battery Cr2032
Measuring media: water, oil, and gas that are non corrosive to stainless steel
Battery replacement is usually done every 12 months (based on actual power consumption)
Function: 1. Bluetooth data connection 2. Data Record/Analysis/Share

Range (Unit:MPa/BAR/PSI)	Part Number 1 ACC=0.5%	Part Number 2 ACC=0.2%	Range (Unit:MPa/BAR/PSI)	Part Number 1 ACC=0.5%	Part Number 2 ACC=0.2%
-0.1/1/15...0	XZW025.-001R0.5	XZW025.-001R0.2	-0.1/1/15...0	XZW025.-001RN0.5	XZW025.-001RN0.2
0...0.1/1/15	XZW025.001R0.5	XZW025.001R0.2	0...0.1/1/15	XZW025.001RN0.5	XZW025.001RN0.2
0...0.16/1.6/24	XZW025.V16R0.5	XZW025.V16R0.2	0...0.16/1.6/24	XZW025.V16RN0.5	XZW025.V16RN0.2
0...0.25/2.5/37	XZW025.V25R0.5	XZW025.V25R0.2	0...0.25/2.5/37	XZW025.V25RN0.5	XZW025.V25RN0.2
0...0.4/4/60	XZW025.004R0.5	XZW025.004R0.2	0...0.4/4/60	XZW025.004RN0.5	XZW025.004RN0.2
0...0.6/6/90	XZW025.006R0.5	XZW025.006R0.2	0...0.6/6/90	XZW025.006RN0.5	XZW025.006RN0.2
0...1/10/150	XZW025.010R0.5	XZW025.010R0.2	0...1/10/150	XZW025.010RN0.5	XZW025.010RN0.2
0...1.6/16/240	XZW025.016R0.5	XZW025.016R0.2	0...1.6/16/240	XZW025.016RN0.5	XZW025.016RN0.2
0...2.5/25/370	XZW025.025R0.5	XZW025.025R0.2	0...2.5/25/370	XZW025.025RN0.5	XZW025.025RN0.2
0...4/40/600	XZW025.040R0.5	XZW025.040R0.2	0...4/40/600	XZW025.040RN0.5	XZW025.040RN0.2
0...6/60/900	XZW025.060R0.5	XZW025.060R0.2	0...6/60/900	XZW025.060RN0.5	XZW025.060RN0.2
0...10/100/1500	XZW025.100R0.5	XZW025.100R0.2	0...10/100/1500	XZW025.100RN0.5	XZW025.100RN0.2
0...16/160/2400	XZW025.160R0.5	XZW025.160R0.2	0...16/160/2400	XZW025.160RN0.5	XZW025.160RN0.2
0...25/250/3700	XZW025.250R0.5	XZW025.250R0.2	0...25/250/3700	XZW025.250RN0.5	XZW025.250RN0.2
0...40/400/6000	XZW025.400R0.5	XZW025.400R0.2	0...40/400/6000	XZW025.400RN0.5	XZW025.400RN0.2
0...60/600/9000	XZW025.600R0.5	XZW025.600R0.2	0...60/600/9000	XZW025.600RN0.5	XZW025.600RN0.2
0...70/700/10000	XZW025.700R0.5	XZW025.700R0.2	0...70/700/10000	XZW025.700RN0.5	XZW025.700RN0.2
0...100/1000/15000	XZW025.1000R0.5	XZW025.1000R0.2	0...100/1000/15000	XZW025.1000RN0.5	XZW025.1000RN0.2

XZWT25系列 蓝牙数字温度传感器 XZWT25 Series Bluetooth Digital Temperature Sensor



XZWT25系列数字温度传感器是一款高精度带蓝牙功能的智能型数字温度传感器，内置高精度传感器，能够准确的测量温度，并且具有精度高、长期稳定性好的特点。该款温度传感体积小，配合“Little Orange”软件使用，具有数据记录和分享，分析等多种功能。操作简单，安装方便。

本产品壳体采用塑料壳体，螺纹连接部分采用不锈钢材质，抗震性好，整体密封防水性达IP54。

本数字温度传感器适用于便携式压力测量、设备配套、校验设备等压力测量领域。可运用于：机械电子行业、仪器仪表配套、压力实验室、工程机械自动化、替代指针精密压力表，可做标准压力表，用于校验压力变送器及普通压力表。

- 特点：
- 1、精度等级：AC 0.5%
 - 2、单位可换：℃/°F 需配合软件使用
 - 3、显示位数：无显示
 - 4、数据输出：配合“Little Orange”软件，通过蓝牙输出数据和分享
 - 5、背光：无
 - 6、防水等级：Ip54
 - 7、供电：纽扣电池CR2032
 - 8、功耗：0.001W
 - 9、测量介质：水、油、气体对不锈钢无腐蚀的介质
 - 10、电池更换：通常每12个月更换一次电池（以实际使用耗电量为准）
 - 11、功能：1.蓝牙数据连接 2.数据记录/分析/分享
 - 12、使用环境：工作温度：-20~65℃； 存储温度：-20 ~ 70℃； 相对湿度： <85%；

The XZWT25 series digital temperature sensor is a high-precision, Bluetooth-enabled smart digital temperature sensor featuring an integrated high-accuracy sensor for precise temperature measurement. It boasts high accuracy and excellent long-term stability. With its compact design, this temperature sensor offers data recording, sharing, analysis, and other functions when paired with the "Little Orange" software, ensuring simple operation and easy installation.

The housing of this product is made of plastic, with the threaded connection parts in stainless steel, offering excellent shock resistance and achieving an overall IP54 sealing and waterproof rating.

This digital temperature sensor is suitable for pressure measurement applications such as portable pressure measurement, equipment integration, and calibration equipment. It can be used in: mechanical and electronic industries, instrument and meter integration, pressure laboratories, construction machinery automation, and as a replacement for dial precision pressure gauges. It can serve as a standard pressure gauge and be employed to calibrate pressure transmitters and ordinary pressure gauges.

Specification:

- 1、Accuracy class: AC 0.5%
- 2、Unit conversion available: (°C/°F)requires software integration
- 3、Display digits: None
- 4、Data Output: Compatible with the "Little Orange" software, it enables data output and sharing via Bluetooth
- 5、Backlightless
- 6、Waterproof rating: Ip54
- 7、Power supply: CR2032 button battery
- 8、Power consumption: 0.001W
- 9、Measurement Medium: Water, oil, gas, and other non-corrosive media for stainless steel
- 10、Battery Replacement: Typically, the battery should be replaced every 12 months (based on actual power consumption usage)
- 11、FUNCTIONS: 1. Bluetooth Data Connection 2. Data Recording/Analysis/Sharing
- 12、Usage Environment: Operating temperature: -20~65°C; Storage temperature: -20°C to 70°C; Relative humidity: <85%;

氮气充气套装及配件系列

Nitrogen Gas Charging Kit and Parrs Series

订购型号说明 How to Order

XZWT25	-200	-G0	C4	-L1000
Temperature	Temperature	Teread:	Probe Diameter:	Probe Length/mm:
Sensor Type	Range:	G0=G1/4	C4=Φ4	L500 =500mm
	200=-50~+200℃	G1=G1/2	C6=Φ6	L1000=1000mm
	300=-50~+300℃	G2=NPT1/4	C8=Φ8	L2000=2000mm
		G3=NPT1/2	C10=Φ10	Or Customized
		G4=M20*1.5	C12=Φ12	
		G5=customized	C16=Φ16	

XZGK系列 蓄能器充气测压工具 Hydraulic Accumulator Nitrogen Gas Charging Filling and Pressure Test Kit

型号 (Order Code) : XZGK-01



Feature:

1: 3 level analog gauge
:1500PSI,3600PSI,6000PSI

2: Pressure Testing Accuracy is according to that is Selected the appropriate pressure gauge

3: 1.5m/5FT gas Charging hose;

4: Gas Hose with adapter suit for outlet valve of CN/UK,USA nitrogen cylinder

5: 7 type transfer adatper suit for most brand accumlater ;

6: Compact design Case, Nice Appearance;

配置描述 Description		
压力表 Pressure Gauge		Quantity: PCS
压力表 Analog PressureI gauge: 0-100BAR/1500PSI		1
压力表 Analog PressureI gauge: 0-250BAR/3600PSI		1
压力表 Analog PressureI gauge: 0-400BAR/6000PSI		1
充气软管 Gas Hose Assembly		Quantity: PCS
Gas hose: Length=1.5m / 5FT		1
主阀体 Main Valve		Quantity: PCS
Main Valve		1
转换测试头 Transfer Adapter		
NO.	Description	Quantity: PCS
1	Transfer Adapter : G1/4	1
2	Transfer Adapter : M14*1.5	1
3	Transfer Adapter : UNF5/16	1
4	Transfer Adapter : UNF1/2	1
5	Transfer Adapter : UNF5/8	1
6	Transfer Adapter : UNF7/8	1
7	"Transfer Adapter : M28*1.5 (this adapter is in main valve body)"	1

XZGK系列 蓄能器充气测压工具 Hydraulic Accumulator Nitrogen Gas Charging Filling and Pressure Test Kit

型号 (Order Code) : XZGK-01D



Feature:

1: Digital gauge with high accuracy 0.5%, Read data directly,Unit can be changed

2: Don't change gauge,one digital gauge is enough to instead all analog gauge;

3: 3.0m/10FT gas Charging hose, longer than other brand kit;

4: Gas Hose with adapter suit for outlet valve of CN/UK,USA nitrogen cylinder

5: 7 type transfer adatper suit for most brand accumlater ;

6: Compact design Case, Nice Appearance;

配置描述 Description		
压力表 Digital Pressure Gauge		Quantity: PCS
压力表 Digital PressureI gauge: 0-700BAR/10000PSI		1
充气软管 Gas Hose Assembly		Quantity: PCS
Gas hose: Length = 3m / 10FT		1
主阀体 Main Valve		Quantity: PCS
Main Valve		1
转换测试头 Transfer Adapter		
NO.	Description	Quantity: PCS
1	Transfer Adapter : G1/4	1
2	Transfer Adapter : M14*1.5	1
3	Transfer Adapter : UNF5/16	1
4	Transfer Adapter : UNF1/2	1
5	Transfer Adapter : UNF5/8	1
6	Transfer Adapter : UNF7/8	1
7	"Transfer Adapter : M28*1.5 (this adapter is in main valve body)"	1

XZGK系列 蓄能器充气测压工具 Hydraulic Accumulator Nitrogen Gas Charging Filling and Pressure Test Kit

型号 (Order Code) : XZGK-01S



- Feature:
- 1: 4 level analog gauge :600PSI,1500PSI,3600PSI,6000PSI
 - 2: Pressure Testing Accuracy is according to that is Selected the appropriate pressure gauge
 - 3: 3m/10FT gas Charging hose , longer than other brand hose;
 - 4: Gas Hose with adapter suit for outlet valve of CN/UK,USA,Euro Nitrogen Cylinder
 - 5: 7 type transfer adatper suit for most brand accumlater ;
 - 6: 2 PCS Replacement core for large flow charging ;
 - 7: Stronger Case, Nice Appearance ;

XZGK系列 蓄能器充气测压工具 Hydraulic Accumulator Nitrogen Gas Charging Filling and Pressure Test Kit

型号 (Order Code) : XZGK-01SD



- Feature:
- 1: Digital gauge, read data directly, high accuracy 0.5%, Unit can changed
 - 2: Don't change gauge, one digital gauge is enough to instead all analog gauge;
 - 3: 3m/10FT gas Charging hose , longer than other brand hose;
 - 4: Gas Hose with adapter suit for outlet valve of CN/UK,USA,Euro Nitrogen Cylinder
 - 5: 7 type transfer adatper suit for most brand accumlater ;
 - 6: 2 PCS Replacement core for large flow charging ;
 - 7: Stronger Case, Nice Appearance;

配置描述 Description		
压力表 Pressure Gauge		Quantity : PCS
压力表 Analog Pressure Gauge : 0-40BAR/600PSI		1
压力表 Analog Pressure Gauge : 0-100BAR/1500PSI		1
压力表 Analog Pressure Gauge : 0-250BAR/3600PSI		1
压力表 Analog Pressure Gauge : 0-400BAR/6000PSI		1
主阀体 Main Valve		Quantity : PCS
Main Valve		1
转换测试头 Transfer Adapter		
NO.	Description	Quantity : PCS
1	Transfer Adapter : G1/4	1
2	Transfer Adapter : M14*1.5	1
3	Transfer Adapter : UNF5/16	1
4	Transfer Adapter : UNF1/2	1
5	Transfer Adapter : UNF5/8	1
6	Transfer Adapter : UNF7/8	1
7	"Transfer Adapter : M28*1.5 (this adapter is in main valve body)"	1
充气软管 Gas Hose Assembly		Quantity : PCS
Gas hose : Length = 3.0m / 9FT		1
氮气瓶转换接头 Adapter to Nitrogen Cylider		Quantity : PCS
1	BSP5/8 suit for UK, CN brand Nitrogen Cylider	1
2	CGA580 suit for US,CA brand Nitrogen Cylider	1
3	W24.23 suit for EU brand Nitrogen Cylider	1
其他附件 Others Accessories		Quantity : PCS
1	Open end wrench 17cm-14cm	2
2	Open end wrench 16cm-13cm	1
3	Allen Key 6mm	1
4	Core with Notched L=46mm	1
5	Core with Notched L=33mm	1


配置描述 Description		
压力表 Digital Pressure Gauge		Quantity : PCS
压力表 Digital Pressure Gauge : 0-700BAR/10000PSI		1
主阀体 Main Valve		Quantity : PCS
Main Valve		1
转换测试头 Transfer Adapter		
NO.	Description	Quantity : PCS
1	Transfer Adapter : G1/4	1
2	Transfer Adapter : M14*1.5	1
3	Transfer Adapter : UNF5/16	1
4	Transfer Adapter : UNF1/2	1
5	Transfer Adapter : UNF5/8	1
6	Transfer Adapter : UNF7/8	1
7	"Transfer Adapter : M28*1.5 (this adapter is in main valve body)"	1
充气软管 Gas Hose Assembly		Quantity : PCS
Gas hose : Length = 3.0m / 9FT		1
氮气瓶转换接头 Adapter to Nitrogen Cylider		Quantity : PCS
1	BSP5/8 suit for UK, CN brand Nitrogen Cylider	1
2	CGA580 suit for US,CA brand Nitrogen Cylider	1
3	W24.23 suit for EU brand Nitrogen Cylider	1
其他附件 Others Accessories		Quantity : PCS
1	Open end wrench 17cm-14cm	2
2	Open end wrench 16cm-13cm	1
3	Adjustable Wrench	1
4	Allen Key 6mm	1
5	Core with Notched L=46mm	1
6	Core with Notched L=33mm	1

XZGK系列 蓄能器充气工具 Hydraulic Accumulator Nitrogen Gas Charging Filling and Pressure Test Kit

型号 (Order Code) : XZGK-01CW



XZGK-01CW Nitrogen Gas Kit for Accumulator

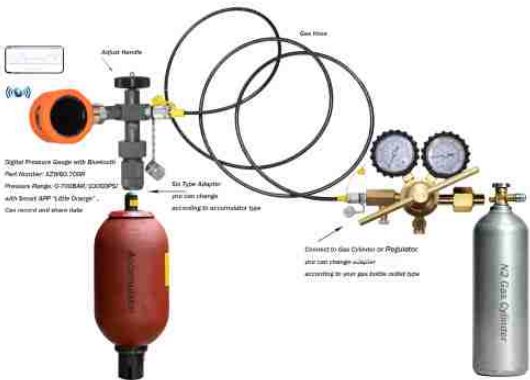

Remark:
如果更换其中的蓝牙数字表为普通的数字表, 则型号变更为: XZGK-01C
If you want to change bluetooth gauge to digital gauge, then part number will be : XZGK-01C

配置描述 Description	
压力表 Digital Pressure Gauge	Quantity : PCS
数字压力表 Digital Bluetooth gauge : $\Phi 60\text{mm}$ ~ 70MPa/700BAR/10000PSI with Protector by Little Orange APP , can record data and transfer to Mobile Phone and share data	1
压力表 Analog Pressure Gauge	Quantity : PCS
压力表 Analog Pressure gauge : 0-400BAR/9000PSI	1
主阀体 Main Valve	Quantity : PCS
Main Valve	1
转换测试头 Transfer Adapter	Quantity : PCS
Transfer Adapter : G1/4	1
Transfer Adapter : M14*1.5	1
Transfer Adapter : UNF5/16	1
Transfer Adapter : UNF1/2	1
Transfer Adapter : UNF5/8	1
Transfer Adapter : UNF7/8	1
Transfer Adapter : M28*1.5 (this adapter is in main valve body)	1
充气软管 Gas Hose Assembly	Quantity : PCS
Gas hose : Length=3.0m / 9FT (M16-G1/4 F)	1
Gas hose : Length=2.0m / 3FT (M16-M16)	1
Gas hose : Length=1.0m / 9FT (M16-JIC37 7/16UNF)	1
氮气瓶转换接头 Adapter to Nitrogen Cylinder	Quantity : PCS
BSP5/8 suit for UK, CN brand Nitrogen Cylinder	1
CGA580 suit for US, CA brand Nitrogen Cylinder	1
W24.23 suit for EU brand Nitrogen Cylinder	1
其他附件 Others Accessories	Quantity : PCS
Open end wrench 17cm-14cm	2
Open end wrench 16cm-13cm	1
Adjustable Wrench	1
Allen Key 6mm	1
Core with Notched L=46mm	1
Core with Notched L=33mm	1
高压减压阀 High Pressure Regulator	Quantity : PCS
减压表 Double Analog Pressure Gauge: 0-350BAR, Max. Delivery Pressure: 160BAR/2300PSI	1
充气阀 Gas Charging Valve	Quantity : PCS
NoAir-556-UNF7/16 Male	1
Goose NECT-UNF7/16 Male	1

XZGK 系列 氮气充气工具 XZGK Nitrogen Gas Charging Kit for Montabert Rockdrill

型号 (Order Code) : XZGK-03



Suit Montabert Rockdrill Follow Model:
HC25/HC28/HC50/HC95/HC110

Compatible Montabert FollowPart Number: 86626017 86689163

配置描述 Description	
压力表 Pressure Gauge	Quantity : PCS
压力表 Analog Pressure gauge : 0-100BAR/1500PSI	1
压力表 Analog Pressure gauge : 0-250BAR/3600PSI	1
压力表 Analog Pressure gauge : 0-400BAR/6000PSI	1
充气软管 Gas Hose Assembly	Quantity : PCS
Gas hose : Length = 1.5m / 5FT	1
主阀体 Main Valve	Quantity : PCS
Main Valve	1

XZGK系列 减震器充气工具 XZGK Nitrogen Gas Charging Kit for ATV/Moto Shock

型号 (Order Code) : XZGK-05



配置描述 Description	
压力表 Pressure Gauge	Quantity : PCS
压力表 Analog Pressure gauge : 0-1BAR/15PSI	1
压力表 Analog Pressure gauge : 0-2.5BAR/36PSI	1
压力表 Analog Pressure gauge : 0-4.0BAR/60PSI	1
压力表 Analog Pressure gauge : 0-6.0BAR/90PSI	1
压力表 Analog Pressure gauge : 0-25BAR/360PSI	1
压力表 Analog Pressure gauge : 0-40BAR/600PSI	1
主阀体 Main Valve	1
针头组件 Needle Kit	1

液压破碎锤充气工具 Nitrogen Gas Charging Device for Hydraulic Breaker



破碎锤充氮气装置性能简介 Description and application

上海西哲生产制造的液压破碎锤充氮装置，整体设计紧凑、外观精巧、使用方便。作为一款普及型的充氮装置，它可以适用于大多数品牌的液压破碎锤。

Introduction:

Our nitrogen gas charging device is special reserved for the use of hydraulic breaker. Its advantage is overall cohesiveness of design, delicate appearance and friendly user. As a common type of nitrogen gas charging device, our product can be used for most brand hydraulic breaker.

特点:

- 1、可用于破碎锤蓄能器的压力测量和氮气补充
- 2、结构紧凑
- 3、使用方便
- 4、便于携带

Features:

- 1. Pressure measurement and nitrogen replenishment for breakers accumulator
- 2. compact
- 3. easy to use
- 4. easy to carry

应用:

适用于各品牌液压破碎锤氮气的补充和氮气压力的测量

Application:

Suit to the nitrogen gas charging of different brands of hydraulic breakers and the pressure testing of nitrogen

名 称 Name	图 片 Picture	订购代码 Part Code	描 述 Description	与设备连接螺纹 Thread of Connecting thread with equipment	与氮气瓶连接螺纹 Thread connecting to Nitrogen Bottle	主阀材质 Material of main valve
氮气充气工具 – 铜 Nitrogen Device Series		XZG-004	Single Gauge 0-10MPa/1400PSI 适用水山、 工兵、古河 suit soosan、 gb、furukawa	M10*1	BSP5/8 Female	Brass
氮气充气工具 – 铝 Nitrogen Device Series		XZG-005	Single Gauge 0-10MPa/1400PSI 适用水山、 工兵、古河 suit soosan、 gb、furukawa	M10*1	BSP5/8 Female	Aluminum
氮气充气工具 – 铝 Nitrogen Device Series		XZG-0051	Single Gauge 0-10MPa/1400PSI 适用水山、 工兵、古河 suit soosan、 gb、furukawa	M10*1	BSP3/4 Female	Aluminum
氮气充气工具 – 克虏伯 Nitrogen Device Series		XZG-006	Single Gauge 0-10MPa/1400PSI 适用克虏伯 Suit Atlas- Copco(krupp)	Plug in	W24.32—14 Female	Brass
氮气充气工具 – 双表 Nitrogen Device Series -Double Gauge		XZG-007	Double Gauge 0-2.5MPa/360PSI 0-10MPa/1450PSI 适用水山、 工兵、古河 suit soosan、 gb、furukawa	M10*1	BSP5/8 Female	Steel
氮气充气工具 – 直插式 Nitrogen Device Series -Plug		XZG-008	Single Gauge 0-10MPa/1400PSI 适用东空 Suit Toku	Plug	BSP5/8 Female	Brass
氮气充气工具 – 双表通用 Nitrogen Device Series -Double Gauge General		XZG-009	Double Gauge 0-6MPa/900PSI 0-25MPa/3600PSI Hose:M16-M16-1m 适用大模 Suit Daemo	M16*2	BSP5/8 Female	Brass
氮气充气工具 – 韩宇 Nitrogen Device Series -Everdigm Brand		XZG-010	Double Gauge 0-4MPa/600PSI 0-25MPa/3600PSI Hose:M12-M12-1m 适用韩宇 Suit Hanwoo (Everdigm)	M12.65*1.5	BSP5/8 Female	Brass
氮气充气工具 – JCB Nitrogen Device Series -JCB Brand		XZG-011	Double Gauge 0-6MPa/ 900PSI 0-25MPa/3600PSI Hose:M16-G1/4-2m 适用于JCB Suit JCB	M10*1	BSP5/8 Female +CGA580	Brass

充气阀 Charging Valve

名称 Name	图片 Picture	订购代码 Part Code	描述 Description	与设备连接螺纹 Thread of Connecting thread with equipment	充气口螺纹 Thread of Gas Inlet	材料 Material	备注 Remark
充气阀 Charging Valve		XZV-012	适用水山、 工兵、古河 suit soosan、 gb、furukawa	G1/2(BSP1/2)	M10*1	Steel	
充气阀 Charging Valve		XZV-013	适用甲南 Suit MKB	M18*1.5	Plug in	Brass	
充气阀 Charging Valve		XZV-014	适用于东空 Suit Toku	G3/8(BSP3/8)	M10*1	Brass	
充气阀 Charging Valve		XZV-015	适用于大模 Suit Daemo	G1/4(BSP1/4)	M16*2	Steel	
充气阀 Charging Valve		XZV-016	适用于韩宇 Suit Hanwoo (Everdigm)	G1/4(BSP1/4)	M12.65*1.5	Steel	
充气阀 Charging Valve		XZV-017	适用克虏伯 Suit Atlas- Copco(krupp)	M18*1.5	G1/8(BSP1/8)	Stainless steel	
充气阀 Charging Valve		XZV-018	适用克虏伯新款 Suit Atlas- Copco(krupp) New Type	UNF1/2	M16*2	Stainless steel	Atlascopcp 3115376800
充气阀 Charging Valve		XZV-0181	适用克虏伯、 山特维克 Suit Atlas- Copco(krupp) Sandvik	UNF1/2	UNF5/16	Stainless steel	Sandvik 80759069 Atlascopcp 3115026200
充气阀 Charging Valve		XZV-0182	Max. Pressure: 3000PSI	UNF1/2	UNF5/16	Stainless steel	

充气阀 Charging Valve

名称 Name	图片 Picture	订购代码 Part Code	描述 Description	与设备连接螺纹 Thread of Connecting thread with equipment	充气口螺纹 Thread of Gas Inlet	材料 Material	备注 Remark
充气阀 Charging Valve		XZV-0182	适用克虏伯、 山特维克 Suit Atlas- Copco(krupp) Sandvik Epiroc	UNF1/2		Stainless steel	Sandvik Epiroc 3115219681
充气阀 Charging Valve		XZV-019	适用于大模 Suit Daemo	G1/4(BSP1/4)	M16*2	Brass	
充气阀 Charging Valve		XZV-021	适用泰石克、 冈田 Suit TEISAKU OKADA	M20*1.5	UNF5/8-18	Steel	
充气阀 Charging Valve		XZV-022		G1/2(BSP1/2)	UNF5/8-18	Steel	
充气阀 Charging Valve		XZV-023		M30*2	UNF5/8-18	Steel	
充气阀 Charging Valve		XZV-024	Max Pressure: 600BAR/9000 PSI	UNF1/2-20	UNF5/8-18	Stainless steel	
充气阀 Charging Valve		XZV-025	Max Pressure: 600BAR/9000 PSI	G3/8	UNF5/8-18	Stainless steel	

XZGK-S 系列减震器氮气充气测压工具 XZGK-S series Hydraulic Accumulator Nitrogen Gas Charging and Pressure Test Kit for Shock

- Feature :
- Max pressure 3000PSI
 - Schrader 556 High Pressure Strut Coupler- no air loss
 - Easy to carry. Easy to use
 - Compact design
 - Suit for Nitrogen or air pressure for all, off-road, ATV, UTV, Dirt-bike, ATC, Sand-rail, and buggy shocks
 - Suit for inflate and deflate the struts on your aircraft

No.	Photo	Function	Description	Order Code
1		Coupler	SCHRADER 556 STRUT COUPLER No Air Loss Connector thread is NPT1/8 male	XZGK-SA1
2		Coupler	SCHRADER 556 STRUT COUPLER No Air Loss Connector thread is JIC37-7/16UNF male	XZGK-SA2
3		Coupler	Goose Nect with Connector No Air Loss Connector thread is 1/8NPT Female with Adapter	XZGK-SA3
4		Pressure testing Pressure adjustment	SCHRADER STRUT COUPLER with Analog Gauge And pressure adjust handle Analog gauge range is 0-25BAR/360PSI Analog gauge range is 0-250BAR/3600PSI Gas Hose Length: 3FT/1m Needle x 3	XZGK-S2
5		Pressure testing Pressure adjustment	SCHRADER STRUT COUPLER with Digital Gauge And pressure adjust handle Digital Gauge Range is 0-250BAR/3600PSI Gas Hose Length: 3FT/1m Needle x 3	XZGK-S2D

No.	Photo	Function	Description	Order Code
6		Pressure testing Gas charging	SCHRADER 556 STRUT COUPLER with Double Analog Gauge Analog gauge range: One is 0-3600PSI Other is 0-1400PSI Gas Hose Length: 3FT/1.0m Needle x 3	XZGK-S3
7		Pressure testing Gas charging	SCHRADER 556 STRUT COUPLER with Double Analog Gauge Analog gauge range: One is 0-3600PSI Other is 0-3600PSI Gas Hose Length: 3FT/1.0m Needle x 3 Compatible Epiroc 3115600192	XZGK-S3H
8		Pressure testing Gas charging Pressure adjustmen	SCHRADER 556 STRUT COUPLER with Double Analog Gauge Analog gauge range: One is 0-3600PSI Other is 0-1400PSI Gauge on handle is 3600PSI Gas Hose Length: One is 3FT/1.0m Other is 6FT/2.0m Needle x 3	XZGK-S4
9		Pressure testing Gas charging Pressure adjustmen	SCHRADER 556 STRUT COUPLER with Double Analog Gauge Analog gauge range: One is 0-3600PSI Other is 0-3600PSI Gauge on handle is 3600PSI Gas Hose Length: One is 3FT/1.0m Other is 6FT/2.0m Needle x 3	XZGK-S4H
10		Pressure testing Gas charging Pressure adjustment	SCHRADER 556 STRUT COUPLER with Digital Gauge Regulator Gauge Range: One is 0-3600PSI Other is 0-1400PSI Digital Gauge on handle is 3600PSI Gas Hose Length: One is 3FT/1.0m Other is 6FT/2.0m Needle x 3	XZGK-S4D
11		Pressure testing Gas charging Pressure adjustment	SCHRADER 556 STRUT COUPLER with Digital Gauge Regulator Gauge Range: One is 0-3600PSI Other is 0-3600PSI Digital Gauge on handle is 3600PSI Gas Hose Length: One is 3FT/1.0m Other is 6FT/2.0m Needle x 3	XZGK-S4DH

集中润滑软管 Grease lubrication hose



简介:

油脂润滑高压管主要用于用于集润滑管路, 具有阻力小, 耐腐蚀, 重量轻, 安装方便, 耐压高等优点。主要运用于以下行业: 风电, 注塑机, 机床, 汽车、工程机械、食品机械, 等等。

Introduction: grease lubrication and high pressure pipe is mainly used for lubrication piping used in set, with a small resistance, corrosion resistance, light weight, easy installation, high pressure, etc. Mainly used in the following industries: wind power, injection molding machine, machine tool, automobile, engineering machinery, food machinery, and so on.

软管结构: 内层材质: PA
单层或双层纤维增强 外层材料: PA或PU
温度范围: -40℃ ~ 100℃(-40°F ~ +212°F)

Hose Construction:
core: PA
reinforcement: One or Two Layers of braided synthetic Fiber;
cover: PU
temperature range: - 40 ~ + 100℃(-40°F ~ +212°F)

软管技术参数

软管型号 Hose model	内径			外径		工作压力		爆破压力		弯曲半径		参考重量
	I.D.			O.D.		W.P		B.P.		Bend Radius		Weight
	Dash Size	mm	Inch	mm	Inch	MPa	PSI	MPa	PSI	mm	Inch	g/M
XDN4.0*8.0		4.0	5/32	8.0	0.32	20	3000	80	12000	45	1.77	45
XDN4.0*8.6		4.0	5/32	8.6	0.34	20	3000	80	12000	45	1.77	45
XDN4.0*9.0		4.0	5/32	9.0	0.35	25	3600	100	14500	50	1.90	50



集中润滑接头系列 Grease Lubrication Fittings

1.0、直接头 Hose stud straight (Abb.1.) (suit hose: DN4*8.6)

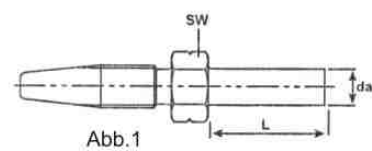


Abb.	da	L	SW	代号/Code	Remark
1	6	20	10	XZ1RW-6L20-1	
1	6	24	10	XZ1RW-6L24-1	
1	6	30	10	XZ1RW-6L30-1	
1	6	65.5	10	XZ1RW-6L65-1	

1.1、直接头 Hose stud straight (Abb.2.) (suit hose: DN4*8.6)

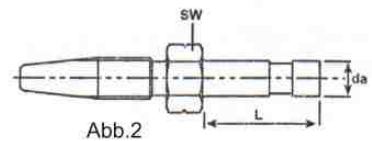


Abb.	da	L	SW	代号/Code	Remark
2	6	20	10	XZ1RW-6L20-2	
2	6	30	10	XZ1RW-6L30-2	

1.2、直接头 Hose stud straight (Abb.3.) (suit hose: DN4*8.6)

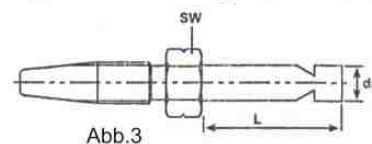


Abb.	da	H	L	SW	代号/Code	Remark
3	6		24	10	XZ1RW-6L24-3	

2.0、90° 弯接头 90° Hose stud (Abb.1.) (suit hose: DN4*8.6)




Abb.	da	H	L	SW	代号/Code	Remark
1	6	13	21	10	XZ1RW9-6L21H13-1	
1	6	14	33	10	XZ1RW9-6L33H14-1	
1	6	17	29	10	XZ1RW9-6L29H17-1	
1	6	28	37	10	XZ1RW9-6L37H28-1	
1	6	28	53	10	XZ1RW9-6L53H28-1	

2.1、90° 弯接头 90° Hose stud (Abb.2.) (suit hose: DN4*8.6)




Abb.	da	H	L	SW	代号/Code	Remark
2	6	28	37	10	XZ1RW9-6L37H28-2	
2	6	28	53	10	XZ1RW9-6L53H28-2	

2.1、90° 弯接头 90° Hose stud (Abb.3.) (suit hose: DN4*8.6)






Abb.	da	H	L	SW	代号/Code	Remark
3	6	14	33	10	XZ1RW9-6L37H28-3	

3.0、套筒 Screw ferrule (suit hose: DN4*8.6)




			L	SW	代号/Code	Remark
			28	12	XZS-100-050	

4.0、螺母 Coupling nut



	G	Di		SW	代号/Code	Remark
	M10*1	6		12	XZL-10-6	

5.0、铜卡套 Double cone olive



		D	L		代号/Code	Remark
		4	5.5		XZ-4TT	
		6	7		XZ-6TT	

