

RELIABLE · EFFICIENT · WORRY-FREE

可靠 · 高效 · 省心



山东雷迈重工有限公司

Shandong Lemax Heavy Industry Co., Ltd.

Tel / Whatsapp: +8615318806588

www.lemaxlift.com

LEMAX CATALOGUE

山东雷迈重工有限公司

SHANDONG LEMAX HEAVY INDUSTRY CO., LTD.

CONTENTS

目录

PRODUCT SHOWCASE	01
产品展示	

COMPANY PROFILE	03
公司介绍	

DIESEL ARTICULATED BOOM LIFT	05
自行曲臂式升降平台	

TELESCOPIC BOOM LIFT	07
自行直臂式升降平台	

TRACKED BOOM LIFT	09
履带折臂式升降平台	

TOWABLE BOOM LIFT	11
拖车折臂式升降平台	

SELF-PROPELLED SCISSOR LIFT	13
自行剪叉升降平台	

TRACKED SCISSOR LIFT	15
履带剪叉式升降平台	

SELF-PROPELLED VERTICAL MAST LIFT	17
铝合金套筒式升降平台	


SINGLE MAST SELF-PROPELLER VERTICAL LIFT	19
铝合金单杆自行升降平台	

DOUBLE MAST SELF-PROPELLED LIFT	21
铝合金双杆自行升降平台	

GLASS VACUUM LIFTER	23
真空玻璃提升机	

PRODUCT SHOWCASE

产品展示

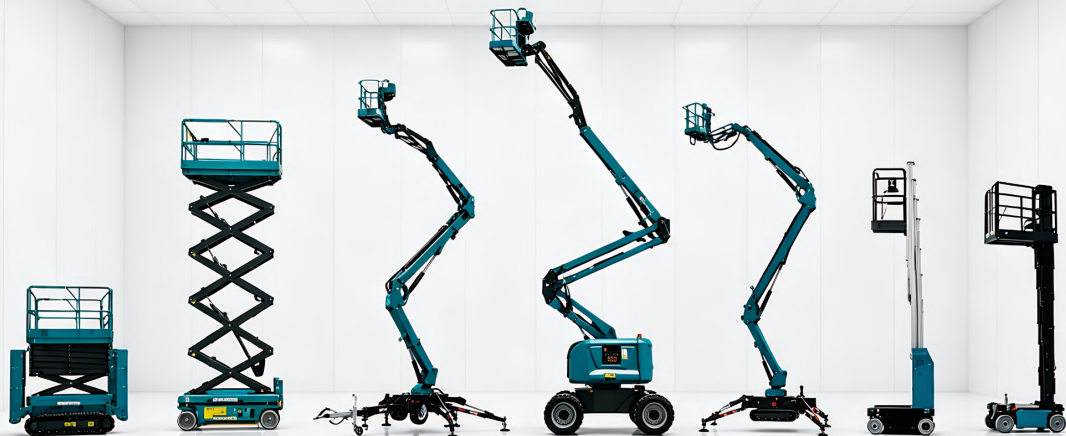

Develop

innovative

service

cooperation



关于我们

ABOUT
US

LEMAY 是一家专业的液压升降设备制造商，专注于产品的设计、生产、销售与服务。我们的产品涵盖高空作业平台、液压货运电梯、轮椅升降机、剪叉式升降机、汽车升降机、汽车旋转台及停车升降机等，为全球 105 个以上国家和地区的客户提供了可靠、高效的升降解决方案，广泛应用于工业、物流、建筑、商业及公共领域。

LEMAY 始终致力于提升产品质量和服务水平，拥有一支经验丰富的工程师和技术团队。我们自主设计并制造升降臂、导轨等关键部件，并选用高品质钢材和优质零部件，以确保设备具有更高的稳定性、安全性和可靠性。我们的产品远销美国、欧洲、澳大利亚、中东、东南亚等市场，并获得了全球客户的广泛认可。

作为中国北方地区领先的高空作业平台及液压升降设备制造商，LEMAY 始终秉持“安全、服务、诚信、效率”的品牌价值观。我们持续投入产品研发与创新，不仅提供符合 CE 标准及相关国家标准的标准化产品，还可根据不同的应用场景和客户需求，提供灵活、专业的定制化升降解决方案。

ABOUT US

LEMAY is a professional manufacturer of hydraulic lifting equipment, specializing in product design, manufacturing, sales, and service. Our product range includes aerial work platforms, hydraulic cargo lifts, wheelchair lifts, scissor lifts, vehicle lifts, vehicle turntables, parking lifts, and more. We provide reliable and efficient lifting solutions to customers in over 105 countries and regions, serving a wide range of industries including industrial, logistics, construction, commercial, and public sectors.

LEMAY is committed to continuous improvement in product quality and customer service. With an experienced team of engineers and technicians, we design and manufacture key components such as lifting booms and guide rails in-house. By using high-quality steel and premium components, we ensure greater stability, safety, and reliability. Our products are exported to markets across the United States, Europe, Australia, the Middle East, and Southeast Asia, earning recognition from customers worldwide.

As a leading manufacturer of aerial work platforms and hydraulic lifting equipment in Northern China, LEMAY upholds the core values of Safety, Service, Integrity, and Efficiency. We continuously invest in product development and innovation, offering not only standardized products that comply with CE standards and relevant national requirements, but also flexible and professional customized lifting solutions tailored to different applications and customer needs.

自行曲臂式升降平台

DIESEL ARTICULATED BOOM LIFT

ITEM	DIESEL ARTICULATED BOOM LIFT			
型号 Model	LA14	LA16	LA18	LA20
最大工作高度 Max. Working Height	16 m	18 m	20 m	22 m
最大平台高度 Max. Platform Height	14 m	16 m	18 m	20 m
最大水平伸展 Max. Horizontal Outreach	7.6 m	9.42 m	10.65 m	11.75 m
额定载荷 Rated Load Capacity	230 kg (Restricted)	230 kg (Restricted)	230 kg (Restricted)	230 kg (Restricted)
最大跨越高度 Max. Up-and-Over Height	4.8 m	8 m	8.5 m	9.1 m
整机长度(收拢状态) Overall Length (Stowed)	6 m	7.73 m	8.22 m	8.75 m
整机宽度 Overall Width	1.73 m	2.2 m	2.2 m	2.2 m
整机高度(收拢状态) Overall Height (Stowed)	2 m	2.23 m	2.27 m	2.32 m
轴距 Wheelbase	1.9 m	2.03 m	2.03 m	2.03 m
底盘中部离地间隙 Ground Clearance (Center of Chassis)	0.22 m	0.29 m	0.29 m	0.3 m
平台尺寸(长×宽) Platform Dimensions(L×W)	1.5 × 0.72 m	1.5 × 0.72 m	1.5 × 0.72 m	1.5 × 0.72 m
最小内倾转弯半径 Min. Inside Turning Radius	0.8 m	3.15 m	3.15 m	3.3 m
最小外倾转弯半径 Min. Outside Turning Radius	3.3 m	4.8 m	4.8 m	5.0 m
行驶速度(收拢状态) Travel Speed (Stowed)	0~4.8 km/h	0~5.0 km/h	0~5.0 km/h	0~5.0 km/h
行驶速度(伸展状态) Travel Speed (Raised/Extended)	0~0.8 km/h	0~0.8 km/h	0~0.8 km/h	0~0.8 km/h
爬坡能力 Gradeability	40%	40%	40%	40%
轮胎规格 Tire Size	33 × 12-20 Solid Tires	33 × 12-20 Solid Tires	33 × 12-20 Solid Tires	36 × 14-20 Solid Tires
回转平台转速 Turntable Rotation Speed	0.5 rpm	0.5 rpm	0.5 rpm	0.5 rpm
回转平台旋转角度 Turntable Rotation	360° continuous	360° Continuous	360° Continuous	360° Continuous
平台调平 Platform Leveling	Automatic leveling	Automatic Leveling	Static Leveling	Static Leveling
平台旋转 Platform Rotation	160°	160°	160°	160°
燃油箱容积 Fuel Tank Capacity	115 L	115 L	115 L	115 L
整机重量 Overall Weight	6,750 kg	7,000 kg	7,680 kg	8,380 kg
系统电压 System Voltage	DC 12 V	DC 12 V	DC 12 V	DC 12 V
驱动与转向 Drive & Steering	4WD, 2-wheel steering	4WD, 2-Wheel Steering	4WD, 2-Wheel Steering	4WD, 2-Wheel Steering
发动机 Engine	V2403, Euro 4 Emission Standard Customizable to Euro 5 Emission Standards	V2403, Euro 4 Emission Standard Customizable to Euro 5 Emission Standards	V2403, Euro 4 Emission Standard Customizable to Euro 5 Emission Standards	V2403, Euro 4 Emission Standard Customizable to Euro 5 Emission Standards
发动机额定功率 Rated Engine Power	36 kW	36 kW	36 kW	36 kW

PRODUCT FEATURES

Powerful Performance. Superior Reach.

Excellent Up-and-Over Outreach

Strong Power for Rough Terrain

Large Working Range Reliable for Outdoor Applications

Ideal for Construction,

Industrial Maintenance, and Outdoor Projects.



自行直臂式升降平台

TELESCOPIC BOOM LIFT

ITEM	TELESCOPIC BOOM LIFT		
型号 Model	LB20	LB22	LB26
最大工作高度 Maximum Working Height	22.3 m	24 m	28.3 m
最大平台高度 Maximum Platform Height	20.3 m	22 m	26.3 m
最大水平伸出距离 Maximum Horizontal Outreach	17.85 m	19.45 m	21.1 m
额定载荷 Load Capacity	300 kg (Restricted) / 200 kg (Unrestricted)	300 kg (Restricted) / 200 kg (Unrestricted)	350 kg (Restricted) / 230 kg (Unrestricted)
整机长度 (收车状态) Overall Length (Stowed)	11 m	11 m	11.7 m
整机宽度 Overall Width	2.5 m	2.5 m	2.48 m
整机高度 (收车状态) Overall Height (Stowed)	2.77 m	2.77 m	2.96 m
轴距 Wheelbase	2.474 m	2.474 m	2.994 m
底盘中部离地间隙 Ground Clearance (Center of Chassis)	0.274 m	0.274 m	0.37 m
平台尺寸 (长×宽) Platform Dimensions (L × W)	2.05 × 0.8 m	2.05 × 0.8 m	2.05 × 0.8 m
内倾转弯半径 Inner Turning Radius	3.0 m	3.0 m	5.775 m
外倾转弯半径 Outer Turning Radius	5.2 m	5.2 m	7.49 m
行驶速度 (收车状态) Travel Speed (Stowed)	0 ~ 5.0 km/h	0 ~ 5.0 km/h	0 ~ 5.0 km/h
行驶速度 (臂架升起 / 伸出) Travel Speed (Boom Raised/Extended)	0 ~ 0.8 km/h	0 ~ 0.8 km/h	0 ~ 0.8 km/h
最大爬坡能力 Maximum Gradeability	38%	38%	38%
轮胎规格 Tire Specification	36 × 14-20 Solid Tires	36 × 14-20 Solid Tires	385 × 45-28 NHS
回转台回转速度 Turntable Stewing Speed	0.5 rpm	0.5 rpm	0.5 rpm
回转台旋转角度 Turntable Rotation	360° Continuous	360° Continuous	360° Continuous
平台调平方式 Platform Leveling	Automatic Leveling	Automatic Leveling	Static Leveling
平台旋转角度 Platform Rotation	160°	160°	160°
油箱容积 Fuel Tank Capacity	180 L	175 L	180 L
整机总重量 Total Weight	12,300 kg	12,500 kg	16,100 kg
系统电压 System Voltage	DC 12 V	DC 12 V	DC 12 V
驱动及转向形式 Drive and Steering Type	4-Wheel Drive, 2-Wheel Steering	4-Wheel Drive, 2-Wheel Steering	4-Wheel Drive, 2-Wheel Steering
发动机 Engine	V2403, Euro 4 Emission Standard Customizable to Euro 5 Emission Standards	V2403, Euro 4 Emission Standard Customizable to Euro 5 Emission Standards	Cummins, Euro 3 Emission Standard Customizable to Euro 5 Emission Standards
发动机额定功率 Rated Engine Power	36 kW	36 kW	48 kW

PRODUCT FEATURES

Key Features
 Standard Basket Rotation
 Emergency Pump
 Stable & Reliable Performance
 Flexible & Precise Operation
 Extensive Customization Options
 OEM Solutions Available



履带折臂式升降平台

TRACKED BOOM LIFT

TRACKED BOOM LIFT							
型号 Model	LT10S	LT12S	LT14S	LT16S	LT18S	LT20S	LT22S
最大工作高度 Max. Working Height	12m	14m	16m	18m	20m	22m	24m
最大平台高度 Max. Platform Height	10m	12m	14m	16m	18m	20m	22m
最大作业半径 Max. Operating Radius	5.5m	7.5m	8.5m	10.5m	11m	11m	11m
平台尺寸 Platform Dimensions(L*W)	0.9×0.7x1.1m	0.9×0.7x1.1m	0.9×0.7x1.1m	0.9×0.7x1.1m	0.9×0.7x1.1m	0.9×0.7x1.1m	0.9×0.7x1.1m
收拢状态 Stowed 外形尺寸(米) Dimensions(m)	4.7*1.3*2	4.7*1.3*2.1	5.65*1.3*2.2	5.7*1.35*2.2	6.1*1.3*2.25	6.1*1.3*2.25	6.1*1.3*2.25
整机重量 Weight	2400kg	2500KG	2800KG	3000KG	4500KG	4700KG	4900KG
平台载重 Lift Capacity	200kg	200kg	200kg	200kg	200kg	200kg	200kg
平台载人数 Platform Occupancy	2 Person	2 person	2 person	2 person	2 person	2 person	2 person
回转台旋转角度 Turntable Rotation	360° (It supports continuous 360° rotation.)						
爬坡能力 Gradeability	45%	45%	45%	45%	45%	45%	45%
最大作业角度 Max. Working Angle	3°	3°	3°	3°	3°	3°	3°
伸缩臂 Telescopic Boom	Yes	Yes	Yes	Yes	Yes	Yes	Yes
平台旋转角度 Platform Rotation	Optional	Optional	Optional	Optional	Optional	Optional	Optional
高压油管 High Pressure Oil Pipe	25N1053MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa
允许作业风速等级 Wind Level	≤5	≤5	≤5	≤5	≤5	≤5	≤5
动力形式 Power	Diesel (V-type twin-cylinder air-cooled diesel engine, 35 HP, made in China.) Or Battery (Customization)						
履带行走机构 Tracked Wheels	Shock-absorbing tracks						

PRODUCT FEATURES

Strong off-road
Compact size
Stable support
Flexible reach
Narrow access

Perfect for complex, narrow & rough terrain aerial work.



拖车折臂式升降平台

TOWABLE BOOM LIFT

TOWABLE BOOM LIFT							
型号 Model	LT10	LT12	LT14	LT16	LT18	LT20	LT22
最大工作高度 Max. Working Height	12m	14m	16m	18m	20m	22m	24m
最大平台高度 Max. Platform Height	10m	12m	14m	16m	18m	20m	22m
最大作业半径 Max. Operating Radius	5.8m	6.5m	8.5m	10.5m	12m	10m	12m
平台尺寸 Platform Dimensions	0.9 × 0.7x1.1m	0.9 × 0.7x1.1m	0.9 × 0.7x1.1m	0.9 × 0.7x1.1m	0.9 × 0.7x1.1m	0.9 × 0.7x1.1m	0.9 × 0.7x1.1m
收纳状态 外形尺寸 Stowed Dimensions	5.2*1.7*2.1m	5.2*1.7*2.2m	5.5*1.7*2.2m	5.65*1.7*2.25m	5.65*1.7*2.2m	5.8*1.8*2.2m	5.8*1.7*2.2m
整机重量 Weight	1900kg	1950kg	2300kg	2600kg	3300kg	3800kg	4500kg
举升载荷 Lift Capacity	200kg	200kg	200kg	200kg	200kg	200kg	200kg
平台载人数 Platform Occupancy	2	2	2	2	2	2	2
回转台 旋转角度 Turntable Rotation	360° (It supports continuous 360° rotation.)						
爬坡能力 Gradeability	45%	45%	45%	45%	45%	45%	45%
最大作业角度 Max. Working Angle	3°	3°	3°	3°	3°	3°	3°
伸缩臂 Telescopic Boom	No	No	Yes	Yes	Yes	Yes	Yes
平台旋转角度 Platform Rotation	Optional	Optional	Optional	Optional	Optional	Optional	Optional
高压油管 High Pressure Oil Pipe	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa	25N10-53MPa
允许作业 风速等级 Wind Level	≤5	≤5	≤5	≤5	≤5	≤5	≤5
动力形式 Power	Diesel(CHANG CHAI F186 418CC 6.3KW MADE IN CHINA) Or Battery (Customization)						

PRODUCT FEATURES

Easy to tow
Quick setup
Stable & safe
Cost effective
Multi-scenario use
Mobile aerial work for outdoor maintenance & installation.



自行剪叉式升降平台

SELF-PROPELLED SCISSOR LIFT

SELF-PROPELLED SCISSOR LIFT

设备型号 Model No.	LS06	LS06	LS10	LS12	LS10
最大作业高度 Max working height	8m	8m	12m	13.8m	12m
最大平台高度 Max platform height	6m	6m	10m	11.8m	10m
额定载重 Lifting capacity	450/113kg	450/113kg	450/113kg	320/113kg	450/113kg
平台尺寸 Platform size	2.27*1.13m	2.27*1.13m	2.27*1.13m	2.27*1.13m	2.27*1.13m
整机总长 Overall length	2.43m	2.43m	2.49m	2.43m	2.49m
整机总宽 Overall width	1.17m	1.17m	1.17m	1.17m	1.17m
收拢高度 Height stowed	2.25m	2.25m	2.5m	2.62m	2.5m
护栏折叠后 "Height stowed (guardrails folded)"	1.685m	1.81m	1.93m	2.06m	2.13m
最小离地间隙 Min.ground clearance	0.105m/0.015m	0.1m/0.02m	0.1m/0.02m	0.1m/0.02m	0.1m/0.02m
平台延伸长度 Extended platform length	0.9m	0.9m	0.9m	0.9m	0.9m
最小转弯半径 Turning radius minimum	0/2.2m	0/2.2m	0/2.2m	0/2.2m	0/2.8m
收拢行驶速度 Travel speed(stowed)	3.5km/h	3.5km/h	3.5km/h	3.5km/h	3.5km/h
起升状态行驶速度 Travel speed(raised)	0.8km/h	0.8km/h	0.8km/h	0.8km/h	0.8km/h
升降速度 Lift speed	3-5m/min	3-5m/min	3-5m/min	4-6m/min	3-5m/min
最大作业倾角 Maximum working angle	X1.5 ° /Y3 °	X1.5 ° /Y3 °	X1.5 ° /Y3 °	X1.5 ° /Y3 °	X1.5 ° /Y3 °
爬坡能力 Grade ability	14 ° (25%)	14 ° (25%)	14 ° (25%)	14 ° (25%)	14 ° (25%)
无痕轮胎规格 (毫米) Non-marking tires (mm)	φ381x127	φ381x127	φ381x127	φ381x127	φ381x127
整机重量 Weight	2200kg	2400kg	2600kg	2880kg	3600kg
升降电机 Lift motor	24V/4.5KW	24V/4.5KW	24V/4.5KW	24V/4.5KW	24V/4.5KW
铅酸蓄电池 LA Battery	24V/200Ah	24V/200Ah	24V/200Ah	24V/200Ah	24V/240Ah
充电器 Charger	24V/30A	24V/30A	24V/30A	24V/30A	24V/30A
机身颜色 (采购量 5 台及以上颜色可定制) 5,color can be customized)	Water blue	Water blue	Water blue	Water blue	Water blue

PRODUCT FEATURES

Platform + Ground Control

Made of Q345 manganese steel,
steel plate welding, stronger and more durable.



履带剪叉式升降平台

TRACKED SCISSOR LIFT

TRACKED SCISSOR LIFT					
型号 Model No	LS06	LS08	LS10	LS12	LS14
最大工作高度 Max working height	8m	10m	12m	13.8m	15.8m
最大平台高度 Max platform height	6m	8m	10m	11.8m	13.8m
额定举升载重 Lifting capacity	450/113kg	320/113kg	320/113kg	320/113kg	230/100kg
平台尺寸 Platform size	2.27*1.1m	2.27*1.10m	2.27*1.1m	2.27*1.1m	2.64*1.15m
整机总长 Overall length	2.84m	2.84m	2.84m	2.84m	3.16m
整机总宽 Overall width	1.58m	1.58m	1.58m	1.58m	1.58m
收纳高度 Height stowed	2.25m	2.45m	2.61m	2.73m	2.76m
护栏折叠后 "Height stowed 收纳高度 (guards folded)"	1.685m	1.98m	2.06m	2.18m	2.21m
最小离地间隙 Mini ground clearance	0	0	0	0	0
伸缩平台延伸长度 Exten ded platform length	0.9m	0.9m	0.9m	0.9m	0.9m
最小转弯半径 Turning radius minimum	0	0	0	0	0
收纳行走速度 Travel speed(stowed)	1.8km/h	1.8km/h	1.8km/h	1.8km/h	1.8km/h
升高行走速度 Travel speed(raised)	0	0	0	0	0
升降速度 Lift speed	3-5m/min	3-5m/min	3-5m/min	3-5m/min	3-5m/min
最大作业倾角 Maximum working angle	X1.5 ° /Y3 °	X1.5 ° /Y3 °	X1.5 ° /Y3 °	X1.5 ° /Y3 °	X1.5 ° /Y3 °
爬坡能力 Grade ability	14 ° (25%)	14 ° (25%)	14 ° (25%)	14 ° (25%)	14 ° (25%)
整机自重 Weight	3000kg	3380kg	3400kg	3680kg	4400kg
升降电机 Lift motor	DC48V/4.5KW	DC48V/4.5KW	DC48V/4.5KW	DC48V/4.5KW	DC48V/4.5KW
铅酸蓄电池 LA Battery	8*12V/200Ah	8*12V/200Ah	8*6V/200Ah	8*12V/200Ah	8*6V/200Ah
充电器 Charger	48V/30A	48V/30A	48V/30A	48V/30A	48V/30A
机身颜色(深购 5 台 以上可定制颜色) Color(Quantity greater than 5,color can be customized)	Water blue	Water blue	Water blue	Water blue	Water blue

PRODUCT FEATURES

Tracked Scissor Lift

LEMEX tracked scissor lift offer strong traction, excellent passability and climbing ability, and low ground contact pressure.



铝合金套筒式升降平台

SELF-PROPELLED VERTICAL MAST LIFT

SELF-PROPELLED VERTICAL MAST LIFT				
型号 MODEL		LM3.6	LM4.8	LM6
最大工作高度 Max.Working Height		5.6m	6.8m	8m
最大平台高度 Max.Platform Height		3.6m	4.8m	6m
主平台额定载重 Loading Capacity		227kg	227kg	159kg
延伸平台载重 Ext.Platform Capacity		114kg	114kg	114kg
整机总长 Overall Length		1.36m	1.36m	1.36m
整机总宽 Overall Width		0.76m	0.76m	0.81m
整机收纳高度 Overall Height		1.7m	1.98m	1.98m
主平台尺寸 Platform Dimension		1.28m × 0.70m	1.28m × 0.70m	1.28m × 0.70m
延伸平台长度 Ext.Platform Length		0.51m	0.51m	0.51m
轴距 Wheel Base		1.04m	1.04m	1.04m
内侧转弯半径 Inner Turning Radius		0.3m	0.3m	0.3m
外侧转弯半径 Outer Turning Radius		1.4m	1.4m	1.4m
收拢行驶速度 Travel Speed(Stowed)		4km/h	4km/h	4km/h
升高行驶速度 Travel speed(Raised)		1.1km/h	1.1km/h	1.1km/h
升降速度 Up/Down Speed		31/32sec	41.5/42sec	52/53sec
爬坡能力 Gradeability		25%	25%	25%
行走轮胎 Drive Tyres		φ305 × 100mm	φ305 × 100mm	φ305 × 100mm
行走电机 Drive Motors		2 × 24VDC/0.5kW	2 × 24VDC/0.5kW	2 × 24VDC/0.5kW
升降电机 Lifting Motor		24VDC/1.2kW	24VDC/1.2kW	24VDC/1.2kW
蓄电池 Battery		2 × 12V/100Ah	2 × 12V/100Ah	2 × 12V/100Ah
充电器 Charger		24V/15A	24V/15A	24V/15A
整机自重 Weight		810kg	980kg	1160kg

PRODUCT FEATURES

SELF-PROPELLED
VERTICAL MAST LIFT
Compact Size.
Powerful Performance.

Drive While Elevated
Ideal for Tight Spaces
Easy Indoor Operation
High Efficiency & Safety

Perfect for Maintenance in Warehouses,
Factories, and Commercial Buildings.



铝合金单杆自行升降平台

SINGLE MAST SELF-PROPELLED LIFT

SINGLE MAST SELF-PROPELLED LIFT			
型号	MODEL	LM0.1-6S	LM0.1-7.5S
最大工作高度	Max.Working Height	8.00m	9.50m
最大平台高度	Max. Platform Height	6.00m	7.50m
额定载重	Loading Capacity	160kg	125kg
额定载人	Occupants	1	1
整机总长	Overall Length	1.40m	1.40m
整机总宽	Overall Width	0.78m	0.78m
整机收拢高度	Overall Height	1.99m	1.99m
平台尺寸	Platform Dimension	0.66m X0.67m	0.66mX0.67m
轴距	Wheel Base	1.075m	1.075m
转弯半径	Turning Radius	0.3m	0.3m
收车行驶速度	Travel Speed(Stowed)	3km/h	3km/h
升车行驶速度	Travel Speed(Raised)	0.8km/h	0.8km/h
升降速度	Up/Down Speed	22/20sec	28/22sec
爬坡能力	Gradeability	25%	25%
驱动轮胎	Drive Tyres	φ305x100mm	φ305x100mm
行走电机	Drive Motors	2x24VDC/0.5kW	2x24VDC/0.5kW
升降电机	Lifting Motor	24VDC/2kW	24VDC/2kW
蓄电池	Battery	2x12v/100Ah	2x12V/100Ah
充电器	Charger	24V/15A	24V/15A
整机重量	Weight	1160kg	1280kg

PRODUCT FEATURES

Lifting Pole

The lifting pole is constructed from sturdy aluminum alloy, ensuring smoother and safer machine operation while extending its service life.



铝合金双杆自行升降平台

DOUBLE MAST SELF-PROPELLED LIFT

DOUBLE MAST SELF-PROPELLED LIFT			
型号	MODEL	LM0.2-7.5S	LM0.2-9S
最大工作高度	Max. Working Height	9.50m	11.00m
最大平台高度	Max. Platform Height	7.50m	9.00m
额定载重	Loading Capacity	200kg	150kg
额定载人	Occupants	1	1
整机总长	Overall Length	1.46m	1.46m
整机总宽	Overall Width	1.01m	1.01m
整机收拢高度	Overall Height	2.03m	2.03m
平台尺寸	Platform Dimension	1.00mx0.65m	1.00mx0.65m
轴距	Wheel Base	1.14m	1.14m
转弯半径	Turning Radius	0.3m	0.3m
收拢行驶速度	Travel Speed(Stowed)	4km/h	4km/h
升高行驶速度	Travel Speed(Raised)	1.1km/h	1.1km/h
升降速度	Up/Down Speed	48/40sec	56/49sec
爬坡能力	Gradeability	25%	25%
驱动轮胎	Drive Tyres	φ305x100mm	φ305x100mm
行走电机	Drive Motors	2x24VDC/0.5kW	2x24VDC/0.5kW
升降电机	Lifting Motor	24VDC/1.3kw	24VDC/1.3kW
蓄电池	Battery	2x12V/100Ah	2x12V/100Ah
充电器	Charger	24V/15A	24V/15A
整机自重	Weight	1270kg	1345kg

PRODUCT FEATURES

Lifting Pole

The lifting pole is constructed from sturdy aluminum alloy, ensuring smoother and safer machine operation while extending its service life.



真空玻璃提升机

GLASS VACUUM LIFTER

VACUUM GLASS LIFTER			
机型 Model Type	HL0.25-2	HL0.25-3	HL0.25-4
载重能力 Load Capacity	200kg(retract) 100kg(extend)	300kg(retract) 150kg(extend)	400kg(retract) 200kg(extend)
举升高度 Lifting Height	2700mm	3600mm	3600mm
吸盘数量 QTY of Suction Cap	4pcs	4pcs	4pcs
橡胶吸盘 Rubber Suction Cap	Ø250mm	Ø300mm	Ø300mm
深循环电池 Deep Cycle Battery	2x12V/35AH	2x12V/126AH	2x12V/126AH
电池充电器 Battery Charger	Smart Charger	Smart Charger	Smart Charger
驱动电机 Drive motor	24V/750W	24V/1200W	24V/1200W
举升电机 Lifting Motor	24V/1500W/6L	24V/2000W/6L	24V/2000W/6L
驱动轮 Driving Wheel	Ø210x70mm	Ø250x80mm	Ø250x80mm
包装尺寸(mm) Packing Size(mm)	2350*620*1700	2560*1030*1700	2560*1030*1700
净重/毛重 N.W/G.W	600/700kg	1100/1150kg	1280/1330kg
装载数量 Loading Qty	1x20/40GP-6/12SETS		

机型 Model Type	HL0.25-5	HL0.25-6	HL0.25-7
载重能力 Load Capacity	500kg(retract) 250kg(extend)	600kg(retract) 300kg(extend)	800kg(retract) 400kg(extend)
举升高度 Lifting Height	3700mm	3700mm	5000mm
吸盘数量 QTY of Suction Cap	6pcs	6pcs	8pcs
橡胶吸盘 Rubber Suction Cap	Ø300mm	Ø300mm	Ø300mm
深循环电池 Deep Cycle Battery	2x12V/126AH	2x12V/126AH	2x12V/126AH
电池充电器 Battery Charger	Smart Charger	Smart Charger	Smart Charger
驱动电机 Drive motor	24V/1200W	24V/1200W	24V/1500W
举升电机 Lifting Motor	24V/2000W/6L	24V/2000W/6L	24V/2200W/12L
驱动轮 Driving Wheel	Ø300x100mm	Ø300x100mm	Ø300x125mm
包装尺寸(mm) Packing Size(mm)	2580*1050*1700	2580*1050*1700	3000*1250*2300
净重/毛重 N.W/G.W	1300/1350kg	1400/1450kg	1600/1650kg
装载数量 Loading Qty	1x20/40GP-6/12SETS		

Movement	Automatic (4 kinds)	1.Pad frame vertical up/down 180° automatic 2.Broom in/out TELESCOPIC automatic 3.Powered arm up/down automatic 4.Lateral side shift 100mm automatic
	Manual (2kinds)	5.Pad frame tilt left/right 90° manual (Pls look at Optional 2,automatic turn left/right) 6.Pad frame rotation 360° manual(Pls look at Optional 1,automatic rotation 360°)
Usages		Mainly used for handling,moving and installing glass,marble,wooden panel etc.

PRODUCT FEATURES

Options (Extra Charged):

Sucker frame automatic rotation 360°
Sucker frame automatic tilt left/right 90°

Wireless remote control

For curved glass, customize the sucker frame: as per requests

