XCJG®

ROTATE WITH WISDOM | REALIZE WIDE WORTH

Shandong Xingchi Bearing Manufacturing Co., Ltd

Tangyuan Town Industrial Zone, Liaocheng City, Shandong Province

lcxczc@163.com

135 6302 2999

Dalian Xingchi Bearing Manufacturing Co., Ltd

29-1 Yuanqu North Road, Wawo Town, Wafangdian City,
Dalian City, Liaoning Province

lcxczc@163.com

130 7983 8515

ISO9001 ISO14001 ISO45001

XCJG®

Xingchi bearings

Committed to becoming the most cost-effective bearing brand

• 企业简介 Company Profile

Shandong Xingchi Bearing Manufacturing Co., Ltd. Specializing in the production of high-quality bearings under the XCJG brand, the company is committed to To become a landmark enterprise in the field of bearings, providing customers with advanced and applicable technology, stable and reliable products, and professional services XCJG was established in 1993 with a factory area of 7800 square meters, providing the most cost-effective bearings and solutions Mi, founded Shandong Xingchi Bearing Manufacturing Co., Ltd. in 2013, has received multiple government awards. In 2019 Established Dalian Xingchi Bearing Company with a factory area of 8600 square meters

Our main products include self-aligning ball bearings, self-aligning roller bearings, tapered roller bearings, and F-series bearings,Mainly focused on metallurgy, mining, papermaking, textile machinery, fans, reducers, elevators, port cranes, oil fields Cement and construction machinery industry。

The development of high-speed professional bearings for wind turbines, 1022M 1024M 1026M, has received recognition and support from multiple companies.

The main supporting facilities are large enterprises and institutions such as Dagang Oilfield, XCMG Group, Shantui, etc., with excellent performance Being able to maintain stable quality and earn the trust of customers.

The company has obtained IS09001 quality management system and IS014001 environmental management system certifications, and adheres to Select high-quality raw materials, strictly control the production and quality testing process, ensure product performance and stability, and continuously We are committed to improving product quality and becoming the most cost-effective bearing brand for our customers.



XCJG® 星驰轴承 THE STAR CHI BEARING

• 企业文化 Corporate culture

Enterprise purpose: Smart rotation, realizing value

Business philosophy: Ensuring fairness through systems, improving quality through management, and promoting unity and sustainable development.

Enterprise Development Concept: Diligence is the key to success, and diligence is the key to success

Corporate mission: To compete with international quality and promote national industry.


Since its inception, Xingchi Bearing has adhered to the principles of people-oriented, goodness first, and trustworthiness

The principle of prioritizing the country and making it our home, and keeping dreams in mind for fifteen years,down-to-earth.

We care about the lives of every employee and cherish every use

Collaboration among households, carefully grasping the quality of every product.

Development strategy: Taking the development and production of mainframe manufacturers as the strategic goal, and focusing on the leading domestic maintenance market To achieve development goals and serve customers through collaborative research and development.

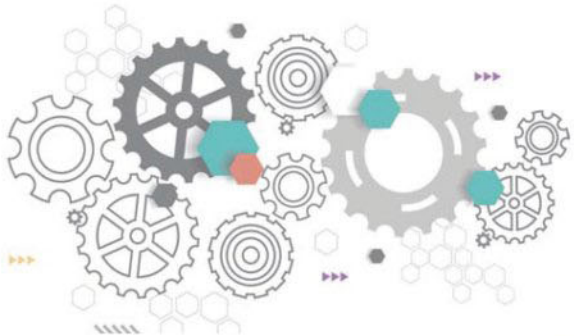

• 企业资质



统一社会信用代码
91371581081763519B

营业执照

（副 本） 1-1

扫描二维码登录"国家企业信用信息公示系统"了解更多登记、备案、许可、监管信息。

名 称 山东星驰轴承制造有限公司
类 型 有限责任公司(自然人投资或控股)
法定代表人 燕芳春
经营范围 轴承及其配件的生产、加工、批发、零售；本公司所经营产品的进出口业务。（依法须经批准的项目，经相关部门批准后方可开展经营活动）

注册资本 捌佰万元整
成立日期 2013年 10 月 29 日
营业期限 2013年 10 月 29 日至 年 月 日
住 所 山东省聊城市临清市唐园镇燕杏园村

登记机关

2020 年 04 月 02 日

国家企业信用信息公示系统网址：http://www.gsxt.gov.cn

市场主体应当于每年1月1日至6月30日通过国家企业信用信息公示系统报送公示年度报告

国家市场监督管理总局监制



质量管理体系认证证书
山东星驰轴承制造有限公司


职业健康安全管理体系认证证书
山东星驰轴承制造有限公司


环境管理体系认证证书
山东星驰轴承制造有限公司


检 验 报 告

• 企业流程

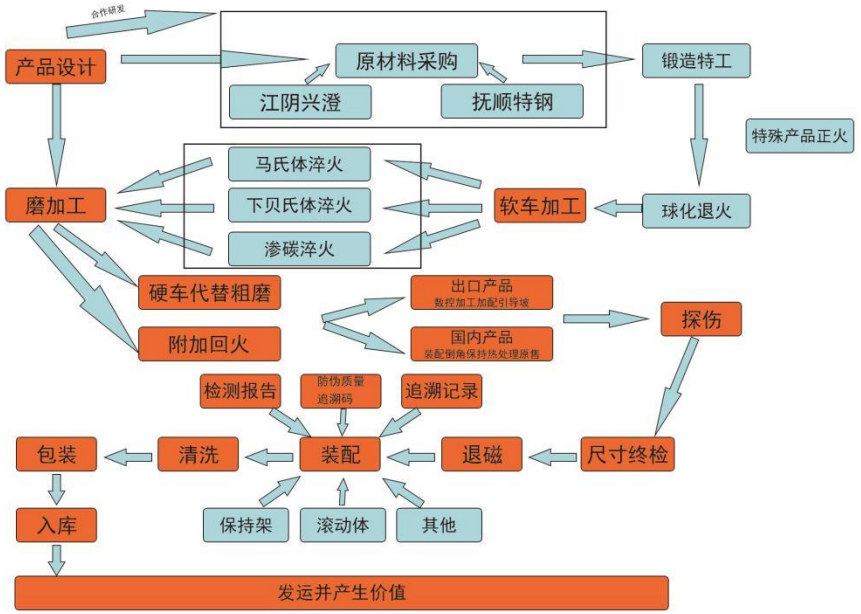








• 检验设备


轮廓仪


圆度仪


振动仪


热处理金相探测器


光谱仪


光谱仪


毛坯探伤


里氏硬度计


洛氏硬度仪


游隙仪器


百分表卡尺


千分表外径台表


千分表内径台表


千分表高度台表


目测


塞尺


轴承内外高测量台表


轴承残磁检测仪


清洗好 待包装


打好包装


检验报告


轴承金相检验报告


山东星驰轴承制造有限公司 保持器进货检测记录

• 企业管理







整理
腾出空间，空间活用，防止误用，塑造清爽的工作场所。

整顿
工作场所一目了然，消除寻找物品的时间，整整齐齐的工作环境。

清扫
保持工作场所干净、亮丽的环境。

安全
建立起安全生产的环境，所有的工作应建立在安全的前提下。

清洁
创造明朗现场，维持上面3S成果。

素养
培养有好习惯，遵守规则的员工，营造团队精神。

6S管理

6S即整理（SEIRI）、整顿（SEITON）、清扫（SEISO）、清洁（SEIKTSU）、素养（SHITSUKE）、安全（SECURITY），6S和5S管理一样兴起于日本企业。

深沟球轴承 Deep Groove Ball Bearing

轴承型号 Bearing No.			外形尺寸Dimensions(mm)			额定载荷Load Rating(KN)		重量Weight
开式基型 OPEN	防尘型 ZZ	密封型 2RS	内径 d	外径 D	宽度 B	动载荷 Cr	静载荷 Cor	kg
6001	6001ZZ	6001-2RS	12	28	8	5.4	2.39	0.021
6002	6002ZZ	6002-2RS	15	32	9	5.4	2.39	0.03
6003	6003ZZ	6003-2RS	17	35	10	6	3.25	0.039
6004	6004ZZ	6004-2RS	20	42	12	9.38	5.03	0.069
6005	6005ZZ	6005-2RS	25	47	12	10	5.85	0.08
6006	6006ZZ	6006-2RS	30	55	13	13.23	8.3	0.116
6007	6007ZZ	6007-2RS	35	62	14	16.21	10.42	0.155
6008	6008ZZ	6008-2RS	40	68	15	17	11.8	0.185
6009	6009ZZ	6009-2RS	45	75	16	21	14.8	0.231
6010	6010ZZ	6010-2RS	50	80	16	22	16.2	0.25
6011	6011ZZ	6011-2RS	55	90	18	30.2	21.8	0.362
6012	6012ZZ	6012-2RS	60	95	18	31.5	24.2	0.385
6013	6013ZZ	6013-2RS	65	100	18	32	24.8	0.41
6014	6014ZZ	6014-2RS	70	110	20	38.5	30.5	0.575
6015	6015ZZ	6015-2RS	75	115	20	40.2	33.2	0.603
6016	6016ZZ	6016-2RS	80	125	22	47.5	40	0.821
6017	6017ZZ	6017-2RS	85	130	22	49.5	43	0.848
6018	6018ZZ	6018-2RS	90	140	24	58	50	1.1
6019	6019ZZ	6019-2RS	95	145	24	60.5	54	1.15
6020	6020ZZ	6020-2RS	100	150	24	60	54	1.18
6021	6021ZZ	6021-2RS	105	160	26	72.5	66	1.52
6022	6022ZZ	6022-2RS	110	170	28	85	73	1.89
6200	6200ZZ	6200-2RS	10	30	9	5.11	2.39	0.032
6201	6201ZZ	6201-2RS	12	32	10	6.82	3.06	0.037
6202	6202ZZ	6202-2RS	15	35	11	7.64	3.72	0.045
6203	6203ZZ	6203-2RS	17	40	12	9.57	4.79	0.065
6204	6204ZZ	6204-2RS	20	47	14	12.84	6.65	0.106
6205	6205ZZ	6205-2RS	25	52	15	14	7.88	0.128
6206	6206ZZ	6206-2RS	30	62	16	19.46	11.31	0.199
6207	6207ZZ	6207-2RS	35	72	17	25.5	15.2	0.288
6208	6208ZZ	6208-2RS	40	80	18	29.5	18	0.368
6209	6209ZZ	6209-2RS	45	85	19	31.5	20.5	0.416
6210	6210ZZ	6210-2RS	50	90	20	35	23.2	0.463
6211	6211ZZ	6211-2RS	55	100	21	43.2	29.2	0.603
6212	6212ZZ	6212-2RS	60	110	22	47.8	32.8	0.789
6213	6213ZZ	6213-2RS	65	120	23	57.2	40	0.99
6214	6214ZZ	6214-2RS	70	125	24	60.8	45	1.084
6215	6215ZZ	6215-2RS	75	130	25	66	49.5	1.171
6216	6216ZZ	6216-2RS	80	140	26	72.5	53	1.448
6217	6217ZZ	6217-2RS	85	150	28	84	62	1.803

XCJG® 星驰轴承 THE STAR CHI BEARING



双面密封圈\2RS



双面防尘槽\ ZZ



0类开式\OPEN




BL

轴承型号 Bearing No.			外形尺寸Dimensions(mm)			额定载荷Load Rating(KN)		重量Weight
开式基型 OPEN	防尘型 ZZ	密封型 2RS	内径 d	外径 D	宽度 B	动载荷 Cr	静载荷 Cor	kg
6300	6300ZZ	6300-2RS	10	35	11	7.65	3.47	0.053
6301	6301ZZ	6301-2RS	12	37	12	9.72	5.09	0.06
6302	6302ZZ	6302-2RS	15	42	13	11.4	5.43	0.082
6303	6303ZZ	6303-2RS	17	47	14	13.58	6.58	0.115
6304	6304ZZ	6304-2RS	20	52	15	15.94	7.88	0.142
6305	6305ZZ	6305-2RS	25	62	17	22.2	11.5	0.232
6306	6306ZZ	6306-2RS	30	72	19	27	15.19	0.346
6307	6307ZZ	6307-2RS	35	80	21	33.2	19.2	0.457
6308	6308ZZ	6308-2RS	40	90	23	40.8	24	0.639
6309	6309ZZ	6309-2RS	45	100	25	52.8	31.8	0.837
6310	6310ZZ	6310-2RS	50	110	27	61.8	38.1	1.082
6311	6311ZZ	6311-2RS	55	120	29	71.5	44.8	1.367
6312	6312ZZ	6312-2RS	60	130	31	81.8	51.8	1.71
6313	6313ZZ	6313-2RS	65	140	33	93.8	60.5	2.1
6314	6314ZZ	6314-2RS	70	150	35	105	68	2.55
6315	6315ZZ	6315-2RS	75	160	37	113	77	3.05
6316	6316ZZ	6316-2RS	80	170	39	123	86.5	3.61
6317	6317ZZ	6317-2RS	85	180	41	133	97	4.284
6318	6318ZZ	6318-2RS	90	190	43	143	107	4.97
6319	6319ZZ	6319-2RS	95	200	45	153	119	5.74
6320	6320ZZ	6320-2RS	100	215	47	173	141	7.09
6321	6321ZZ	6321-2RS	105	225	49	184	153	8.05
6322	6322ZZ	6322-2RS	110	240	50	205	179	9.53
6403	6403ZZ	6403-2RS	17	62	17	22.7	10.8	0.27
6404	6404ZZ	6404-2RS	20	72	19	31	15.2	0.4
6405	6405ZZ	6405-2RS	25	80	21	36.1	19.4	0.53
6406	6406ZZ	6406-2RS	30	90	23	43.4	23.9	0.735
6407	6407ZZ	6407-2RS	35	100	27	55	31	0.952
6408	6408ZZ	6408-2RS	40	110	27	65.5	37.5	1.221
6409	6409ZZ	6409-2RS	45	120	29	77.5	45.5	1.57
6410	6410ZZ	6410-2RS	50	130	31	92	55.2	1.88
6411	6411ZZ	6411-2RS	55	140	33	100	62.5	2.25
6412	6412ZZ	6412-2RS	60	150	35	109	70	2.8
6413	6413ZZ	6413-2RS	65	160	37	118	78.5	3.44

（薄壁）深沟球轴承 (thin-wall) deep groove ball bearing





深沟球轴承主要承受径向载荷，也可承受一定量的轴向载荷。该类轴承摩擦系数小，极限转速高，尺寸范围与形式变化多样。适用于精密仪表、低噪音电机、汽车、摩托车及一般机械等，是机械工业中使用最为广泛的一类轴承。

The deep groove bearing is mainly used to bear the radial load, and could also bear a certain amount of axial load. Such bearing has a mall friction coefficient, high limited rotating speed and various dimension ranges and types. It is applicable in such fields in precision instrument, low noise motor, car, motor cycle and general machinery, and is a kind of bearing used most popular in the machinery industry.

轴承型号 Bearing Designations	外型尺寸(毫米) Boundary Dimensions(mm)			基本额定负荷（千牛） Basic Load Rating(kn)		极限转速（转/分） Limiting Speed(r/min)		重量（千克） Weight (kg)
新标准 New Standard	d	D	B	动态 Dynamic Cr	静态 Static Cor	润滑剂Lubricant 脂Grease	油Oil	
61805	25	37	7	4.36	2.6	16000	20000	0.022
61806	30	42	7	4.49	2.9	13000	17000	0.027
61807	35	47	7	4.75	3.2	11000	15000	0.03
61808	40	52	7	4.94	3.45	10000	13000	0.034
61809	45	58	7	6.6	6.1	9000	12000	0.04
61810	50	65	7	6.76	6.5	8500	10000	0.052
61811	55	72	9	9.04	8.8	8000	9500	0.083
61812	60	78	10	11.9	11.4	7000	8500	0.11
61813	65	85	10	12.4	12.7	6700	8000	0.13
61814	70	90	10	12.4	13.2	6300	7500	0.14
61815	75	95	10	12.7	14.3	6000	7000	0.15
61816	80	100	10	13	15	5600	6700	0.15
61817	85	110	13	18.5	19.5	5500	6500	0.27
61818	90	115	13	19	20.1	5100	6300	0.28
61819	95	120	13	19.3	20.4	5000	6000	0.322
61820	100	125	13	45.6	62.6	1679	1960	0.5
61821	105	130	13	49.5	65.3	1650	1900	0.56
61822	110	140	16	50.6	73.6	1596	1830	0.6
61824	120	150	16	58.7	76.0	1560	1780	0.65
61826	130	165	18	60.3	79.2	1500	1720	0.94
61828	140	175	18	65.5	81.0	1474	1688	0.99
61830	150	190	20	68.9	85.0	1446	1653	1.5
61832	160	200	20	70.4	88.2	1410	1648	1.7

XCJG® 星驰轴承 THE STAR CHI BEARING

（薄壁）深沟球轴承 (thin-wall) deep groove ball bearing

轴承型号 Bearing Designations	外型尺寸(毫米) Boundary Dimensions(mm)			基本额定负荷（千牛） Basic Load Rating(kn)		极限转速（转/分） Limiting Speed(r/min)		重量（千克） Weight (kg)
新标准 New Standard	d	D	B	动态 Dynamic Cr	静态 Static Cor	润滑剂Lubricant 脂Grease	油Oil	
61834	170	215	22	74.8	90.8	1395	1624	1.9
61836	180	225	24	78.4	99.4	1364	1613	2.00
61838	190	240	24	109.5	140.1	1343	1598	2.03
61840	200	250	24	114.4	141.1	1310	1590	2.38
61844	220	270	24	146.7	146.5	1277	1568	2.79
61848	240	300	28	158	194	1265	1555	4.5
61852	260	320	28	159.3	205.8	1196	1505	4.85
61856	280	350	33	160.5	216.9	1150	1460	7.6
61860	300	380	38	162	222	1100	1400	11
61864	320	400	38	168	235	1000	1300	12
61872	360	440	38	182	285	1100	1400	12.2
61876	380	480	46	235	348	950	1200	20.5
61880	400	500	46	247	405	950	1200	21.7
61884	420	520	46	251	425	950	1180	22
61888	440	540	46	255	420	860	1100	24
61892	460	580	56	322	538	860	1000	33.5
61896M	480	600	56	315	610	870	1100	36
618/500M	500	620	56	315	465	800	950	37.3
618/530	530	650	56	315	480	750	900	41.1
618/560MA	560	680	56	328	525	700	850	42.7
618/600	600	730	60	345	710	670	800	52.7
618/630	630	780	69	420	760	630	750	65.7
618/670	670	820	69	420	780	560	670	82.8
618/710	710	870	74	451	905	530	630	98.1/96.1
618/750	750	920	78	515	1240	480	610	110
618/800	800	980	82	545	1360	430	510	132
618/850	850	1030	82	555	1300	450	530	144
618/900	900	1090	85	600	1430	380	450	155
618/950	950	1150	90	663	1620	360	430	188
618/1000	1000	1220	100	635	1720	340	400	230
61905	25	42	9	9.5	4.55	16000	19000	0.0415
61906	30	47	9	9.75	4.95	14000	17000	0.0433
61907	35	55	10	9.8	5.5	12000	15000	0.08
61908	40	62	12	11.8	7.5	10000	12000	0.12
61909	45	68	12	12.5	9.8	9600	11000	0.129
61910	50	72	12	13.5	11	8500	10000	0.134

（薄壁）深沟球轴承 (thin-wall) deep groove ball bearing


轴承型号 Bearing Designations	外型尺寸(毫米) Boundary Dimensions(mm)			基本额定负荷（千牛） Basic Load Rating(kn)		极限转速（转/分） Limiting Speed(r/min)		重量（千克） Weight (kg)
新标准 New Standard	d	D	B	动态 Dynamic Cr	静态 Static Cor	润滑剂Lubricant 脂Grease	油Oil	
61912	60	85	13	17	15.1	7500	9000	0.201
61913	65	90	13	19.5	17	6700	8000	0.203
61916	80	110	16	38	64	1880	2356	0.39
61920	100	140	20	59	76	1790	2010	0.78
61921	105	145	20	67	99	1783	2000	0.80
61922	110	150	20	79	103	1782	1993	0.86
61924	120	165	22	88	126	1743	1984	1.15
61926	130	180	24	98	132	1728	1946	1.56
61928	140	190	24	111	140	1704	1921	1.8
61930	150	210	28	123	155	1693	1900	2.1
61932	160	220	28	139	158	1659	1884	3.9
61934	170	230	28	142	163	1614	1867	4.6
61936	180	250	33	146	169	1597	1860	5.4
61938	190	260	33	146	169	1562	1849	5.86
61940	200	280	38	150	173	1560	1930	7.3
61944	220	300	38	152	178	1600	2000	6.34
61948	240	320	38	142	178	1400	1800	8.2
61952	260	360	46	210	268	1200	1600	13.7
61956	280	380	46	210	268	1100	1400	15
61960	300	420	56	270	370	1000	1300	21.1
61964	320	440	56	275	392	950	1200	23
61968	340	460	56	292	418	900	1100	27
61972	360	480	56	319	446	840	980	40
619/500	500	660	78	445	808	500	630	80
619/530	530	710	82	468	885	700	850	91.6
619/560	560	750	85	475	925	670	800	110
619/630	630	850	100	610	1330	600	710	163
619/670	670	900	103	670	1450	530	630	194
619/710	710	950	106	645	1510	500	610	218
619/750	750	1000	112	745	1790	490	570	260
619/800	800	1060	115	815	2100	430	500	280
619/850	850	1120	118	815	2150	400	480	315
619/900	900	1180	122	830	2270	360	440	355
619/950	950	1250	132	985	2850	330	410	395
619/1000	1000	1320	140	985	2880	330	380	525
16005	25	47	8	8.45	5	14000	17000	0.0562

XCJG® 星驰轴承 THE STAR CHI BEARING

（薄壁）深沟球轴承 (thin-wall) deep groove ball bearing

轴承型号 Bearing Designations	外型尺寸(毫米) Boundary Dimensions(mm)			基本额定负荷（千牛） Basic Load Rating(kn)		极限转速（转/分） Limiting Speed(r/min)		重量（千克） Weight (kg)
新标准 New Standard	d	D	B	动态 Dynamic Cr	静态 Static Cor	润滑剂Lubricant 脂Grease	油Oil	
16006	30	55	9	9.9	6.35	12000	15000	0.085
16007	35	62	9	11	7.5	9000	12000	0.11
16008	40	68	9	12.8	8.15	8000	11000	0.13
16009	45	75	10	14.5	10	7500	9500	0.17
16010	50	80	10	16.8	11.4	7000	8900	0.18
16011	55	90	11	20.3	14	6800	8500	0.26
16012	60	95	11	20.8	15	6300	7900	0.28
16013	65	100	11	22.5	16.6	6000	7500	0.3
16014	70	110	13	29.1	25	5900	6900	0.43
16015	75	115	13	22.1	22	5600	6700	0.583
16016	80	125	14	32	30	5300	6300	0.599
16017	85	130	14	31.5	30	5000	6000	0.636
16018	90	140	16	53.8	59.4	3600	4800	0.90
16020	100	150	16	67.8	79.6	3325	4546	0.95
16021	105	160	18	76.3	86.5	3124	4213	1.23
16022	110	170	19	91.2	98.4	2909	4003	1.47
16024	120	185	19	99.8	103.5	2716	3715	1.82
16026	130	200	22	108.4	113.2	2439	3400	2.32
16028	140	210	22	129.7	131.0	2250	3175	2.49
16030	150	225	24	132	146	1998	2768	2.62
16032	160	240	25	138	151	1764	2339	4.61
16034	170	260	28	141	158	1438	1884	5.83
16036	180	280	31	144	157	1800	2400	5.14
16038	190	290	31	149	168	1700	2200	5.46
16040	200	310	34	167	191	1800	2000	6.62
16044	220	340	37	181	216	1400	1800	9.3
16048	240	360	37	172	210	1200	1600	14.5
16052	260	400	44	235	310	1100	1500	23
16964	320	440	37	195	380	1300	1500	17
16976	380	520	44	300	450	950	1100	31.2
16056	280	420	44	235	330	1300	1600	22.5
16060/HA	300	460	50	289	400	1200	1500	33.1
16064	320	480	50	275	400	1100	1300	34
16068	340	520	57	335	520	950	1200	46
16072	360	540	57	340	540	1000	1200	50
16076	380	560	57	368	615	940	1100	50

调心球轴承 Aligning ball bearing





轴承型号 Bearing No.		外形尺寸 Dimensions（mm）			重量 (kg) Weight
圆柱孔 Cylindrical bore	圆锥孔 Tapered bore	d	D	B	
1203	1203K	17	40	12	0.072
1204	1204K	20	47	14	0.120
1205	1205K	25	52	15	0.140
1206	1206K	30	62	16	0.220
1207	1207K	35	72	17	0.32
1208	1208K	40	80	18	0.42
1209	1209K	45	85	19	0.47
1210	1210K	50	90	20	0.53
1211	1211K	55	100	21	0.71
1212	1212K	60	110	22	0.90
1213	1213K	65	120	23	1.15
1214	1214K	70	125	24	1.30
1215	1215K	75	130	25	1.41
1216	1216K	80	140	26	1.74
1217	1217K	85	150	28	2.10
1218	1218K	90	160	30	2.56
1303	1303K	17	47	14	0.135
1304	1304K	20	52	15	0.165
1305	1305K	25	62	17	0.225
1306	1306K	30	72	19	0.385
1307	1307K	35	80	21	0.51
1308	1308K	40	90	23	0.72
1309	1309K	45	100	25	0.96
1310	1310K	50	110	27	1.25
1311	1311K	55	120	29	1.6
1312	1312K	60	130	31	2.03
1313	1313K	65	140	33	2.54
1314	1314K	70	150	35	3.19
1315	1315K	75	160	37	3.65
1316	1316K	80	170	39	4.32
1317	1317K	85	180	41	5.15
1318	1318K	90	190	43	5.95
1022M	1022M	110	170	28	2.3
1024M	1024M	120	180	28	3
1026M	1026M	130	200	33	3.7

轴承型号 Bearing No.		外形尺寸 Dimensions（mm）			重量 (kg) Weight
圆柱孔 Cylindrical bore	圆锥孔 Tapered bore	d	D	B	
2203	2203K	17	40	16	0.085
2204	2204K	20	47	18	0.133
2205	2205K	25	52	18	0.15
2206	2206K	30	62	20	0.25
2207	2207K	35	72	23	0.38
2208	2208K	40	80	23	0.48
2209	2209K	45	85	23	0.52
2210	2210K	50	90	23	0.56
2211	2211K	55	100	25	0.75
2212	2212K	60	110	28	1.03
2213	2213K	65	120	31	1.4
2214	2214K	70	125	31	1.52
2215	2215K	75	130	31	1.6
2216	2216K	80	140	33	1.98
2217	2217K	85	150	36	2.5
2218	2218K	90	160	40	3.14
2303	2303K	17	47	19	0.155
2304	2304K	20	52	21	0.193
2305	2305K	25	62	24	0.319
2306	2306K	30	72	27	0.48
2307	2307K	35	80	31	0.64
2308	2308K	40	90	33	0.89
2309	2309K	45	100	36	1.2
2310	2310K	50	110	40	1.58
2311	2311K	55	120	43	2.03
2312	2312K	60	130	46	2.57
2313	2313K	65	140	48	3.2
2314	2314K	70	150	51	3.9
2315	2315K	75	160	55	4.77
2316	2316K	80	170	58	5.55
2317	2317K	85	180	60	6.58

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸			额定负荷		疲劳负荷极限	极限转速		重量
				动态	静态				
	d	D	B	Cr	cor	Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU202EM	15	35	11	12.5	10.2	1.22	18000	26000	0.049
NJ202EM		35	11	12.5	10.2	1.22	18000	26000	0.055
NUP202EM		35	11	12.5	10.2	1.22	18000	26000	0.049
N202 EM		35	11	12.5	10.2	1.22	18000	26000	0.045
NF202EM		35	11	12.5	10.2	1.22	18000	26000	0.048
NU203 EM	17	40	12	17.2	14.3	1.73	15000	22000	0.069
NJ203 EM		40	12	17.2	14.3	1.73	15000	22000	0.063
NUP203 EM		40	12	17.2	14.3	1.73	15000	22000	0.073
N 203 EM		40	12	17.2	14.3	1.73	15000	22000	0.076
NF 203 EM		40	12	17.2	14.3	1.73	15000	22000	0.069
NU2203EM		40	16	23.8	21.6	2.65	15000	22000	0.102
NJ2203 EM		40	16	23.8	21.6	2.65	15000	22000	0.095
NUP2203 EM		40	16	23.8	21.6	2.65	15000	22000	0.106
NU 303 EM		47	14	24.6	20.4	2.55	14000	20000	0.136
NJ 303 EM		47	14	24.6	20.4	2.55	14000	20000	0.142
NUP 303 EM		47	14	24.6	20.4	2.55	14000	20000	0.148
N 303 EM		47	14	24.6	20.4	2.55	14000	20000	0.134
NU204EM	20	47	14	25.1	22	2.75	13000	19000	0.132
NJ204 EM		47	14	25.1	22	2.75	13000	19000	0.138
NUP204EM		47	14	25.1	22	2.75	13000	19000	0.145
N204 EM		47	14	25.1	22	2.75	13000	19000	0.129
NU2204 EM		47	18	29.7	27.5	3.45	13000	19000	0.144
NJ2204 EM		47	18	29.7	27.5	3.45	13000	19000	0.227
NU 304 EM		52	15	35.5	26	3.25	13000	18000	0.226
NJ 304 EM		52	15	35.5	26	3.25	13000	18000	0.231
NUP 304 EM		52	15	35.5	26	3.25	13000	18000	0.237
N 304 EM		52	15	35.5	26	3.25	13000	18000	0.221
NU2304EM		52	21	47.5	38	4.8	13000	18000	0.247
NJ2304 EM		52	21	47.5	38	4.8	13000	18000	0.252
NUP2304EM		52	21	47.5	38	4.8	13000	18000	0.258
NU205 EM	25	52	15	28.6	27	3.35	11000	16000	0.157
NJ205EM		52	15	28.6	27	3.35	11000	16000	0.160
NUP205EM		52	15	28.6	27	3.35	11000	16000	0.165
N 205 EM		52	15	28.6	27	3.35	11000	16000	0.152
NU2205EM		52	18	34.1	34	4.25	11000	16000	0.185
NJ2205EM		52	18	34.1	34	4.25	11000	16000	0.190
NUP2205EM		52	18	34.1	34	4.25	11000	16000	0.195
N2205EM		52	18	34.1	34	4.25	11000	16000	0.182
NU305EM		62	17	46.5	36.5	4.55	11000	15000	0.272
NJ305EM		62	17	46.5	36.5	4.55	11000	15000	0.293
NUP305EM		62	17	46.5	36.5	4.55	11000	15000	0.302
N305EM		62	17	46.5	36.5	4.55	11000	15000	0.267
NU2305EM		62	24	64	55	6.95	11000	15000	0.400
NJ2305EM		62	24	64	55	6.95	11000	15000	0.403
NUP2305EM		62	24	64	55	6.95	11000	15000	0.408
N2305EM		62	24	64	55	6.95	11000	15000	0.398
NU1006M		55	13	17.9	17.3	1.86	11000	15000	0.120
NU206EM	30	62	16	44	36.5	4.55	9800	14000	0.238
NJ206EM		62	16	44	36.5	4.55	9800	14000	0.241
NUP206EM		62	16	44	36.5	4.55	9800	14000	0.245
N206EM		62	16	44	36.5	4.55	9800	14000	0.233
NU2206EM		62	20	55	49	6.1	9800	14000	0.300
NJ2206EM		62	20	55	49	6.1	9800	14000	0.307
NUP2206EM		62	20	55	49	6.1	9800	14000	0.313
N2206EM		62	20	55	49	6.1	9800	14000	0.297
NU306EM		72	19	58.5	48	6.2	8400	12000	0.425
NJ306EM		72	19	58.5	48	6.2	8400	12000	0.433
NUP306EM		72	19	58.5	48	6.2	8400	12000	0.440
N306EM		72	19	58.5	48	6.2	8400	12000	0.421
NU2306EM		72	27	83	75	9.65	8400	12000	0.566
NJ2306EM		72	27	83	75	9.65	8400	12000	0.620
NUP2306EM		72	27	83	75	9.65	8400	12000	0.660
N2306EM		72	27	83	75	9.65	8400	12000	0.598
NU406M		90	23	60.5	53	6.8	7700	11000	0.750
NJ406M		90	23	60.6	53	6.8	7700	11000	0.790

型号	基本尺寸			额定负荷		疲劳负荷极限	极限转速		重量
				动态	静态				
	d	D	B	Cr	cor	Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU1007E	35	62	14	35.8	38	4.55	9100	13000	0.16
NU207 EM		72	17	56	48	6.1	8400	12000	0.34
NJ207 EM		72	17	56	48	6.1	8400	12000	0.35
NUP207EM		72	17	56	48	6.1	8400	12000	0.355
N207 EM		72	17	56	48	6.1	8400	12000	0.34
NF207EM		72	17	56	48	6.1	8400	12000	0.346
NU2207EM		72	23	69.5	63	8.15	8400	12000	0.444
NJ2207EM		72	23	69.5	63	8.15	8400	12000	0.46
NUP2207EM		72	23	69.5	63	8.15	8400	12000	0.475
N2207 EM		72	23	69.5	63	8.15	8400	12000	0.489
NU307EM		80	21	75	63	8.15	7700	11000	0.539
NJ 307 EM		80	21	75	63	8.15	7700	11000	0.578
NUP 307 EM		80	21	75	63	8.15	7700	11000	0.595
N307 EM		80	21	75	63	8,15	7700	11000	0.561
NF 307 EM		80	21	75	63	8,15	7700	11000	0.569
NU2307EM		80	31	106	98	12.7	7700	11000	0.823
NJ2307EM		80	31	106	98	12.7	7700	11000	0.837
NUP2307EM		80	31	106	98	12.7	7700	11000	0.845
N2307EM		80	31	106	98	12.7	7700	11000	0.816
NU407M		100	25	76.5	69.5	9	6700	9500	1
NJ 407 M		100	25	76.5	69.5	9	6700	9500	1.05
NU1008M	40	68	15	25.1	26	3	13000	18000	0.23
NJ1008M		68	15	25.1	26	3	13000	18000	0.238
N1008M		68	15	25.1	26	3	13000	18000	0.226
NU208EM		80	18	62	53	6.7	7700	11000	0.432
NJ208EM		80	18	62	53	6.7	7700	11000	0.437
NUP208EM		80	18	62	53	6.7	7700	11000	0.441
N208EM		80	18	62	53	6.7	7700	11000	0.428
NU2208EM		80	23	81.5	75	9.65	7700	11000	0.567
NJ2208EM		80	23	81.5	75	9.65	7700	11000	0.585
NUP 2208EM		80	23	81.5	75	9.65	7700	1100	0.598
N2208EM		80	23	81.5	75	9.65	7700	11000	0.558
NU308EM	45	90	23	93	78	10.2	6700	9500	0.770
NJ 308 EM		90	23	93	78	10.2	6700	9500	0.785
NUP 308 EM		90	23	93	78	10.2	6700	9500	0.794
N308EM		90	23	93	78	10.2	6700	9500	0.766
NF 308 EM		90	23	93	78	10.2	6700	9500	0.774
NU2308EM		90	33	129	120	15.3	6700	9500	1.041
NJ2308 EM		90	33	129	120	15.3	6700	9500	1.110
NUP2308EM		90	33	129	120	15.3	6700	9500	1.190
N2308EM		90	33	129	120	15.3	6700	9500	1.020
NF2308EM		90	33	129	120	15.3	6700	9500	1.080
NU408M		110	27	96.8	90	11.6	6000	8500	1.150
NJ 408 M		110	27	96.8	90	11.6	6000	8500	1.300
NU1009M		75	16	44.6	52	6.3	7700	11000	0.260
NU209EM	45	85	19	69.5	64	8.15	6700	9500	0.513
NJ209EM		85	19	69.5	64	8.15	6700	9500	0.524
NUP209EM		85	19	69.5	64	8.15	6700	9500	0.529
N209 EM		85	19	69.5	64	8.15	6700	9500	0.508
NF 209 EM		85	19	69.5	64	8.15	6700	9500	0.517
NU2209EM		85	23	85	81.5	10.6	6700	9500	0.620
NJ2209 EM		85	23	85	81.5	10.6	6700	9500	0.633
NUP2209EM		85	23	85	81.5	10.6	6700	9500	0.650
N2209EM		85	23	85	81.5	10,6	6700	9500	0.611
NU309EM		100	25	112	100	12.9	6000	8500	1.012
NJ309EM		100	25	112	100	12.9	6000	8500	1.08
NUP 309 EM		100	25	112	100	12.9	6000	8500	1.13
N 309 EM		100	25	112	100	12.9	6000	8500	0.98
NF 309 EM		100	25	112	100	12.9	6000	8500	1.05
NU2309EM	-	100	36	160	153	20	6000	8500	1.445
NJ2309 EM		100	36	160	153	20	6000	8500	1.47
NUP2309EM		100	36	160	153	20	6000	8500	1.56
N2309EM		100	36	160	153	20	6000	8500	1.41
NU409M		120	29	106	102	13.4	5300	7500	1.64
NJ409M		120	29	106	102	13.4	5300	7500	1.67

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸			额定负荷		疲劳负荷极限	极限转速		重量
	d	D	B	动态 Cr	静态 cor	Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU1010M	50	80	16	46.8	56	6.7	6700	9500	0.310
N11010M		80	16	46.8	56	6.7	6700	9500	0.316
N 1010 M		80	16	46.8	56	6.7	6700	9500	0.304
NU210EM		90	20	73.5	69.5	8.8	6300	9000	0.575
NJ210EM		90	20	73.5	69.5	8.8	6300	9000	0.739
NUP210EM		90	20	73.5	69.5	8.8	6300	9000	0.745
N210 EM		90	20	73.5	69.5	8.8	6300	9000	0.572
NE210EM		90	20	73.5	69.5	8.8	6300	9000	0.582
NU2210EM		90	23	90	88	11.4	6300	9000	0.966_
N12210_EM		90	23	90	88	11.4	6300	9000	0.981
NUP2210EM		90	23	90	88	11.4	6300	9000	0.997
N2210 EM		90	23	90	88	11.4	6300	9000	0.953
NU 310 EM		110	27	127	112	15	5600	8000	1.301
N1310EM		110	27	127	112	15	5600	8000	1.330
NUP 310 EM		110	27	127	112	15	5600	8000	1.380
N310EM		110	27	127	112	15	5600	8000	1.270
NF 310 EM		110	27	127	112	15	5600	8000	1.320
NU2310EM		110	40	186	186	24.5	5600	8000	2.861
NJ2310EM		110	40	186	186	24.5	5600	8000	2.900
NUP2310EM		110	40	186	186	24.5	5600	8000	2.980
N2310EM		110	40	186	186	24.5	5600	8000	2.840
NU410M		130	31	130	127	16.6	4900	7000	2.290
NJ410M		130	31	130	127	16.6	4900	7000	2.320
NUP410M		130	31	130	127	16.6	4900	7000	2.250
NU1011M	55	90	18	57.2	69.5	8.3	6000	8500	0.472
NJ1011M		90	18	57.2	69.5	8.3	6000	8500	0.480
NU211EM		100	21	96.5	95	12.2	5600	8000	0.753
NJ211EM		100	21	96.5	95	12.2	5600	8000	0.768
NUP211EM		100	21	96.5	95	12.2	5600	8000	0.774
N211 EM		100	21	96.5	95	12.2	5600	8000	0.761
NF211EM		100	21	96.5	95	19.0	5600	8000	0.769
NU2211 EM		100	25	114	118	12.0	5600	8000	0.894
NJ2211EM		100	25	114	118	15.3	5600	8000	0.914
NUP2211EM		100	25	114	118	15.3	5600	8000	0.932
N2211 EM		100	25	114	118	15.3	5600	8000	0.886
NU 311 EM	60	120	29	156	143	18.6	4900	7000	1.660
NJ311 EM		120	29	156	143	18.6	4900	7000	1.710
NUP 311 EM		120	29	156	143	18.6	4900	7000	1.780
N 311 EM		120	29	156	143	18.6	4900	7000	1.630
NF 311 EM		120	29	156	143	18.6	4900	7000	1.690
NU2311EM		120	43	232	232	30.5	4900	7000	2.41
NJ2311EM		120	43	232	232	30.5	4900	7000	3.73
NUP2311EM		120	43	232	232	30.5	4900	7000	3.79
N2311EM		120	43	232	232	30.5	4900	7000	3.67
NU411M		140	33	142	140	18.6	4400	6300	2.79
NJ411M		140	33	142	140	18.6	4400	6300	2.91
NU1012M		95	18	37.4	44	5.3	7700	11000	0.5
NJ1012M		95	18	37.4	44	5.3	7700	11000	0.509
N1012M		95	18	37.4	44	5.3	7700	11000	0.497
NU212 EM		110	22	108	102	13.4	5300	7500	0.943
NJ212EM		110	22	108	102	13.4	5300	7500	0.966
NUP212EM		110	22	108	102	13.4	5300	7500	0.975
N212 EM		110	22	108	102	13.4	5300	7500	0.939
NF212 EM		110	22	108	102	13.4	5300	7500	0.953
NU2212EM		110	28	146	153	20	5300	7500	1.243
NJ2212EM		110	28	146	153	20	5300	7500	1.35
NUP2212EM		110	28	146	153	20	5300	7500	1.43
NU 312 EM		130	31	173	160	20.8	4700	6700	2.057
NJ 312 EM		130	31	173	160	20.8	4700	6700	2.1
NUP 312 EM		130	31	173	160	20.8	4700	6700	2.15
N312 EM		130	31	173	160	20.8	4700	6700	2.03
NF 312 EM		130	31	173	160	20.8	4700	6700	2.08
NU2312EM		130	46	260	265	34.5	4700	6700	3.008
NJ2312EM		130	46	260	265	34.5	4700	6700	3.14
NUP2312EM		130	46	260	265	34.5	4700	6700	3.21

型号	基本尺寸			额定负荷		疲劳负荷极限	极限转速		重量
	d	D	B	动态 Cr	静态 cor	Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU412M	60	150	35	168	173	22	4200	6000	3.54
NJ412M		150	35	168	173	22	4200	6000	3.61
NUP412M		150	35	168	173	22	4200	6000	3.69
NU2314EM	75	150	51	315	325	41.5	3900	5600	4.486
NJ2314EM		150	51	315	325	41.5	3900	5600	4.540
NUP 2314 EM		150	51	315	325	41.5	3900	5600	4.590
NU414M		180	42	229	240	30	3500	5000	5.93
NJ414M		180	42	229	240	30	3500	5000	6.070
NU1015M		115	20	58.3	71	8.5	7000	10000	0.779
NJ1015M		115	20	58.3	71	8.5	7000	10000	0.796
NU215EM		130	25	150	156	20.4	4200	6000	1.445
NJ215EM		130	25	150	156	20.4	4200	6000	1.470
NUP 215 EM		130	25	150	156	20.4	4200	6000	1.540
N215 EM		130	25	150	156	20.4	4200	6000	1.420
NU2215EM		130	31	186	208	27	4200	6000	2.817
NJ2215EM		130	31	186	208	27	4200	6000	2.860
NUP 2215 EM		130	31	186	208	27	4200	6000	2.940
NU315EM		160	37	280	265	33.5	3700	5300	3.718
NJ 315 EM		160	37	280	265	33.5	3700	5300	3.780
NUP 315 EM		160	37	280	265	33.5	3700	5300	3.850
N315EM		160	37	280	265	33.5	3700	5300	3.85
NU2315EM		160	55	380	400	50	3700	5300	5.570
NJ2315EM		160	55	380	400	50	3700	5300	5.660
NUP2315EM		160	55	380	400	50	3700	5300	5.750
NU415M		190	45	264	280	34	3400	4800	7.030
NJ415M		190	45	264	280	34	3400	4800	7.200
NU1016M	80	125	22	66	81.5	10.4	6300	6300	1.010
NJ1016M		125	22	99	127	16.3	5600	9500	1,040
NU216EM		140	26	160	166	21.2	3900	5600	1.730
NJ216EM		140	26	160	166	21.2	3900	5600	1.760
NUP216EM		140	26	160	166	21.2	3900	5600	1.810
N216 EM		140	26	160	166	21.2	3900	5600	1,690
NU2216 EM		140	33	212	245	31	3900	5600	3.558
NJ2216 EM		140	33	212	245	31	3900	5600	3.600
NUP2216EM		140	33	212	245	31	3900	5600	3.68
NF 2216 EM		140	33	212	245	31	3900	5600	3.510
NU 316 EM		170	39	300	290	36	3500	5000	4.394
NJ 316 EM		170	39	300	290	36	3500	5000	4.470
NUP 316 EM		170	39	300	290	36	3500	5000	4.54
N 316 EM		170	39	300	290	36	3500	5000	4.35
NU 2316 EM		170	58	415	440	55	3500	5000	6.662
NJ 2316 EM		170	58	415	440	55	3500	5000	6.800
NUP 2316 EM		170	58	415	440	55	3500	5000	6.910
N 2316 EM		170	58	415	440	55	3500	5000	6.59
NU 416 M		200	48	303	320	39	3200	4500	8.35
NJ 416 M		200	48	303	320	39	3200	4500	8.41
N 416 M		200	48	303	320	39	3200	4500	8.32
NU 1017 M	85	130	22	68.2	86.5	10.8	6300	9000	1.04
NJ 1017 M		130	22	68.2	86.5	10.8	6300	9000	1.06
NUP 1017 M		130	22	68.2	86.5	10.8	6300	9000	1.09
NU 217 EM		150	28	190	200	24.5	3700	5300	2.14
NJ217 EM		150	28	190	200	24.5	3700	5300	2.19
NUP 217 EM		150	28	190	200	24.5	3700	5300	2.240
N 217 EM		150	28	190	200	24.5	3700	5300	2.110
NU2217 EM		150	36	250	280	34.5	3700	5300	3,420
NJ 2217 EM		150	36	250	280	34.5	3700	5300	3.460
NUP 2217 M		150	36	250	280	34.5	3700	5300	3.53
NU 317 EM		180	41	340	335	41.5	3400	4800	5.125
NJ 317 EM		180	41	340	335	41.5	3400	4800	5.320
NUP 317 EM		180	41	340	335	41.5	3400	4800	5.32
N 317 EM		180	41	340	335	41.5	3400	4800	5.04
NU2317M		180	60	455	490	60	3400	4800	7.52
NJ 2317 M		180	60	455	490	60	3400	4800	7.560
NUP2317M		180	60	455	490	60	3400	4800	7.670
NU 417 M		210	52	319	335	39	3000	4300	9.860

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸			额定负荷		疲劳负荷极限	极限转速		重量
	d	D	B	动态 Cr	静态 cor	Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NJ 417 M	85	210	52	319	335	39	3000	4300	9.990
N 417 M		210	52	319	335	39	3000	4300	9.830
NU1018M	90	140	24	80.9	104	12.7	6000	8500	1.400
NJ1018M		140	24	80.9	104	12.7	6000	8500	1,420
NU218EM		160	30	208	220	27	3500	5000	2,600
NJ218EM		160	30	208	220	27	3500	5000	2,680
NUP218EM		160	30	208	220	27	3500	5000	2.760
N218 EM		160	30	208	220	27	3500	5000	2.550
NU2218EM		160	40	280	315	39	3500	5000	3.807
NJ2218EM		160	40	280	315	39	3500	5000	3,640
NUP2218EM		160	40	280	315	39	3500	5000	3.750
NU 318 EM		190	43	365	360	43_	3200	4500_	6.113
NJ318EM		190	43	365	360	43	3200	4500	6.210
NUP 318 EM		190	43	365	360	43	3200	4500	6.320
N318 EM		190	43	365	360	43	3200	4500	6.030
NU2318 EM		190	64	500	540	65.5	3200	4500	8.990
NJ2318 EM		190	64	500	540	65.5	3200	4500	9.150
NUP2318EM		190	64	500	540	65.5	3200	4500	9.250
NU418M		225	54	380	415	48	2800	4000	11.20
NU1019M	95	145	24	84.2	110	13.2	5600	8000	1.450
NJ1019M		145	24	84.2	110	13.2	5600	8000	1.480
NU219EM		170	32	255	265	32.5	3400	4800	3,260
NJ219EM		170	32	255	265	32.5	3400	4800	3.320
NUP219EM		170	32	255	265	32.5	3400	4800	3,390
N219 EM		170	32	255	265	32.5	3400	4800	3.230
NU2219EM		170	43	325	375	45.5	3400	4800	4.379
NJ2219EM		170	43	325	375	45.5	3400	4800	4.450
NUP2219 EM		170	43	325	375	45.5	3400	4800	4.560
NU319EM		200	45	390	390	46.5	3000	4300	7.020
NJ319EM		200	45	390	390	46.5	3000	4300	7.140
NUP 319 EM		200	45	390	390	46.5	3000	4300	7.230
N 319 EM		200	45	390	390	46.5	3000	4300	6.970
NU2319EM		200	67	530	585	69.5	3000	4300	10.40
NJ2319EM		200	67	530	585	69.5	3000	4300	10.60
NUP2319EM		200	67	530	585	69.5	3000	4300	10.8
NU419M	100	240	55	413	455	52	2500	3600	13.90
NJ419M		240	55	413	455	52	2500	3600	14.20
NU1020M		150	24	85.8	114	13.7	5300	7500	1.51
NJ1020M		150	24	85.8	114	13.7	5300	7500	1.54
NUP1020M		150	24	85.8	114	13.7	5300	7500	1.590
NU220EM		180	34	285	305	36.5	3200	4500	3.911
NJ220EM		180	34	285	305	36.5	3200	4500	3.970
NUP 220 EM		180	34	285	305	36.5	3200	4500	4.07
N220 EM		180	34	285	305	36.5	3200	4500	3.87
NU2220EM		180	46	380	450	54	3200	4500	5.358
NJ2220EM		180	46	380	450	54	3200	4500	5.43
NUP2220EM		180	46	380	450	54	3200	4500	5.510
NU 320 EM		215	47	450	440	51	2700	3800	8.550
NJ320EM		215	47	450	440	51	2700	3800	8.800
NUP 320 EM		215	47	450	440	51	2700	3800	8,980
N 320 EM		215	47	450	440	51	2700	3800	8,420
NU2320EM		215	73	670	735	85	2700	3800	13.54
NJ2320EM		215	73	670	735	85	2700	3800	12.40
NUP2320EM		215	73	670	735	85	2700	3800	12.70
NU420M		250	58	429	475	53	2500	3600	15.90
NJ 420 M		250	58	429	475	53	2500	3600	16.10
NU1021M	105	160	26	101	137	16	5300	7500	1.960
N 1021 M		160	26	101	137	16	5300	7500	1.88
NU221EM		190	36	300	315	36.5	3000	4300	4.56
NJ221EM		190	36	300	315	36.5	3000	4300	4.450
NUP221EM		190	36	300	315	36.5	3000	4300	4.52
N221 EM		190	36	300	315	36.5	3000	4300	4.32
NU321EM		225	49	500	500	57	2700	3800	9.850
NJ 321 EM		225	49	500	500	57	2700	3800	9.970
N 321 EM		225	49	500	500	57	2700	3800	9.78

型号	基本尺寸			额定负荷		疲劳负荷极限	极限转速		重量
	d	D	B	动态 Cr	静态 cor	Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU421M	105	260	60	501	570	64	2400	3400	17.20
NU1022M	110	170	28	128	166	19.3	4900	7000	2.410
NU222EM		200	38	335	365	42.5	2800	4000	5.396
NJ222 EM		200	38	335	365	42.5	2800	4000	5.460
NUP222EM		200	38	335	365	42.5	2800	4000	5.550
N222 EM		200	38	335	365	42.5	2800	4000	5.370
NU2222 EM		200	53	440	520	61	2800	4000	8.307
NJ2222EM		200	53	440	520	61	2800	4000	8.430
NUP2222EM		200	53	440	520	61	2800	4000	8.520
NU322EM		240	50	530	540	61	2400	3400	11.54
NJ322 EM		240	50	530	540	61	2400	3400	11.80
NUP 322 EM		240	50	530	540	61	2400	3400	12.00
N322 EM		240	50	530	540	61	2400	3400	11.30
NU2322EM		240	80	780	900	102	2400	3400	18.68
NJ2322EM		240	80	780	900	102	2400	3400	19.00
NUP2322EM		240	80	780	900	102	2400	3400	19.20
NU 422 M		280	65	532	585	64	2200	3200	22.30
NJ422M		280	65	532	585	64	2200	3200	22.60
NU 1024 M	120	180	28	134	183	20.8	4400	6300	2.580
NJ1024 M		180	28	134	183	20.8	4400	6300	2.63
NF1024M		180	28	134	183	20.8	4400	6300	2.61
NU224 EM		215	40	390	430	49	2500	3600	6.260
NJ224 EM		215	40	390	430	49	2500	3600	6.59
NUP224EM		215	40	390	430	49	2500	3600	6.720
N224 EM		215	40	390	430	49	2500	3600	6.270
NU2224 EM		215	58	520	630	72	2500	3600	9.378
NJ2224 EM		215	58	520	630	72	2500	3600	9.53
NUP2224EM		215	58	520	630	72	2500	3600	9.670
NU324EM		260	55	610	620	69.5	2200	3200	15.01
NJ324 EM		260	55	610	620	69.5	2200	3200	15.30
NUP 324 EM		260	55	610	620	69.5	2200	3200	15.60
N324 EM		260	55	610	620	69.5	2200	3200	14.80
NU2324EM		260	86	915	1040	116	3000	4300	23.70
NJ2324 EM		260	86	915	1040	116	3000	4300	23.90
NUP2324EM		260	86	915	1040	116	3000	4300	24.20
NU424M	130	310	72	644	735	78	2000	2800	30.70
NJ424M		310	72	644	735	78	2000	2800	31.10
NU1026M		200	33	165	224	25	3900	5600	3.880
NJ1026M		200	33	165	224	25	3900	5600	3.940
NUP1026M		200	33	165	224	25	3900	5600	3.980
NU226EM		230	40	415	455	51	2400	3400	7.401
NJ226EM		230	40	415	455	51	2400	3400	7.440
NUP226EM		230	40	415	455	51	2400	3400	7.520
N226 EM		230	40	415	455	51	2400	3400	7.370
NU2226EM		230	64	610	735	83	2400	3400	11.66
NJ2226EM		230	64	610	735	83	2400	3400	11.90
NUP2226EM		230	64	610	735	83	2400	3400	12.10
NU 326 EM		280	58	720	750	81.5	2100	3000	18.20
NJ326EM		280	58	720	750	81.5	2100	3000	18.50
NUP 326 EM		280	58	720	750	81.5	2100	3000	18.80
N 326 EM		280	58	720	750	81.5	2100	3000	18.00
NU2326EM		280	93	1060	1250	137	2700	3800	29.10
NJ2326EM		280	93	1060	1250	137	2700	3800	29.70
NUP2326EM		280	93	1060	1250	137	2700	3800	29.90
NU1028M	140	210	33	172	245	27	3700	5300	4.110
NJ1028M		210	33	172	245	27	3700	5300	4.180
NUP1028M		210	33	172	245	27	3700	5300	4.260
NU228EM		250	42	450	510	57	2200	3200	9.320
NJ228EM		250	42	450	510	57	2200	3200	9.450
NUP228EM		250	42	450	510	57	2200	3200	9.530
N228EM	-	250	42	450	510	57	2200	3200	9.260
NU2228EM		250	68	655	830	93	3400	4800	14.69
NJ2228EM		250	68	655	830	93	3400	4800	15.40
NUP2228EM		250	68	655	830	93	3400	4800	15.90
N2228EM		250	68	655	830	93	3400	4800	14.50

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸			额定负荷		疲劳负荷	极限转速		重量
	d	D	B	动态 Cr	静态 cor	极限 Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU 328 EM	140	300	62	780	830	88	2000	2800	22.28
NJ328EM		300	62	780	830	88	2000	2800	22.60
NUP 328 EM		300	62	780	830	88	2000	2800	22.90
NU2328EM	150	300	102	1200	1430	150	2500	3600	36.78
NJ2328EM		300	102	1200	1430	150	2500	3600	37.30
NUP2328EM		300	102	1200	1430	150	2500	3600	37.60
NU1030M		225	35	194	275	30	3500	5000	5.090
NJ1030M		225	35	194	275	30	3500	5000	5.110
NUP1030M		225	35	194	275	30	3500	5000	5.130
NU230EM		270	45	510	600	64	2000	2800	11.64
NJ230EM		270	45	510	600	64	2000	2800	11.80
NUP230EM		270	45	510	600	64	2000	2800	12.00
N230 EM		270	45	510	600	64	2000	2800	11.50
NU2230EM		270	73	735	930	100	2000	2800	18.60
NJ2230EM		270	73	735	930	100	2000	2800	19.00
NU 330 EM		320	65	900	965	100	1800	2600	26.65
NJ 330 EM		320	65	900	965	100	1800	2600	27.00
N 330 EM		320	65	900	965	100	1800	2600	26.40
NU2330EM		320	108	1370	1630	166	2400	3400	44.19
NJ2330EM		320	108	1370	1630	166	2400	3400	44.90
NU1032 EM	160	240	38	229	325	35.5	3400	4800	6.080
NJ1032 EM		240	38	229	325	35.6	3400	4800	6.190
NU232 EM		290	48	585	680	72	1800	2600	14.39
NJ232 EM		290	48	585	680	72	1800	2600	14.60
NUP232EM		290	48	585	680	72	1800	2600	14.80
N232 EM		290	48	585	680	72	1800	2600	14.20
NU2232EM		290	80	930	1200	129	2500	3600	24.00
NJ2232EM		290	80	930	1200	129	2500	3600	24.30
N2232EM		290	80	930	1200	129	2500	3600	23.70
NU 332 EM		340	68	1000	1080	112	1700	2400	31.55
NJ 332 EM		340	68	1000	1080	112	1700	2400	32.00
N332 EM		340	68	1000	1080	112	1700	2400	31.20
NU2332EM		340	114	1250	1730	173	2000	2800	52.82
NJ2332EM		340	114	1250	1730	173	2000	2800	53.50
N2332 EM		340	114	1250	1730	173	2000	2800	52.60
NU1034M	170	260	42	275	400	41.5	3000	4300	8.32
NJ1034M		260	42	275	400	41.5	3000	4300	8.46
NU234EM		310	52	695	815	85	1700	2400	17.8
NJ234EM		310	52	695	815	85	1700	2400	18.10
NUP234EM		310	52	695	815	85	1700	2400	18.30
N234 EM		310	52	695	815	85	1700	2400	17.60
NU2234EM		310	86	1450	2040	204	2100	3000	28.00
NJ2234EM		310	86	1450	2040	204	2100	3000	28.70
NU334EM		360	72	952	1180	116	1500	2200	36.70
NJ334 EM		360	72	952	1180	116	1500	2200	37.3
N334 EM		360	72	952	1180	116	1500	2200	36.40
NU2334EM		360	120	1450	2040	204	2100	3000	61.5
NJ2334 EM		360	120	1450	2040	204	2100	3000	61.9
NU1036M	180	280	46	336	475	51	2800	4000	10.8
NU236EM		320	52	720	850	88	2200	3200	18.5
NJ236EM		320	52	720	850	88	2200	3200	18.9
NUP236EM		320	52	720	850	88	2200	3200	19.2
NU2236EM		320	86	1100	1430	146	2200	3200	30.5
NJ2236EM		320	86	1100	1430	146	2200	3200	31.2
NU336 EM		380	75	1020	1290	125	1500	2200	42.40
NJ336EM		380	75	1020	1290	125	1500	2200	43
NU2336EM		380	126	1610	2240	216	2000	2800	70.80
NJ2336EM		380	126	1610	2240	216	2000	2800	71.70
NU1038M	190	290	46	347	500	53	2700	3800	11.30
NU238EM		340	55	800	965	98	2100	3000	22.50
NJ238EM		340	55	800	965	98	2100	3000	22.90
N238EM		340	55	800	965	98	2100	3000	23.20
NU2238EM		340	92	1220	1600	160	2100	3000	37.90
NJ2238EM		340	92	1220	1600	160	2100	3000	38.30
NU 338 EM		400	78	1140	1500	143	1400	2000	49.40

型号	基本尺寸			额定负荷		疲劳负荷	极限转速		重量
	d	D	B	动态 Cr	静态 cor	极限 Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU2338EM	200	400	132	1830	2550	236	1800	2600	81.50
NJ2338EM		400	132	1830	2550	236	1800	2600	82.90
NU1040M		310	51	380	570	58.5	2100	3000	14.60
NJ1040M		310	51	380	570	58,6	2100	3000	14.80
NU240EM		360	58	850	1020	100	2000	2800	26.70
NJ240EM		360	58	850	1020	100	2000	2800	27.30
NUP240EM		360	58	850	1020	100	2000	2800	27.70
NU2240EM		360	98	1370	1800	180	2000	2800	44.90
NU340EM		420	80	1230	1630	150	1700	2400	55.40
NU2340EM		420	138	1980	2800	255	1700	2400	93.20
NJ2340EM		420	138	1980	2800	255	1700	2400	95.00
NU1044M	220	340	56	495	735	73.5	2000	2800	19.00
NJ244EM		400	65	1060	1290	125	1700	2400	36.80
NJ244EM		400	65	1060	1290	125	1700	2400	37.40
NUP244EM		400	65	1060	1290	125	1700	2400	37.90
NU2244EM		400	108	1570	2280	212	1700	2400	61.00
NU344M		460	88	1210	1630	150	1200	1700	72.60
NJ344M		460	88	1210	1630	150	1200	1700	73.70
NU2344EM		460	145	2380	3450	310	1500	2200	121.0
NU1048M	240	360	56	523	800	78	1800	2600	20.00
NJ248M		440	72	952	1370	129	1500	2200	50.6
NJ248M		440	72	952	1370	129	1500	2200	52.30
NUP248M		440	72	952	1370	129	1500	2200	53.80
NU2248M		440	120	1450	2360	216	1500	2200	84.70
NJ2248M		440	120	1450	2360	216	1500	2200	84.20
NU348M		500	95	1450	2000	180	1100	1600	92.60
NJ348M		500	95	1450	2000	180	1400	2000	96.10
NU2348EM		500	155	2600	3650	320	1400	2000	94.80
NU1052M	260	400	65	627	965	96.5	1800	2400	29.5
NJ252M		480	80	1170	1700	156	1400	2000	68.5
NJ252M		480	80	1170	1700	156	1400	2000	70.0
NUP252M		480	80	1170	1700	156	1400	2000	72.0
NU2252M		480	130	1790	3000	265	1300	2000	110
NJ2252M		480	130	1790	3000	265	1300	2000	112
NU 352 EM		540	102	1940	2700	236	1100	1800	125
NU1056M	280	420	65	660	1060	102	1700	2200	31.5
NU256M		500	80	1140	1700	153	1400	1900	71.5
NJ256M		500	80	1140	1700	153	1400	1900	73.0
NU2256EM		500	130	2200	3250	285	1200	1900	115
NU2356M		580	175	2700	4300	365	1000	1700	230
NU1060M	300	460	74	858	1370	129	1500	2000	46.5
NJ1060M		460	74	858	1370	129	1500	2000	47.0
NU260M		540	85	1420	2120	183	1300	1800	89.5
NU2260M		540	140	2090	3450	300	1200	1800	145
NU1064M	320	480	74	880	1430	132	1400	1900	48.5
NJ1064M		480	74	880	1430	132	1400	1900	49
NU264M		580	92	1610	2450	204	1200	1600	115
NU2264 EM		580	150	3190	5000	415	1000	1600	1800
NU1068M	340	520	82	1080	1760	156	1300	1700	65.0
NJ1068M		520	82	1080	1760	156	1300	1700	68.0
NU2268M		620	165	2640	4500	365	1000	1500	220
NU1072M	360	540	82	1100	1830	163	1300	1600	67.5
NU2272M		650	170	2920	4900	4000	950	1400	250
NU1076M	380	560	82	1140	1930	170	1200	1600	71.0
NJ1076M		560	82	1140	1930	170	1200	1600	73
NU2276EM		680	175	3960	6400	510	850	1300	275
NU1080M	400	600	90	1380	2320	204	1100	1500	92.5
NU1084M	420	620	90	1420	2450	212	1100	1400	96.0
NU1088M	440	650	94	1510	2650	212	1000	1300	105
NU1092M	460	680	100	1650	2850	224	950	1200	115
NU1292M		830	165	4180	6800	510	750	1100	415
NU2292M		830	212	5120	8650	655	700	1100	530
NU1096M	480	700	100	1680	3000	232	900	1200	130
NU10/500M	500	720	100	1720	3100	236	900	1100	135
NU12/500M		920	185	5280	8500	620	670	950	585

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸			额定负荷		疲劳负荷	极限转速		重量
	d	D	B	动态 Cr	静态 cor	极限 Pu	脂润滑转速	油润滑转速	
	mm			kN	kN	kN	r/min	r/min	kg
NU10/530M	530	780	112	2290	4050	305	800	1000	190
NU20/530 EM	530	780	145	3740	7350	550	670	1000	255
NU10/560M	560	820	115	2330	4250	310	750	1000	210
NU20/560 EM		820	150	3800	7650	560	630	1000	290
NU12/560M		1030	206	7210	11200	780	560	800	850
NU10/600M	600	870	118	2750	5100	365	700	900	245
NU 20/600		870	155	4180	8000	570	600	900	325
NU22600 EM		1090	155	5610	9800	670	480	850	710
NU10/630 EM	630	920	128	3410	6200	430	630	1000	285
NU20/630EM		920	170	4730	9500	670	560	850	400
NU12/630EM		1150	230	8580	13700	915	450	700	1100
NU10/670EM	670	980	136	3740	6800	465	530	800	350
NU20/670EM		980	180	5390	11000	750	500	800	480
NU 10/710	710	1030	140	4680	8500	570	500	750	415
NU20/710EM		1030	185	5940	12000	815	480	700	540
NU 10/750	750	1090	150	4730	8800	585	430	670	490
NU20/750 EM		1090	195	7040	14600	980	430	670	635
NU20/800EM	800	1150	200	7040	14600	950	400	630	715

型号	基本尺寸			额定负荷		极限转速		重量
	d	D	B	动态	静态			
	mm			Cr kN	cor kN	脂润滑转速 r/min	油润滑转速 r/min	kg
NCF 3004 V	20	42	16	26.1	26.5	5700	8200	0.110
NCF1005V	25	47	12	21.0	21.8	5300	7600	0.0918
NCF 3005V		47	16	29.7	33.1	5300	7600	0.122
NCF205V		52	15	32.5	21.7	5300	7600	0.151
NCF2305V		62	24	56.8	61.8	4300	6200	0.402
NCF 3006V	30	55	19	35.7	39.7	5000	7100	0.220
NCF206EV		62	16	47.3	48.7	5000	7100	0.224
NCF 3007 V	35	62	20	43.7	50.5	4500	6400	0.265
NCF 307 EV		80	21	74.8	84.1	4500	6400	0.558
NCF 3008V	40	68	21	51.6	62.7	4000	5700	0.317
NCF208EV		80	18	66.5	70.9	4000	5700	0.409
NCF 308 EV		90	23	92.4	96.0	3400	4800	0.707
NCF3009V	45	75	23	57.5	74.1	3500	5000	0.420
NCF 3010V	50	80	23	72.7	93.1	3400	4800	0.440
NCF 3011V	55	90	26	100	133	2900	4100	0.640
NCF2912V	60	85	16	52.3	76.0	3000	4300	0.295
NCF3012V		95	26	101	139	2700	3800	0.695
NCF2913V	65	90	16	55.4	83.6	2700	3800	0.309
NCF 3013 V		100	26	106	155	2500	3600	0.740
NCF2914V	70	100	19	72.7	10	2500	3600	0.490
NCF3014V		110	30	122	164	2400	3400	1.05
NCF2915V	75	105	19	75.2	119	2400	3400	0.520
NCF 3015 V		115	30	127	181	2100	3000	1.09
NCF2916V	80	110	19	76.9	125	2200	3200	0.550
NCF2916X3V		114	20	76.0	127	2200	3200	0.672
NCF 3016V		125	34	157	217	2000	2900	1.45
NCF2917V	85	120	22	969	158	2100	3000	0.810
NCF3017V		130	34	163	224	2000	2900	1.55
NCF2918V	90	125	22	100	167	2000	2900	0.840
NCF 3018 V		140	37	188	266	1900	2700	1.95
NCF2920V	100	140	24	122	190	1800	2500	1.15
NCF3020V		150	37	199	195	1800	2500	2.12
NCF2922V	110	150	24	127	209	1600	2300	1,24
NCF3022V		170	45	261	380	1500	2100	3.58
NCF2924V	120	165	27	163	276	1500	2100	1.77
NCF 3024 V		180	46	277	418	1500	2100	3.96
NCF2124X2V		200	52	380	587	1100	1600	6.37
NCF2224V		215	58	486	698	1100	1600	9.07
NCF2925X3V	125	165	26	127	268	1400	2000	1.56
NCF2926V	130	180	30	195	342	1300	1900	2.38

型号	基本尺寸			额定负荷		极限转速		重量
	d	D	B	动态 Cr	静态 cor	脂润滑转速	油润滑转速	
	mm			kN	kN	r/min	r/min	kg
NCF 3026V	130	200	52	392	589	1300	1800	5.92
NCF2928V	140	190	30	209	371	1300	1800	2.45
NCF3028V		210	53	418	646	1200	1700	6.10
NCF2228V		250	68	658	969	980	1400	14.6
NCF2930V	150	210	36	277	466	1100	1600	3.79
NCF3030V		225	56	434	675	1100	1500	748
NCF2230V		270	73	752	1120	910	1300	18.7
NCF2932V	160	220	36	288	504	1100	1500	4.04
NCF3032V		240	60	486	760	980	1400	9.18
NCF2232V		290	80	941	1430	800	1140	23.1
NCF2934V	170	230	36	298	532	980	1400	4.43
NCF3034V		260	67	637	1010	910	1300	12.4
NCF2234V		310	86	1050	1620	700	1000	28.7
NCF2936V	180	250	42	371	660	910	1300	6.25
NCF3036V		280	74	742	1190	840	1200	16.7
NCF2938V	190	260	42	418	741	910	1300	6.56
NCF3038V		290	75	752	1230	840	1200	17.5
NCF2238V		340	92	1190	1800	670	950	35.7
NCF1884V	420	520	46	660	1430	480	600	21
NCF2984V		560	82	1650	3600	450	560	57
NCF3084V		620	150	3030	5700	430	530	150
NCF1888V	440	540	46	671	1460	450	560	22
NCF2888V		540	60	1060	2700	450	560	29
NCF2988V		600	95	2010	4400	430	530	80
NCF3088V		650	157	3580	6500	400	500	175
NCF1892V	460	580	56	913	1960	430	530	34.0
NCF2892V		580	72	1300	3050	430	530	44.0
NCF2992V		620	95	2050	4500	400	500	83.5
NVF3092 V		680	163	3690	6950	380	480	195
NCF1896V	480	600	56	935	2040	400	500	35.5
NCF2896V		600	72	1320	3150	400	500	46
NCF2996V		650	100	2290	4900	380	480	98.0
NCF 3096V		700	165	3740	7200	360	450	205
NCF18/500V	500	620	56	952	2120	380	480	36.5
NCF28/500V		620	72	1340	3350	380	480	48.0
NCF29/500V		670	100	2330	5000	380	450	100
NCF 30/500V		720	167	3800	7500	360	450	215
NCE18/530V	530	650	561	990	2240	360	450	38.5
NCE28/530V		650	72	1400	3450	360	450	49.5
NCE29/530V		710	106	2640	6100	340	430	120
NCE30/530V		780	185	5230	10600	320	400	300
NCE18/560V	560	680	56	1020	2360	340	430	40.5
NCE28/560V		680	72	1420	3650	340	430	54.0
NCF29/560 V		750	112	3080	6700	320	400	140
NCF 30/560 V		820	195	5830	11800	300	380	345
NCF18/600V	600	730	60	1050	2550	320	400	51.5
NCF28/600V		730	78	1570	4300	320	400	67.5
NCF29/600V		800	118	3190	7100	300	380	170
NCF18/630V	630	780	691	1250	2900	300	360	72.5
NCF28/630V		780	88	1870	5000	300	360	92.5
NCF29/630V		850	128	3740	8650	280	340	205
NCE18/670V	670	820	691	1300	3150	280	340	76.5
NCE28/670V		820	88	1940	5300	280	340	97.5
NCF29/670V		900	136	3910	9000	260	320	245
NCF18/710V	710	870	74	1540	3750	260	320	92.5
NCF28/710V		870	95	2330	6300	260	320	115
NCF29/710V		950	140	4290	10000	240	300	275
NCF18/750V	750	920	78	1870	4500	240	300	110
NCE28/750V		920	100	2640	6950	240	300	140
NCF29/750V		1000	145	4460	10600	220	280	315
NCF18/800V	800	980	820	1940	4800	220	280	130
NCF28/800V		980	106	2750	7500	220	280	165
NCF29/800V		1060	150	4950	12200	200	260	360
NCF18/850V	850	1030	82	2010	5100	200	260	135
NCF28/850V		1030	106	2860	8000	200	260	175

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸			额定负荷		极限转速		重量
	d	D	B	动态 Cr	静态 cor	脂润滑转速	油润滑转速	
	mm			kN	kN	r/min	r/min	kg
NCF29/850V	850	1120	155	5230	1270	190	240	405
NCF18/900V	900	1090	85	2380	6000	190	240	160
NCF28/900V		1090	112	3190	9150	190	240	208
NCF29/900V		1180	165	5940	14600	170	220	472
NCF18/950V	950	1150	90	2420	6300	170	220	185
NCF28/950V		1150	118	3410	9800	170	220	240
NCF29/950V		1250	175	6600	16300	160	200	565
NCF18/1000V	1000	1220	100	2920	7500	160	200	230
NCF28/1000V		1220	128	4130	11600	160	200	310
NCF29/1000V		1320	185	7480	18600	150	190	680
NCF18/1120V	1120	1360	106	3740	9650	130	170	298

型号	基本尺寸			额定负荷		极限转速		重量
	d	D	B	动态 Cr	静态 cor	脂润滑转速	油润滑转速	
	mm			kN	kN	r/min	r/min	kg
NNCF5006V	30	55	34	73.7	88	5300	7500	0.360
NNCF5007V	35	62	36	89.7	112	4700	6700	0.450
NNCF5008V	40	68	38	106	140	4200	6000	0.57
NNCF5009V	45	75	40	112	156	3700	5300	0.690
NNCF5010V	50	80	40	142	196	3500	5000	0.790
NNCF5011V	55	90	46	190	280	3000	4300	1.21
NNCF4912V	60	85	25	78.1	137	3200	4500	0.530
NNCF5012V		95	46	198	300	2800	4000	1.21
NNCF5013V	65	100	46	209	325	2700	3800	1.35
NNCF4914V	70	100	30	114	193	2700	3800	0.750
NNCF5014V		110	54	238	345	2500	3600	1.91
NNCF5015V	75	115	54	251	380	2200	3200	1.91
NNCF4916V	80	110	30	121	216	2400	3400	0.860
NNCF5016V		125	60	308	455	2100	3000	2.62
NNCF5017V	85	130	60	314	475	2100	3000	2.70
NNCF4918V	90	125	35	161	300	2100	3000	1.33
NNCF5018V		140	67	369	560	2000	2800	3.65
NNCF4920V	100	140	40	209	400	1800	2600	2.04
NNCF5020V		150	67	391	620	1800	2600	3.92
NNCF4922V	110	150	40	220	430	1700	2400	2.18
NNCF5022V		170	80	512	800	1500	2200	6.26
NNCF4924V	120	165	45	242	480	1500	2200	2.93
NNCF5024V		180	80	539	880	1400	2000	6.74
NNCF4926V	130	180	50	275	530	1400	2000	3.98
NNCF5026V		200	95	765	1250	1300	1900	10.5
NNCF4928V	140	190	50	286	570	1300	1900	4.25
NNCF5028V		210	95	809	1370	1300	1800	11.3
NNCF4830V	150	190	40	255	585	1300	1800	2.67
NNCF4930 V		210	60	429	830	1200	1700	6.63
NNCF 5030 V		225	100	842	1430	1200	1700	13.2
NNCF4832V	160	200	40	260	610	1200	1700	2.94
NNCE4932V		220	60	446	915	1100	1600	7.06
NNCF5032V		240	109	952	1600	1100	1500	16.1
NNCF4834V	170	215	45	286	655	1100	1600	3.87
NNCF4934V		230	60	457	950	1100	1500	7.36
NNCF5034V		260	122	1230	2120	980	1400	22.8
NNCF4836V	180	225	45	297	695	1100	1500	4.07
NNCF4936V		250	69	594	1220	980	1400	10.7
NNCF5036V		280	136	1420	2500	910	1300	30.4
NNCF4838V	190	240	50	330	750	980	1400	5.35
NNCF4938V		260	69	594	1220	980	1400	11.3
NNCF5038V		290	136	1470	2600	910	1300	31.8
NNCF4840V	200	250	50	330	800	980	1400	5.52
NNCF4940V		280	80	704	1500	910	1300	15.6
NNCF5040V		310	150	1680	3050	840	1200	41.2
NNCF4844V	220	270	50	352	865	840	1200	5.90
NNCF4944V		300	80	737	1600	840	1200	17.2

型号	基本尺寸			额定负荷		极限转速		重量
	d	D	B	动态 Cr	静态 cor	脂润滑转速	油润滑转速	
	mm			kN	kN	r/min	r/min	kg
NNCF4848V	240	300	60	539	1290	770	1100	9.13
NNCF4948V		320	80	781	1760	770	1100	18.4
NNCF4852V	260	320	60	561	1400	700	1000	9.67
NNCF4952V		360	100	1170	2550	670	950	32.3
NNCF4856V	280	350	69	737	1860	670	950	15.2
NNCF4956V		380	100	1210	2700	630	900	34.3
NNCF4860V	300	380	80	858	2120	600	850	21.9
NNCF4960V		420	118	1680	3750	560	800	53.5
NNCF4864V	320	400	80	897	2280	560	800	22.8
NNCF4964V		440	118	1760	4050	530	750	56.3
NNCF4868V	340	420	80	913	2400	530	750	25.4
NNCF4968V		460	118	1790	4250	490	700	59.6
NNCF5068CV		520	243	4400	8300	530	670	185
NNCF4872CV	360	440	80	935	2550	560	700	26.5
NNCF4972CV		480	118	1830	4500	530	670	61.5
NNCF5072CV		540	243	4460	8650	500	630	195
NNCF4876CV	380	480	100	1400	3650	530	670	44.8
NNCF4976CV		520	140	2380	5700	500	630	91.5
NNCF5076CV		560	243	4680	9150	480	600	200
NNCF4880CV	400	500	100	1420	3750	500	630	46.2
NNCF4980CV		540	140	2420	6000	480	600	95.5
NNCF5008CV		600	272	5500	11000	450	560	270

型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FC182870	90	140	701	105	1.5	1.5	220	450
FC182874		140	74	105	1.5	1.5	222	454
FC202870	100	138	70	110	1.5	1.1	194	416
FC202880		138	80	110	1.5	1.1	262	609
FC2028100		140	90	110	1.5	11	280	655
FC2028100		140	901	110	1.1	1.1	280	655
FC2028104		140	104	111	1.5	1.1	290	710
FC202870		140	701	111.105	1.5	1.5	211	250
FC202870		140	701	111	1.5	1.1	209	435
FC202880		138	80	110.105	1.5	1.5	261	326
FC2030106		150	106	113	1.5	1.5	350	740
FC2030120		150	1201	113	1.5	1.1	370	800
FC203080		150	80	122	1.5	1.1	255	650
FC2230120	110	150	120	121	1.5	1.5	393	1058
FC223080		150	80	122.125	1.5	1.5	197	690
FC2234120		170	120	127	2	2	518	1150
FC223490		170	90	127.125	2	2	362	417
FC2236100		180	100	128	2	2	521	996
FC243390	120	165	90	132	1.5	1.5	340	820
FC2436105		180	105	136	2	2	460	650
FC2436120		180	120	136	2	2	505	1140
FC243692		180	92	137	2	2	426	966
FC2640104	130	200	104	150	2	2	460	860
FC2640104		200	104	150.145	2	2	460	860
FC2640125		200	125	149	2	2	650	1400
FC2838119	140	190	119	154	2	2	490	1330
FC2842100		210	100	158	2	2	540	1190
FC2842106		210	106	158	2	2	537	1190
FC2842116		210	116	160	2.5	2.5	700	1475
FC2842125		210	125	158	2	2	620	1370
FC2842155		210	155	158	2	2	800	1910
FC2842155K		210	155	158	2	2	693	1610
FC2942155	145	210	155	166	2	2	690	1900
FC2945156		225	156	169	2	2	913	1800
FCD2944120		220	120	164	2	2	608	1310

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FC3042120	150	210	120	166	2	2	565	1400
FC3044120		220	120	167	2	2	630	1370
FC3044150		220	150	168	2.5	2.5	885	2030
FC3045120		225	120	169	2	2	690	1590
FC3045150		225	150	169	2	2	774	1803
FC3046130		230	130	174	2.5	25	860	1785
FC3046156		230	156	174	3	3	820	1660
FC3141160	155	205	160	168	3	3	620	930
FC3245168	160	225	168	178	2	2	1947	2301
FC3246130		230	130	180	2	2	700	1740
FC3246168		230	168	180	3	3	820	2220
FC3246180		230	180	178	2.5	2.5	1055	2580
FC3248124		240	124	183	2.1	2.1	780	1800
FC3248168		240	168	183	2.5	2.5	950	2310
FC3248170		240	170	183	2	2.5	1090	2475
FC3248195		240	195	182	3	3	1340	2500
FC3250140		250	140	182	2.1	2.1	930	1970
FC3250200		250	200	182	2.1	2.1	900	2370
FC3252168		260	168	183	2.5	2.5	947	2310
FC3445225	170	260	225	196	2.1	2.1	1650	3350
FC3445225		260	225	193	4	4	2100	3350
FC3446120		230	120	187	2.5	2.5	720	1795
FC3446130		230	130	188.5	2.5	2.5	680	1720
FC3446160		230	160	185.5	2	2	980	2500
FC3446180		230	180	185.5	2	2	820	2190
FC3448130		240	130	190	2	2	746	1845
FC3448156		240	156	190	2	2	840	2220
FC3448160		240	160	190	2	2	860	2300
FC3450168		250	168	192	2.5	2.5	1110	2580
FC3450170		250	170	192	2	2	1050	2400
FC3451180		255	180	193	2.5	2.5	1215	2780
FC3452120		260	120	195	2.5	2.5	880	1780
FC3452150		260	150	195	2.5	2.5	900	1950
FC3452170		260	170	195	2	2	1080	2610
FC3452225		260	225	195	2	2	1300	3300
FC3650120	180	250	120	200	2.1	2.1	615	1620
FC3650130		250	130	200	2.1	2.1	700	1890
FC3650156		250	156	200	2.1	2.1	900	2400
FC3652120		260	120	202	2.5	2.5	740	1730
FC3652124		260	124	202	2.1	2.1	740	1730
FC3652140		260	140	200	2.5	2.5	847	1918
FC3652154		260	154	202	3.5	3.5	932	2332
FC3652160		260	160	202	2.1	2.1	932	2300
FC3652168		260	168	202	2.1	2.1	1040	2700
FC3652180		260	180	202	2.1	2.1	1100	2800
FC3653180		265	180	204	2.5	2.5	1250	2925
FC3656180		280	180	207	3.5	3.5	1150	1500
FC3656206		280	180	206	3.5	3.5	1400	3000
FC3852114	190	260	114	212	2.1	2.1	620	1650
FC3852168		260	168	212	2.1	2.1	990	2600
FC3853124		265	124	213	2.1	2.1	820	1930
FC3854124		270	124	212	2.1	2.1	793	2056
FC3854166		270	166	212	2.1	2.1	1170	2910
FC3854168		270	168	212	2.1	2.1	1000	2490
FC3854170		270	170	213	2.5	2.5	920	2430
FC3854200		270	200	212	2.1	2.1	1370	3350
FC3856200		280	200	214	2.1	2.1	1243	3117
FC4054120	200	270	120	222	2.1	2.1	615	1645
FC4054170		270	170	222	2.1	2.1	940	2840
FC4056170		280	170	222	2.1	2.1	1100	3000
FC4056188		280	188	222	3.5	3.5	1030	2700
FC4056190		280	190	223	2.5	2.5	1325	3375
FC4056200		280	200	222	2.1	2.1	1210	3350
FC4058130		290	130	226	2.1	2.1	907	1171
FC4058192		290	192	226	2.5	2.5	1230	3200

型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FC4058232	200	290	232	226	2.1	2.1	1340	3880
FC4062200		310	200	229	3.5	3.5	1960	4000
FC4062230		310	230	229	3.5	3.5	2550	5000
FC4062265		310	265	227	3	3	2700	5000
FC4258192	210	290	192	236	2.1	2.1	1030	3000
FC4258192		290	192	236	2.1	2.1	1130	3510
FC4260170		300	170	234	2.1	2.1	1100	2810
FC4260210		300	210	234	2.1	2.1	1388	3700
FC4460192	220	300	192	242	2.5	2.5	1090	3310
FC4462157		310	157	246	2.1	2.1	998	2708
FC4462190	230	310	190	246	2.1	2.1	1263	3438
FC4462192		310	192	246	2.1	2.1	1340	3650
FC4462215		310	215	242	2.5	2.5	1635	4210
FC4462225		310	225	244	2.1	2.1	1510	4217
FC4464160		320	160	245	3	3	1385	3165
FC4464210		320	210	248	2.1	2.1	1400	3530
FC4468192		340	192	246	2.1	2.1	1820	3600
FC4468200		340	200	250	2.1	2.1	1542	3360
FC4468290		340	290	250	4	4	3150	5600
FC4666170	230	330	170	260	2.1	2.1	1215	3228
FC4666206		330	206	260	2.1	2.1	1490	4000
FC4666220K		330	220	266	2.1	2.1	1620	4680
FC4666230		330	230	249	4	4	2400	4150
FC4668260		340	260	261	2.1	2.1	1920	5360
FC4673250		365	250	266	3	3	2400	5380
FC4866220	240	330	220	264	2.5	2.5	1370	3790
FC4866220		330	220	270	3	3	1500	4100
FC4868192		340	192	266	2.1	2.1	1480	4090
FC4868200		340	200	266	2.1	2.1	2360	4110
FC4872200		360	200	272	2.1	2.1	1870	4410
FC4872220		360	220	272	2.5	2.5	1880	4750
FC4872290		360	290	270	4	4	3350	5750
FCD4868220		340	220	268	3	3	1850	4710
FC5068170	250	340	170	274	3	3	1200	3540
FCD5068220		340	220	276	2.1	2.1	1590	4950
FC5068230		340	230	276	3	3	1590	4950
FC5070220		350	220	278	3	3	1740	4400
FC5070230		350	230	278	3	3	1610	4570
FC5072160		360	160	284	3	3	1171	3016
FC5072220		360	220	282	3	3	1800	4600
FC5272192	260	360	192	288	3	3	1274	3468
FC5272200		360	200	292	3	3	1470	4410
FC5272200		360	200	288	3	3	1483	4217
FC5272265		360	265	288	3	3	1850	5560
FC5274200		370	200	292	3	3	1700	4430
FC5274220		370	220	292	3	3	1964	4650
FC5274230		370	230	292	3	3	1828	5210
FC5276220		380	220	290	3	3	2150	4750
FC5276280		380	280	294	3	3	2270	6520
FC5280200		400	200	296	4	4	1792	3542
FC5280200		400	200	296	4	4	1793	3340
FC5280220		400	220	296	3	3	2079	4970
FC5280250		400	250	310	3	3	2100	6400
FC5280250K		400	250	310	3	3	2100	6400
FC5280290		400	145	296	4	4	1800	1720
FCD5272260		360	260	287	2.5	2.5	2185	5985
FCD5272260		360	260	287	2.1	2.1	2050	5980
FCD5274200		370	100	290	3	3	1710	4100
FCD5276280		380	280	295	3	3	2520	6610
FCD5280290		400	290	296	4	4	2710	7100
FC5476230	270	380	230	298	3	3	1830	4960
FC5478236		390	236	312	3	3	2310	5950
FC5478240		390	240	298	3	3	2406	5686
FC5480220		400	220	305	3	3	1840	4570
FCD5476280		380	280	298	2.5	2.5	2495	6730

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FCD5478240	270	390	240	298	3	3	2210	5770
FCD5670208	280	350	208	298	2.5	2.5	1540	4995
FC5675200		375	200	307	3	3	1888	5835
FC5676290		380	290	308	3	3	1888	5835
FCD5678275		390	275	308	3	3	2250	6500
FC5678220		390	220	312	3	3	1800	5350
FC5678240		390	240	312	3	3	1840	5420
FCD5678240		390	240	312	3	3	4970	5850
FC5678275		390	275	312	3	3	2140	6460
FCD5678275		390	275	312	3	3	2140	6460
FCD5680244		400	244	312	7.5	4	2300	6000
FC5680255		400	255	314	3	3	2006	5700
FC5680290		400	290	316	3	3	2350	7250
FCD5684280		420	280	318	3	3	2600	6800
FC5882220	290	410	220	320	4	4	2160	5730
FC5882240		410	240	320	4	4	2300	6200
FC5884300		420	300	327	4	4	2800	7900
FCD5884300		420	300	327	4	4	2870	8330
FC5992290	295	460	290	341	4	4	3050	7900
FCD6080300	300	400	300	328	3	3	2620	7875
FC6084218		420	218	332	4	4	1880	5050
FC6084240		420	240	332	4	4	2225	6100
FC6084300		420	300	332	4	4	2720	8130
FCD6084300		420	300	332	3	3	2700	8100
FCDP6084300		420	300	332	3	3	3000	9300
FCD6086240		430	240	338	3	3	2570	6445
FCD6092350		460	350	340	4	4	4100	10500
FCD6092270		460	270	344	3	3	3190	7420
FC6286240	310	430	240	344.5	3	3	2495	6590
FC6488240	320	440	240	351	4	4	2120	6100
FCD6488240		440	240	351	4	4	2150	6100
FCD6488300		440	3001	351	4	4	2830	8700
FC6488300		440	300	352	4	4	2700	7660
FC6490240		450	240	355	4	4	2400	6700
FCD6490240		450	2401	355	4	4	2400	6700
FC6492280		460	280	357	4	4	2800	7400
FCD6492340		460	340	357	4	4	3320	9340
FC6492300		460	3001	357	4	4	3010	8400
FCD6494350		470	350	361.7	3	3	3875	10110
FCD6492324		460	324	357	4	4	3010	8400
FCD6496290		480	290	364	4	4	3520	8640
FCD6496350		480	3501	364	4	4	3140	9640
FCDP6496350		480	3501	364	10×20°	4	3768	10660
FCD6496306		480	3061	364	4	4	3950	8250
FC6688200	330	440	2001	360	3	3	2155	5775
FCD6692340		460	3401	365	4	4	3340	9180
FCDP6692340		460	340	365	4	4	3300	9800
FC6890250	340	450	250	369	4	4	2300	7200
FC6890250		450	250	371	4	4	2300	7200
FC6890250		450	250	370	4	4	2100	6670
FC6890250		450	250	366	4	4	2250	3600
FCD6890250		450	250	340	4	4	2330	7250
FC6892260		460	260	370	4	4	2380	7600
FCD6892260		460	260	370	4	4	2374	6749
FC6896280	340	480	280	378	4	4	3880	8050
FCD6896350		480	350	378	4	4	3430	10060
FCDP6896350		480	350	378	7×20°	2.5	3860	10600
FCDP68100370		500	370	385	6	6	4510	13450
FCD70100380	350	500	380	389	4	4	4050	11400
FCDP70100380		500	380	389	4	4	4500	13450
FCD70100300		500	300	388	5	5	3270	8990
FCD70104300		520	300	401	5	5	3300	9000
FCDP70100400		500	400	388	11.5×20	3	4220	12450
FCDP70100410		500	410	388	11.5×20	3	5800	13500
FC7296290	360	480	290	388	3	3	3100	9135

型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FCD72100250	360	500	250	394	3	3	3350	7765
FCD72102370		510	370	400	4	4	3756	9870
FC72102370		510	370	400	4	4	3730	10980
FCD72102400		510	400	397	5	5	4545	12845
FCDP72104380		520	380	405	4	4	4150	12200
FCD72104380		520	380	405	4	4	3750	11000
FCD72110430		550	430	409	4	4	5270	13900
FCD72100250		500	250	394	3	3	3300	8000
FCD7496230	370	480	230	400	5	5	2490	7380
FCD7496250		480	250	401	3	3	2660	8025
FCD74104380		520	380	409	4	4	4190	12890
FCDP74104380		520	380	409	4	4	4190	12890
FCDP74104400		520	400	409	4	4	4440	13390
FCDP74106400		530	400	413	4	4	4433	13402
FCD74108400		540	400	416	4	4	4500	13800
FCDP74108400		540	400	416	4	4	5050	15300
FCDP74104380		520	380	409	1.5	1.5	5230	12000
FCDP75120440	375	600	440		2	2	5350	15600
FCD76108300	380	540	300	422	4	4	3440	9100
FCDP76108400		540	400	422	4	4	4650	15070
FCD76108380		540	380	422	4	4	3800	10900
FCD76100300		500	300	412	4	4	2940	9470
FCD76104280		520	280	417	4	4	3395	9385
FCD76104290		520	290	418	4	4	3490	9720
FCD76104300		520	300	426	4	4	2800	9620
FCDP76108300		540	300	421	8.5×20°	2	3600	9980
FCD76108260		540	260	428	4	4	3350	8550
FCD76108300		540	300	422	4	4	3400	9000
FCD76108380		540	380	422	4	4	3930	11360
FCD76108400		540	400	422	4	4	4250	13350
FC76108304		540	304	422	4	4	4650	1100
FC76108340		540	340	422	4	4	5250	11900
FCD76112300		560	300	424	13.5×20	2	4950	9650
FCD78108320	390	540	320	431	4	4	4200	12000
FCD78108400		540	400	424	4	4	4470	13180
FCD78110310		550	310	430	4	4	4090	8960
FCDP78108320		540	320	431	10×20°	2	4270	13220
FCD80112410	400	560	410	445	5	5	4470	14080
FCDP80112410		560	410	445	13.5×20°	3	5200	16960
FCD80118420		590	420	450	4	4	5715	15185
FCDP80118440		590	440	450	5	5	6500	18100
FCD80118440		590	440	450	5	5	5890	16600
FCDP80110400		550	400	441	13.5×20°	3	4900	15890
FC80112300		560	300	442	4	4	4550	10000
FC80110300		550	300	442	5	5	4460	5050
FCD82112400	410	560	400	450	5	5	4460	14400
FCDP82112400		560	400	450	11×20°	2	5000	16370
FCDP82120440		600	440	460	5	5	5885	17300
FCD82120440		600	440	460	2	2	5000	15200
FCD84112437	420	560	437	456	5	5	5240	16490
FCD84116260		580	260	460	4	4	2877	9650
FCD84116320		580	320	463	4	4	3600	10800
FCDP84116400		580	400	463	4	4	4700	14920
FCDP84120440		600	440	470	8×20°	5	5546	17600
FCD84120440		600	440	470	5	5	4935	14990
FCD84124400		620	400	473	5	5	5420	15470
FCDP84124400		620	400	473	4	4	6140	18260
FCD88124450	440	620	450	487	4	4	6020	19000
FCDP88124450		620	450	487	12×20°	5	6690	21160
FCDP88130355		650	355	494	12.5×20	4	5360	12600
FCD88132340		660	340	492	6	6	5170	12970
FC90114300	450	590	300	490	14.5×20	4	3900	12200
FCD90124450		620	450	490	6	6	5710	17760

圆柱滚子轴承 Cylindrical roller bearing



型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FCD92130355	460	650	355	509.5	12×20°	3	4500	13200
FCDP92130355		650	355	509.5	12×20°	3	5020	14600
FCDP92130424		650	424	510	12×20°	3	6000	20240
FCD92130470		650	470	509	12×20°	3	6100	20200
FCDP92130470		650	470	509	12×20°	3	7240	23080
FCDP92138500		690	500	518	12×20°	6	8600	25200
FC92136400		680	400	518	6	6	8050	17400
FCDP94132470	470	660	470	517	12×20°	6	7550	24560
FCDP96120236	480	600	236	510	3	3	3035	9715
FCDP96130450		650	450	525	12×20°	3	6600	21200
FCDP96130420		650	420	523	5	5	5840	17725
FCD96130450		650	450	525	6	6	6650	20200
FCDP96136420		680	420	528	12×20°	3	6700	16300
FCD96136450		650	450	525	6	6	6650	20200
FCD96136500		680	500	532	6	6	7970	22800
FCDP96136500		680	500	532	12×20°	3	7600	24000
FCDP100134450	500	670	450	556	12.5×20°	5	7300	24580
FCD100136405		680	405	550	5	5	5160	17300
FCDP100136450		680	450	550	5	2	7300	24580
FCDP100138470		690	470	547	5	5	6945	20785
FCDP100138510		690	510	552	5	5	7400	22555
FCDP100140515		700	515	554	5	5	7690	22880
FCDP100142480		710	480	558	18×20°	5	7040	24040
FCDP100144400		720	400	558	6	3	6300	21170
FCDP100144530		720	530	568	13×20°	5	8640	25600
FCD100144530		720	530	568	6	6	8640	25600
FCDP102136500	510	680	500	560	6	6	7180	26000
FCD102136500		680	500	560	7.5×20°	5	7180	26000
FCDP102146520		730	520	569	17.5x20°	6	7610	19800
FCDP102152550		760	550	570	16×20°	5	9680	23800
FCDP104134450	520	670	450	559	12×20°	4	17980	24850
FCDP104140540		700	540	564	6	6	7635	24640
FCDP104114550		720	550	566	5	5	8250	25325
FCDP104147535		730	535	574.5	5	5	8425	24800
FCDP106140540	530	700	540	574	6	6	7445	24965
FCDP106152520		760	520	587	12×20°	5	9360	25600
FCDP106152520		760	520	587	12×20°	5	9300	29440
FCDP106150550		750	550	586	12×20°	5	9500	30900
FCDP106156500		780	500	591	6	6	8300	22600
FCDP106156570		780	570	601	14×20°	6	10200	29200
FCDP106142520		710	520	575	6	6	7880	27850
FCDP110148510	550	740	510	600	15×20°	2	8080	24300
FCDP110160520		800	520	612	14×20°	6	9360	26500
FCDP110160560		800	560	610	18.5×20	6	9680	28000
FCDP110160560		800	560	612	6	6	11090	34250
FCDP112164600	560	820	600	625	20×20°	3	14200	34000
FCDP112160600		800	600	620	7.5	7.5	13000	33500
FCDP112164630		820	630	625	3	3	14400	36000
FCDP112136360		680	360	590	3	3	4545	17145
FCDP114150530	570	750	530	622	5	5	7490	28000
FCDP114160514		800	514	626	6	6	9290	30160
FCDP114163594		815	594	628	6	6	11570	36190
FCDP114166600		830	600	635	6	6	11200	36500
FCDP116156486	580	780	520	634	12×20°	2	9900	27000
FCDP118164590	590	820	590	649	6	6	12800	35100
FCDP120164575	600	820	575	660	15×20°	4	10000	36000
FCDP120174540		870	540	672	22×20°	4	11880	31500
FCDP120174640		870	640	672	20×20°	4	12560	40000
FCDP120174600		870	600	672	20×20°	4	12340	40340
FCDP122164430	610	820	430	665	19×20°	3	7130	23600
FCDP122174660		870	660	680	20×20°	4	12230	43620
FCDP126180670	630	900	670	698	6	6	13920	45950
FCD126184515		920	515	700	7.5	7.5	13700	17160
FCD126170436		850	436	690	6	6	7450	23500
FCD126160360		800	360	675	5	5	6850	19500

型号	基本尺寸						额定负荷	
	d	D	B	FW	r1.2最小	r3.4最小	动态	静态
	mm						Cr	cor
							kN	kN
FCDP128176600	640	880	600	700	6	6	13500	40000
FCDP130180650	650	900	650	704	20×20°	7.5	13230	41500
FCDP130184670		920	670	723	17×20°	4	13230	46500
FCDP130184680		920	680	723	7.5	7.5	12935	39415
FCDP130184690		920	690	723	7.5	7.5	14500	45000
FCD132164440	660	820	440	702	7.5	4	7450	22700
FCD132176450		880	450	727	6	6	7500	23500
FCD134190700	670	950	700	750	7.5	7.5	14500	47300
FCDP136188600	680	940	600	743	8	4	16900	43400
FCDP136196640		980	640	760	20×20°	4	17600	44800
FCDP136204650		1020	650	803	6	6	14640	40185
FCDP136204680		1020	680	775	6	6	20000	49500
FCDP138196715	690	980	715	767.5	20×20°	4	15230	51300
FCDP138196750		980	750	766	20×20°	7.5	17000	53000
FCDP140186620	700	930	620	763	18×20°	3	12080	40850
FCDP140196700		980	700	774	20×20°	4	17800	48200
FCDP140200710		1000	710	770	4	4	19000	47500
FCDP142200715	710	1000	715	787.5	17×20°	4	18000	53200
FCDP142204710		1020	710	785	4	4	19500	49700
FCDP145200700	725	1000	700	796	6	6	18000	49500
FCDP146188500	730	940	500	780	20×20°	3	11800	47000
FCDP146192620		960	620	790	20×20°	3	14600	49000
FCDP146206750		1030	750	809	20×20°	6	18800	55500
FCDP150200500	750	1000	500	816	6	6	10400	35200
FCDP150200670		1000	670	813	20×20°	3	15000	47500
FCDP150166650		1080	650	833	7.5	7.5	19500	48000
FCDP150218750		1090	750	832	22×20°	7.5	21500	51500
FCDP150226670		1133	6/0	848	6	6	21000	50500
FCDP152216790	760	1080	790	846	7.5	7.5	23500	65000
FCDP152203700		1050	700	832	7.5	7.5	18500	55000
FCDP152206750		1030	750	828	7.5	7.5	21000	61200
FCDP152215787		1080	787	846	7.5	7.5	26600	64000
FCDP152216805		1080	805	846	6	6	23500	65000
FCDP156214780	780	1070	780	853	13×20°	6	20100	57900
FCD158203610	790	1015.9	610	850	6	6	13450	50230
FCDP160216700	800	1080	700	878	20×20°	3	17820	55500
FCDP160230850		1150	850	905	5	5	25200	68000
FCDP160216750		1080	750	880	6	6	20000	60000
FCDP164226800	820	1130	800	903	23×20°	6	19400	64600
FCDP164232840		1160	840	910	7.5	7.5	21600	68500
FCDP166216710	830	1080	710	896	25×20°	7.5	14500	60500
FCDP168232840	840	1160	840	928	23×20°	4	24700	70800
FCDP170230840	850	1150	840	928	23×20°	4	19600	72000
FCDP170236850		1180	850	940	5	5	20100	72700
FCDP170244900		1220	900	940	5	5	23000	84000
FCDP170236650		1180	650	945	7.5	7.5	19000	50500
FCDP172228750	860	1140	750	938	7.5	7.5	20500	61000
FCDP172232710		1160	735	940	6	6	21000	60000
FCDP176228800	880	1140	800	946	6	6	24000	76000
FCDP180244840	900	1220	840	989	24×20°	4	22400	76000
FCDP180256930		1280	930	1000	25×20°	4	26000	88350
FCDP180246895		1230	895	990	7.5	7.5	26400	80000
FCDP180256780		1280	780	998	23×20°	7.5	28500	80500
FCDP1802561050		1280	1050	1000	7.5	7.5	28900	80500
FCDP184256815	920	1280	815	1010	7.5	7.5	28700	80000
FCDP184256865		1280	865	1015	7.5	7.5	27600	77500
FCDP184268975		1300	975	1019	7.5	7.5	32500	92500
FCDP190260850	950	1300	850	1044	26×20°	7.5	27200	91100
FCDP190272975		1360	975	1075	26×20°	6	30600	90000
FCDP1902721000		1360	1000	1075	22×20°	5	34200	99000
FCDP174229685	970	1145	705	94	6	6	20500	63000
FCDP196262880	980	1310	880	1061.7	20×20°	45×45	25700	82000
FCDP200272800	1000	1360	800	1101	23×20°	4	24700	80000
FCDP200262880		1310	880	1080	9.5	9.5	21100	76565
FCDP206276850	1030	1380	850	1124		7.5	29000	90500

圆柱滚子轴承 Cylindrical roller bearing



轴承公称内径 d mm		游隙									
		C2		标准(CN)		C3		C4		C5	
超过	到	最小	最大	最小	最大	最小	最大	最小	最大	最小	最大
-	10	0	25	20	45	35	60	50	75	-	-
10	24	0	25	20	45	35	60	50	75	65	90
24	30	0	25	20	45	35	60	50	75	70	95
30	40	5	30	25	50	45	70	60	85	80	105
40	50	5	35	30	60	50	80	70	100	95	125
50	65	10	40	40	70	60	90	80	110	440	140
65	80	10	45	40	75	65	100	90	125	130	165
80	100	15	50	50	85	75	110	105	140	155	190
100	120	15	55	50	90	85	125	125	165	180	220
120	140	15	60	60	105	100	145	145	190	20	245
140	160	20	70	70	120	115	165	165	215	225	275
160	180	25	75	75	125	120	170	170	220	250	300
180	200	35	90	90	145	140	195	195	250	275	330
200	225	45	105	105	165	160	220	220	280	305	365
225	250	45	110	110	175	170	235	235	300	300	395
250	280	55	125	125	195	190	260	260	330	375	440
280	315	55	130	130	205	200	275	275	350	410	485
315	355	65	145	145	225	225	305	305	385	455	535
355	400	100	190	190	180	280	370	370	460	510	600
400	450	110	210	210	310	310	410	410	510	565	665
450	500	110	220	220	330	330	440	440	550	625	735

无外圈行星轮轴承 Non outer ring planetary gear bearing

单位：mm

序号	轴承型号	轴承尺寸						零件数量	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
1	RN204V	20	0 -0.011	36.85	0 -0.015	14	0 -0.10	1	19.8	19.3	02-内圈 04-滚子 89-锁圈 单列
	RN204V-02	20	0 -0.011	28.9	0 -0.10	14	0 -0.10				
	RN204V-04			6	+0.005 -0.01	8	0 -0.03	16			
	RN204V-89	34.7	0 -0.20	39.7	+0.20 0	1.2	+0.03 -0.03	2			
2	RN2205V	25	0 -0.011	46.55	0 -0.015	18	0 -0.10	1	40.1	45.1	02-内圈 04-滚子 89-锁圈 单列
	RN2205V-02	25	0 -0.011	35	0 -0.10	18	0 -0.10				
	RN2205V-04			8	+0.005 -0.01	12	0 -0.03	15			
	RN2205V-89	43.2	0 -0.20	49.2	+0.20 0	1.2	+0.03 -0.03	2			
3	F-219590	30	0 -0.011	50.74	0 -0.015	14	0 -0.10	1	28.2	30.9	02-内圈 04-滚子 89-锁圈 单列
	F-219590-02	30	0 -0.011	40.1	0 -0.10	14	0 -0.10				
	F-219590-04			7.5	+0.005 -0.01	7.5	0 -0.03	15			
	F-219590-89	48	0 -0.20	53.4	+0.20 0	2.3	+0.03 -0.03	2			
4	RSL-182206	30	0 -0.011	55.24	0 -0.015	20	0 -0.10	1	59.2	64.3	02-内圈 04-滚子 单列
	RSL-182206-02	30	0 -0.011	42	0 -0.10	20	0 -0.10				
	RSL-182206-04			9	+0.005 -0.01	14	0 -0.03	16			

单位：mm

序号	轴承型号	轴承尺寸						零件数量	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
5	RSL-182207	35	0 -0.011	63.97	0 -0.015	23	0 -0.10	1	75.2	79.4	02-内圈 04-滚子 单列
	RSL-182207-02	35	0 -0.011	46.5	0 -0.10	23	0 -0.10				
	RSL-182207-04			11	+0.005 -0.01	15	0 -0.04	15			
6	RSL-182210	50	0 -0.011	81.4	0 -0.015	23	0 -0.10	1	92.1	111.1	02-内圈 04-滚子 单列
	RSL-182210-02	50	0 -0.011	64.5	0 -0.10	23	0 -0.10				
	RSL-182210-04			11	+0.005 -0.01	15	0 -0.04	20			
7	RSL-182211	55	0 -0.011	88.81	0 -0.015	25	0 -0.10	1	112.5	139	02-内圈 04-滚子 单列
	RSL-182211-02	55	0 -0.011	70	0 -0.10	25	0 -0.10				
	RSL-182211-04			12	+0.005 -0.01	17	0 -0.04	20			
8	RSL-182212	60	0 -0.011	99.17	0 -0.015	28	0 -0.10	1	135.5	148.6	02-内圈 04-滚子 单列
	RSL-182212-02	60	0 -0.011	77	0 -0.10	28	0 -0.10				
	RSL-182212-04			14	+0.005 -0.01	20	0 -0.04	19			
9	RSL-183012	60	0 -0.011	86.75	0 -0.015	26	0 -0.1	1	104.4	143.3	02-内圈 04-滚子 单列
	RSL-183012-02	60	0 -0.011	71.5	0 -0.10	26	0 -0.10				
	RSL-183012-04			10	0.005 -0.01	17	0 -0.04	24			

无外圈行星轮轴承 Non outer ring planetary gear bearing

单位：mm

序号	轴承型号	轴承尺寸						零件数量	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
10	F-219593	25	0 -0.011	42.51	0 -0.015	12	0 -0.10	1	18.7	20.1	02-内圈 04-滚子 89-锁圈
	F-219593-02	25	0 -0.011	34.5	0 -0.10	12	0 -0.10				
	F-219593-04			6	+0.005 -0.01	6	0 -0.03	19			单列
	F-219593-89	39.6	0 -0.20	44.9	+0.20 0	2.3	+0.03 -0.03	2			
11	RN306V	30	0 -0.011	62	0 -0.015	19	0 -0.10	1	56.5	74.8	02-内圈 04-滚子 89-锁圈
	RN306V-02	30	0 -0.011	45.9	0 -0.10	19	0 -0.10				
	RN306V-04			10	+0.005 -0.01	10	0 -0.03	16			单列
	RN306V-89	57.8	0 -0.20	66	+0.20 0	1.2	+0.03 -0.03	2			
12	F-208098	35	0 -0.011	52.09	0 -0.015	26.5	0 -0.10	1	57.6	81.2	02-内圈 04-滚子
	F-208098-02	35	0 -0.011	44.5	0 -0.10	26.5	0 -0.10				62-隔垫 89-锁圈
	F-208098-04			6	+0.005 -0.01	8	0 -0.03	24*2			
	F-208098-62	46.6	+0.15 0	51.8	0 -0.15	1.74	+0.02 -0.02	2			双列
	F-208098-89	50	0 -0.20	54.6	+0.20 0	1.5	+0.03 -0.03	1			

尺寸：mm

序号	轴承型号	轴承尺寸						零件个数	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
13	F-208099	40	0 -0.011	57.81	0 -0.015	34	0 -0.10	1	71.6	110.9	02-内圈 04-滚子
	F-208099-02	40	0 -0.011	50	0 -0.10	34	0 -0.10				62-隔垫 89-锁圈
	F-208099-04			6	+0.005 -0.01	10	0 -0.03	27*2			
	F-208099-62	52.3	+0.15 0	57.5	0 -0.15	2.6	+0.02 -0.02	2			双列
	F-208099-89	55.7	0 -0.20	60.3	+0.20 0	1.5	+0.03 -0.03	1			
14	RNN3005X3V	25	0 -0.011	42.6	0 -0.015	23	0 -0.10	1	32.1	40.2	02-内圈 04-滚子
	RNN3005X3V-02	25	0 -0.011	35	0 -0.10	23	0 -0.10				62-隔垫 89-锁圈
	RNN3005X3V-04			6	+0.005 -0.01	6	0 -0.03	19*2			
	RNN3005X3V-62	38	+0.15 0	42	0 -0.15	1.65	+0.02 -0.02	2			双列
	RNN3005X3V-89	40	0 -0.20	45	+0.20 0	1.2	+0.03 -0.03	1			
15	RNN30036X3V	30	0 -0.011	49.6	0 -0.015	25	0 -0.10	1	43.8	56.7	02-内圈 04-滚子
	RNN3006X3V-02	30	0 -0.011	40	0 -0.10	25	0 -0.10				62-隔垫 89-锁圈
	RNN3006X3V-04			7	+0.005 -0.01	7	0 -0.03	19*2			
	RNN3006X3V-62	43.6	+0.15 0	49.3	0 -0.15	1.5	+0.02 -0.02	2			双列
	RNN3006X3V-89	47.1	0 -0.20	51.7	+0.20 0	1.5	+0.03 -0.03	1			

XCJG® 星驰轴承 THE STAR CHI BEARING

无外圈行星轮轴承 Non outer ring planetary gear bearing

单位：mm

序号	轴承型号	轴承尺寸						零件个数	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
16	RNN3009X3V	45	0 -0.011	66.9	0 -0.015	36	0 -0.10	1	103	151	02-内圈 04-滚子 62-隔垫 89-锁圈
	RNN3009X3V-02	45	0 -0.011	55	0 -0.10	36	0 -0.10				
	RNN3009X3V-04			8	+0.005 -0.01	12	0 -0.03	23*2			
	RNN3009X3V-62	58	+0.15 0	66.5	0 -0.15	2.2	+0.02 -0.02	2			双列
	RNN3009X3V-89	64	0 -0.20	69	+0.20 0	1.5	+0.03 -0.03	1			
17	573270	50	0 -0.011	69.67	0 -0.015	32	0 -0.10	1	86.2	134.8	02-内圈 04-滚子 62-隔垫 89-锁圈
	573270-02	50	0 -0.011	59	0 -0.10	32	0 -0.10				
	573270-04			7	+0.005 -0.01	10	0 -0.03	28*2			
	573270-62	63.2	+0.15 0	69.5	0 -0.15	2	+0.02 -0.02	2			双列
	573270-89	67.9	0 -0.20	72.5	+0.20 0	1.5	+0.03 -0.03	1			
18	F-212543	50	0 -0.011	75.25	0 -0.015	40	0 -0.10	1	134	198.3	02-内圈 04-滚子 62-隔垫 89-锁圈
	F-212543-02	50	0 -0.011	62	0 -0.10	40	0 -0.10				
	F-212543-04			9	+0.005 -0.01	14	0 -0.03	23*2			
	F-212543-62	68	+0.15 0	75	0 -0.15	1	+0.02 -0.02	2			双列
	F-212543-89	72	0 -0.20	78	+0.20 0	1.4	+0.03 -0.03	1			

单位：mm

序号	轴承型号	轴承尺寸						零件个数	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
19	F-204781	40	0 -0.011	61.75	0 -0.015	35.5	0 -0.10	1	97	136	02-内圈 04-滚子 62-隔垫 89-锁圈
	F-204781-02	40	0 -0.011	50	0 -0.10	35.5	0 -0.10				
	F-204781-04			8	+0.005 -0.01	12	0 -0.03	21*2			
	F-204781-62	56	+0.15 0	61	0 -0.15	1	+0.02 -0.02	2			双列
	F-204781-89	59	0 -0.20	64	+0.20 0	1.5	+0.03 -0.03	1			
20	RNN3004X3V	20	0 -0.011	36.85	0 -0.015	25	0 -0.10	1	28	31	02-内圈 04-滚子 62-隔垫 89-锁圈
	RNN3004X3V-02	20	0 -0.011	28.90	0 -0.10	25	0 -0.10				
	RNN3004X3V-04			6	+0.005 -0.01	6	0 -0.03	16*2			
	RNN3004X3V-62	30.5	+0.15 0	36.7	0 -0.15	1.75	+0.02 -0.02	2			双列
	RNN3004X3V-89	34.7	0 -0.20	39.7	+0.20 0	1.2	+0.03 -0.03	1			
★21	F-208099	40	0 -0.011	57.81	0 -0.015	34	0 -0.10	1	71.6	110.9	02-内圈 04-滚子 62-隔垫 89-锁圈
	F-208099-02	40	0 -0.011	50	0 -0.10	34	0 -0.10				
	F-208099-04			6	+0.005 -0.01	12	0 -0.03	27*2			双列
	F-208099-62	52.3	+0.15 0	57.5	0 -0.15	1.0	+0.02 -0.02	2			
	F-208099-89	55.7	0 -0.20	60.3	+0.20 0	1.5	+0.03 -0.03	1			★优化

无外圈行星轮轴承 Non outer ring planetary gear bearing

单位：mm

序号	轴承型号	轴承尺寸						零件数量	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
22	F-210408	22	0 -0.011	38.75	0 -0.015	22.5	0 -0.10	1	32.6	35.2	02-内圈 04-滚子 62-隔垫 89-锁圈
	F-210408-02	22	0 -0.011	31.1	0 -0.10	22.5	0 -0.10				
	F-210408-04			6	+0.005 -0.01	6	0 -0.03	17*2			双列
	F-210408-62	33.3	+0.15 0	38.6	0 -0.15	1.8	+0.02 -0.02	2			
	F-210408-89	36.3	0 -0.20	40.9	+0.20 0	1.5	+0.03 -0.03	1			
23	RNN3007X3V	35	0 -0.011	61.5	0 -0.015	40	0 -0.10	1	103.6	142.9	02-内圈 04-滚子 62-隔垫 89-锁圈
	RNN3007X3V-02	35	0 -0.011	47	0 -0.10	40	0 -0.10				
	RNN3007X3V-04			10	+0.005 -0.01	14	0 -0.03	16*2			双列
	RNN3007X3V-62	54.3	+0.15 0	61.2	0 -0.15	2	+0.02 -0.02	2			
	RNN3007X3V-89	58.9	0 -0.20	63.5	+0.20 0	1.5	+0.03 -0.03	1			
24	F-219012	45	0 -0.011	65.02	0 -0.015	34	0 -0.10	1	91.5	135	02-内圈 04-滚子 62-隔垫 89-锁圈
	F-219012-02	45	0 -0.011	55	0 -0.10	34	0 -0.10				
	F-219012-04			7.5	+0.005 -0.01	11	0 -0.03	24*2			双列
	F-219012-62	59.2	+0.15 0	64.6	0 -0.15	1.85	+0.02 -0.02	2			
	F-219012-89	62.3	0 -0.20	66.8	+0.20 0	1.5	+0.03 -0.03	1			
24-1	RNN2006X2V	30	0 -0.15	62	0 -0.03	38	0 -0.1	1	67.5	87.8	02-内圈 04-滚子 62-隔垫 89-锁圈
	RNN2006X2V-02	30	0 -0.15	46.5	0 -0.1	38	0 -0.1				
	RNN2006X2V-04			10	0.005 -0.01	12	0 -0.03	16*2			双列
	RNN2006X2V-62	52	0.15 0	61.8	0 -0.15	1.5	0.03 -0.03	2			
	RNN2006X2V-89	58	0 -0.2	65	0.2 0	1.5	0.03 -0.03	1			

单位：mm

序号	轴承型号	轴承尺寸						零件个数	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
25	RN306X3V	30	0 -0.010	55.3	0 -0.015	20	0 -0.12	1	59.4	64.3	02-内圈 04-滚子 62-隔垫 89-锁圈
	RN306X3V-02	30	0 -0.010	42	0 -0.10	20	0 -0.12				
	RN306X3V-04			9	+0.005 -0.01	14	0 -0.03	16			单列
	RN306X3V-89	52	0 -0.20	58	+0.20 0	1.2	+0.03 -0.03	2			
	RN306X3V-62	48.1	+0.10 0	55	0 -0.10	1.8	0 -0.06	2			
26	CPM-2594	30	0 -0.011	46.4	0 -0.015	32	0 -0.10	1	73.2	105.7	02-内圈 04-滚子 62-隔垫 89-锁圈
	CPM-2594-02	30	0 -0.011	38.7	0 -0.10	32	0 -0.10				
	CPM-2594-04			6	0.005 -0.01	12	0 -0.03	21*2			双列
	CPM-2594-62	40.8	+0.10 0	46.2	0 -0.10	1.5	0 -0.06	2			
	CPM-2594-89	44.1	0 -0.20	48.6	+0.20 0	1.5	+0.03 -0.03	1			
27	RN2204V	20	0 -0.010	41.5	0 -0.015	18	0 -0.12	1	35.5	37.5	02-内圈 04-滚子 89-锁圈
	RN2204V-02	20	0 -0.010	30	0 -0.15	18	0 -0.12				
	RN2204V-04			8	0 -0.010	12	0 -0.03	13			单列
	RN2204V-89	39.6	0 -0.20	44.9	+0.20 0	2.3	0 -0.1	2			

XCJG® 星驰轴承 THE STAR CHI BEARING


无外圈行星轮轴承 Non outer ring planetary gear bearing

单位：mm

序号	型号	轴承尺寸						零件个数	Cr	Cor	备注
		内径	公差	外径	公差	宽度	公差	个	KN	KN	
28	NCPL06V	30	0 -0.011	55.24	0 -0.015	20	0 -0.10	1	59.2	64.3	02-内圈 04-滚子 62-隔垫 89-锁圈
	NCPL06V-02	30	0 -0.01	42	0 -0.15	20	0 -0.10	1			
	NCPL06V-04			9	0 -0.01	14	0 -0.03	16			单列
	NCPL06V-62	47.2	+0.10 0	54.9	0 -0.10	1.8	0 -0.06	2			
	NCPL06V-89	52	0 -0.20	59.2	+0.20 0	2	0 -0.10	2			




调心滚子轴承 Self-aligning roller bearing

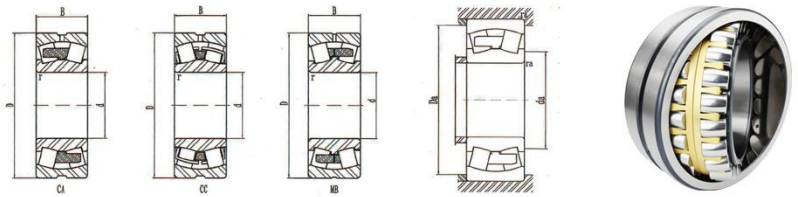

型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
21304	20	52	15	32	32	6100	7500	27	45	1.0	0.17
21305	25	62	17	42	45	5400	6800	32	55	1.0	0.25
21306	30	72	19	58	64	4400	5800	37	65	1.0	0.43
21307	35	80	21	65	75	4200	5400	44	71	1.5	0.52
21308	40	90	23	89	99	3800	4500	49	81	1.5	0.75
21309	45	100	25	106	118	3400	3800	54	91	1.5	1.03
21310	50	110	27	124	144	3000	4000	60	100	2.0	1.40
21311	55	120	29	146	175	2800	3400	65	110	2.0	1.68
21312	60	130	31	167	201	2600	3300	72	118	2.1	2.00
21313	65	140	33	188	235	2400	3200	77	128	2.1	2.57
21314	70	150	35	218	276	2200	2900	82	138	2.1	3.20
21315	75	160	37	245	311	2000	2800	87	148	2.1	3.76
21316	80	170	39	268	359	2000	2400	92	158	2.1	4.81
21317	85	180	41	307	397	1800	2200	99	166	2.5	5.30
21318	90	190	43	330	433	1600	2200	104	176	2.5	6.20
21319	95	200	45	366	500	1700	2200	109	186	2.5	7.10
21320	100	215	47	397	546	1600	2000	114	201	2.5	8.90
21321	105	225	49	420	575	1500	1900	119	211	2.5	10.10
21322	110	240	50	460	635	1400	1800	124	226	2.5	11.82

XCJG® 星驰轴承 THE STAR CHI BEARING

调心滚子轴承 Self-aligning roller bearing

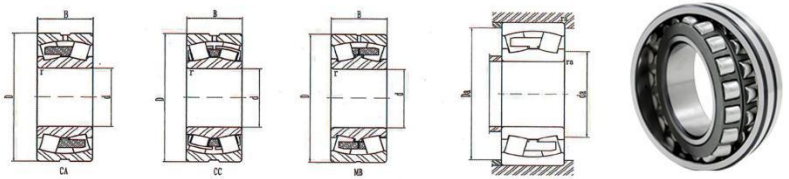

型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
22205	25	52	18	40	42	8100	10000	30	46	1.0	0.17
22206	30	62	20	53	59	5600	6800	36	56	1.0	0.30
22207	35	72	23	79	87	4700	5800	42	65	1.0	0.44
22208	40	80	23	81	94	4600	5600	47	73	1.0	0.51
22209	45	85	23	85	100	4200	5200	52	78	1.0	0.61
22210	50	90	23	87	108	3900	4800	57	83	1.0	0.88
22211	55	100	25	105	129	3500	4300	64	91	1.5	0.82
22212	60	110	28	126	170	3200	4200	69	101	1.5	1.21
22213	65	120	31	155	201	2800	3500	74	111	1.5	1.62
22214	70	125	31	163	211	2700	3300	79	116	1.5	1.70
22215	75	130	31	167	222	2500	3200	84	121	1.5	1.80
22216	80	140	33	180	245	2300	3000	90	130	2.0	2.21
22217	85	150	36	216	286	2200	2800	95	140	2.0	2.85
22218	90	160	40	247	332	2000	2600	100	150	2.0	3.50
22219	95	170	43	286	391	2000	2400	107	158	2.1	4.25
22220	100	180	46	319	438	1800	2400	112	168	2.1	4.90
22222	110	200	53	417	592	1500	1900	122	188	2.1	7.50
22224	120	215	58	484	698	1400	1800	132	203	2.1	9.00
22226	130	230	64	567	834	1200	1600	144	216	2.5	11.30
22228	140	250	68	647	958	1100	1600	154	236	2.5	14.60
22230	150	270	73	760	1130	950	1300	164	256	2.5	18.45
22232	160	290	80	850	1280	950	1200	174	276	2.5	22.30
22234	170	310	86	975	1500	950	1200	188	292	3.0	28.45
22236	180	320	86	1010	1590	8001	1000	198	302	3.0	30.00
22238	190	340	92	842	1555	750	1050	208	322	3.0	35.80
22240	200	360	98	947	1790	700	900	218	342	3.0	47.00
22244	220	400	108	1250	2280	950	1300	238	382	3.0	61.80
22248	240	440	120	1820	2750	900	1200	258	422	3.0	85.30
22252	260	480	130	1900	3600	850	1100	282	458	4.0	110.00
22256	280	500	1301	1990	3600	800	1000	302	478	4.0	126.00
22260	300	540	140	2310	4750	670	850	322	518	4.0	143.00
22264	320	580	150	2490	4550	650	850	342	558	4.0	175.00
22272	360	650	170	4200	6200	400	550				248.00
22276	380	700	175	4500	6500	4004	550				288.00

调心滚子轴承 Self-aligning roller bearing



型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
22308	40	90	33	124	142	4100	5000	49	81	1.5	1.06
22309	45	100	36	146	175	3600	4500	54	91	1.5	1.42
22310	50	110	40	180	216	3200	4300	60	100	2.0	1.89
22311	55	120	43	214	258	3200	3800	65	110	2.0	2.42
22312	60	130	46	245	294	2800	3500	72	118	2.1	3.00
22313	65	140	48	268	324	2500	3300	77	128	2.1	3.60
22314	70	150	51	301	373	2000	2700	82	138	2.1	4.40
22315	75	160	55	352	451	2200	3000	87	148	2.1	5.43
22316	80	170	58	397	513	2000	2800	92	158	2.1	6.23
22317	85	180	60	433	556	2000	2500	99	166	2.5	7.50
22318	90	190	64	489	641	1800	2200	104	176	2.5	8.85
22319	95	200	67	536	709	1800	2200	109	186	2.5	10.20
22320	100	215	73	626	840	1700	2100	114	201	2.5	13.40
22322	110	240	80	716	963	1600	2000	124	226	2.5	18.25
22324	120	260	86	847	1154	1400	1800	134	246	2.5	22.30
22326	130	280	93	970	1340	1300	1700	148	262	3.0	29.06
22328	140	300	102	1140	1620	1100	1500	158	282	3.0	36.40
22330	150	320	108	1270	1850	1000	1400	168	302	3.0	42.80
22332	160	340	114	1070	1820	950	1300	178	322	3.0	50.20
22334	170	360	120	1180	2120	950	1300	188	342	3.0	59.60
22336	180	380	126	1290	2330	900	1200	198	362	3.0	69.85
22338	190	400	132	1430	2600	850	1050	212	378	4.0	80.90
22340	200	420	138	1530	2800	750	950	222	398	4.0	93.50
22344	220	460	145	2570	3450	700	900	242	438	4.0	120.00
22348	240	500	155	2950	4100	650	850	262	487	4.0	146.00
22352	260	540	165	3370	4700	600	800	288	512	5.0	191.00
22356	280	580	175	3600	5600	550	750	308	552	5.0	230.00
22360	300	620	185	3950	6000	500	700	336	584	6.0	265.00
22364	320	670	200	4530	6820	450	650	346	630	6.0	360.00
22368	340	710	212	5100	7800	400	600	368	680	6.0	411.00
22372	360	750	224	5650	8600	350	500	392	720	6.0	469.00
22376	380	780	230	6000	9300	300	500	415	740	6.0	518.00
22380	400	820	243	7400	10300	200	400	442	790	6.0	623.00

调心滚子轴承 Self-aligning roller bearing



型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
23022	110	170	45	278	461	2200	3000	120	160	2.0	3.92
23024	120	180	46	304	510	2000	2800	130	170	2.0	4.20
23026	130	200	52	383	644	1900	2600	140	190	2.0	6.30
23028	140	210	53	414	719	1800	2400	150	200	2.0	6.80
23030	150	225	56	451	790	1700	2200	162	213	2.1	8.20
23032	160	240	60	515	900	1700	2200	172	228	2.1	9.85
23034	170	260	67	626	1112	1600	2000	182	248	2.1	14.20
23036	180	280	74	730	1290	1400	1800	192	268	2.1	17.20
23038	190	290	75	767	1390	1300	1700	202	278	21	19.80
23040	200	310	82	890	1650	1200	1600	212	298	2.1	23.65
23044	220	340	90	1090	2040	1100	1500	234	326	2.5	28.80
23048	240	360	92	1160	2220	1000	1400	254	346	2.5	36.20
23052	260	400	104	1460	2850	900	1200	278	382	3.0	51.20
23056	280	420	106	1580	3030	850	1100	298	402	3.0	62.90
23060	300	460	118	1910	3800	800	1000	318	442	3.0	76.00
23064	320	480	121	2130	3610	800	1000	338	462	3.0	81.50
23068	340	520	133	2570	4400	700	900	362	498	4.0	104.00
23072	360	540	134	2150	4480	670	850	382	518	4.0	110.00
23076	380	560	135	2480	5000	630	800	402	538	40	125.00
23080	400	600	240	2550	5500	550	650	422	578	4.0	152.00
23084	420	620	150	2750	5850	450	600	442	598	4.0	160.00
23088	440	650	157	3550	6500	400	500	468	622	5.0	185.00
23092	460	680	163	3800	7140	370	480	488	652	5.0	208.00
23096	480	700	165	3800	6900	330	430	508	672	5.0	217.00
230/500	500	720	167	4100	7700	300	400	528	692	5.0	236.00
230/530	530	780	185	5000	10200	260	360	558	752	5.0	308.00
230/560	560	820	195	5020	10500	260	360	588	792	5.0	360.00
230/600	600	870	200	5900	11600	240	340	628	842	5.0	421.00
230/630	630	920	212	6500	12800	230	330	666	884	6.0	471.00
230/670	670	980	230	7400	14200	230	330	706	944	6.0	604.00
230/710	710	1030	236	8050	16200	200	280	746	994	6.0	660.00
230/750	750	1090	250	8150	18900	200	280	786	1054	6.0	780.00
230/800	800	1150	258	12200	20900	180	260	836	1114	6.0	890.00
230/850	850	1220	272	9050	22500	150	220	886	1184	6.0	1074.00
230/900	900	1280	280	9800	22500	150	220	936	1244	6.0	1220.00
230/950	950	1360	300	11300	26500	130	200	986	1324	6	1450.00
230/1000	1000	1420	308	12700	30500	130	200	1036	1384	6.0	1590.00
230/1060	1060	1500	325	13380	32300	120	160	1104	1456	8.0	2250.00
230/1180	1180	1660	355	15000	36000	110	150	1240	1600	8.0	2460.00
230/1250	1250	1750	375	17350	43650	100	120	1285	1715	8.0	2750.00

调心滚子轴承 Self-aligning roller bearing



型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
23120	100	165	52	330	520	2000	2800	110	155	2.0	5.05
23121	105	175	56	249	494	1900	2600	119	161	2.5	5.50
23122	110	180	56	386	613	1800	2400	120	170	2.0	6.23
23124	120	200	62	463	736	1800	2400	130	190	2.0	7.62
23126	130	210	64	492	812	1700	2200	140	200	2.0	8.62
23128	140	225	68	561	953	1600	2000	152	213	2.1	10.85
23130	150	250	80	747	1267	1400	1800	162	238	2.1	16.10
23132	160	270	86	870	1460	1300	1700	172	258	2.1	19.45
23134	170	280	88	911	1565	1200	1600	182	268	2.1	21.05
23136	180	300	96	1060	1850	1100	1500	194	286	2.5	26.90
23138	190	320	104	1200	2120	1000	1400	204	306	2.5	34.90
23140	200	340	112	1420	2530	950	1300	214	326	2.5	43.50
23144	220	370	120	1610	2900	900	1200	238	352	3.0	54.10
23148	240	400	128	1840	3310	850	1100	258	382	3.0	67.50
23152	260	440	144	2270	4190	800	1000	278	422	3.0	94.90
23156	280	460	146	2380	4410	750	900	302	438	4.0	102.30
23160	300	500	160	2660	4800	670	850	322	478	4.0	123.00
23164	320	540	176	3560	5700	630	800	342	518	4.0	165.00
23168	340	580	190	4040	6460	600	750	362	558	4.0	208.00
23172	360	600	192	4080	6850	560	700	382	578	4.0	222.00
23176	380	620	194	4300	7750	400	500	402	598	4.0	236.00
23180	400	650	200	4550	8200	380	480	428	622	5.0	265.00
23184	420	700	224	5320	9200	360	450	448	672	5.0	350.00
23188	440	720	226	5900	10000	340	430	468	692	5.0	377.00
23192	460	760	240	6300	11100	320	400	496	724	6.0	443.00
23196	480	790	248	6850	12000	300	380	516	754	6.0	485.00
231/500	500	830	264	7550	13800	280	360	536	794	6.0	580.00
231/530	530	870	272	8050	15300	280	360	566	834	6.0	643.00
231/560	560	920	280	9050	15900	260	340	596	884	6.0	740.00
231/600	600	980	300	10100	18800	240	320	636	944	6.0	894.00
231/630	630	1030	315	10200	20200	220	300	666	994	6.0	1050.00
231/670	670	1090	336	10800	22700	210	290	706	1054	6.0	1250.00
231/710	710	1150	345	11800	25200	200	280	754	1106	8.0	1430.00
231/750	750	1220	365	13350	28100	190	270	794	1176	8.0	1700.00
231/800	800	1280	375	14350	30550	180	260	844	1236	8.0	1920.00
231/850	850	1360	400	15600	33450	160	220	904	1306	10	2200.00
231/1000	1000	1580	462	20300	45600	100	130	965	1532	10	3500.00

调心滚子轴承 Self-aligning roller bearing



型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
23218	90	160	52.4	335	492	1900	2600	100	150	2.0	4.62
23220	100	180	60.3	428	637	1800	2300	112	168	2.1	6.82
23222	110	200	69.8	530	809	1600	2000	122	188	2.1	9.80
23224	120	215	76	620	968	1500	1900	132	203	2.1	11.80
23226	130	230	80	708	1092	1300	1700	144	216	2.5	13.95
23228	140	250	88	826	1320	1200	1600	154	236	2.5	18.60
23230	150	270	96	963	1560	1100	1500	164	256	2.5	23.96
23232	160	290	104	1112	1810	1000	1400	174	276	2.5	29.30
23234	170	310	110	1200	2030	950	1300	188	292	3.0	34.90
23236	180	320	112	1280	2170	900	1200	198	302	3.0	37.85
23238	190	340	120	1450	2490	850	1100	208	322	3.0	46.10
23240	200	360	128	1650	2870	800	1000	218	342	3.0	55.30
23244	220	400	144	2130	3720	750	950	238	382	3.0	78.30
23248	240	440	160	2560	4620	670	850	258	422	3.0	108.10
23252	260	480	174	2760	4700	630	800	282	458	4.0	141.00
23256	280	500	176	3080	5100	600	750	302	478	4.0	147.00
23260	300	540	192	3700	5950	530	670	322	518	4.0	192.00
23264	320	580	208	4180	6820	500	630	342	558	4.0	245.00
23268	340	620	224	5000	8150	450	570	368	592	5.0	300.00
23272	360	650	232	5130	7880	430	550	388	622	5.0	335.00
23276	380	680	240	5750	9300	410	530	408	652	5.0	380.00
23280	400	720	256	6450	11000	390	510	428	692	5.0	450.00
23284	420	760	272	7250	11900	370	490	456	724	6.0	548.00
23288	440	790	280	7700	12800	350	470	476	754	6.0	590.00
23292	460	830	296	8400	13600	320	440	496	794	6.0	698.00
23296	480	870	310	10600	15200	300	420	516	834	6.0	837.00
232/500	500	820	336	10600	18600	280	400	536	884	6.0	985.00
232/530	530	980	355	11000	20300	260	380	574	936	8.0	1165.00
232/560	560	1030	365	11150	21000	240	360	612	992	8.0	1350.00
232/600	600	1090	388	13100	25000	220	340	654	1048	8.0	1555.0
232/630	630	1150	412	13700	26800	190	300	684	1096	10	1850.00
232/670	670	1220	438	15600	30500	170	260	724	1166	10	2270.00
232/710	710	1280	450	15700	30500	160	220	764	1226	10	2470.00
232/750	750	1360	475	19000	37500	150	210	814	1296	12	2980.00
232/800	800	1420	488	19900	41000	130	170	864	1356	12	3320.00
232/850	850	1500	515	22300	45500	120	160	914	1436	12	3861.00
232/900	900	1580	515	23600	49000	110	140	964	1516	12	4247.00

调心滚子轴承 Self-aligning roller bearing



型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
24013	65	100	35	110	165	2800	3800	74	90	1.0	0.96
24015	75	115	40	164	250	2600	3500	82	106	1.0	1.48
24018	90	140	50	230	320	2400	3200	100	125	1.5	2.98
24020	100	150	50	251	448	2400	3000	110	140	2.0	3.20
24022	110	170	60	380	600	2100	2800	120	170	2.0	5.05
24024	120	180	60	400	675	2000	2700	130	170	2.0	5.15
24026	130	200	69	472	852	2000	2700	140	190	2.0	7.45
24028	140	210	69	488	895	1900	2600	150	200	2.0	8.12
24030	150	225	75	570	1070	1800	2500	162	213	2.0	11.10
24032	160	240	80	652	1230	1700	2400	172	228	2.0	12.10
24034	170	260	90	792	1520	1600	2300	182	248	2.0	16.45
24036	180	280	100	928	1820	1500	2100	192	268	2.0	22.10
24038	190	290	100	975	1910	1300	1800	202	278	2.0	22.95
24040	200	310	109	1120	2220	1200	1600	212	298	2.5	29.40
24044	220	340	118	1370	2760	1200	1500	234	326	2.5	39.20
24048	240	360	118	1440	2930	1000	1300	254	346	3.0	40.90
24052	260	400	140	1840	3850	940	1200	278	382	3.0	63.00
24056	280	420	140	1960	4100	900	1100	298	402	3.0	66.00
24060	300	460	160	2430	5160	840	1000	318	442	3.0	95.20
24064	320	480	160	2700	5100	790	1000	338	462	4.0	106.00
24068	340	520	180	3280	5890	720	900	362	498	4.0	139.00
24072	360	540	180	3370	6220	670	840	382	518	4.0	147.00
24076	380	560	180	3420	7000	670	840	402	538	4.0	152.00
24080	400	600	200	4090	7800	600	750	422	578	4.0	202.00
24084	420	620	200	4180	8450	570	720	442	598	5.0	210.00
24088	440	650	212	4550	9100	540	670	468	622	5.0	245.00
24092	460	680	218	4900	10200	510	640	488	652	5.0	277.00
24096	480	700	218	5000	10400	500	630	508	672	5.0	285.00
240/500	500	720	218	5200	10450	480	600	528	692	5.0	298.00
240/530	530	780	250	6350	12700	450	550	558	752	5.0	410.00
240/560	560	820	258	6950	13800	420	520	588	792	5.0	465.00
240/600	600	870	272	8100	16500	390	490	628	842	6.0	550.00
240/630	630	920	290	7350	17100	350	450	666	884	6.0	660.00
240/670	670	980	308	9700	19900	340	430	706	944	6.0	790.00
240/710	710	1030	315	8900	21600	320	410	746	994	6.0	880.00
240/750	750	1090	335	9730	25000	300	390	786	1054	6.0	1065.00
240/800	800	1150	345	12200	30500	290	370	836	1114	6.0	1246.00
240/850	850	1220	365	12500	31500	270	350	886	1184	6.0	1394.00
240/900	900	1280	375	12800	31500	230	330	936	1244	6.0	1880.00
240/950	950	1360	412	14600	39000	200	300	986	1324	6.0	1990.00
240/1000	1000	1420	412	15600	40000	160	260	1036	1384	6.0	2100.00
240/1060	1060	1500	438	17200	45000	130	200	1104	1456	8.0	2490.00
240/1120	1120	1580	462	18100	48500	100	170	1164	1536	8.0	2790.00

XCJG® 星驰轴承 THE STAR CHI BEARING

调心滚子轴承 Self-aligning roller bearing



型号 Bearing No	尺寸 Dimensions (mm)			载荷 Load Ratings(Kn)		转速 (RPM)		安装尺寸 Mounting Dimensions(mm)			重量 Weight (kg)
								da	Da	ra	
	d	D	B	Cr	Cor	Grease	Oil	Min	Max	Max	
24122	110	180	69	472	798	1800	2200	120	170	2.0	6.73
24124	120	200	80	575	998	1600	1900	130	190	2.0	9.62
24126	130	210	80	585	1030	1200	1600	140	200	2.0	10.25
24128	140	225	85	670	1200	1200	1800	152	213	2.1	12.45
24130	150	250	100	890	1600	1000	1300	162	238	2.1	18.95
24132	160	270	109	1040	1880	1000	1300	172	258	2.1	24.70
24134	170	280	109	1070	1930	900	1200	182	268	2.1	26.50
24136	180	300	118	1210	2220	800	1100	194	286	2.5	33.00
24138	190	320	128	1410	2590	700	1000	204	306	2.5	40.50
24140	200	340	140	1620	3030	700	900	214	326	2.5	49.00
24144	220	370	150	1900	3580	700	950	238	352	3.0	62.50
24148	240	400	160	2160	4090	650	850	258	382	3.0	77.20
24152	260	440	180	2730	5330	600	800	278	422	3.0	106.80
24156	280	460	180	2810	5480	560	750	302	438	4.0	113.50
24160	300	500	200	3560	5990	550	750	322	478	4.0	159.00
24164	320	540	218	4660	6950	530	730	342	518	4.0	210.00
24168	340	580	243	5040	8220	510	710	362	558	4.0	260.00
24172	360	600	243	5320	8840	500	700	382	578	4.0	277.00
24176	380	620	243	5420	9310	580	680	402	598	4.0	293.00
24180	400	650	250	5890	10070	550	650	428	622	5.0	326.00
24184	420	700	280	7000	11950	530	630	448	672	5.0	433.00
24188	440	720	280	7120	12500	500	600	468	692	5.0	452.00
24192	460	760	300	7850	14400	450	550	496	724	6.0	558.00
24196	480	790	308	8550	14900	400	500	516	754	6.0	605.00
241/500	500	830	325	9300	16100	370	470	536	794	6.0	745.00
241/530	530	870	335	10000	18300	330	430	566	834	6.0	830.00
241/560	560	920	350	11400	20500	300	400	596	884	6.0	956.00
241/600	600	980	375	10900	22400	280	380	636	944	6.0	1140.00
241/630	630	1030	400	12000	25600	250	350	666	994	6.0	1400.00
241/670	670	1090	412	14000	31500	220	320	706	1054	6.0	1575.00
241/710	710	1150	438	14400	30800	190	270	754	1106	8.0	1800.00
241/750	750	1220	475	16400	37000	150	220	792	1175	8.0	2100.00
241/800	800	1280	475	17500	38400	130	200	842	1238	8.0	2300.00
241/850	850	1360	500	19200	42700	100	150	898	1312	10	2700.00

调心滚子轴承 Self-aligning roller bearing



轴承公称内径 d mm		游隙									
		C2		标准(CN)		C3		C4		C5	
超过	到	最小	最大	最小	最大	最小	最大	最小	最大	最小	最大
14	18	10	20	20	35	35	45	45	60	60	75
18	24	10	20	20	35	35	45	45	60	60	75
24	30	15	25	25	40	40	55	55	75	75	95
30	40	15	30	30	45	45	60	60	80	80	100
40	50	20	35	35	55	55	75	75	100	100	125
50	65	20	40	40	65	65	90	90	120	120	150
65	80	30	50	50	80	80	110	110	145	145	180
80	100	35	60	60	100	100	135	135	180	180	225
100	120	40	75	75	120	120	160	160	210	210	260
120	140	50	95	95	145	145	190	190	240	240	300
140	160	60	110	110	170	170	220	220	280	280	350
160	180	65	120	120	180	180	240	240	310	310	390
180	200	70	130	130	200	200	260	260	340	340	430
200	225	80	140	140	220	220	290	290	380	380	470
225	250	90	150	150	240	240	320	320	420	420	520
250	280	100	170	170	260	260	350	350	460	460	570
280	315	110	190	190	280	280	370	370	500	500	630
315	355	120	200	200	310	310	410	410	550	550	690
355	400	130	220	220	340	340	450	450	600	600	750
400	450	140	240	240	370	370	500	500	660	660	820
450	500	140	260	260	410	410	550	550	720	720	900
500	560	150	280	280	440	440	600	600	780	780	1000
560	630	170	310	310	480	480	650	650	850	850	1100
630	710	190	350	350	530	530	700	700	920	920	1190
710	80	210	390	390	580	580	770	770	1010	1010	1300
800	900	230	430	430	650	650	860	860	1120	1120	1440
900	1000	260	480	480	710	710	930	930	1220	1220	1570

XCJG® 星驰轴承 THE STAR CHI BEARING

圆锥滚子轴承 Tapered roller bearing



轴承型号 Bearing No.	外形尺寸Dimensions(mm)			额定载荷Load Rating(KN)		重量Weight
	内径 d	外径 D	宽度 T	动载荷 Cr	静载荷 Cor	kg
30202	15	35	11	14.9	13.4	0.053
30203	17	40	13.25	20.8	21.8	0.079
30204	20	47	15.25	28.2	30.5	0.126
30205	25	52	16.25	32.2	37	0.154
30206	30	62	17.25	43.2	50.5	0.231
30207	35	72	18.25	54.2	63.5	0.331
30208	40	80	19.75	63	74	0.422
30209	45	85	20.75	67.8	83.5	0.474
30210	50	90	21.75	73.2	92	0.529
30211	55	100	22.75	90.8	115	0.713
30212	60	110	23.75	102	130	0.904
30213	65	120	24.75	120	152	1.13
30214	70	125	26.25	132	175	1.26
30215	75	130	27.25	138	185	1.36
30216	80	140	28.25	160	212	1.67
30217	85	150	30.5	178	238	2.06
30218	90	160	32.5	200	270	2.54
30219	95	170	34.5	228	308	3.04
30220	100	180	37	255	350	3.72
30222	110	200	41	315	445	5.21
30224	120	215	43.5	338	482	6.2
30226	130	230	43.75	365	520	6.94
30228	140	250	45.75	408	585	8.73
30230	150	270	49	450	645	10.8
30302	15	42	13	22.8	21.5	0.098
30303	17	47	15.25	28.2	27.2	0.129
30304	20	52	16.25	42.8	33.2	0.165
30305	25	62	18.25	46.8	48	0.263
30306	30	72	20.75	59	63	0.387
30307	35	80	22.75	75.2	82.5	0.515
30308	40	90	25.25	90.8	108	0.747
30309	45	100	27.25	108	130	0.984
30310	50	110	29.25	130	158	1.28
30311	55	120	31.5	152	188	1.63
30312	60	130	33.5	170	210	1.99
30313	65	140	36	195	242	2.44
30314	70	150	38	218	272	2.98
30315	75	160	40	252	318	3.57
30316	80	170	42.5	278	352	4.27

圆锥滚子轴承 Tapered roller bearing



轴承型号 Bearing No.	外形尺寸Dimensions(mm)			额定载荷Load Rating(KN)		重量Weight
	内径 d	外径 D	宽度 T	动载荷 Cr	静载荷 Cor	kg
30317	85	180	44.5	305	388	4.96
30318	90	190	46.5	342	440	5.8
30319	95	200	49.5	372	455	6.96
30320	100	215	51.5	422	521	8.49
30321	105	225	53.5	464	578	9.73
30322	110	240	54.5	481	590	11.4
30324	120	260	59.5	620	867	17.8
30326	130	280	63.75	657	834	18.1
32203	17	40	17.25	27.3	28.3	0.102
32204	20	47	19.25	36.5	39.5	0.16
32205	25	52	19.25	42	47	0.187
32206	30	62	21.25	51.8	63.8	0.287
32207	35	72	24.25	70.5	89.5	0.445
32208	40	80	24.75	77.8	97.2	0.532
32209	45	85	24.75	80.8	105	0.573
32210	50	90	24.75	82.8	108	0.626
32211	55	100	26.75	108	142	0.853
32212	60	110	29.75	132	180	1.17
32213	65	120	32.75	98	158	1.55
32214	70	125	33.25	168	238	1.64
32215	75	130	33.25	170	242	1.74
32216	80	140	35.25	198	278	2.13
32217	85	150	38.5	228	325	2.68
32218	90	160	42.5	270	395	3.44
32219	95	170	45.5	302	448	4.24
32220	100	180	49	340	512	5.1
32221	105	190	53	380	578	6.26
32222	110	200	56	430	665	7.43
32224	120	215	61.5	478	758	9.6
32226	130	230	67.75	554	830	11.5
32228	140	250	71.75	645	1050	14.4
32230	150	270	77	720	1180	18.2
32232	160	290	84	858	1430	23.3
32234	170	310	91	968	1640	28.6
32236	180	320	91	998	1720	29.9
32304	20	52	22.25	42.8	46.2	0.23
32305	25	62	25.25	61.5	68.8	0.368
32306	30	72	28.75	81.5	96.5	0.562
32307	35	80	32.75	99	118	0.763
32308	40	90	35.25	115	148	1.04
32309	45	100	38.25	145	188	1.4
32310	50	110	42.25	178	235	1.89
32311	55	120	45.5	202	270	2.37
32312	60	130	48.5	228	302	2.9
32313	65	140	51	260	350	3.51
32314	70	150	54	298	408	4.34
32315	75	160	58	348	482	5.37
32316	80	170	61.5	388	542	6.38
32317	85	180	63.5	422	592	7.31
32318	90	190	67.5	478	682	8.81
32319	95	200	71.5	315	738	10.1

XCJG® 星驰轴承 THE STAR CHI BEARING

圆锥滚子轴承 Tapered roller bearing



轴承型号 Bearing No.	外形尺寸Dimensions(mm)			额定载荷Load Rating(KN)		重量Weight
	内径 d	外径 D	宽度 T	动载荷 Cr	静载荷 Cor	kg
32320	100	215	77.5	600	872	13
32321	105	225	81.5	648	945	14.8
32322	110	240	84.5	691	943	17.8
32324	120	260	90.5	825	1230	22.2
32326	130	280	98.75	852	1160	26.5
32328	150	300	107.75	1110	1570	35.1
32004X	20	42	15	25	28.2	0.095
32005X	25	47	15	28	34	0.11
32006X	30	55	17	35.8	46.8	0.17
32007X	35	62	18	43.2	59.2	0.224
32008X	40	68	19	51.8	71	0.267
32009X	45	75	20	58.5	81.5	0.337
32010X	50	80	20	61	89	0.366
32011X	55	90	23	80.2	118	0.551
32012X	60	95	23	81.8	122	0.584
32013X	65	100	23	82.8	128	0.62
32014X	70	110	25	105	160	0.839
32015X	75	115	25	102	160	0.872
32016X	80	125	29	140	220	1.27
32017X	85	130	29	140	220	1.32
32018X	90	140	32	170	270	1.72
32019X	95	145	32	122	192	1.7
32020X	100	150	32	172	282	1.85
32021X	105	160	35	205	335	2.4
32022X	110	170	38	245	402	3.02
32024X	120	180	38	258	427	3.34
32026X	130	200	45	340	563	5.04
32028X	140	210	45	346	585	5.28
32030X	150	225	48	391	668	6.41
32032X	160	240	51	440	758	7.75
32034X	170	260	57	526	905	10.5
32036X	180	280	64	644	1100	14.1
32038X	190	290	64	654	1170	14.7
32040X	200	310	70	755	1340	19.1
32044X	220	340	76	894	1620	25.2
32052X	260	400	87	1170	2170	39.5
32056X	280	420	87	1200	2280	41.7
33005	25	47	17	32.5	42.5	0.129
33006	30	55	20	43.8	58.8	0.201
33007	35	62	21	46.8	63.2	0.25
33008	40	68	22	60.2	79.5	0.306
33009	45	75	24	72.5	100	0.398
33010	50	80	24	76.8	110	0.433
33011	55	90	27	94.8	145	0.651
33012	60	95	27	96.8	150	0.691
33013	65	100	27	98	158	0.732
33014	70	110	31	135	220	1.07
33015	75	115	31	132	220	1.12
33016	80	125	36	182	305	1.63
33017	85	130	36	180	305	1.69
33018	90	140	39	232	388	2.2

圆锥滚子轴承 Tapered roller bearing



轴承型号 Bearing No.	外形尺寸 Dimensions(mm)			重量 Weight
	内径 d	外径 D	宽度 T	kg
33019	95	145	39	2.26
33020	100	150	39	2.33
33021	105	160	43	3.08
33022	110	170	47	3.74
33024	120	180	48	4.07
33026	130	200	55	6.14
33028	140	210	56	6.57
33030	150	225	59	8.09
33108	40	75	26	0.51
33109	45	80	26	0.552
33110	50	85	26	0.597
33111	55	95	30	0.877
33112	60	100	30	0.91
33113	65	110	34	1.32
33114	70	120	37	1.71
33115	75	125	37	1.796
33116	80	130	37	1.88
33117	85	140	41	2.51
33118	90	150	45	3.216
33119	95	160	49	3.94
33120	100	165	52	4.29
33121	105	175	56	5.33
33122	110	180	56	5.52
33124	120	200	62	7.73
33205	25	52	22	0.216
33206	30	62	25	0.359
33207	35	72	28	0.551
33208	40	80	32	0.715
33209	45	85	32	0.77
33210	50	90	32	0.867
33211	55	100	35	1.18
33212	60	110	38	1.56
33213	65	120	41	2.04
33214	70	125	41	2.15
33215	75	130	41	2.25
33216	80	140	46	2.94
33217	85	150	49	3.56
33218	90	160	55	4.69
33219	95	170	58	5.54
33220	100	180	63	6.4
33221	105	190	68	8.12
32904	20	37	12	0.056
32905	25	42	12	0.064
32906	30	47	12	0.072
32907	35	55	14	0.114
32908	40	62	15	0.155
32909	45	68	15	0.18
32910	50	72	15	0.181
32911	55	80	17	0.262
32912	60	85	17	0.279

轴承型号 Bearing No.	外形尺寸 Dimensions(mm)			重量 Weight
	内径 d	外径 D	宽度 T	kg
32913	65	90	17	0.295
32914	70	100	20	0.471
32915	75	105	20	0.49
32916	80	110	20	0.514
32917	85	120	23	0.767
32918	90	125	23	0.796
32919	95	130	23	0.831
32920	100	140	25	1.12
32921	105	145	25	1.16
32922	110	150	25	1.2
32924	120	165	29	1.78
32926	130	180	32	2.34
32928	140	190	32	2.47
31305	25	62	18.25	0.262
31306	30	72	20.75	0.392
31307	35	80	22.75	0.514
31308	40	90	25.25	0.727
31309	45	100	27.25	0.944
31310	50	110	29.25	1.21
31311	55	120	31.5	1.56
31312	60	130	33.5	1.9
31313	65	140	36	2.37
31314	70	150	38	2.86
31315	75	160	40	3.38
31316	80	170	42.5	4.05
31317	85	180	44.5	4.69
31318	90	190	46.5	5.46
31319	95	200	49.5	6.46
31320	100	215	56.5	8.59
320/32	32	58	17	0.196
395/394	63.5	110	22	0.843
567/563	73.025	127	36.512	1.81
575/572	76.2	139.992	36.512	2.39
580/572	82.55	139.992	36.512	2.169
582/572	82.55	139.992	36.512	2.145
594A/592A	95.25	152.4	39.688	2.489
663/653	82.55	146	41.275	2.753
683/672	95.25	168.275	41.275	3.286
740/742	80.962	150.089	44.45	3.168
749/742	85.026	150.089	44.45	3.22
1988/1922	28.575	57.15	19.845	0.22
2783/2720	31.75	76.2	23.812	0.57
2785/2720	33.338	76.2	23.812	0.55
2788/2720	38.1	76.2	23.812	0.5
2789/2720	39.688	76.2	23.812	0.48
3386/3320	39.688	80.167	29.37	0.651
3490/3420	38.1	79.375	29.37	0.66
3782/3720	44.45	93.264	30.162	0.97
6386/6320	66.675	135.755	53.975	3.54
13687/13620	38.1	69.012	19.05	0.29

圆锥滚子轴承 Tapered roller bearing




轴承型号 Bearing No.	外形尺寸 Dimensions(mm)			重量 Weight
	内径 d	外径 D	宽度 T	kg
13687/13621	38.1	69.012	19.05	0.29
15117/15245	29.987	62	19.05	0.26
17887/17831	45.23	79.985	19.842	0.41
18590/18520	41.275	73.025	16.667	0.275
25580/25520	44.45	82.931	23.81	0.575
25590/25520	45.618	82.931	23.812	0.554
25590/25523	45.618	82.931	26.988	0.59
25877/25820	34.925	73.025	23.812	0.469
25877/25821	34.925	73.025	23.812	0.47
28584/28521	52.388	92.075	24.068	0.68
28680/28622	55.562	97.63	24.608	0.77
28985/28920	60.325	101.6	25.4	0.81
29586/29522	63.5	107.95	25.4	0.94
29590/29522	66.675	107.95	25.4	0.844
31594/31520	34.925	76.2	29.37	0.64
33885/33821	44.45	95.25	27.783	0.978
33889/33821	50.8	95.25	27.783	0.87
33895/33822	53.975	95.25	27.783	0.817
37425/37625	107.95	158.75	23.02	1.37
39580/39520	57.15	112.712	30.162	1.405
39581/39520	57.15	112.712	30.162	1.405
45280/45220	44.45	104.775	30.162	1.33
47490/47420	71.438	120	32.545	1.46
47679/47620	76.2	133.35	33.338	1.9
52400/52618	101.6	157.162	36.512	2.45
65500/65237	60.325	127	44.45	2.56
09067/09195	19.05	49.225	18.034	0.17
76/32B	32	75	29.75	0.647
127509	45	85	25	0.584
M84548/M84510	25.4	57.15	19.431	0.24
M86647/M86610	28.575	64.292	21.433	0.34
M86649/M86610	30.162	64.292	21.433	0.328
M88043/M88010	30.162	68.262	22.225	0.41
M88048/M88010	33.338	68.262	22.225	0.38
JM205149/JM205110	50	90	28	0.75
JM612949/JM612910	70	115	29	1.16
LM102949/LM102910	45.242	73.431	19.558	0.32
LM102949/LM102911	45.242	73.431	21.43	0.33
LM104949/LM104910	50.8	82	21.976	0.43
LM104949/LM104911	50.8	82.55	21.59	0.42
LM11749/LM11710	17.462	39.878	13.843	0.081
LM11949/LM11910	19.05	45.237	15.494	0.13
LM12649/LM12610	21.43	50.005	17.526	0.17
LM12748/LM12710	21.43	45.237	15.494	0.12
LM12749/LM12710	21.987	45.237	15.494	0.12
LM12749/LM12711	21.987	45.974	15.494	0.12
LM29748/LM29710	38.1	65.088	18.034	0.24
LM29749/LM29710	38.1	65.088	18.034	0.24
LM29749/LM29711	38.1	65.088	19.812	0.16
LM300849/300811	40.987	67.975	17.5	0.24

轴承型号 Bearing No.	外形尺寸 Dimensions(mm)			重量 Weight
	内径 d	外径 D	宽度 T	kg
LM48548/LM48510	34.925	65.088	18.034	0.26
LM501349/LM501310	41.275	73.431	19.558	0.33
LM501349/LM501311	41.275	73.431	23.012	0.367
LM501349/LM501314	41.275	73.431	21.43	0.36
LM503349/LM503310	45.987	74.976	18	0.31
LM603049/LM603011	45.242	77.788	19.842	0.37
LM603049/LM603012	45.242	77.788	21.43	0.39
LM603049/LM603014	45.242	79.974	19.842	0.395
LM67045/LM67010	31.75	59.131	15.875	0.179
LM67045/LM67014	31.75	61.986	15.875	0.21
LM67048/LM67010	31.75	59.131	15.875	0.19
LM67049A/LM67010	31.75	59.131	15.875	0.19
LM67049A/LM67014	31.75	61.986	15.875	0.2
LM72849/LM72810	22.606	47	15.5	0.13
LM78349/LM78310A	34.987	61.973	16.7	0.21
LM806649/LM806610	53.975	88.9	19.05	0.447
HM212049/HM212011	66.675	122.238	38.1	1.85
HM212049/HM212010	66.675	122.238	38.1	1.85
HM218248/HM218210	89.975	146.975	40	2.52
HM220149/HM220110	99.974	156.975	42	2.75
HM516449/HM516410	82.55	133.35	39.688	2.12
HM518445/HM518410	88.9	152.4	39.688	2.89
HM803146/HM803110	41.275	88.9	30.162	0.9
HM804848/HM804810	48.412	95.25	30.162	0.97
HM813841/HM813811	60.325	127	36.512	2.22
HM813843/HM813810	61.912	127	36.512	2.13
HM813844/HM813810	66.675	127	36.512	2.021
HM813849/HM813810	71.438	127	36.512	1.98
HM813849/HM813811	71.438	127	36.512	1.98
HM88648/HM88610	35.717	72.233	25.4	0.49
HM88649/HM88610	34.925	72.233	25.4	0.5
HM89446/HM89410	34.925	76.2	29.37	0.66
HM89448/HM89410	36.512	76.2	29.37	0.62
HM89449/HM89410	36.512	76.2	29.37	0.62
HM903249/HM903210	44.45	95.25	30.958	1.02
L44643/L44610	25.4	50.292	14.224	0.13
L44649/L44610	26.988	50.292	14.224	0.124
L45449/L45410	29	50.292	14.224	0.12
L68149/L68110	34.987	59.131	15.875	0.17
L68149/L68111	34.987	59.974	15.875	0.18
LL510749/LL510710	63.5	92.075	13.495	0.26
JL22349/JL22310	22	41	14.4	0.08
JL69345/JL69310	38	63	17	0.2
JL69349/JL69310	38	63	17	0.2
JL819349/JL819310	95	135	20	1.2
JLM714149/JLM714110	75	115	25	0.91
JLM104945/JM104910	50	82	21.5	0.42
JLM104948/JLM104910	50	82	21.5	0.42
H715341/H715311	66.675	136.525	46.038	3.3
H715343/H715311	68.262	136.525	46.038	3.24

外球面轴承 Outer spherical bearing








型 号	轴径 d mm	基本尺寸(mm)									重量(kg)
		D	Bi	Be	r	n	m	G	ds	T	参考
UCW201	12	40	26	15	1	10	16	4	M5×0.8	4	0.12
UCW202	15	40	26	15	1	10	16	4	M5×0.8	4	0.11
UCW203	17	40	26	15	1	10	16	4	M5×0.8	4	0.10
UC201	12	47	31	17	1	12.7	18.3	4.5	M6×0.75	4.5	0.21
UC202	15	47	31	17	1	12.7	18.3	4.5	M6×0.75	4.5	0.19
UC203	17	47	31	17	1	12.7	18.3	4.5	M6×0.75	4.5	0.18
UC204	20	47	31	17	1.5	12.7	18.3	4.5	M6×0.75	4.5	0.16
UC205	25	52	34	17	1.5	14.3	19.7	5	M6×0.75	4.5	0.19
UC206	30	62	38.1	19	1.5	15.9	22.2	5	M6×0.75	5.1	0.31
UC207	35	72	42.9	20	2	17.5	25.4	6	M8×1	5.8	0.49
UC208	40	80	49.2	21	2	19	30.2	8	M8×1	6.2	0.63
UC209	45	85	49.2	22	2	19	30.2	8	M8×1	6.5	0.68
UC210	50	90	51.6	23	2	19	32.6	9	M10×1.25	6.5	0.79
UC211	55	100	55.6	24	2.5	22.2	33.4	9	M10×1.25	7.3	1.04
UC212	60	110	65.1	26	2.5	25.4	39.7	10	M10×1.25	7.7	1.47
UC213	65	120	82.6	27	2.5	25.4	39.7	10	M10×1.25	8.3	1.73
UC214	70	125	85.7	29	2.5	30.2	44.4	12	M12×1.5	8.7	2.08
UC215	75	130	96	30	2.5	33.3	44.5	14	M12×1.5	9.2	2.25
UC216	80	140	65.1	32	3	33.3	49.3	14	M12×1.5	9.6	2.86
UC217	85	150	74.6	34	3	34.1	51.6	14	M12×1.5	10.5	3.42
UC218	90	160	77.8	36	3	39.7	56.3	15	M12×1.5	11.1	4.4
UC220	100	180	96	46	4	40	56	16	M16×1.5	15	6.67
UC305	25	62	38	21	2	15	23	6	M6×0.75	6.1	0.45
UC306	30	72	43	23	2	17	26	6	M6×0.75	6.7	0.57
UC307	35	80	48	25	2.5	19	29	8	M8×1	7.4	0.72
UC308	40	90	52	27	2.5	19	33	10	M10×1.25	8.2	1.0
UC309	45	100	57	30	2.5	22	35	10	M10×1.25	9	1.30
UC310	50	110	61	32	3	22	39	12	M12×1.5	10	1.67
UC311	55	120	66	34	3	25	41	12	M12×1.5	10.7	2.10
UC312	60	130	71	36	3.5	26	45	12	M12×1.5	11.5	2.62
UC313	65	140	75	38	3.5	30	45	12	M12×1.5	12.2	3.19
UC314	70	150	78	40	3.5	33	45	12	M12×1.5	13	3.88
UC315	75	160	82	42	3.5	32	50	14	M14×1.5	13.8	4.68
UC316	80	170	86	44	3.5	34	52	14	M14×1.5	14.5	5.50
UC317	85	180	96	46	4	40	56	16	M16×1.5	15	6.67
UC318	90	190	96	48	4	40	56	16	M16×1.5	15.9	7.5
UC319	95	200	103	50	4	41	62	16	M16×1.5	16.7	8.8
UC320	100	215	108	54	4	42	66	18	M18×1.5	18	10.94
UC322	110	240	117	60	4	46	71	18	M18×1.5	21	14.5
UC324	120	260	126	64	4	51	75	18	M18×1.5	22	18.75
UC326	130	280	135	68	5	54	81	20	M20×1.5	23	23.29
UC328	140	300	145	73	5	59	86	20	M20×1.5	25	28.87


XCJG® 星驰轴承 THE STAR CHI BEARING

外球面轴承 Outer spherical bearing










型 号	基本尺寸(mm)									重量(kg)
	d_1	D	L	d	Bi	Be	T	Y	W	参考
UK205	20	52	35	25	23	17	4.5	8	38	0.25
UK206	25	62	38	30	26	19	5.1	8	45	0.40
UK207	30	72	43	35	27	20	5.8	9	52	0.54
UK208	35	80	46	40	29	21	6.2	10	58	0.70
UK209	40	85	50	45	30	22	6.5	11	65	0.78
UK210	45	90	55	50	31	23	6.5	12	70	0.94
UK211	50	100	59	55	33	24	7.3	12	75	1.18
UK212	55	110	62	60	36	26	7.7	13	80	1.5
UK213	60	120	65	65	38	27	8.3	14	85	1.84
UK215	65	130	73	75	41	30	9.2	15	98	2.62
UK216	70	140	78	80	44	32	9.6	17	105	3.30
UK217	75	150	82	85	46	34	10.5	18	110	3.97
UK218	80	160	86	90	49	36	11.1	19	120	4.77
UK305	20	62	35	25	26	21	6.1	8	38	0.49
UK306	25	72	38	30	29	23	6.7	8	45	0.60
UK307	30	80	43	35	31	25	7.4	9	52	0.75
UK308	20	90	46	40	34	27	8.2	10	58	1.02
UK309	25	100	50	45	37	30	9	11	65	1.33
UK310	30	110	55	50	40	32	10	12	70	1.7
UK311	50	120	59	55	43	34	10.7	12	75	2.08
UK312	55	130	62	60	46	36	11.5	13	80	2.56
UK313	60	140	65	65	48	38	12.2	14	85	3.10
UK315	65	160	73	75	54	42	13.8	15	98	4.81
UK316	70	170	78	80	57	44	14.5	17	105	5.72
UK317	75	180	82	85	60	46	15	18	110	6.67
UK318	80	190	86	90	63	48	15.9	18	120	7.63
UK319	85	200	90	95	66	50	16.7	19	125	8.85
UK320	90	215	97	100	72	54	18	20	130	10.94
UK322	100	240	105	110	80	60	21	21	145	14.57
UK324	110	260	112	120	86	64	22	22	155	18.25
UK326	115	280	121	130	92	68	23	23	165	23.6
UK328	125	300	131	140	98	73	25	24	180	29.15

外球面轴承 Outer spherical bearing



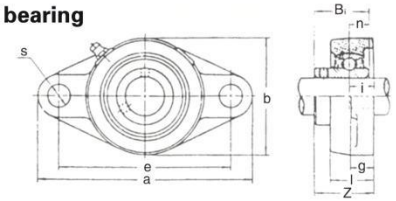



带座轴承型号	轴径 mm	基本尺寸(mm)										重量(kg)
		a	e	i	g	l	s	b	z	Bi	n	参考
UCFL201	12	113	90	15	12	25.5	12	60	33.3	31	12.7	0.52
UCFL202	15	113	90	15	12	25.5	12	60	33.3	31	12.7	0.51
UCFL203	17	113	90	15	12	25.5	12	60	33.3	31	12.7	0.50
UCFL204	20	113	90	15	12	25.5	12	60	33.3	31	12.7	0.48
UCFL205	25	130	99	16	16	27	14	68	35.7	34.1	14.3	0.51
UCFL206	30	148	117	18	16	31	14	80	40.2	38.1	15.9	0.99
UCFL207	35	161	130	19	16	34	16	90	44.4	42.9	17.5	1.31
UCFL208	40	175	144	21	16	36	16	100	51.2	49.2	19	1.53
UCFL209	45	188	148	22	19	38	18	108	52.2	49.2	19	1.68
UCFL210	50	197	157	22	19	40	18	115	54.6	51.6	19	1.88
UCFL211	55	224	184	25	19	43	20	130	58.4	55.6	22.2	3.10
UCFL212	60	250	202	29	23	48	20	140	68.7	65.1	25.4	4.00
UCFL213	65	258	210	30	23	50	24	155	69.7	65.1	25.4	5.00
UCFL214	70	265	216	31	23	54	24	160	75.4	74.6	30.2	5.60
UCFL215	75	275	225	34	23	56	24	165	78.5	77.8	33.3	6.20
UCFL216	80	290	233	34	25	58	24	180	83.3	82.6	33.3	8.20
UCFL217	85	305	248	36	25	63	26	190	87.6	85.7	34.1	9.26
UCFL218	90	320	265	40	25	68	26	205	96.3	96	39.7	11.73
UCFL305	25	150	113	16	13	29	19	80	39	38	15	0.95
UCFL306	30	180	134	18	15	32	23	90	44	43	17	1.51
UCFL307	35	185	141	20	16	36	23	100	49	48	19	1.75
UCFL308	40	200	158	23	17	40	23	112	56	52	19	2.2
UCFL309	45	230	177	25	18	44	25	125	60	57	22	3.26
UCFL310	50	240	187	28	19	48	25	140	67	61	22	4.05
UCFL311	55	250	198	30	20	52	25	150	71	66	25	4.95
UCFL312	60	270	212	33	22	56	31	160	78	71	26	6.1
UCFL313	65	295	240	33	25	58	31	175	78	75	30	7.92
UCFL314	70	315	250	36	28	61	35	185	81	78	33	9.6
UCFL315	75	320	260	39	30	66	35	195	89	82	32	10.58
UCFL316	80	355	285	38	32	68	38	210	90	86	34	13.35
UCFL317	85	370	300	44	32	74	38	220	100	96	40	16.7
UCFL318	90	385	315	44	36	76	38	235	100	96	40	18.4
UCFL319	95	405	330	59	40	94	41	250	121	103	41	22
UCFL320	100	440	360	59	40	94	44	270	125	108	42	27.08
UCFL321	105	444	360	59	40	94	44	270	127	112	44	28.2
UCFL322	110	474	390	60	42	96	44	300	131	117	46	33.1
UCFL324	120	524	430	65	48	110	47	330	140	126	51	47.8
UCFL326	130	554	460	65	50	115	47	360	146	135	54	58
UCFL328	140	604	500	75	60	125	51	400	161	145	59	82.6

XCJG® 星驰轴承 THE STAR CHI BEARING

外球面轴承 Outer spherical bearing








带座轴承型号	轴径 mm	基本尺寸(mm)										重量(kg)
		h	a	e	b	S1	S2	g	w	Di	n	参考
UCP201	12	30.2	127	95	38	13	19	14	62	31	12.7	0.64
UCP202	15	30.2	127	95	38	13	19	14	62	31	12.7	0.62
UCP203	17	30.2	127	95	38	13	19	14	62	31	12.7	0.61
UCP204	20	33.3	127	95	38	13	19	14	65	31	12.7	0.68
UCP205	25	36.5	140	105	38	13	19	15	71	34	14.3	0.80
UCP206	30	42.9	165	121	48	17	21	17	83	38.1	15.9	1.25
UCP207	35	47.6	167	127	48	17	21	18	93	42.9	17.5	1.60
UCP208	40	49.2	184	137	54	17	21	18	98	49.2	19	1.80
UCP209	45	54	190	146	54	17	20	20	106	49.2	19	2.18
UCP210	50	57.2	206	159	60	20	25	21	114	51.6	19	2.58
UCP211	55	63.5	219	171	60	20	25	23	126	55.6	22.2	3.20
UCP212	60	69.8	241	184	70	20	25	25	138	65.1	25.4	4.42
UCP213	65	76.2	265	203	70	25	29	27	151	65.1	25.4	5.50
UCP214	70	79.4	266	210	72	25	31	27	157	74.6	30.2	6.46
UCP215	75	82.6	275	217	74	25	31	28	163	77.8	33.3	7.24
UCP216	80	88.9	292	232	78	25	31	30	175	82.6	33.3	8.80
UCP217	85	95.2	310	247	83	25	31	32	187	85.7	34.1	10.80
UCP218	90	101.6	327	262	88	27	33	33	200	96	39.7	12.50
UCP220	100	110	420	320	110	33	45	40	220	96	40	20.9
UCP305	25	45	175	132	45	17	20	15	85	38	15	1.24
UCP306	30	50	180	140	50	17	20	18	95	43	17	1.52
UCP307	35	56	210	160	56	17	25	20	106	48	19	2.24
UCP308	40	60	220	170	60	17	27	22	116	52	19	3.20
UCP309	45	67	245	190	67	20	30	24	129	57	22	4.70
UCP310	50	75	275	212	75	20	35	27	143	61	22	6.45
UCP311	55	80	310	236	80	20	38	30	154	66	25	7.27
UCP312	60	85	330	250	85	25	38	32	165	71	26	8.80
UCP313	65	90	340	260	90	25	38	33	176	75	30	11.10
UCP314	70	95	360	280	90	27	40	35	187	78	33	12.36
UCP315	75	100	380	290	100	27	40	35	198	82	32	14.80
UCP316	80	106	400	300	110	27	40	40	210	86	34	18.98
UCP317	85	112	420	320	110	33	45	40	220	96	40	20.90
UCP318	90	118	430	330	110	33	45	45	235	96	40	26.70
UCP319	95	125	470	360	120	36	50	45	250	103	41	30.80
UCP320	100	140	490	380	120	36	50	50	275	108	42	35.59
UCP321	105	140	490	380	120	36	50	50	280	112	44	36.10
UCP322	110	150	520	400	140	40	55	55	300	117	46	40.85
UCP324	120	160	570	450	140	40	55	65	320	126	51	50.85
UCP326	130	180	600	480	140	40	55	75	355	135	54	63.65
UCP328	140	200	620	500	140	40	55	75	390	145	59	78.27

外球面轴承 Outer spherical bearing







带座轴承型号	轴径 mm	基本尺寸(mm)									重量(kg)
		a	e	i	g	l	s	z	Di	n	参考
UCF201	12	86	64	15	11	25.5	12	33.3	31	12.7	0.58
UCF202	15	86	64	15	11	25.5	12	33.3	31	12.7	0.56
UCF203	17	86	64	15	11	25.5	12	33.3	31	12.7	0.54
UCF204	20	86	64	15	11	25.5	12	33.3	31	12.7	0.61
UCF205	25	95	70	16	13	27	12	35.7	34.1	14.3	0.79
UCF206	30	108	83	18	13	31	12	40.2	38.1	15.9	1.11
UCF207	35	117	92	19	15	34	14	44.4	42.9	17.5	1.66
UCF208	40	130	102	21	15	36	16	51.2	49.2	19	1.93
UCF209	45	137	105	22	16	38	16	52.2	49.2	19	2.28
UCF210	50	143	111	22	16	40	16	54.6	51.6	19	2.53
UCF211	55	162	130	25	18	43	19	58.4	55.6	22.2	3.98
UCF212	60	175	143	29	18	48	19	68.7	65.1	25.4	4.30
UCF213	65	187	149	30	22	50	19	69.7	65.1	25.4	5.49
UCF214	70	193	152	31	22	54	19	75.4	74.6	30.2	6.47
UCF215	75	200	159	34	22	56	19	78.5	77.8	33.3	6.54
UCF216	80	208	165	34	22	58	23	83.3	82.6	33.3	7.86
UCF217	85	220	175	36	24	63	23	87.6	85.7	34.1	9.77
UCF218	90	235	187	40	24	68	23	96.3	96	39.7	11.72
UCF220	100	260	204	44	27	74	31	100	96	40	16.48
UCF305	25	110	80	16	13	29	16	39	38	15	1.30
UCF306	30	125	95	18	15	32	16	44	43	17	1.76
UCF307	35	135	100	20	16	36	19	49	48	19	2.20
UCF308	40	150	112	23	17	40	19	56	52	19	2.9
UCF309	45	160	125	25	18	44	19	60	57	22	3.89
UCF310	50	175	132	28	19	48	23	67	61	22	4.65
UCF311	55	185	140	30	20	52	23	71	66	25	5.70
UCF312	60	195	150	33	22	56	23	78	71	26	6.50
UCF313	65	208	166	33	22	58	23	78	75	30	7.83
UCF314	70	226	178	36	25	61	25	81	78	33	10.13
UCF315	75	236	184	39	25	66	25	89	82	32	11.28
UCF316	80	250	196	38	27	68	31	90	86	34	13.95
UCF317	85	260	204	44	27	74	31	100	96	40	16.48
UCF318	90	280	216	44	30	76	35	100	96	40	20.17
UCF319	95	290	228	59	30	94	35	121	103	41	22.35
UCF320	100	310	242	59	32	94	38	125	108	42	26
UCF321	105	310	242	59	32	94	38	127	112	44	27
UCF322	110	340	266	60	35	96	41	131	117	46	38.0
UCF324	120	370	290	65	40	110	41	140	126	51	43.67
UCF326	130	410	320	65	45	115	41	146	135	54	61.3
UCF328	140	450	350	75	55	125	41	161	145	59	90.0

XCJG® 星驰轴承 THE STAR CHI BEARING

外球面轴承 Outer spherical bearing









带座轴承型号	轴径 mm	基本尺寸(mm)															重量(kg)
		o	g	p	q	s	b	k	e	a	w	j	i	h	Bi	n	参考
UCT201	12	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.86
UCT202	15	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.84
UCT203	17	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.82
UCT204	20	16	10	51	32	19	51	12	76	89	94	32	21	61	31	12.7	0.81
UCT205	25	16	10	51	32	19	51	12	76	89	97	32	24	62	34.1	14.3	0.92
UCT206	30	16	10	56	37	22	57	12	89	102	113	37	28	70	38.1	15.9	1.31
UCT207	35	16	13	64	37	22	64	12	89	102	129	37	30	78	42.9	17.5	1.66
UCT208	40	19	16	83	49	29	83	16	102	114	144	49	33	88	49.2	19	2.43
UCT209	45	19	16	83	49	29	83	16	102	117	144	49	35	87	49.2	19	2.58
UCT210	50	19	16	83	49	29	86	16	102	117	149	49	37	90	51.6	19	2.78
UCT211	55	25	19	102	64	35	95	22	130	146	171	64	38	106	55.6	22.2	4.17
UCT212	60	32	19	102	64	35	102	22	130	146	194	64	42	119	65.1	25.4	4.8
UCT213	65	32	21	111	70	41	121	26	151	167	224	70	44	137	65.1	25.4	7.3
UCT214	70	32	21	111	70	41	121	26	151	167	224	70	46	137	74.6	30.2	7.36
UCT215	75	32	21	111	70	41	121	26	151	167	232	70	48	140	77.8	33.3	7.99
UCT216	80	32	21	111	70	41	121	26	165	184	235	70	51	140	82.6	33.3	8.92
UCT217	85	38	29	124	73	48	157	30	173	198	260	73	54	162	85.7	34.1	11.46
UCT305	25	16	12	62	36	26	65	12	80	89	122	36	26	76	38	15	1.4
UCT306	30	18	14	70	41	28	74	16	90	100	137	41	28	85	43	17	1.8
UCT307	35	20	15	75	45	30	80	16	100	111	150	45	32	94	48	19	2.4
UCT308	40	22	17	83	50	32	89	18	112	124	162	50	34	100	52	19	3.0
UCT309	45	24	18	90	55	34	97	18	125	138	178	55	38	110	57	22	4.1
UCT310	50	27	20	98	61	37	106	20	140	151	191	61	40	117	61	22	5.3
UCT311	55	29	21	105	66	39	115	22	150	163	207	66	44	127	66	25	6.4
UCT312	60	31	23	113	71	41	123	22	160	178	220	71	46	135	71	26	7.6
UCT313	65	32	25	116	70	43	134	26	170	190	238	80	50	146	75	30	9.15
UCT314	70	36	25	130	85	46	140	26	180	202	252	90	52	155	78	33	11.3
UCT315	75	36	25	132	85	46	150	26	192	216	262	90	55	160	82	32	13.92
UCT316	80	42	28	150	98	53	160	30	204	230	282	102	60	174	86	34	16
UCT317	85	42	30	152	98	53	170	32	214	240	298	102	64	183	96	40	19.08
UCT318	90	46	30	160	106	57	175	32	228	255	312	110	66	192	96	40	22.34
UCT319	95	46	31	165	106	57	180	35	240	270	322	110	72	197	103	41	25
UCT320	100	48	32	175	115	59	200	35	260	290	345	120	75	210	108	42	32.2
UCT321	105	48	32	175	115	59	200	35	260	290	345	120	75	210	112	44	32.0
UCT322	110	52	38	185	125	65	215	38	285	320	385	130	80	235	117	46	39
UCT324	120	60	42	210	140	70	230	45	320	355	432	140	90	267	126	51	56
UCT326	130	65	45	220	150	75	240	50	350	385	465	150	100	285	135	54	69
UCT328	140	70	50	230	160	80	255	50	380	415	515	155	100	315	145	59	86.5

外球面轴承 Outer spherical bearing


图1


图2



图3

图1

带座轴承型号	轴径 mm	基本尺寸(mm)									重量(kg)
		h	a	e	b	t	r	w	Di	n	参考
UCPA201	12	30.2	76	52	38	M10×1.5	12	62	31	12.7	0.72
UCPA202	15	30.2	76	52	38	M10×1.5	12	62	31	12.7	0.70
UCPA203	17	30.2	76	52	38	M10×1.5	12	62	31	12.7	0.68
UCPA204	20	30.2	76	52	38	M10×1.5	12	62	31	12.7	0.66
UCPA205	25	36.5	84	56	38	M10×1.5	15	72	34.1	14.3	0.89
UCPA206	30	42.9	94	66	48	M14×2	18	84	38.1	15.9	1.31
UCPA207	35	47.6	110	80	48	M14×2	20	95	42.9	17.5	1.71
UCPA208	40	49.2	116	84	54	M14×2	20	100	49.2	19	2.18
UCPA209	45	54.2	120	90	54	M14×2	25	108	49.2	19	2.28
UCPA210	50	57.2	130	94	60	M16×2	25	116	51.6	19	2.98
UCPA211	55	63.5	140	104	70	M16×2	25	125	55.6	22.2	3.15
UCPA212	60	69.9	150	114	80	M16×2	25	138	65.1	25.4	3.35
UCPA213	65	76.2	160	124	90	M16×2	25	150	65.1	25.4	4.45

图2

带座轴承型号	轴径 mm	基本尺寸(mm)												重量(kg)
		a	p	e	i	s	J	k	g	f	z	Bi	n	参考
UCFC201	12	100	78	55.1	10	12	5	7	20.5	62	28.3	31	12.7	0.81
UCFC202	15	100	78	55.1	10	12	5	7	20.5	62	28.3	31	12.7	0.81
UCFC203	17	100	78	55.1	10	12	5	7	20.5	62	28.3	31	12.7	0.81
UCFC204	20	100	78	55.1	10	12	5	7	20.5	62	28.3	31	12.7	0.81
UCFC205	25	115	90	63.6	10	12	6	7	21	70	29.7	34.1	14.3	1.09
UCFC206	30	125	100	70.7	10	12	8	8	23	80	32.2	38.1	15.9	1.51
UCFC207	35	135	110	77.8	11	14	8	9	26	90	36.4	42.9	17.5	1.98
UCFC208	40	145	120	84.8	11	14	10	9	26	100	41.2	49.2	19	2.32
UCFC209	45	160	132	93.3	10	16	12	14	26	105	40.2	49.2	19	3.07
UCFC210	50	165	138	97.6	10	16	12	14	28	110	42.6	51.6	19	3.28
UCFC211	55	185	150	106.1	13	19	12	15	31	125	46.4	55.6	22.2	4.20
UCFC212	60	195	160	113.1	17	19	12	15	36	135	56.7	65.1	25.4	5.45
UCFC213	65	205	170	120.2	16	19	14	15	36	145	55.7	65.1	25.4	5.91
UCFC214	70	215	177	125.1	17	19	14	18	40	150	61.4	74.6	30.2	7.29
UCFC215	75	220	184	130.1	18	19	16	18	40	160	62.5	77.8	33.3	8.02
UCFC216	80	240	200	141.4	18	23	16	18	42	170	67.3	82.6	33.3	9.92
UCFC217	85	250	208	147.1	18	23	18	20	45	180	69.6	85.7	34.1	11.58
UCFC218	90	265	220	155.5	22	23	18	20	50	190	78.3	96	39.7	13.74

图3

带座轴承型号	轴径 mm	基本尺寸(mm)										重量(kg)
		h	a	e	b	S_1	S_2	g	w	Bi	n	参考
UCPH201	12	70	127	95	40	13	19	15	101	31	12.7	1.0
UCPH202	15	70	127	95	40	13	19	15	101	31	12.7	0.99
UCPH203	17	70	127	95	40	13	19	15	101	31	12.7	0.98
UCPH204	20	70	127	95	40	13	19	15	101	31	12.7	0.96
UCPH205	25	80	140	105	50	13	19	16	114	34	14.3	1.20
UCPH206	30	90	165	121	50	17	21	18	130	38.1	15.9	1.90
UCPH207	35	95	167	127	60	17	21	19	140	42.9	17.5	2.40
UCPH208	40	100	184	137	70	17	25	19	149	49.2	19	2.80
UCPH209	45	105	190	146	70	17	25	20	157	49.2	19	3.20
UCPH210	50	110	206	159	70	20	25	22	165	51.6	19	3.60
UCPH211	55	120	219	171	75	19	22	22	181	55.6	22.2	3.80
UCPH212	60	130	235	184	85	19	23	25	197	65.1	25.4	4.20
UCPH213	65	140	262	203	95	23	28	27	212	65.1	25.4	4.80

直线滑动单元滑块 Linear slide unit slider






滑块型号 Unit Designation	主要尺寸Dimensions (mm)													配合直线轴承Slide bush			重量 Weight (g)
	T	h	E	W	L	F	G	B	C	K	S_1	S_2	L_1	型号 Designation	基本负荷率 Basic load rating 动 dynamic CN	静 static CON	
SCS6UU	6	9	15	30	25	18	15	20	15	5	M4	3.4	8	LM6 UU	206	265	34
SCS8UU	6	11	17	34	30	22	18	24	18	5	M4	3.4	8	LM8 UU	274	392	52
SCS10UU	8	13	20	40	35	26	21	28	21	6	M5	4.3	12	LM10 UU	372	549	92
SCS12UU	8	15	21	42	36	28	24	30.5	26	5.75	M5	4.3	12	LM12 UU	510	784	102
SCS13UU	8	15	22	44	39	30	24.5	33	26	5.5	M5	4.3	12	LM13 UU	510	784	120
SCS16UU	9	19	25	50	44	38.5	32.5	36	34	7	M5	4.3	12	LM16 UU	774	1180	200
SCS20UU	11	21	27	54	50	41	35	40	40	7	M6	5.2	12	LM20 UU	882	1370	255
SCS25UU	12	26	38	76	67	51.5	42	54	50	11	M8	7	18	LM25 UU	980	1570	600
SCS30UU	15	30	39	78	72	59.5	49	58	58	10	M8	7	18	LM30 UU	1570	2740	735
SCS35UU	18	34	45	90	80	68	54	70	60	10	M8	7	18	LM35 UU	1670	3140	1100
SCS40UU	20	40	51	102	90	78	62	80	60	11	M10	8.7	25	LM40 UU	2160	4020	1590
SCS50UU	25	52	61	122	110	102	80	100	80	11	M10	8.7	25	LM50 UU	3820	7940	3340
SCS60UU	30	58	66	132	122	114	94	108	90	12	M10	10.7	25	LM60 UU	4700	10000	4270


滑块型号 Unit Designation	主要尺寸Dimensions (mm)													配合直线轴承Slide bush			重量 Weight (g)
	T	h	E	W	L	F	G	B	C	K	S_1	S_2	L_1	型号 Designation	基本负荷率 Basic load rating 动 dynamic CN	静 static CON	
SCS8LUU	6	11	17	34	58	22	18	24	42	5	M4	3.4	8	LM8UU×2	274	392	0.1
SCS10LUU	8	13	20	40	68	26	21	28	46	6	M5	4.3	12	LM10UU×2	372	549	0.18
SCS12LUU	8	15	21	42	70	28	24	30.5	50	5.75	M5	4.3	12	LM12UU×2	510	784	0.20
SCS13LUU	8	15	22	44	75	30	24.5	33	50	5.5	M5	4.3	12	LM13UU×2	510	784	0.23
SCS16LUU	9	19	25	50	85	38.5	32.5	36	60	7	M5	4.3	12	LM16UU×2	774	1180	0.39
SCS20LUU	11	21	27	54	96	41	35	40	70	7	M6	5.2	12	LM20UU×2	882	1370	0.49
SCS25LUU	12	26	38	76	130	51.5	42	54	100	11	M8	7	18	LM25UU×2	980	1570	1.165
SCS30LUU	15	30	39	78	140	59.5	49	58	110	10	M8	7	18	LM30UU×2	1570	2740	1.43
SCS35LUU	18	34	45	90	155	68	54	70	120	10	M8	7	18	LM35UU×2	1670	3140	2.13
SCS40LUU	20	40	51	102	175	78	62	80	140	11	M10	8.7	25	LM40UU×2	2160	4020	3.09
SCS50LUU	25	52	61	122	215	102	80	100	160	11	M10	8.7	25	LM50UU×2	3820	7940	6.53
SCS60LUU	30	58	66	132	240	114	94	108	180	12	M12	10.7	25	LM60UU×2	4700	10000	9.29




双排角接触推力球转盘轴承



020型



021/022型




023/024型

■技术参数


轴承型号 Designations			外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter			结构尺寸 Structure dimensions							齿轮参数 Gear parameters								额定负荷 Basic load ratings	质量 Mass
无齿式	外齿式	内齿式	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	m	Da	Z	da	Z	b	x	Coa	kg
non-gear type	external gear type	internal gear type	mm			mm			mm	(D3*)(d1*)					mm		mm		mm		mm		10^4 N	
020・25・500・**	021・25・500・**	023・25・500・**	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	5	615	126	355	72	60	0.5	121	100
	022・25・500・**	024・25・500・**	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	6	648	105	348	59	60	0.5	121	100
020・25・560・**	021・25・560・**	023・25・560・**	676	444	106	640	480	20	18	583	577	96	26	4	M10×1	5	705	138	415	84	60	0.5	134	115
	022・25・560・**	024・25・560・**	676	444	106	640	480	20	18	583	577	96	26	4	M10×1	6	708	115	408	69	60	0.5	134	115
020・25・630・**	021・25・630・**	023・25・630・**	746	514	106	710	550	24	18	633	647	96	26	4	M10×1	6	792	129	480	81	60	0.5	153	130
	022・25・630・**	024・25・630・**	746	514	106	710	550	24	18	633	647	96	26	4	M10×1	8	792	96	472	60	60	0.5	153	130
020・25・710・**	021・25・710・**	023・25・710・**	826	594	106	790	630	24	18	733	728	96	26	4	M10×1	6	864	141	558	94	60	0.5	173	140
	022・25・710・**	024・25・710・**	826	594	106	790	630	24	18	733	728	96	26	4	M10×1	8	864	105	552	70	60	0.5	173	140
020・30・800・**	021・30・800・**	023・30・800・**	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	8	984	120	616	78	80	0.5	230	200
	022・30・800・**	024・30・800・**	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	10	990	96	610	62	80	0.5	230	200
020・30・900・**	021・30・900・**	023・30・900・**	1042	758	124	998	802	30	22	929	923	114	29	6	M10×1	8	1088	133	712	90	80	0.5	258	250
	022・30・900・**	024・30・900・**	1042	758	124	998	802	30	22	929	923	114	29	6	M10×1	10	1090	106	710	72	80	0.5	258	250
020・30・1000・**	021・30・1000・**	023・30・1000・**	1142	858	124	1098	902	36	22	1029	1023	114	29	6	M10×1	10	1200	117	810	82	80	0.5	286	300
	022・30・1000・**	024・30・1000・**	1142	858	124	1098	902	36	22	1029	1023	114	29	6	M10×1	12	1200	97	792	67	80	0.5	286	300
020・30・1120・**	021・30・1120・**	023・30・1120・**	1262	978	124	1218	1022	36	22	1148	1143	114	29	6	M10×1	12	1320	129	920	93	80	0.5	321	340
	022・30・1120・**	024・30・1120・**	1262	978	124	1218	1022	36	22	1148	1143	114	29	6	M10×1	12	1320	107	912	77	80	0.5	321	340
020・40・1250・**	021・40・1250・**	023・40・1250・**	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	12	1500	122	1008	85	90	0.5	482	580
	022・40・1250・**	024・40・1250・**	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	14	1498	104	1008	73	90	0.5	482	580
020・40・1400・**	021・40・1400・**	023・40・1400・**	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10×1	12	1644	134	1152	97	90	0.5	543	650
	022・40・1400・**	024・40・1400・**	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10×1	14	1652	115	1148	83	90	0.5	543	650
020・40・1600・**	021・40・1600・**	023・40・1600・**	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10×1	14	1848	129	1344	97	90	0.5	620	750
	022・40・1600・**	024・40・1600・**	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10×1	16	1856	113	1344	85	90	0.5	620	750
020・40・1800・**	021・40・1800・**	023・40・1800・**	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10×1	14	2058	144	1540	111	90	0.5	692	820
	022・40・1800・**	024・40・1800・**	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10×1	16	2064	126	1536	97	90	0.5	692	820




双排角接触推力球转盘轴承



020型



021/022型




023/024型

■技术参数


轴承型号 Designations			外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter			结构尺寸 Structure dimensions							齿轮参数 Gear parameters								额定负荷 Basic load ratings	质量 Mass
无齿式	外齿式	内齿式	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	m	Da	Z	da	Z	b	x	Coa	kg
non-gear type	external gear type	internal gear type	mm			mm			mm	(D3*)(d1*)					mm		mm		mm		mm		10^4 N	
020・50・2000・**	021・50・2000・**	023・50・2000・**	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	16	2304	141	1696	107	120	0.5	987	1150
	022・50・2000・**	024・50・2000・**	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	18	2304	125	1692	95	120	0.5	987	1150
020・50・2240・**	021・50・2240・**	023・50・2240・**	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10×1	16	2544	156	1936	122	120	0.5	1110	1500
	022・50・2240・**	024・50・2240・**	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10×1	18	2556	139	1926	108	120	0.5	1110	1500
020・50・2800・**	021・50・2800・**	023・50・2800・**	3015	2585	190	2949	2651	56	33	2838	2832	178	47	8	M10×1	18	3114	170	2484	139	120	0.5	1390	1900
	022・50・2800・**	024・50・2800・**	3015	2585	190	2949	2651	56	33	2838	2832	178	47	8	M10×1	20	3120	153	2480	125	120	0.5	1390	1900
020・60・3150・**	021・60・3150・**	023・60・3150・**	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	20	3540	174	2760	139	150	0.5	1870	3300
	022・60・3150・**	024・60・3150・**	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	22	3542	158	2760	126	150	0.5	1870	3300
020・60・3550・**	021・60・3550・**	023・60・3550・**	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10×1	20	3940	194	3160	159	150	0.5	2110	3700
	022・60・3550・**	024・60・3550・**	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10×1	22	3938	176	3168	145	150	0.5	2110	3700
020・60・4000・**	021・60・4000・**	023・60・4000・**	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10×1	22	4400	197	3608	165	150	0.5	2370	4200
	022・60・4000・**	024・60・4000・**	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10×1	25	4400	173	3660	145	150	0.5	2370	4200
020・60・4500・**	021・60・4500・**	023・60・4500・**	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10×1	22	4884	219	4114	188	150	0.5	2670	4700
	022・60・4500・**	024・60・4500・**	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10×1	25	4900	193	4100	165	150	0.5	2670	4700




交叉圆柱滚子转盘轴承



110型



111/112型




113/114型

■技术参数


轴承型号 Designations			外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter			结构尺寸 Structure dimensions							齿轮参数 Gear parameters								额定负荷 Basic load ratings	质量 Mass
无齿式	外齿式	内齿式	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	m	Da	Z	da	Z	b	x	Coa	kg
non-gear type	external gear type	internal gear type	mm			mm			mm	(D3*)(d1*)					mm		mm		mm		mm		10^4 N	
110・25・500・**	111・25・500・**	113・25・500・**	602	398	75	566	434	20	18	499	501	65	10	4	M10×1	5	630	123	365	71	60	0.5	104	80
	112・25・500・**	114・25・500・**	602	398	75	566	434	20	18	499	501	65	10	4	M10×1	6	630	120	366	62	60	0.5	104	80
110・25・560・**	111・25・560・**	113・25・560・**	662	458	75	626	494	20	18	558.5	561.5	65	10	4	M10×1	5	690	135	423	86	60	0.5	116	90
	112・25・560・**	114・25・560・**	662	458	75	626	494	20	18	558.5	561.5	65	10	4	M10×1	6	690	112	426	72	60	0.5	116	90
110・25・630・**	111・25・630・**	113・25・630・**	732	528	75	696	564	24	18	628.5	631.5	65	10	4	M10×1	6	774	126	492	83	60	0.5	130	100
	112・25・630・**	114・25・630・**	732	528	75	696	564	24	18	628.5	631.5	65	10	4	M10×1	8	776	94	488	62	60	0.5	130	100
110・25・710・**	111・25・710・**	113・25・710・**	812	608	75	776	644	24	18	708.5	711.5	65	10	4	M10×1	6	852	139	570	96	60	0.5	149	110
	112・25・710・**	114・25・710・**	812	608	75	776	644	24	18	708.5	711.5	65	10	4	M10×1	8	856	104	568	72	60	0.5	149	110
110・28・800・**	111・28・800・**	113・28・800・**	922	678	82	878	722	30	22	798.5	801.5	72	10	6	M10×1	8	968	118	632	80	65	0.5	185	170
	112・28・800・**	114・28・800・**	922	678	82	878	722	30	22	798.5	801.5	72	10	6	M10×1	10	970	94	630	64	65	0.5	185	170
110・28・900・**	111・28・900・**	113・28・900・**	1022	778	82	978	822	30	22	898.5	901.5	72	10	6	M10×1	8	1064	130	736	93	65	0.5	209	190
	112・28・900・**	114・28・900・**	1022	778	82	978	822	30	22	898.5	901.5	72	10	6	M10×1	10	1070	104	730	74	65	0.5	209	190
110・28・1000・**	111・28・1000・**	113・28・1000・**	1122	878	82	1078	922	36	22	998.5	1001.5	72	10	6	M10×1	10	1190	116	820	83	65	0.5	233	210
	112・28・1000・**	114・28・1000・**	1122	878	82	1078	922	36	22	998.5	1001.5	72	10	6	M10×1	12	1188	96	816	69	65	0.5	233	210
110・28・1120・**	111・28・1120・**	113・28・1120・**	1242	998	82	1198	1042	36	22	1118	1122	72	10	6	M10×1	10	1300	127	940	95	65	0.5	262	230
	112・28・1120・**	114・28・1120・**	1242	998	82	1198	1042	36	22	1118	1122	72	10	6	M10×1	12	1308	106	936	79	65	0.5	262	230
110・32・1250・**	111・32・1250・**	113・32・1250・**	1390	1110	91	1337	1163	40	26	1248	1252	81	10	6	M10×1	12	1452	118	1044	88	75	0.5	321	350
	112・32・1250・**	114・32・1250・**	1390	1110	91	1337	1163	40	26	1248	1252	81	10	6	M10×1	14	1456	101	1036	75	75	0.5	321	350
110・32・1400・**	111・32・1400・**	113・32・1400・**	1540	1260	91	1487	1313	40	26	1398	1402	81	10	6	M10×1	12	1608	131	1188	100	75	0.5	358	400
	112・32・1400・**	114・32・1400・**	1540	1260	91	1487	1313	40	26	1398	1402	81	10	6	M10×1	14	1610	112	1190	86	75	0.5	358	400
110・32・1600・**	111・32・1600・**	113・32・1600・**	1740	1460	91	1687	1513	45	26	1598	1602	81	10	8	M10×1	14	1820	127	1386	100	75	0.5	412	440
	112・32・1600・**	114・32・1600・**	1740	1460	91	1687	1513	45	26	1598	1602	81	10	8	M10×1	16	1824	111	1376	87	75	0.5	412	440
110・32・1800・**	111・32・1800・**	113・32・1800・**	1940	1660	91	1887	1713	45	33	1798	1802	81	10	8	M10×1	14	2016	141	1568	113	75	0.5	460	500
	112・32・1800・**	114・32・1800・**	1940	1660	91	1887	1713	45	33	1798	1802	81	10	8	M10×1	16	2016	123	1568	99	75	0.5	460	500




交叉圆柱滚子转盘轴承



110型



111/112型



113/114型

■技术参数

轴承型号 Designations			外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter			结构尺寸 Structure dimensions							齿轮参数 Gear parameters								额定负荷 Basic load ratings	质量 Mass
无齿式	外齿式	内齿式	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	m	Da	Z	da	Z	b	x	Coa	kg
non-gear type	external gear type	internal gear type	mm			mm			mm	(D3*)(d1*)					mm		mm		mm		mm		10^4 N	
110・40・2000・**	111・40・2000・**	113・40・2000・**	2178	1825	112	2110	1891	48	33	1998	2002	100	12	8	M10×1	16	2272	139	1728	109	90	0.5	686	900
	112・40・2000・**	114・40・2000・**	2178	1825	112	2110	1891	48	33	1998	2002	100	12	8	M10×1	18	2268	123	1728	97	90	0.5	686	900
110・40・2240・**	111・40・2240・**	113・40・2240・**	2418	2065	112	2350	2131	48	33	2237.5	2242.5	100	12	8	M10×1	16	2496	153	1984	125	90	0.5	764	1000
	112・40・2240・**	114・40・2240・**	2418	2065	112	2350	2131	48	33	2237.5	2242.5	100	12	8	M10×1	18	2502	136	1980	111	90	0.5	764	1000
110・40・2500・**	111・40・2500・**	113・40・2500・**	2678	2325	112	2610	2391	56	33	2497.5	2502.5	100	12	8	M10×1	16	2772	151	2232	125	90	0.5	797	876
	112・40・2500・**	114・40・2500・**	2678	2325	112	2610	2391	56	33	2497.5	2502.5	100	12	8	M10×1	20	2780	136	2220	112	90	0.5	797	876
110・40・2800・**	111・40・2800・**	113・40・2800・**	2978	2625	112	2910	2691	56	33	2797.5	2802.5	100	12	8	M10×1	18	3078	168	2520	141	90	0.5	960	1250
	112・40・2800・**	114・40・2800・**	2978	2625	112	2910	2691	56	33	2797.5	2802.5	100	12	8	M10×1	20	3080	151	2520	127	90	0.5	960	1250
110・50・3150・**	111・50・3150・**	113・50・3150・**	3376	2922	134	3286	3014	56	45	3147.5	3152.5	122	12	8	M10×1	20	3480	171	2820	142	110	0.5	1380	2150
	112・50・3150・**	114・50・3150・**	3376	2922	134	3286	3014	56	45	3147.5	3152.5	122	12	8	M10×1	22	3476	155	2816	129	110	0.5	1380	2150
110・50・3550・**	111・50・3550・**	113・50・3550・**	3776	3322	134	3686	3414	56	45	3547.5	3552.5	122	12	8	M10×1	20	3880	191	3220	162	110	0.5	1570	2470
	112・50・3550・**	114・50・3550・**	3776	3322	134	3686	3414	56	45	3547.5	3552.5	122	12	8	M10×1	22	3894	174	3212	147	110	0.5	1570	2470
110・50・4000・**	111・50・4000・**	113・50・4000・**	4226	3772	134	4136	3864	60	45	3997.5	4002.5	122	12	10	M10×1	20	4334	194	3652	167	110	0.5	1760	2800
	112・50・4000・**	114・50・4000・**	4226	3772	134	4136	3864	60	45	3997.5	4002.5	122	12	10	M10×1	22	4350	171	3650	147	110	0.5	1760	2800
110・50・4500・**	111・50・4500・**	113・50・4500・**	4726	4272	134	4636	4364	60	45	4497.5	4502.5	122	12	10	M10×1	22	4940	217	4158	190	110	0.5	1980	3100
	112・50・4500・**	114・50・4500・**	4726	4272	134	4636	4364	60	45	4497.5	4502.5	122	12	10	M10×1	25	4850	191	4150	167	110	0.5	1980	3100

直线滑动单元滑块 Linear slide unit slider





支撑型号 Support Designation	轴承尺寸 Shaft Demensions	尺寸Dimensions (mm)									锁紧螺栓 Locking Bpolt	安全螺栓 Clamping Bolt	重量 Weight (g)
		h	E	W	L	F	G	P	B	S			
SK8	8	20	21	42	14	32.8	6	18	32	5.5	M4	M5	24
SK10	10	20	21	42	14	32.8	6	18	32	5.5	M4	M5	24
SK12	12	23	21	42	14	38	6	20	32	5.5	M4	M5	30
SK13	13	23	21	42	14	38	6	20	32	5.5	M4	M5	30
SK16	16	27	24	48	16	44	8	25	38	5.5	M4	M5	40
SK20	20	31	30	60	20	51	10	30	45	6.6	M5	M6	70
SK25	25	35	35	70	24	60	12	38	56	6.6	M6	M6	130
SK30	30	42	42	84	28	70	12	44	64	9	M6	M8	180
SK35	35	50	49	98	32	85	15	50	74	11	M8	M10	270
SK40	40	60	57	114	36	96	15	60	90	11	M8	M10	420
SK50	50	70	63	126	40	120	18	74	100	14	M12	M12	750
SK60	60	80	74	148	45	136	18	90	120	14	M12	M12	1100

滑块型号 Unit Designation	主要尺寸Dimensions (mm)												配合直线轴承Slide bush			重量 Weight (g)
	h	E	W	L	F	h_1	θ	B	C	S	L_1	T	型号 Designation	基本负荷率 Basic load rating 动 dynamic CN	静 static CoN	
SBR16LUU	20	22.5	45	85	33	10	80°	32	60	M5	12	9	LM16UU-OP×2	1548	2360	300
SBR20LUU	23	24	48	96	39	10	60°	35	70	M6	12	11	LM20UU-OP×2	1764	2740	400
SBR25LUU	27	30	60	130	47	11.5	50°	40	100	M6	12	14	LM25UU-OP×2	1960	3140	900
SBR30LUU	33	35	70	140	56	14	50°	50	110	M8	18	15	LM30UU-OP×2	3140	5480	1260
SBR35LUU	37	40	80	155	63	16	50°	55	120	M8	18	18	LM35UU-OP×2	3340	6230	1850
SBR40LUU	42	45	90	175	72	19	50°	65	140	M10	20	20	LM40UU-OP×2	4320	8040	2660
SBR50LUU	53	60	120	215	92	23	50°	94	160	M10	160	20	LM50UU-OP×2	7640	15880	6000

滑块型号 Unit Designation	主要尺寸Dimensions (mm)												配合直线轴承Slide bush			重量 Weight (g)
	h	E	W	L	F	h_1	θ	B	C	S	L_1	T	型号 Designation	基本负荷率 Basic load rating 动 dynamic CN	静 static CoN	
SBR10UU	15	18	36	32	24	6	80°	25	20	M5	10	7	LM10UU-OP	350	500	63
SBR12UU	17	20	40	39	27.6	6	80°	28	26	M5	10	7	LM12UU-OP	372	549	65
SBR13UU	17	20	40	39	27.6	8.5	80°	28	26	M5	10	8	LM13UU-OP	510	784	100
SBR16UU	20	22.5	45	45	33	10	80	32	30	M5	12	9	LM16UU-OP	774	1180	150
SBR20UU	23	24	48	50	39	10	60°	35	35	M6	12	11	LM20UU-OP	882	1370	200
SBR25UU	27	30	60	65	47	11.5	50°	40	40	M6	12	14	LM25UU-OP	980	1570	450
SBR30UU	33	35	70	70	56	14	50°	50	50	M8	18	15	LM30UU-OP	1570	2740	630
SBR35UU	37	40	80	80	63	16	50°	55	55	M8	18	18	LM35UU-OP	1670	3140	925
SBR40UU	42	45	90	90	72	19	50°	65	65	M10	20	20	LM40UU-OP	2160	4020	1330
SBR50UU	53	60	120	110	92	23	50°	94	80	M10	20	25	LM50UU-OP	3820	7940	3000

轴承介绍


深沟球轴承


调心球轴承



圆柱滚子轴承


调心滚子轴承


无外圈行星轮轴承


圆锥滚子轴承


平面推力球轴承


外球面带座轴承



滚针轴承


无油轴承


回转支承


深沟薄壁轴承


直线导轨


轴套


关节轴承

- 原材料选择

兴澄特钢 XINGCHENG STEEL

大冶特殊钢股份有限公司 DAYE SPECIAL STEEL CO.,LTD

西宁特殊钢股份有限公司 XINING SPECIAL STEEL CO.,LTD.

抚顺特殊钢股份有限公司 FUSHUN SPECIAL STEEL SHARES CO.,LTD.

- 竞争伙伴

ZWZ LYC 中国·洛轴 TMB NXZ 西北轴承股份有限公司 XIBEI BEARING CO.,LTD.

- 明星用户

XCMG 徐工集团 武钢股份 WISCO,Ltd. SHANTUI 山推工程机械股份有限公司 SHANTUI CONSTRUCTION MACHINERY CO.,LTD.

山力 SUNNY BAOSTEEL 宝钢集团 ZOOMLION 中联重科 章鼓 ZHANG GU 中国驰名商标

冠洲 GUANZHOU BAOWU 兰石重装 SANY

我們企业
OURS COMPANY



- 售后服务

▲ 销售工程师一销售员负责订单承揽及商务谈判的同时负责售前、售后的技术指导工作。

▲ 24小时待机一销售人员24小时不关机, 时刻准备为用户提供服务。

▲ 24小时到位一接到用户电话，24小时之内赶到用户现场。

▲ 供货形式灵活一可按订单交货、可按用户现场零库存备货、可按生产线承包, 可按设备状况定制特殊尺寸产品。

▲ 供货批量灵活一订单量小于10套也可生产。

▲ 供货周期灵活一轴承钢产品理论供货周期已缩短至27天。

XCJG® 星驰轴承

- 应用领域



矿山



油田



振动筛



纺机



风机



消防



减速机



起重



道路



工程机械



水泥