真诚打造信誉 · 追求更高品位

Create Sincere Credit · Go In For Higher Level












山东鑫六合智能科技

SHANDONGXINLIUHE

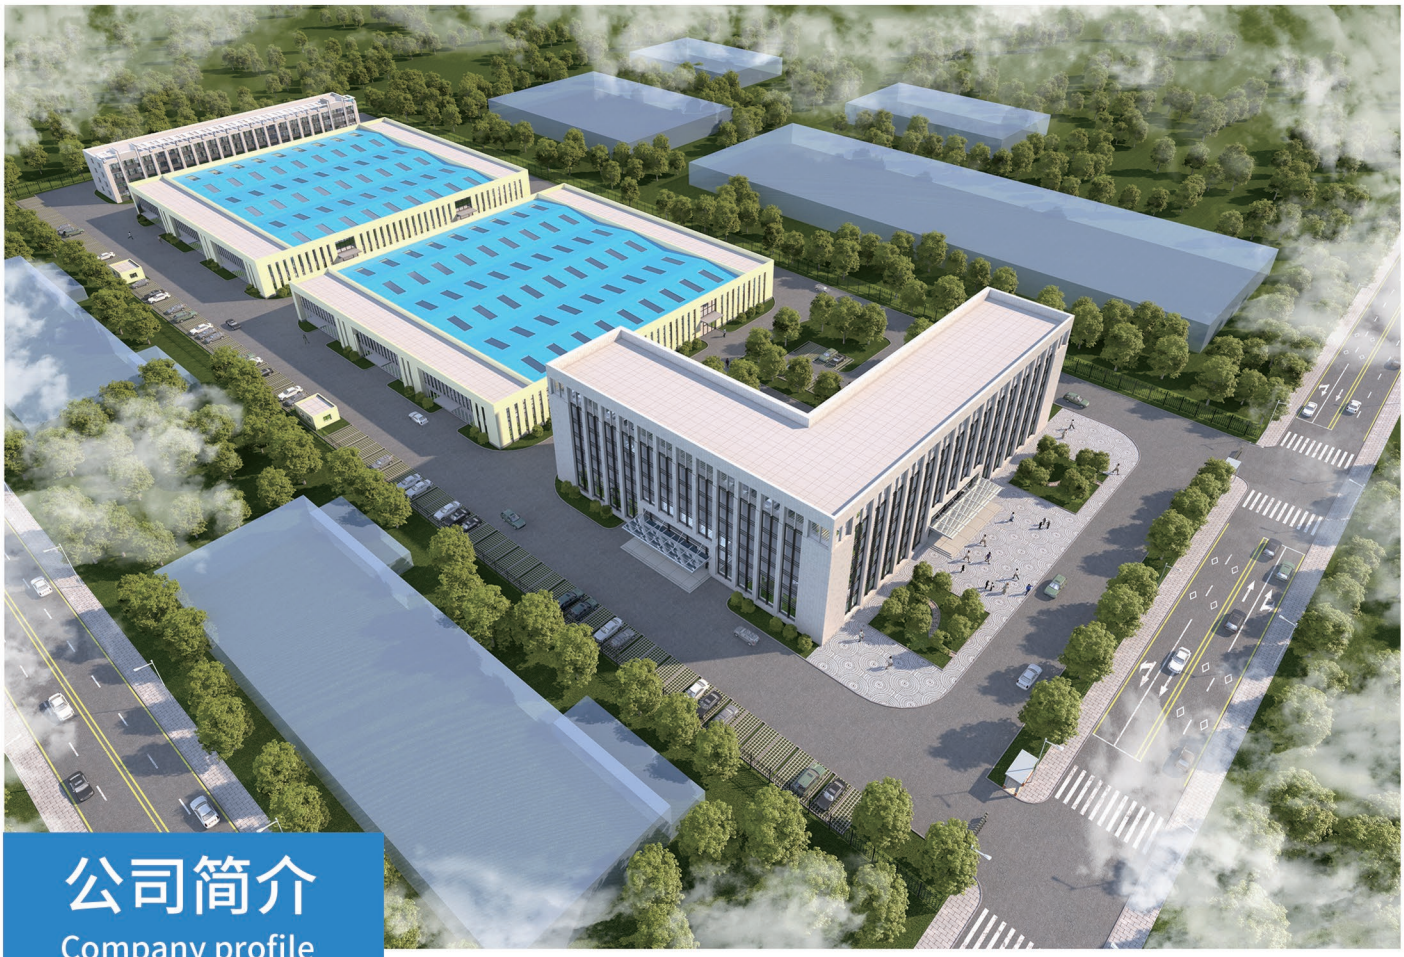

公司简介
Company profile

山东鑫六合智能科技有限公司，集产、学、研于一体的高端智能装备研发与制造企业，国家级高新技术企业，科技型、创新型中小企业，济宁市专精特新企业，公司位于济宁市国家级高新技术产业开发区，投资兴建“鑫六合智能安全科技园”，建设总用地60亩，地上总建筑面积31029㎡。涵盖研发中心、办公楼、实验楼、生产车间等。

公司主要产品板块，工程机械智能化仪表和电控系统，线束总成，轮式机械高端方向机总成，操纵箱总成，新能源工程机械电控系统总成。

公司与中国矿业大学、山东大学、中国地质大学（武汉）、中国科学院电子学研究所建立了稳定的产学研合作关系。对接中国矿业大学等科研院所的“十二五”和“十三五”国家级重大科研成果转化和产业化任务，实现新旧动能转换，科技创新和智能制造的多元化高端装备产业园区。

公司的工程机械智能化产品，配套于三一重工、中联重科、山推；日本石川岛，长野；韩国现代，斗山，迪万伦等。

Shandong Xinliuhe Intelligent Technology Co., LTD., a set of production, learning, research in one of the high-end intelligent equipment R & D and manufacturing enterprises, national high-tech enterprises, science and technology, innovative small and medium-sized enterprises, Jining city specialized in special new enterprises, the company is located in Jining City national high-tech industrial development Zone, invested in the construction of "Xinliuhe intelligent security technology Park", the total construction land of 60 acres, The total floor area is 31,029 square meters. Covering R & D center, office building, laboratory building, production workshop, etc.

The main products of the company are construction machinery intelligent instrument and electronic control system, wiring harness assembly, wheeled machinery high-end direction machine assembly, control box assembly, new energy construction machinery electronic control system assembly.

The company has established stable industry-university-research cooperation with China University of Mining and Technology, Shandong University, China University of Geosciences (Wuhan), and Institute of Electronics, Chinese Academy of Sciences. Docking the "12th Five-Year" and "13th Five-Year" national-level major scientific research achievements transformation and industrialization tasks of scientific research institutes such as China University of Mining and Technology, and realizing the transformation of old and new driving forces, scientific and technological innovation and intelligent manufacturing of diversified high-end equipment industrial parks.

The company's construction machinery intelligent products, supporting Sany Heavy Industry, Zoomlion, Shantui; Nagano, Ishikawa Island, Japan; Korea Hyundai, Doosan, Diwanlun, etc.

网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717


LHW-37系列7寸彩屏仪表
LHW-37 series 7 inch color screen instrument



技术参数 Technical specification

● 工作电压：12VDC(8~18)/24VDC(18~36)	● Operating voltage:12VDC(8~18)/24VDC(18~36)
● 工作温度：-30~80°C	● Operating temperature: -30~80°C
● 存储温度：-40°C~+85°C	● Storage temperature: -40°C~+85°C
● 防护等级：IP67	● Protection level: IP67
● 屏幕尺寸：7寸TFT-LCD显示	● Screen size: 7 "TFT-LCD display
● 屏幕分辨率：1024x600	● Screen resolution: 1024x600
● 人机交互：电容触摸+硅胶按键	● Human-computer interaction: capacitive touch + silicone button
● 语言：中文、英文(其他可定制)	● Language: Chinese, English (other customizable)
● 通讯：CAN2.0B	● Communication: CAN2.0B
● 视频显示：CVBS摄像头视频	● Video display: CVBS camera video
● 连接器：34芯 2-6447232-3（AMP）	● Connector: 34-core 2-6447232-3CAMP)

外型尺寸图 Exterior dimensions drawing

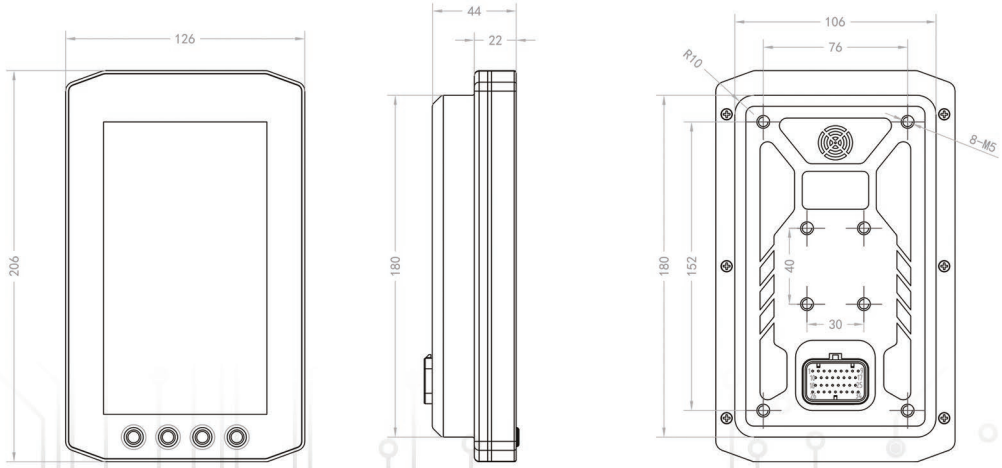


LHT-39推土机8寸彩屏仪表
LHT-39 bulldozer 8-inch color screen instrument



技术参数 Technical specification

● 工作电压：12VDC(8~18)/24VDC(18~36)	● Operating voltage:12VDC(8~18)/24VDC(18~36)
● 工作温度：-30~80°C	● Operating temperature: -30~80°C
● 存储温度：-40°C~80°C	● Storage temperature: -40°C~80°C
● 防护等级：IP67	● Protection level: IP67
● 屏幕尺寸：8寸TFT-LCD显示	● Screen size: 8 "TFT-LCD display
● 屏幕分辨率：1024x600	● Screen resolution: 1024x600
● 人机交互：电容触摸+硅胶按键	● Human-computer interaction: capacitive touch + silicone button
● 语言：中文、英文(其他可定制)	● Language: Chinese, English (other customizable)
● 通讯：CAN2.0B	● Communication: CAN2.0B
● 视频显示：CVBS摄像头视频	● Video display: CVBS camera video
● 连接器：26芯1473288-6（AMP）	● Connector: 26-core 1473288-6 (AMP)

外型尺寸图 Exterior dimensions drawing

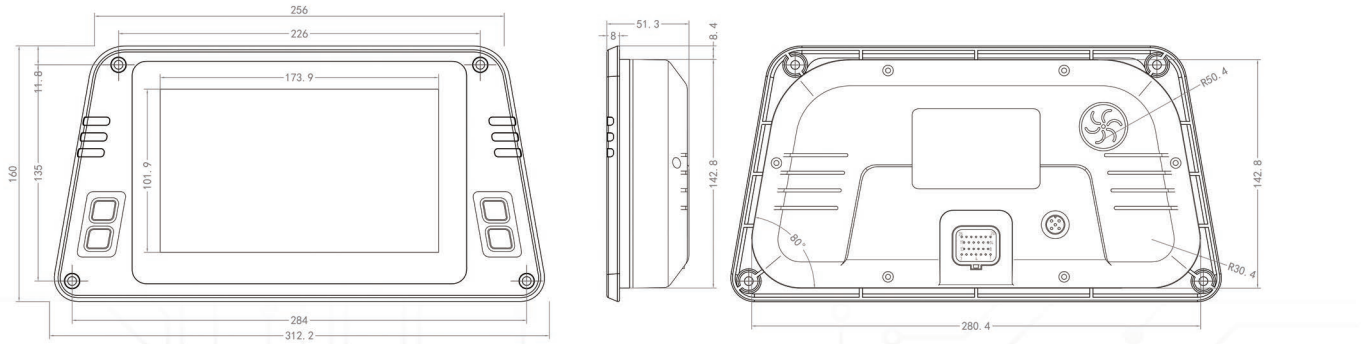

网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717


LHZ-20装载机步进电机组合仪表
LHZ-20 loader stepper motor combination instrument



技术参数 Technical specification

● 工作电压：12VDC(8~18)/24VDC(18~36)	● Operating voltage:12VDC(8~18)/24VDC(18~36)
● 工作温度：-30~80°C	● Operating temperature: -30~80°C
● 存储温度：-40°C~80°C	● Storage temperature: -40°C~80°C
● 防护等级：IP65	● Protection level: IP65
● 显示方式：1、7路步进电机仪表	● Display mode: 1、7 stepping motor instrument
2、128x64点阵液晶屏	2、128x64 lattice LCD screen
3、LED指示灯x19	3、 LED indicator x19
● 按键：硅胶按键x1	● Button: silicone button x1
● 通讯：CAN2.0B	● Communication: CAN2.0B
● 连接器：32芯 964824-2（AMP）	● Connector: 32-core 964824-2 (AMP)

外型尺寸图 Exterior dimensions drawing

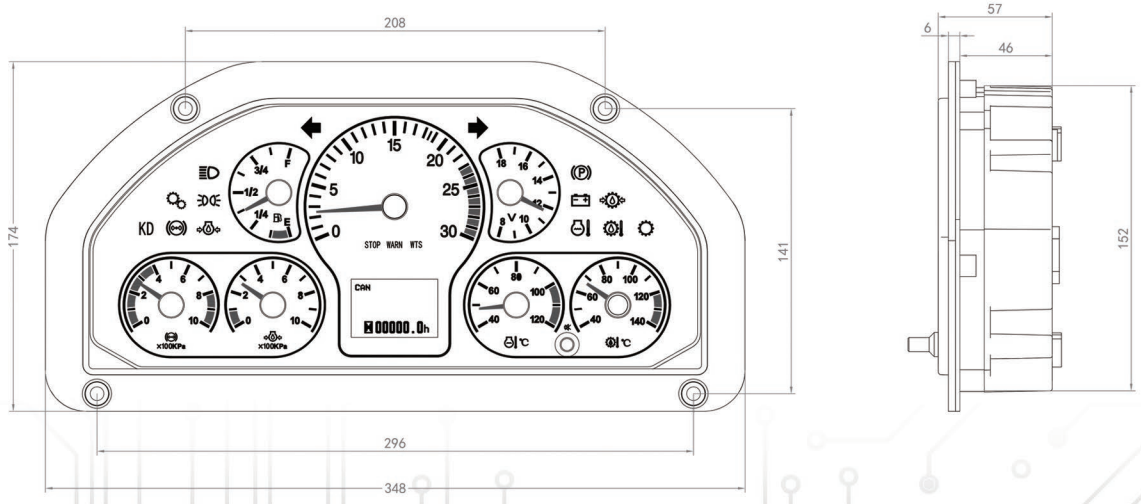

LHW-27组合仪表
LHW-27 combined instrument





技术参数 Technical specification

- 工作电压：12VDC(8~18)/24VDC(18~36)
- 工作温度：-30~80°C
- 存储温度：-40°C~80°C
- 屏幕：LCD+LED彩色段码屏
- 通讯：CAN2.0B

- Operating voltage:12VDC(8~18)/24VDC(18~36)
- Operating temperature: -30~80°C
- Storage temperature: -40°C~80°C
- Screen: LCD color segment code screen
- Communication: CAN2.0B

外型尺寸图 Exterior dimensions drawing

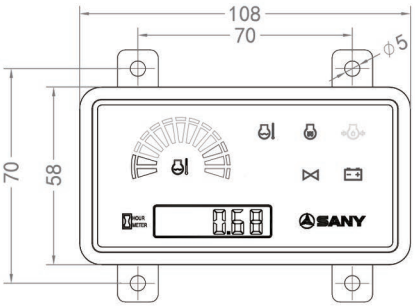



技术参数 Technical specification


- 工作电压：12VDC(8~18)/24VDC(18~36)
- 工作温度：-30~80°C
- 存储温度：-40°C~80°C
- 屏幕：LCD彩色段码屏
- 通讯：CAN2.0B


- Operating voltage:12VDC(8~18)/24VDC(18~36)
- Operating temperature: -30~80°C
- Storage temperature: -40°C~80°C
- Screen: LCD color segment code screen
- Communication: CAN2.0B

LHW-24彩色段码屏
LHW-24 color segment code screen



外型尺寸图 Exterior dimensions drawing

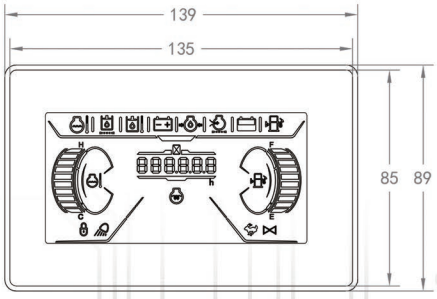

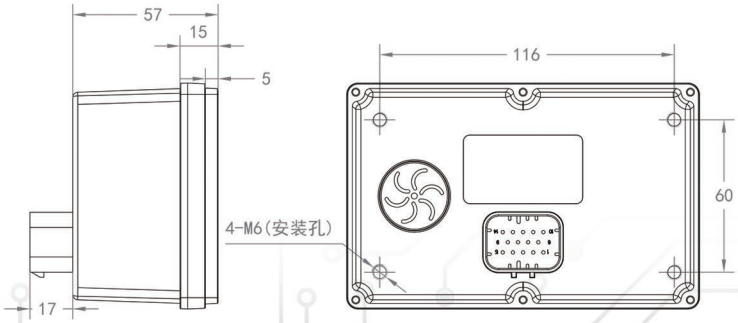

网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717

仪表产品展示
Instrument products display



- LHW-25型10.1寸彩屏仪表
- LHW-25 type 10.1 "color screen instrument



- LHT-28型组合仪表
- LHT-28 type combined instrument



- LHW-41型8寸彩屏仪表
- LHW-41 type 8 inch color screen instrument



- LHW-8型5寸彩屏仪表
- LHW-8type 5 inch color screen instrument



- LHW-9型5寸彩屏仪表
- LHW-9 type 5 inch color screen instrument



- LHW-35型5寸彩屏仪表
- LHW-35type 5 inch color screen instrument



- LHW-32型7寸彩屏仪表
- LHW-32 type 7 inch color screen instrument



- LHW-5型5寸彩屏仪表
- LHW-5type 5 inch color screen instrument



- LHW-26型组合仪表
- LHW-26 type combined instrument



- LHW-42型5寸彩屏仪表
- LHW-42 type 5 inch color screen instrument



- LHW-16型7寸彩屏仪表
- LHW-42 type 5 inch color screen instrument



- LHL-17型组合仪表
- LHL-17 type combined instrument



- LHL-30型组合仪表
- LHL-30 type combined instrument



- LHW-33型组合仪表
- LHW-33 type combined instrument



- LHL-15型组合仪表
- LHL-15 type combined instrument



- LHW-31型组合仪表
- LHW-31 type combined instrument

网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717

电源控制器
power controller



- 工作电压：12VDC(8~18)/24VDC(18~36)
- 防护等级：IP67
- 工作温度：-30~80°C
- 存储温度：-40°C~85°C
- 端口数量：96P

- Working voltage: 12VDC(8~18)/24VDC(18~36)
- Protection level: IP67
- Operating temperature: -30~80°C
- Storage temperature: -40°C~85°C
- Number of ports: 96P

ECU-3控制器
ECU-3 controller



- 工作电压：12VDC(8~18)/24VDC(18~36)
- 防护等级：IP67
- 工作温度：-30~80°C
- 存储温度：-40°C~85°C
- 端口数量：34P+26P

- Working voltage: 12VDC(8~18)/24VDC(18~36)
- Protection level: IP67
- Operating temperature: -30~80°C
- Storage temperature: -40°C~80°C
- Number of ports: 34P+26P

ECU-5控制器
ECU-5 controller



- 工作电压：12VDC(8~18)/24VDC(18~36)
- 防护等级：IP67
- 工作温度：-30~80°C
- 存储温度：-40°C~85°C
- 端口数量：24P

- Working voltage: 12VDC(8~18)/24VDC(18~36)
- Protection level: IP67
- Operating temperature: -30~80°C
- Storage temperature: -40°C~80°C
- Number of ports: 24P

ECU-8控制器
ECU-8 controller



- 工作电压：12VDC(8~18)/24VDC(18~36)
- 防护等级：IP67
- 工作温度：-30~80°C
- 存储温度：-40°C~85°C
- 端口数量： 80p

- Working voltage: 12VDC(8~18)/24VDC(18~36)
- Protection level: IP67
- Operating temperature: -30~80°C
- Storage temperature: -40°C~80°C
- Number of ports: 80p

ECU-9控制器
ECU-9 controller



- 工作电压：12VDC(8~18)/24VDC(18~36)
- 防护等级：IP67
- 工作温度：-30~80°C
- 存储温度：-40°C~85°C
- 端口数量： 121P

- Working voltage: 12VDC(8~18)/24VDC(18~36)
- Protection level: IP67
- Operating temperature: -30~80°C
- Storage temperature: -40°C~80°C
- Number of ports: 121P

LF28型方向机
Type LF28 steering machine




LF29型方向机
Type LF29 steering machine



网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717

LF32型可调倾角方向机总成
LF32 adjustable Angle steering machine assembly

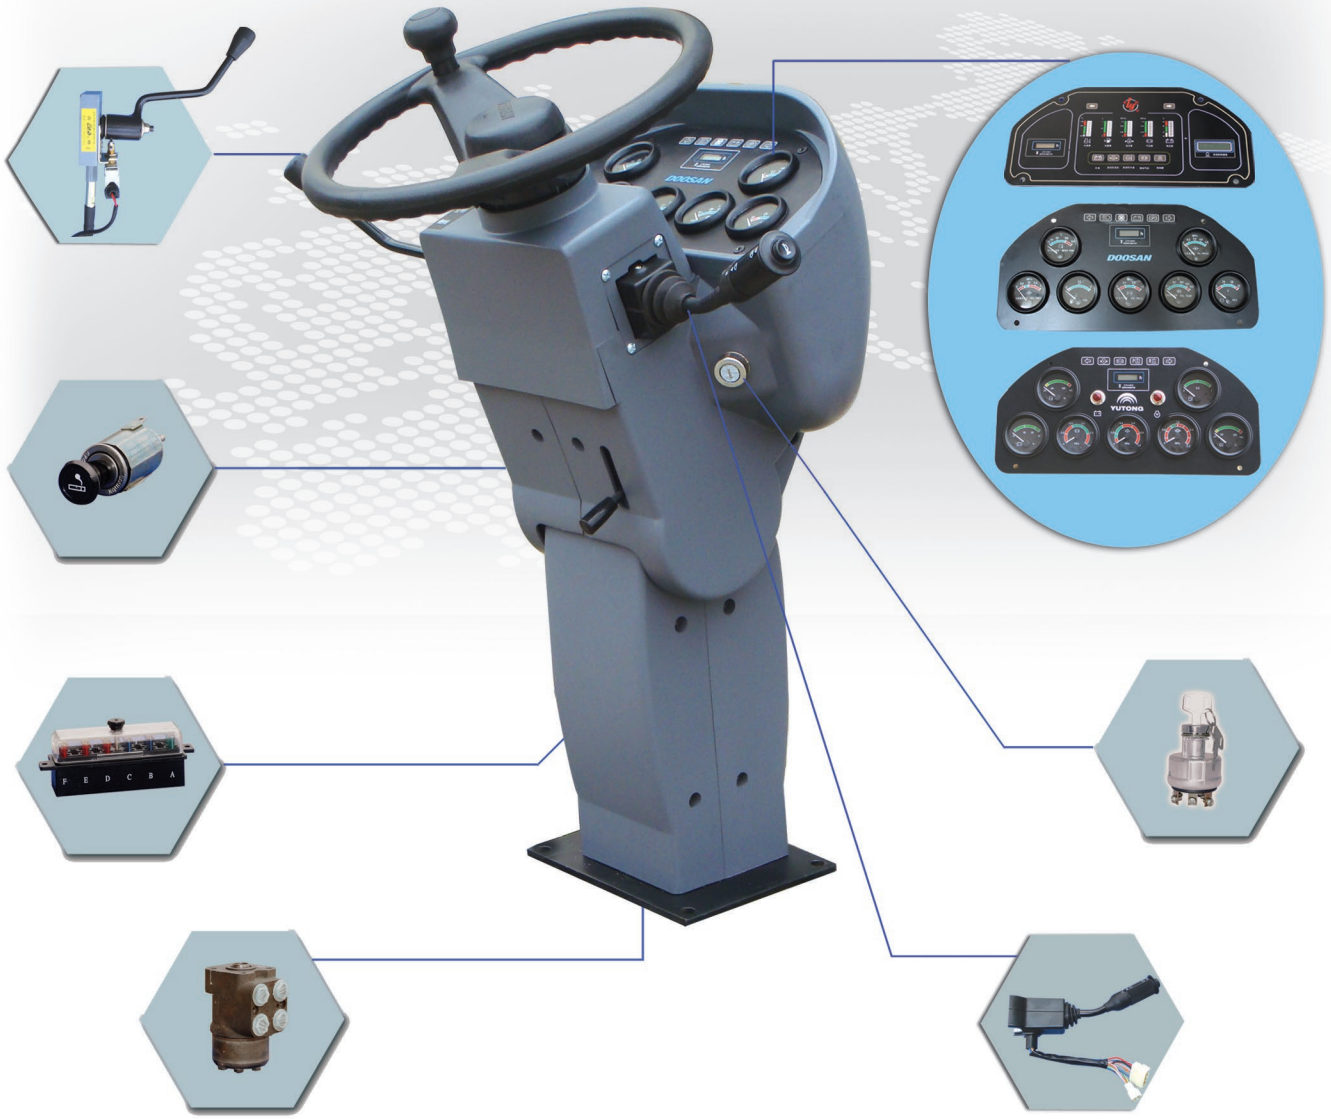

系列方向机 Series steering machine



- LF27型方向机
- Type LF27
- LF22型方向机
- Type LF22
- LF23型方向机
- Type LF23
- LF77型方向机
- Type LF77
- LF31型方向机
- Type LF31

操纵箱
Maneuvering box



- LW09型操纵箱
- LW09 control box









- LW07型操纵箱
- LW07 control box




我公司主要自主研制开发的小型挖掘机仪表、电器、空调、操纵箱总成，借鉴国外小挖优秀制造商的成熟、先进的产品技术，全套注塑模具成型，是国内首款专为小型挖掘机量身定做的电器成套产品，与世界先进水平同步，充分提高挖掘机仪表、电器档次，是一揽子解决小挖配套电器的最佳产品。

多种配置，灵活组合，适用于各种吨位挖掘机。

Our company independently developed small excavator instrumentation, electrical appliances, air conditioning, control box assembly, drawing on the mature and advanced product technology of foreign small excavator excellent manufacturers, a full set of injection mold molding, is the first domestic electrical complete sets of products tailored for small excavators, synchronized with the world's advanced level, fully improve the excavator instrumentation, electrical gear. It is the best product to solve the small mining supporting electrical appliances. A variety of configurations, flexible combination, suitable for various tonnage excavators.

网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717

操纵箱
Maneuvering box

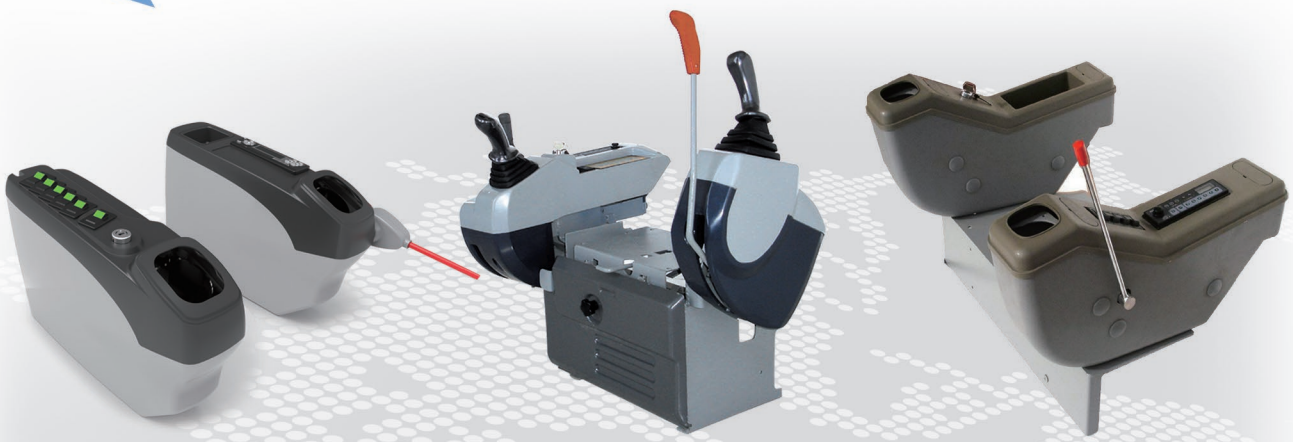

- LW08型操纵箱
- LW08 control box

- LW10型操纵箱
- LW10 control box

- LW03型操纵箱
- LW03 control box



- LW09型操纵箱
- LW09 control box



- LW01型操纵箱
- LW01 control box




- LW02型操纵箱
- LW02 control box



- LW12型操纵箱
- LW12 control box



- LT05型操纵箱
- LT05 control box

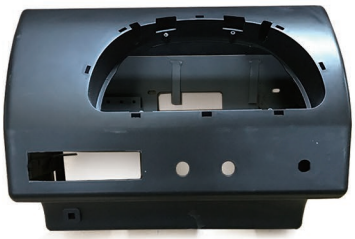

- LT04型操纵箱
- LT04 control box

工业遥控器
Industrial remote control





其他产品展示 Other products display



- 方向盘
- Steering wheel



- 方向盘
- Steering wheel



- 翘板开关
- Rocker switch



- 一键启动开关
- One-click start switch



- 启动开关
- Start button



- 组合开关
- Combination switch



- CAN总线面板开关
- CAN bus panel switch




- 继电器
- Relay



- 线束
- wiring harness

网址：http://www.sdxlhkj.com 电 话：0537-7395716 7395717

工厂场景
Factory scene















山东鑫六合智能科技有限公司

Shandong Xinliuhe Intelligent Technology Co., Ltd.



地　址：山东省济宁市高新区高新大道北段鑫六合安全科技园内

电　话：0537-7395716　7395717

网　址：http://www.sdxlhkj.com

李根峰：15318181299

张鹏翔：13375371588