

TECHNOLOGICAL
INNOVATIVE
PROFESSIONAL



AORIS

YANTAI WEALL HEAVY MACHINERY CO.,LTD



YANTAI WEALL HEAVY MACHINERY CO.,LTD

Address: No.193 Wutong Road, Fushan District, Yantai,China

Phone: +86 13054542888

Email: cathy@well-attachments.com

Intelligent attachments for excavators

COMPANY PROFILE »

- YANTAI WEALL HEAVY MACHINERY CO.,LTD is an international company that integrates R&D, manufacturing services, and sales of high-end excavator attachments on devices.
- The company has a 12,000 - square - meter modern factory, with an annual production capacity of over 20,000 sets.
- The company develops and manufactures excavator attachments . Nearly 100 specifications and models. All the products are being exported to more than 70 Countries and regions around the world. Products are used in special scenarios such as mining, municipal construction, and material removal.
- We have obtained CE European safety certification and more than 40 national technical patents. With a customer-centric philosophy, we have established close cooperative relationships with many customers. At the same time, we have established a comprehensive after-sales service system in cooperation with our agents. We continuously understand customer needs and optimize our products and services to meet the diverse needs of global customers.
- The company always upholds the core principle of “Technological Innovation, Quality First” and is committed to providing customers with diversified and high quality excavator attachment solutions .



COMPANY HONORS »



HYDRAULIC BREAKER SERIES



Side Type



Silenced Type



Top Type (welding bracket)



Backhoe Loader Hammer



Top Type(bolts on bracket)



Hydraulic Post Driver



Skid Steer Loader Hammer



Furukawa Breaker



» Side Type



Model	Unit	WAB10	WAB20	WAB30	WAB40	WAB43	WAB50
Chisel Diameter	mm	40	45	53	68	75	100
Weight	kg	100	113	175	267	368	776
Oil Flow	l/min	15-30	20-40	20-50	40-70	50-90	80-110
Pressure	bar/psi	90-120	90-120	90-120	110-140	120-150	150-170
Impact Rate	bmp	800-1100	700-1200	600-1100	500-900	400-800	350-700
Suitable Excavator	ton	0.8-2.5	1.2-3.0	2.5-4.5	4-7	6-9	11-15

Model	Unit	WAB70	WAB81	WAB81A	WAB121	WAB131	WAB151
Chisel Diameter	mm	135	140	140	155	165	175
Weight	kg	1487	1737	1770	2503	3096	3735
Oil Flow	l/min	100-150	120-180	120-180	180-240	200-260	210-290
Pressure	bar/psi	160-180	160-180	160-180	160-180	160-180	160-190
Impact Rate	bmp	350-600	350-500	350-500	350-450	250-400	200-350
Suitable Excavator	ton	18-21	20-26	20-26	28-35	30-40	40-55

» Silenced Type



Model	Unit	WAB20	WAB30	WAB40	WAB43	WAB50
Chisel Diameter	mm	45	53	68	75	100
Weight	kg	148	206	337	425	865
Oil Flow	l/min	20-40	20-50	40-70	50-90	80-110
Pressure	bar/psi	90-120	90-120	110-140	120-150	150-170
Impact Rate	bmp	700-1200	600-1100	500-900	400-800	350-700
Suitable Excavator	ton	1.2-3.0	2.5-4.5	4-7	6-9	11-15

Model	Unit	WAB70	WAB81	WAB81A	WAB121	WAB131	WAB151
Chisel Diameter	mm	135	140	140	155	165	175
Weight	kg	1497	1756	1776	2350	2780	3945
Oil Flow	l/min	100-150	120-180	120-180	180-240	200-260	210-290
Pressure	bar/psi	160-180	160-180	160-180	160-180	160-180	160-190
Impact Rate	bmp	350-600	350-500	350-500	350-450	250-400	200-350
Suitable Excavator	ton	18-21	20-26	20-26	28-35	30-40	40-55

» Top Type (Welding Bracket)



Model	Unit	WAB10	WAB20	WAB30	WAB40	WAB43	WAB50
Chisel Diameter	mm	40	45	53	68	75	100
Weight	kg	96	110	223	296	404	865
Oil Flow	l/min	15-30	20-40	20-50	40-70	50-90	80-110
Pressure	bar/psi	90-120	90-120	90-120	110-140	120-150	150-170
Impact Rate	bmp	800-1100	700-1200	600-1100	500-900	400-800	350-700
Suitable Excavator	ton	0.8-2.5	1.2-3.0	2.5-4.5	4-7	6-9	11-15

» Backhoe Loader Hammer



Model	Unit	WAB40	WAB43	WAB45
Chisel Diameter	mm	68	75	85
Weight	kg	270	390	520
Oil Flow	l/min	40-70	50-90	60-100
Pressure	bar/psi	110-140	120-150	130-160
Impact Rate	bmp	500-900	400-800	400-800
Suitable Excavator	ton	4-7	6-9	7-14

» Top Type(Bolts On Bracket)



Model	Unit	WAB20	WAB30	WAB40	WAB43	WAB50
Chisel Diameter	mm	45	53	68	75	100
Weight	kg	110	223	296	404	865
Oil Flow	l/min	20-40	20-50	40-70	50-90	80-110
Pressure	bar/psi	90-120	90-120	110-140	120-150	150-170
Impact Rate	bmp	700-1200	600-1100	500-900	400-800	350-700
Suitable Excavator	ton	1.2-3.0	2.5-4.5	4-7	6-9	11-15

Model	Unit	WAB70	WAB81	WAB81A	WAB121	WAB131	WAB151
Chisel Diameter	mm	135	140	140	155	165	175
Weight	kg	1750	1940	1973	2544	2728	4015
Oil Flow	l/min	100-150	120-180	120-180	180-240	200-260	210-290
Pressure	bar/psi	160-180	160-180	160-180	160-180	160-180	160-190
Impact Rate	bmp	350-600	350-500	350-500	350-450	250-400	200-350
Suitable Excavator	ton	18-21	20-26	20-26	28-35	30-40	40-55

» Hydraulic Post Driver



Model	Unit	WAB30	WAB40	WAB43	WAB45
Chisel diameter	mm	203	203	228	254
Weight	kg	330	340	400	550
Oil flow	l/min	20-40	40-70	50-90	60-100
Pressure	bar/psi	90-120	110-140	120-150	130-160
Impact rate	bmp	800-1100	500-900	400-800	400-800
Suitable excavator	ton	1.2-3	4-7	6-9	7-14

» Skid Steer Loader Hammer



Model	Unit	AB10	WAB20	WAB30	WAB40
Chisel Diameter	mm	40	45	53	68
Operating Weight	T-Type	110	120	280	335
	S-Type	143	158	263	395
Oil Flow	l/min	15-30	20-40	20-50	40-70
Pressure	bar/psi	90-120	90-120	90-120	110-140
Impact Rate	bmp	800-1100	700-1200	600-1100	500-900
Suitable Excavator	ton	0.8-2.5	1.2-3.0	2.5-4.5	4-7

» Furukawa Breaker



Model	Unit	WAB15G	WAB20G	WAB30G	WAB40G
Operating Weight	D-TYPE	kg	1210	1720	2260
		lbs	2667	3351	4982
	T-TYPE	kg	1250	1775	2460
		lbs	2755	3913	5423
S-TYPE	kg	1330	1797	2580	3180
	lbs	2932	3961	5688	7010
Operating Pressure	bar/psi	150-180	160-180	160-180	180-200
Required Oil Flow	l/min	90-120	130-150	150-190	190-250
Tool	Diameter	mm	120	135	150
	Weight	kg	90	125	165
	Length	mm	1100	1200	1300
Impact Rate	bpm	400-900	400-800	350-750	250-600
Hydraulic Hose	inch	1	1	1	1.25
Suitable Excavator	ton	15-18	15-18	27-35	35-45

VIBRO HAMMER SERIES



Vibro Hammer



Side Grip Vibro Hammer



» Vibro Hammer



Model	Unit	ARS-PD160	ARS-PD260	ARS-PD360	ARS-PD500
Weight	kg	1900	2600	3200	4500
Eccentric Torque	nm	35	50	65	85
Frequency	rpm	2500	2800	2800	2800
Setting Pressure	bar	200	280	300	300
Oil Flow	l/min	140	168	210	265
Suitable Excavator	ton	14~17	18~26	27~38	39~50

» Side Grip Vibro Hammer



Model	Unit	ARS-S40	ARS-S60	ARS-S70
Weight	kg	2600	3400	3500
Length	mm	1350	1600	1600
Height	mm	2410	2610	2610
Width	mm	1050	1280	1280
Bottom Clamping Force	kn	292	292	442
Side Clamping Force	kn	439	439	532
Power	kw	53~59	80~88	107~118
Oil Flow	l/min	100~110	150~165	201~221
Frequency	rpm	2500	2500	2500
Eccentric Torque	nm	4	5.2	6.3
Suitable Excavator	ton	18-26	27-38	40-50

EARTH AUGER SERIES



Earth Auger-Different Installation Bracket



» Earth Auger



» Mini Size Earth Auger



Model	Unit	ARS1500	ARS2000	ARS2500	ARS3500	ARS4500	
Suitable Excavator	ton	1.0-2.0	1.0-2.5	1.5-3.0	2.0-4.0	3.0-5.0	
Torque	nm	511~1496	639~2190	830~2847	1205~3614	1500~4499	
Pressure	bar	70~205	70~240	70~240	80~240	80~240	
Oil Flow	lpm	20~45	25~57	27~65	40~85	50~95	
Rotate Speed	rpm	44~98	43~99	36~87	42~90	40~77	
		ARS1500-2500			ARS3500-4500		
Drill Diameter		Soft Soil	Ordinary Soil	Pan Soil	Soft Soil	Ordinary Soil	Pan Soil
Φ100~200mm	m	1.8~2.5	1.8~2.3	1.6~2	3~4	2.7~3.6	2.4~3.2
Φ250~350mm	m	1.5~2.3	1.6~2.1	1.4~1.9	3~4	2.7~3.6	2.4~3.2
Φ400~500mm	m	1.2~1.5	1.1~1.5	1~1.3	3~4	2.7~3.6	2.4~3.2
Φ550~650mm					1.9~2.2	1.8~2.6	1.4~1.6
Φ700~800mm							

» Middle Size Earth Auger



Model	Unit	ARS5500			ARS7000			ARS8000		
Suitable Excavator	ton	4.5-6			5.0-7.0			6.0-8.0		
Torque	nm	1685~5477			2133~6931			2717~8152		
Pressure	bar	80~260			80~260			80~240		
Oil Flow	lpm	40~115			60~135			70~150		
Rotate Speed	rpm	30~87			36~81			33~70		
		ARS5500			ARS7000			ARS8000		
Drill Diameter		Soft Soil	Ordinary Soil	Pan Soil	Soft Soil	Ordinary Soil	Pan Soil	Soft Soil	Ordinary Soil	Pan Soil
Φ100~200mm	m	4	3.6	3.3	5	4.5	4	6	5.4	4.9
Φ250~350mm	m	4	4	3.3	5	4	3.5	6	5.4	4.9
Φ400~500mm	m	4	4	3.3	4	3.5	3	5	4.5	4.1
Φ550~650mm	m	4	3.5	3	2.5	2.3	2	4.5	4.1	3.7
Φ700~800mm	m	3	2.5	2.2				4	3.6	3.2

» Bigger Size Earth Auger



Model	Unit	ARS15000			ARS20000			ARS25000		
Suitable Excavator	ton	10-15			13~20			15~22		
Torque	nm	5024~15071			13043-19564			16503~24755		
Pressure	bar	80~260			80~240			160-240		
Oil Flow	lpm	80~170			80~170			80~170		
Rotate Speed	rpm	20~43			16~33			12~26		
		ARS15000			ARS20000			ARS25000		
Drill Diameter		Soft Soil	Ordinary Soil	Pan Soil	Soft Soil	Ordinary Soil	Pan Soil	Soft Soil	Ordinary Soil	Pan Soil
Φ100~200mm	m	8	7	6	8.5	7.7	6.9	9	8.1	7.3
Φ250~350mm	m	7	6	5	8.5	7.7	6.9	9	8.1	7.3
Φ400~500mm	m	6	4	3.5	8	7.2	6.5	8.5	7.7	6.9
Φ550~650mm	m	5	4.5	3	8	7.2	6.5	8	7.7	6.3
Φ700~800mm	m	4.5	4	3.5	7	6.3	5.7	7.5	6.8	6.1

» Mulcher



Model	Unit	ARS-70	ARS-120	ARS-200
Excavator Weight	ton	6-7	10-15	18-23
Rotor Length	mm	1000	1400	1600
Rotating Speed	rpm	1800-2500	1800-2500	1800-2500
Number Of Blades		24	34	38
Cutting Diameter	mm	250	300	400
Oil Pressure	mpa	24.5	24.5	24.5
Weight	kg	421	500	550

» Bush Cutter



Model	Unit	ARS-50	ARS-80	ARS-200
Excavator Weight	ton	5-8	8-12	18-22
Number Of Blades		24	36	56
Cutting Width	mm	1000	1200	1500
Cutting Height	mm	24.5	24.5	24.5
Oil Flow	l/min	20-40	35-40	60-80
Working Pressure	kg/cm²	120-130	180-200	220-240
Rotating Speed	rpm	1800	2300	2340
Weight	kg	300	400	500

QUICK HITCH SERIES



Hydraulic Quick Hitch



Manual Quick Hitch



Casting Quick Hitch



Tilt Rotator



Rotation Quick Hitch



Tilt Quick Hitch



Quick Hitch



Model	Unit	ARSMINI	ARSO2	ARS04	ARS06	ARS08	ARS10	ARS17
Length	mm	388	534-545	600	765	880-910	983-1050	1006-1173
Height	mm	246	307	310	388	492	574	558-610
Width	mm	175	258-263	270-280	353-436	449-483	543-568	606-663
Arm Width	mm	80-140	155-170	180-200	232-315	306-340	375-411	416-469
Pin To Pin Center	mm	80-150	230-270	290-360	380-420	460-480	473-540	550-620
Diameter Of Pin	mm	25-40	45-50	50-55	60-70	70-80	80-90	90-120
Weight	kg	25-30	50-60	80-90	140-170	290-320	480-560	630-670
Oil Flow	l/min	10-20	10-20	10-20	10-20	10-20	10-20	10-20
Suitable Excavator	ton	1.5-4	4-6	5-9	9-19	17-23	25-35	35-45

Tilt Rotator



Model	Unit	ARS-04	ARS-06
Weight	kg	240	315
Speed	rpm	10	10
Max Tilt Degree	°	45	45
Rotation Torque	nm	6600	8200
Tilt Torque	nm	21500	40550
Max Pressure	bar	120-150	180-200
Necessary Flow	l/min	18-38	80-100
Rotational Torque	nm	6500	7800
Suitable Excavator	ton	5-9	9-15

» Rotation Quick Hitch



Model	Unit	ARS03	ARS04	ARS06
Rotation Range	°	360	360	360
Working Pressure	kg/cm ²	120-160	120-160	150-170
Oil Flow	l/min	50-100	50-100	100-140
Suitable Excavator	ton	3.5	5~8	9~16
Height	mm	530	580	680
Weight	kg	66	195	280

» Tilt Quick Hitch



Model	Unit	ARS900	ARS1900	ARS3200	ARS4900	ARS7300
Tilt Range	°	180	180	180	180	180
Torque	nm	900	1900	3200	4900	7300
Working Pressure	bar	120-150	120-150	120-150	120-150	120-150
Oil Flow	lpm	15-25	15-25	15-25	15-25	15-25
Suitable excavator	ton	1.5-3	3-5	5-7	7-12	11-15
Height	mm	460	465	562	568	924
Weight	kg	55	65	110	160	380

GRAPPLE SERIES



Demolition Grapple



Rotation Grapple



Wood Grapple



Manual Wood Grapple



Hydraulic Grab



Heavy Duty Grab




Vertical Grab



Rotator Log Grab



Mechanical Grab



» Demolition Grapple



Model	Unit	ARS-03	ARS-04	ARS-05	ARS-06	ARS-08	ARS-10
Suitable Excavator	ton	3-4	5-6	7-8	12-16	20-28	30-38
Weigh	kg	350	445	580	900	1350	1800
Max Opening	mm	1000	1280	1480	1700	1920	2250
Claw Width	mm	480	520	580	800	1030	1200
Open Height	mm	980	1029	1190	1349	1496	1610
Close Height	mm	1010	1181	1310	1549	1731	1890
Rotational Pressure	mpa	17.5	17.5	17.5	18	18	18
Working Flow	l/min	40	40	50	100	120	160
Working Pressure	mpa	25	25	25	25	25	25

» Rotation Grapple



Model	Unit	ARS-04	ARS-06	ARS-08	ARS-10
Suitable Excavator	ton	5-8	9-16	17-23	25-35
Weight	kg	430	800	1500	1750
Max Opening	mm	1450	1650	1900	2200
Working Pressure	kg/cm ²	120-160	160-180	200-220	200-220
Working Flow	l/min	50-100	90-110	100-140	130-170

» Wood Grapple



Model	Unit	ARS-04	ARS-06	ARS-08
Suitable Excavator	ton	5-8	9-16	17-23
Weight	kg	400	650	700
Max Opening	mm	1500	1710	2000
Working Pressure	kg/cm ²	120-160	160-180	200-220
Working Flow	l/min	50-100	90-110	100-140

» Rotator Log Grab



Model	Unit	FX-18	FX-26	FX-36	FX-42
Max Opening	mm	1100	1340	1520	1710
Weigh	kg	100	152	200	350
Motor		GR10/30	50	60/100	120/160
Maximum Load Capacity	ton	5-8	9-16	17-23	25-35

» Hydraulic Grab



Suitable Excavator(ton)	Weight(kg)	Max Opening(mm)	Jaw Width(mm)
1.7~2.5	106	610	350
3~4	160	749	400
4~6	250	820	492
7~10	330	891	592
12~15	650	1210	620
17~23	1250	1509	820
25~30	1450	1509	820
33~39	1600	2350	840

» Heavy Duty Grab



Model	Unit	ARS06 (fixed)	ARS06 (Rotate)	ARS08 (fixed)	ARS08 (Rotate)
Weight	kg	1430	1590	1980	2060
Suitable Excavator	ton	10~19	10~19	20~30	20~30
Max Opening	mm	1700	1700	1905	1905
Working Pressure	bar	220	220	250	250
Oil Flow	l/min	80	80	180	180
Capacity	m ³	0.33	0.33	0.52	0.52
Height	mm	1563	1800	1953	2000

» Vertical Grab



Model	Unit	ARS 500	ARS 510	ARS 600	ARS 610
Jaw	P	5	6	5	6
Capacity	L	500	500	600	600
Weight	kg	900	1000	1100	1200
Max Pressure	bar	250	250	250	250
Oil Flow	l/min	100	120	125	150
Suitable Excavator	ton	15-20	15-22	18-25	18-27
Max Opening	mm	1860	1860	1960	1960

» Mechanical Grab



Model	Unit	YC04	YC06	YC08	YC10
Weight	kg	390	740	1380	1700
Max Opening	mm	1500	1700	2000	2300
Suitable Excavator	ton	5-9	10-16	17-23	24-30

» Mechanical Grab



Model	Unit	ARS06	ARS10	ARS15	ARS20	ARS30	ARS35	ARS45
Suitable Excavator	ton	4-6	7-11	12-16	17-23	24-30	31-40	41-50
Max Opening	mm	1000	1200	1400	2000	2300	2500	2700
Weight	kg	260	400	750	1400	1700	1900	2100

DEMOLITION SERIES



Demolition Shear



Eagle Shear



Power Shear




Dismantle Shear



Fixed Pulverizer



Rotation Pulverizer



» Demolition Shear



Model	Unit	ARS-04	ARS-06	ARS-08
Max Opening	mm	520	780	980
Weight	kg	650	1250	2200
Rotation Range	°	360	360	360
Oil Flow	l/min	160	200	240
Pressure	bar	240-250	300	300
Suitable Excavator	ton	6-12	14-18	20-30



Model	Unit	ARS-02	ARS-03	ARS-06	ARS-06	ARS-08
Max Opening	mm	287	350	440	530	900
Weight	kg	140	388	420	600	1800
Rotation Rang		Manual	Manual	Manual	Hydraulic	Hydraulic
Oil Flow	l/min	30-50	50-100	90-110	100-140	200
Pressure	bar	180	180	210	230	300
Suitable Excavator	ton	0.8-2	3-5	5-8	9-16	17-25

» Eagle Shear



Model	Unit	ARS-S180	ARS-S280	ARS-S380	ARS-S480	ARS-S580
Suitable Excavator	ton	13-17	20-29	30-39	40-49	50-59
Pressure	bar	250-300	250-300	300-320	320-350	320-350
Oil Flow	lpm	90-110	180-220	200-250	200-250	250-300
Max Opening	mm	400	450	600	700	800
Cutting Thickness	mm	500	550	700	780	900
Weight	kg	1280	2300	3500	5150	6050

» Power Shear



Model	Unit	ARS-40	ARS-180	ARS-285
Suitable Excavator	ton	5-12	14-17	20-30
Pressure	bar	200-240	250-300	300-320
Oil Flow	lpm	90-110	180-220	200-250
Max Opening	mm	350	610	860
Cutting Thickness	mm	411	500	660
Length	mm	1560	2000	2385
Weight	kg	540	1800	2700

» Dismantle Shear



Model	Unit	ARS-150	ARS-200
Max Opening	mm	762	780
Pressure	bar	200-240	250-300
Oil Flow	lpm	90-120	160-200
Height	mm	1953	2587
Weight	kg	540	1800
Suitable Excavator	ton	12-16	20-30

» Rotation Pulverizer



Model	Unit	ARS04	ARS06	ARS08	ARS10
Weight	kg	330	880	1500	1800
Max Opening	mm	535	720	860	900
Pressure	bar	100-130	150-220	180-220	180-220
Oil Flow	l/min	85-105	120-170	160-180	160-180
Suitable Excavator	ton	5-8	9-16	17-23	25-30



Model	Unit	ARS04	ARS06	ARS08	ARS10
Max Opening	mm	499	641	680	776
Weight	kg	640	710	1500	2085
Crushing Force	kn	320	466	665	751
Cutting Force	kn	505	1193	1181	1682
Pressure	bar	180-200	200-240	200-240	240-280
Oil Flow	par	30-40	30-50	30-50	160-200
Suitable Excavator	ton	6-8	12-15	12-15	18-25

VIBRATION SERIES



Vibrating Plate Compactor



Compaction Wheel



Vibrating Plate Compactor



Integrated bracket



Bolts bracket



No mounting bracket

Model	Unit	ARS-02	ARS-04	ARS-06	ARS-08	ARS-10
Weight	kg	180	300	500	900	950
Impact Power	ton	3	4	6.5	15	15
Impact Rate	rpm	1800	2000	2000	2000	2000
Oil Flow	l/min	25~40	45~75	85~105	120~170	120~170
Working Pressure	kg/cm ²	100~130	100~130	100~130	150~200	150~200
Bottom Plate Size	mm	650*400*14	900*500*18	1160*650*22	1350*900*28	1350*900*28
Height	mm	600	760	920	1060	1100
Width	mm	410	550	700	900	900
Suitable Excavator	ton	2~3	4~9	11~16	17~23	24~30

Compaction Wheel



Model	Unit	ARS80	ARS120	ARS200	ARS300	ARS400
Pin Diameter	mm	50	60/65	80	90/100	100/110
Rotor Diameter	mm	600	600	600	900	900
Rotor Width	mm	350	460	610	610	910
Weight	kg	480	550	695	1330	1540
Suitable Excavator	ton	6~10	12~18	20~24	25~36	40~50

SCREENING BUCKET SERIES




Screening Bucket




» Screening Bucket



Model	Unit	ARS04	ARS06	ARS08	ARS10	ARS17
Suitable Excavator	ton	5~8	10~15	17-23	25-30	28-35
Rotaty Screen Diameter	mm	720	930	1160	1420	1600
Rotating Speed	r/min	35-40	35-40	30-35	30-35	30-35
Working Pressure	bar	120-150	180-210	180-220	200-230	220-250
Oil Flow	l/min	40-45	90-100	90-100	100-110	100-120
Weight	kg	560	800	1600	2100	2600
Capacity	m³	0.4	0.8	1.2	1.6	2

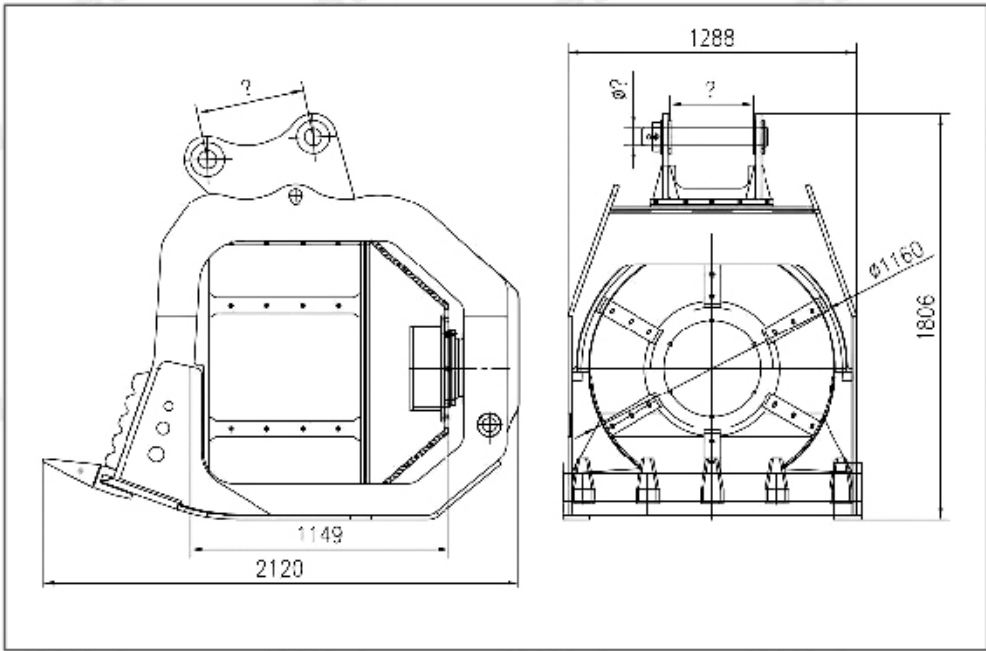

BUCKET SERIES**Mini Bucket****Mud Bucket****Tilt Bucket****Rock Bucket****Skeleton Bucket****Screen Bucket****» Mini Bucket**

Suitable Excavator (ton)	Width (mm)	Weight (kg)	Capacity (m ³)
mini	200	56	0.04
	300	66	0.065
	450	79	0.098
	600	95	0.13
5-6	200	80	0.052
	300	92	0.08
	450	108	0.13
	600	123	0.16
7-10	900	155	0.24
	200	105	0.062
	300	121	0.102
	450	142	0.166
	600	162	0.234
	900	202	0.373

» Mud Bucket

Suitable Excavator (ton)	Width (mm)	Weight (kg)	Capacity (m ³)
2-4	1025	130	0.16
	1200	168	0.144
5-8	1000	190	0.28
	1200	240	0.27
	1500	290	0.3
12-15	1500	550	0.5
	1800	620	0.7

» Tilt Bucket



Suitable Excavator (ton)	Width (mm)	Weight (kg)	Capacity (m³)
2.5~4	800	165	0.155
	1000	180	0.175
5~8	1000	230	0.22
	1200	280	0.26
10~15	1200	565	0.65
	1500	760	0.81
22	1500	1360	1.1

» Rock Bucket



Suitable Excavator (ton)	Width (mm)	Weight (kg)	Bucket Teeth
12	30"-762	388	4
15	36"-915	600	5
18	42"-1067	815	5
20	48"-1220	1085	5
25	54"-1372	1410	6
30	60"-1524	1725	6
36	60"-1524	1725	6
49	66"-1676	2370	6

» Skeleton Bucket



Suitable Excavator (ton)	Width (mm)	Weight (kg)	Bucket Teeth	Grid Size(mm)
12	24"-610	90	5	70*70
15	30"-762	180	5	70*70
18	30"-762	250	5	80*80
20	36"-915	390	5	80*80
25	42"-1067	590	6	90*90
30	48"-1220	900	6	90*90
36	48"-1220	1160	6	100*100
49	54"-1372	1390	5	100*100

RIPPER



» Ripper

Model	Unit	ARS-03	ARS-04	ARS-06	ARS-08	ARS-10	ARS-17
Pin Diameter	mm	30~40	45~50	60/65/70	80	90	100~110
Weight	kg	52	108	245	450	680	1000
Height	mm	750	882	1140	1200	1300	1400
Suitable Excavator	ton	1.7~3.5	5~8	9~16	17~23	25~33	35~47