AORIS

烟台裕洋机械设备有限公司

www.well-attachments.com

电话：+86 13675350028（同微信）

邮箱：cathy@well-attachments.com

地址：山东省烟台市福山区梧桐路193号

AORIS

挖掘机属具



烟台裕洋机械设备有限公司



源头工厂

关于AORIS

我们是谁

AORIS是一家专注于挖掘机属具研发与制造的源头工厂。从快速连接器到铲斗、抓斗和打桩机，每一件产品均在我们自己的车间内进行设计、焊接和测试，为买家提供直接的工厂价格、稳定的质量以及全面的OEM和ODM灵活性。

12,000m² 工厂面积	**90+** 团队人数
ISO&CE 认证	**OEM&ODM** 定制支持


为什么选择我们

20,000+ 套每年
大规模生产能力，交货周期稳定

1年质保
完善的售后服务

OEM/ODM 定制
按照您的图纸定制生产

公司荣誉

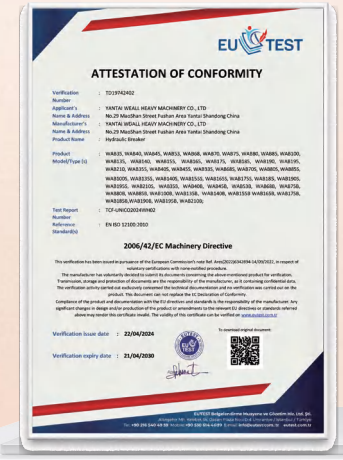
EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD1974Z402

Applicant's Name & Address : YANTAI WEALL HEAVY MACHINERY CO., LTD
No.29 MaoShan Street Fushan Area Yantai Shandong China

Manufacturer's Name & Address : YANTAI WEALL HEAVY MACHINERY CO., LTD
No.29 MaoShan Street Fushan Area Yantai Shandong China

Product Name : Hydraulic Breaker

Product Model(Type (s)) : WAB35, WAB40, WAB45, WAB53, WAB68, WAB70, WAB75, WAB80, WAB85, WAB100, WAB115, , WAB160, WAB155, , WAB300, WAB175, WAB185, WAB210, WAB215, WAB405, WAB455, WAB435, WAB585, WAB705, WAB805, WAB855, WAB9099, WAB3350, WAB1405, WAB1515, WAB1655, WAB1755, WAB1855, WAB1905, WAB1955, WAB2105, WAB2205, WAB2405, WAB2455, WAB2535, WAB2805, WAB2755, WAB2805, WAB855, WAB1300, WAB1358, WAB1408, WAB1558 WAB1658, WAB1758, WAB1858,WAB1908, WAB1958, WAB2208,

Test Report Number : TCF-UNICO2024HH02

Reference Standard(s) : EN ISO 12100:2010

2006/42/EC Machinery Directive

This verification has been issued in pursuance of the European Commission's note Ref. Ares(2021063439)4-14/09/2022, in respect of voluntary certifications with none-notified procedure.

The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Conformity.

Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 22/04/2024

Verification expiry date : 21/04/2030

To download original document:

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD1974Z401

Applicant's Name & Address : YANTAI WEALL HEAVY MACHINERY CO., LTD
No.29 MaoShan Street Fushan Area Yantai Shandong China

Manufacturer's Name & Address : YANTAI WEALL HEAVY MACHINERY CO., LTD
No.29 MaoShan Street Fushan Area Yantai Shandong China

Product Name : Quick Coupler

Product Model(Type (s)) : WAQMIM, WAQ02, WAQD4, WAQ06, WAQ08, WAQ10, WAQ12;

Test Report Number : TCF-UNICO2024HH01

Reference Standard(s) : EN ISO 12100:2010

2006/42/EC Machinery Directive

This verification has been issued in pursuance of the European Commission's note Ref. Ares(2021063439)4-14/09/2022, in respect of voluntary certifications with none-notified procedure.

The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Conformity.

Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 22/04/2024

Verification expiry date : 21/04/2030

To download original document:

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD8302501

Applicant's Name : YANTAI WEALL HEAVY MACHINERY CO., LTD

Applicant's Address : No. 19A Wulong Road, Fushan District, Yantai City, Shandong Province,China

Manufacturer's Name : YA ITAI WeALL HEAVY MACHINERY CO., LTD

Manufacturer's Address : No.183 Wulong Road, Fushan District, Yantai City, Shandong Province,China

Product Name : Compactor

Product Model(Type (s)) : AR502, AR504, AR506, AR508, AR510, AR580, AR610, AR6200, AR6300, AR6400

Test Report Number : UNICO2025113052605706

Reference Standard(s) : EN ISO 12100:2010, EN 60204-1:2018

Brand : AORIS

2006/42/EC Machinery Directive

This verification has been issued in pursuance of the European Commission's note Ref. Ares(2025034)394-14/05/2022, in respect of voluntary certifications with none-notified procedure. The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Conformity.

Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 27/11/2025

Verification expiry date : 26/11/2030

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD0846Z401

Applicant's Name : Yantai Weall Heavy Machinery Co.,Ltd

Applicant's Address : 193 Wulong Road,Fushan District, Yantai City, Shandong Province,China

Manufacturer's Name : Yantai Weall Heavy Machinery Co.,Ltd

Manufacturer's Address : 193 Wulong Road,Fushan District, Yantai City, Shandong Province,China

Product Name : EXCAVATOR BUCKET

Product Model(Type (s)) : AR50MNI, AR5200, AR6500, AR6400, AR5450, AR5500, AR5800, AR5900, AR61000, AR51000, AR51500, AR52000

Test Report Number : UNICO2025321H01

Reference Standard(s) : EN ISO 12100:2010

Brand : YTAORIS

2006/42/EC Machinery Directive

This verification has been issued in pursuance of the European Commission's note Ref. Ares(2025034)394-14/05/2022, in respect of voluntary certifications with none-notified procedure. The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Conformity.

Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 26/03/2025

Verification expiry date : 25/03/2031

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD0846Z402

Applicant's Name : Yantai Weall Heavy Machinery Co.,Ltd

Applicant's Address : 193 Wulong Road,Fushan District, Yantai City, Shandong Province,China

Manufacturer's Name : Yantai Weall Heavy Machinery Co.,Ltd

Manufacturer's Address : 193 Wulong Road,Fushan District, Yantai City, Shandong Province,China

Product Name : EXCAVATOR GRAPPLE

Product Model(Type (s)) : AR5MNI, AR502, AR503, AR504, AR506, AR508, AR510, AR515, FX18, FX26, FX36, FX42

Test Report Number : UNICO2025321H02

Reference Standard(s) : EN ISO 12100:2010

Brand : YTAORIS

2006/42/EC Machinery Directive

This verification has been issued in pursuance of the European Commission's note Ref. Ares(2025034)394-14/05/2022, in respect of voluntary certifications with none-notified procedure. The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Conformity.

Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 26/03/2025

Verification expiry date : 25/03/2031

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD0846Z402

Applicant's Name : Yantai Weall Heavy Machinery Co.,Ltd

Applicant's Address : 193 Wulong Road,Fushan District, Yantai City, Shandong Province,China

Manufacturer's Name : Yantai Iaiball Heavy Machinery Co.,Ltd

Manufacturer's Address : Yai Wulong Road,Fushine District, Yantai City, Shandong Province,China

Product Name : EXCAVATOR GRAPPLE

Product Model(Type (s)) : AR5MNI, AR502, AR503, AR504, AR506, AR508, AR510, AR515, FX18, FX26, FX36, FX42

Test Report Number : UNICO2025321H02

Reference Standard(s) : EN ISO 12100:2010, EN 60204-1:2018

Brand : YTAORIS

2006/42/EC Machinery Directive

This verification has been issued in pursuance of the European Commission's note Ref. Ares(2025034)394-14/09/2022, in respect of voluntary certifications with none-notified procedure. The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Conformity.

Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 26/03/2025

Verification expiry date : 25/03/2031

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


EU TEST

ATTESTATION OF CONFORMITY

Verification Number : TD5653Z501

Applicant's Name : YANTAI WEALL HEAVY MACHINERY CO., LTD

Applicant's Address : No.183 Wulong Road, Fushan District, Yantai City, China

Manufacturer's Name : YANTAI WeALL ReliSY MACHINERY CO., LTD

Manufacturer's Address : No.193 Wulong Road, Fushan District, Yantai City, China

Product Name : Mulcher

Product Model(Type (s)) : AR58MNI, AR584, AR606, AR608,

Test Report Number : UNICO2025091TL05

Reference Standard(s) : EN ISO 12100:2010, EN 60204-1:2018

Brand : AORIS

2006/42/EC Machinery Directive

verification has been issued in pursuance of the European Commission's note Ref. Ares(2025034)394-14/05/2022, in respect of voluntary certifications with none-notified procedure. The manufacturer has voluntarily decided to submit its documents concerning the above-mentioned product for verification. Transmission, storage and protection of documents are the responsibility of the manufacturer, as it containing confidential data. The verification activity carried out exclusively concerned the technical documentation and no verification was carried out on the product. This document can not replace the EC Declaration of Performance. Compliance of the product and documentation with the EU directives and standards is the responsibility of the manufacturer. Any significant changes in design and/or production of the product or amendments to the relevant EU directives or standards referred above may render this certificate invalid. The validity of this certificate can be verified on www.eutest.com.tr

Verification issue date : 24/09/2025

Verification expiry date : 23/09/2030

EUTEST Belgelendirme Muayene ve Gözetim Hiz. Ltd. Şti.


证书号第18136113号

实用新型专利证书

实用新型名称：一种分体式容箱液压快速连接器

发 明 人：于涛

专 利 号：ZL 2022 2 2620386.5

专利申请日：2022 年 09 月 29 日

专 利 权 人：烟台裕洋机械设备有限公司

地 址：265300 山东省烟台市福山区凤凰山路 210

授权公告日：2022 年 12 月 27 日 授权公告号：CN 218127756 U

国家知识产权局依照中华人民共和国专利法组织进行初步审查，决定授予专利权，颁发实用新型专利证书并登专利登记簿上予以登记。专利权自授权公告之日起生效。专利权期限为十年，自申请日起算。

专利证书记载专利登记时的法律状况。专利权的转移、质押、无效、恢复和专利权人姓名或名称、国籍、地址变更等事项记载在专利登记簿上。

局长
申长雨

第 1 页（共 2 页）

其他事项参见背页


证书号第18114450号

实用新型专利证书

实用新型名称：一种液压打桩机打桩机构

发 明 人：于涛

专 利 号：ZL 2022 2 2619906.7

专利申请日：2022 年 10 月 09 日

专 利 权 人：烟台裕洋机械设备有限公司

地 址：265300 山东省烟台市福山区凤凰山路 210

授权公告日：2022 年 12 月 27 日 授权公告号：CN 218148337 U

国家知识产权局依照中华人民共和国专利法组织进行初步审查，决定授予专利权，颁发实用新型专利证书并登专利登记簿上予以登记。专利权自授权公告之日起生效。专利权期限为十年，自申请日起算。

专利证书记载专利登记时的法律状况。专利权的转移、质押、无效、恢复和专利权人姓名或名称、国籍、地址变更等事项记载在专利登记簿上。

局长
申长雨

第 1 页（共 2 页）

其他事项参见背页

快换



快换





型号	单位	ARSMINI	ARS02	ARS04	ARS06	ARS08	ARS10	ARS17
长度	mm	388	534-545	600	765	880-910	983-1050	1006-1173
高度	mm	246	307	310	388	492	574	558-610
宽度	mm	175	258-263	270-280	353-436	449-483	543-568	606-663
开档	mm	80-140	155-170	180-200	232-315	306-340	375-411	416-469
中心距	mm	80-150	230-270	290-360	380-420	460-480	473-540	550-620
销轴	mm	25-40	45-50	50-55	60-70	70-80	80-90	90-120
重量	kg	25-30	50-60	80-90	140-170	290-320	480-560	630-670
流量	l/min	10-20	10-20	10-20	10-20	10-20	10-20	10-20
适配挖机	ton	0.8-3	3-5	5-9	10-16	17-23	25-35	35-45

主要特点

- 采用高强度Q355钢材制造
- 销轴及连接件经过热处理
- 紧凑结构，低矮设计，保持挖掘机的挖掘力
- 适用于挖掘机上各种工装，如挖斗、松土器、破碎锤等

可选择

- 液压/机械安装配件
- 吊钩
- 各种适配器

适配器	M	S	MS	HS	SW	CW	AR	X
								

平推快换





型号	单位	ARSMINI	ARS02	ARS04	ARS06	ARS08	ARS10	ARS17
长度	mm	291	550	590	750	950	1050	1150
高度	mm	238	310	340	460	510	600	630
宽度	mm	185	145-175	160-230	220-270	300-340	550-600	610-760
销轴	mm	25-30	30-40	45-55	60-70	70-80	80-90	90-120
工作压力	bar	120-150	120-150	200-250	250-300	250-300	250-300	250-300
流量	l/min	15-25	15-25	15-25	15-25	15-25	15-25	15-25
重量	kg	25	40	78	200	316	620	600-720
适配挖机	ton	0.8-2.5	3-5	6-9	10-16	18-25	26-30	40-52

主要特点

- 双锁安全结构
- 紧凑设计——提升整机性能
- 采用高强度耐磨钢材，以延长使用寿命
- 适用于挖掘机上各种工装，如挖斗、松土器、破碎锤等

可选择

- 液压/机械安装配件
- 吊钩
- 各种适配器

适配器	M	S	MS	HS	SW	CW	AR	X
								

旋转快换







型号	单位	ARSMINI	ARS04	ARS06
旋转角度	degree	360	360	360
工作压力	kg/cm²	120-160	160-180	180-200
流量	l/min	50-100	50-100	100-140
高度	mm	530	580	680
重量	kg	66	130/195	280
适配挖机	ton	1-3	5-9	10-16

主要特点

- 360度连续旋转
- 高强度钢结构，坚固耐用
- 由回转支承驱动，结构低矮
- 适用于挖掘机上各种工装，如挖斗、松土器、破碎锤等

可选择

- 液压/机械安装配件
- 吊钩
- 各种适配器

适配器	M	S	MS	HS	SW	CW	AR	X
								

倾斜快换



型号	单位	ARS900	ARS1900	ARS3200	ARS4900	ARS7300
倾斜角度	degree	180	180	180	180	180
扭矩	N·m	900	1900	3200	4900	7300
工作压力	bar	120-150	120-150	160-180	160-180	200-220
流量	l/min	15-25	15-25	15-25	15-25	15-25
高度	mm	460	465	562	568	924
重量	kg	55	65	110	160	380
适配挖机	ton	1.5-3	3-5	5-7	7-12	11-15



型号	单位	ARS900	ARS1900	ARS2800	ARS4700
倾斜角度	degree	180	180	180	180
扭矩	Nm	900	1900	2800	4700
压力	bar	210	210	210	210
排量	cm^2	234	540	700	1180
净重	kg	27	45	35	84



型号	单位	ARS2870	ARS4400	ARS7190
倾斜角度	degree	180	180	180
扭矩	Nm	2870	4400	7190
压力	bar	210	210	210
排量	cm^2	700	1016	1897
净重	kg	48	84	118

主要特点

- 180度倾斜两个方向
- 结构紧凑，自重合理
- 锁紧系统经过反复测试，连接可靠
- 适用于挖掘机上各种工装，如挖斗、松土器、破碎锤等

可选择

- 液压/机械安装配件
- 吊钩
- 各种适配器

适配器	M	S	MS	HS	SW	CW	AR	X
								

液压手腕





型号	单位	ARS02	ARS04	ARS06
重量	kg	240	315	440
速度	rpm	25	≤20	≤20
最大倾斜角度	°	45	45	45
旋转扭矩	N·m	6600	8200	10500
倾斜扭矩	N·m	4500	6500	9500
最大压力	bar	160-180	180-200	240
流量	l/min	18-38	50-80	80-100
适配挖机	ton	3-4	5-9	10-15

主要特点

- 360° 持续旋转 ＋ 45°双向倾斜
- 集成夹具可用于抓取不规则材料
- 强劲的液压马达确保即使在重载条件下也能实现强力旋转和倾斜
- 适用于挖掘机上各种工装，如挖斗、松土器、破碎锤等

可选择

- 液压/机械安装配件
- 吊钩
- 各种适配器

适配器	M	S	MS	HS	SW	CW	AR	X
								

打桩机







打桩机

- 全液压柔性控制，轻松拾取料堆
- 高性能进口减震橡胶块
- 配备大扭矩液压马达，激振力更强
- 开放式箱体结构：内部压力平衡 + 高效散热，实现长时间连续运行

型号	单位	ARS-PD160	ARS-PD260	ARS-PD360	ARS-PD500
质量	kg	1900	2600	3200	4500
偏心扭矩	nm	35	50	65	85
振频	rpm	2500	2800	2800	2800
工作压力	bar	200	280	300	300
工作流量	l/min	140	168	210	265
适配挖机	ton	11-17	18-26	27-38	39-50



侧夹打桩机

- 360度旋转和45度倾斜
- 内置液压旋转马达和齿轮：防油污染和冲击保护
- 不受桩长限制，可在有限空间内施工
- 驱动钢管桩、H型钢、工字钢、钢板桩、混凝土桩、太阳能地桩等

型号	单位	ARS-S40	ARS-S60	ARS-S70
质量	kg	2600	3400	3500
长度	mm	1350	1600	1600
高度	mm	2410	2610	2610
宽度	mm	1050	1280	1280
底部夹紧力	kn	292	292	442
侧夹紧力	kn	439	439	532
功率	kw	53-59	80-88	107-118
流量	l/min	100-110	150-165	201-221
频率	rpm	2500	2500	2500
偏心力矩	nm	4	5.2	6.3
适配挖机	ton	18-26	27-38	40-50

抓具





抓料机

- 可无限旋转的360°顺时针和逆时针转动回转支承系统
- 高夹紧力和快速的循环时间得益于单一的大直径气缸设计
- 使用手柄操作抓斗，对驾驶员而言更加舒适灵活

型号	单位	ARS-02	ARS-04	ARS-06	ARS-08	ARS-10
适配挖机	ton	2.5-4	7-8	12-16	20-28	30-38
重量	kg	180	380	900	1350	1800
最大开口	mm	950	1150	1700	1920	1920
爪宽	mm	350	500	800	1030	1200
工作压力	bar	160-180	180-200	200-220	240-260	240-260
工作流量	l/min	40	50	100	120	160



旋转马达抱式抓木器

- 360° 液压旋转：可将原木从任意位置拾取，精确调整至所需方向
- 悬臂吊架：在水平提升原木时，利用吊架实现杠杆作用并牢固固定负载
- 内置油道设计，接头强度更高、韧性更好

型号	单位	FX-18	FX-26	FX-36	FX-42
适配挖机	ton	1-3	3-5	5-8	9-16
重量	kg	100	152	200	350
最大开口	mm	1100	1340	1520	1710
马达	-	30F	40F	50F	60F
装载容量	kg	500-1500	2000-2500	3000-5000	5000-6000



抱式抓木器

- 旁通式设计，既有宽开口与大容量，闭合时仍能紧密贴合木捆
- 单油缸＋双连杆抱爪，动作柔顺、夹持稳定
- 360° 顺/逆时针回转且转速可调

型号	单位	ARS-04	ARS-06	ARS-08
适配挖机	ton	5-9	10-16	17-23
重量	kg	400	650	700
最大开口	mm	1500	1710	2000
工作压力	kg/cm²	120-160	160-180	200-220
工作流量	l/min	50-100	90-110	100-140



树剪

- 采用可更换且弧形设计的刀片，显著提高了切割效率
- 大直径、高功率的油缸可实现最高的剪切效率
- 一种多功能属具，可抓取和切割

型号	单位	ARS02	ARS04	ARS06
适配挖机	ton	2-4	6-10	12-16
重量	kg	200	365	880
最大开口	mm	535	585	825
宽度	mm	665	825	1080
刀片厚度	mm	18	20	20
最大切割直径	mm	200	300	350



莲花抓

- 精准多瓣抓取与取出，同步且精确运行
- 每片独立油缸驱动，合拢力均匀
- 适用于废料场、港口及废物处理场所

型号	单位	ARS06 (固定)	ARS06 (旋转)	ARS08 (固定)	ARS08 (旋转)
适配挖机	ton	10-19	10-19	20-30	20-30
重量	kg	1430	1590	1980	2060
最大开口	mm	1700	1700	1905	1905
工作压力	bar	220	220	250	250
流量	l/min	80	80	180	180
容积	m^3	0.33	0.33	0.52	0.52
高度	mm	1563	1800	1953	2000



立式莲花抓

- 立式莲花抓一-同类别中夹紧力最高
- 多瓣式结构，覆盖面积广，物料搬运稳定可靠
- 专为最严苛的废金属、拆除和散装物料搬运而设计

型号	单位	ARS500	ARS510	ARS600	ARS610
适配挖机	ton	15-20	15-22	18-25	18-27
重量	kg	900	1000	1100	1200
最大开口	mm	1860	1860	1960	1960
齿	P	5	6	5	6
容积	L	500	500	600	600
工作压力	bar	250	250	250	250
流量	l/min	100	120	125	150



澳式抓

- 采用五指互锁网状结构设计，提供最大抓握力和控制性
- 更大的抓取空间设计可一次性抓取大量物料
- 采用Q355作为主体材料，NM400作为爪片——使用寿命极长

适配挖机（ton）	重量 (kg)	最大开口 (mm)	爪宽 (mm)
1.7-2.5	106	610	350
3-4	160	749	400
4-6	250	820	492
7-10	330	891	592
12-15	650	1210	620
17-23	1250	1509	820
25-30	1450	1509	820
33-39	1600	2350	840



旋转双缸抓

- 双油缸驱动，夹持力更强、更均衡，适应重载作业
- 采用进口平衡阀马达，具有缓冲及刹车功能
- 使用特制的旋转齿轮，延长产品寿命

型号	单位	ARS-04	ARS-06	ARS-08	ARS-10
适配挖机	ton	5-8	9-16	17-23	25-35
重量	kg	430	800	1500	1750
最大开口	mm	1450	1650	1900	2200
工作压力	kg/cm²	120-160	160-180	200-220	200-220
工作流量	l/min	50-100	90-110	100-140	130-170



日式旋转抓

- 360度旋转：配备集成式回转支承系统和内置制动阀的旋转电机
- 单缸结构：采用单个液压缸，并搭配机械连杆结构，例如 3+2 或 4+3 配置
- 安全与控制阀：即使液压流量或压力下降，也能在主缸上保持夹紧压力

型号	单位	ARS-04	ARS-06	ARS-08	ARS-10
适配挖机	ton	4-8	9-16	17-25	26-35
重量	kg	565	990	1940	2100
最大开口	mm	1336	1623	2115	2115
工作压力	kg/cm²	120-160	150-170	160-180	160-180
工作流量	l/min	50-100	90-110	100-140	130-170



日式抓

- 日式设计：通常采用多齿或壳状结构（常见为2+3或类似指形排列）
- 更轻的重量：移除沉重的电机/轴承组件，可减轻属具的整体重量
- 同步夹爪：许多固定式款型采用机械连杆设计，使两侧夹爪能够以相同速度均匀闭合

型号	单位	ARS-02	ARS-04	ARS-06
适配挖机	ton	2-4	5-8	9-16
重量	kg	175	250	920
最大开口	mm	960	1336	1623
工作压力	kg/cm²	160	180	190
工作流量	l/min	30	40	70

挖斗



微型斗



岩石斗



泥斗



贝壳斗



倾斜斗



旋转斗



网格斗



旋转倾斜斗



V型斗



4合1挖斗



V 型倾斜斗



装载机岩石斗



V型旋转倾斜斗



开合斗



铲斗夹



月牙斗





微型斗

- 高效挖掘:一次成型,挖出整洁笔直的沟槽
- 紧凑轮廓:适应狭窄空间,实现精准开挖
- 广泛适用:适用于排水、市政管线及灌溉工程

适配挖机（ton）	宽度（mm）	重量（kg）	容积（m^3）
Mini	200	56	0.02
	300	66	0.03
	450	79	0.045
	600	95	0.06
5-6	200	80	0.03
	300	92	0.04
	450	108	0.06
	600	123	0.08
	900	155	0.12
7-10	200	105	0.050
	300	121	0.076
	450	142	0.114
	600	162	0.152
	900	202	0.228

定制选项

上架

任何挖机品牌&销轴尺寸

挖斗宽度

根据您的工作宽度

斗齿&刀板

斗齿或者螺栓连接的刀板

颜色&标志

根据客户需求

适配器	M	S	MS	HS	SW	CW	AR	X
								



泥斗

- 大容量：高效装载淤泥、黏土及松散土壤
- 易卸料：弧形斗体设计，黏性物料顺畅卸出，不堵塞
- 广泛适用：适用于清淤、挖掘及场地清理作业

适配挖机（ton）	宽度（mm）	重量（kg）	容积（m^3）
2-4	1025	130	0.135
	1200	158	0.158
5-8	1000	190	0.186
	1200	240	0.224
	1500	290	0.280
12-15	1500	550	0.563
	1800	620	0.675

定制选项

上架

任何挖机品牌&销轴尺寸

挖斗宽度

根据您的工作宽度

斗齿&刀板

斗齿或者螺栓连接的刀板

颜色&标志

根据客户需求

适配器	M	S	MS	HS	SW	CW	AR	X
								



倾斜斗

- 液压倾斜功能：平滑调节铲斗角度，实现精准整平
- 减少重新定位：原地倾斜作业，缩短循环时间，降低油耗
- 广泛适用：理想适用于园林景观、排水及坡面修整工程

适配挖机（ton）	宽度（mm）	重量（kg）	容积（m^3）
2.5-4	800	165	0.097
	1000	180	0.12
5-8	1000	230	0.131
	1200	280	0.158
10-15	1200	565	0.22
	1500	760	0.28
22	1500	1360	0.66

定制选项

上架

任何挖机品牌&销轴尺寸

挖斗宽度

根据您的工作宽度

斗齿&刀板

斗齿或者螺栓连接的刀板

颜色&标志

根据客户需求

适配器	M	S	MS	HS	SW	CW	AR	X
								



网格斗

- 开放网格设计：筛分土壤与细料，同时保留岩石块
- 高效作业：筛选与装载一步完成，节省搬运时间
- 广泛适用：适用于挖掘、拆除及场地清理作业

适配挖机（ton）	宽度（mm）	重量（kg）	斗齿	网格尺寸(mm)
12	24"-610	90	5	70*70
15	30"-762	180	5	70*70
18	30"-762	250	5	80*80
20	36"-915	390	5	80*80
25	42"-1067	590	6	90*90
30	48"-1220	900	6	90*90
36	48"-1220	1160	6	100*100
49	54"-1372	1390	5	100*100

定制选项

上架

任何挖机品牌&销轴尺寸

挖斗宽度

根据您的工作宽度

斗齿&刀板

斗齿或者螺栓连接的刀板

颜色&标志

根据客户需求

适配器	M	S	MS	HS	SW	CW	AR	X
								



岩石斗

- 重型斗体：加强结构，承受高冲击岩石装载
- 耐磨部件：淬硬斗齿与衬板，延长使用寿命
- 大载荷：高效装载岩石、碎石及拆除废料

适配挖机（ton）	宽度（mm）	重量（kg）	容积（m^3）
12	30"-762	388	0.857
15	36"-915	600	1.029
18	42"-1067	815	1.20
20	48"-1220	1085	1.373
25	54"-1372	1410	1.543
30	60"-1524	1725	1.714
36	60"-1524	1725	1.714
49	66"-1676	2370	1.89

定制选项

上架

任何挖机品牌&销轴尺寸

挖斗宽度

根据您的工作宽度

斗齿&刀板

斗齿或者螺栓连接的刀板

颜色&标志

根据客户需求

适配器	M	S	MS	HS	SW	CW	AR	X
								

筛分斗






筛分斗

- 液压驱动高频振动:大幅提升处理效率
- 可更换网孔:不同尺寸的筛网满足多种物料需求
- 结构紧凑轻便,适合狭小空间环境
- 筛筒可前后旋转,便于筛分

型号	单位	ARS04	ARS06	ARS08	ARS10	ARS17
适配挖机	ton	5~8	10~15	17-23	25-30	28-35
旋转筛网直径	mm	720	930	1160	1420	1600
旋转速度	r/min	35-40	35-40	30-35	30-35	30-35
工作压力	bar	120-150	180-210	180-220	200-230	220-250
流量	l/min	40-45	90-100	90-100	100-110	100-120
重量	kg	560	800	1600	2100	2600
容积	m^3	0.4	0.8	1.2	1.6	2

定制支持

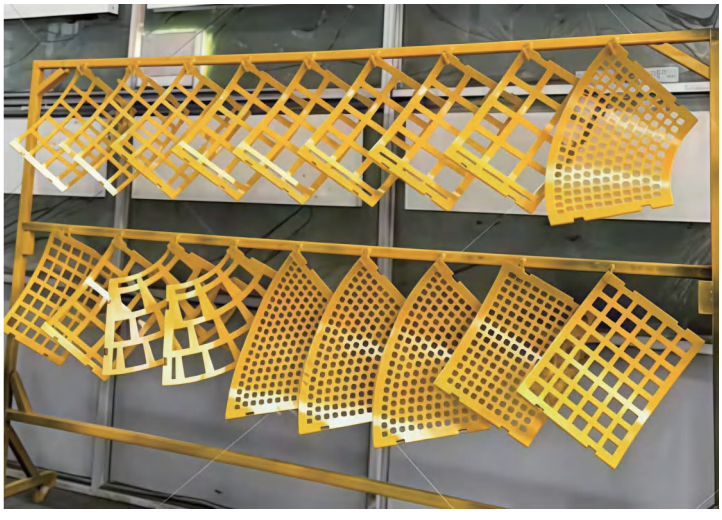

- 网格尺寸可根据需求和使用条件进行定制
- 标志 & 颜色
- 不同的适配器

适配器	M	S	MS	HS	SW	CW	AR	X
								


林业清理



拓灌机

- 高效的植被粉碎能力:配备高效刀盘和锋利耐磨刀片
- 精准控制:采用液压驱动模式,功率强劲,输出稳定
- 适应狭窄空间作业:紧凑型设计使其能在复杂地形中灵活运作

型号	单位	ARS02	ARS04	ARS06	ARS08
适配挖机	ton	3-5	5-8	10-15	18-23
质量	kg	230	500	650	800
轴长	cm	600	1000	1200	1400
刀片数量	pcs	14	24	28	32
旋转速度	rpm	2000-2500	2500-3000	2500-3000	2500-3000
工作压力	bar	160-180	180-200	200-220	240-260
工作流量	l/min	25-35	60-150	90-150	140-200



打草机

- 高效切割,可快速清除草、杂草和低矮灌木
- 操作员可以在将挖掘机底座保持在稳定地面上的,修剪困难区域
- 可根据您的挖机流量为您匹配相应的型号

型号	单位	ARS04	ARS06	ARS08
适配挖机	ton	5-8	9-16	18-22
重量	kg	300	400	560
轴长	cm	1200	1600	1800
刀片数量	pcs	22	32	38
旋转速度	rpm	3000	3000	3000
工作压力	bar	120-130	180-200	220-240
工作流量	l/min	20-40	35-40	60-80

夯机





液压振动夯

- 利用挖掘机上的液压系统提供动力，操作方便
- 原装进口马达：耐力持久，打击力度更大
- 减震系统可防止振动传递，保护挖掘机臂

型号	单位	ARS-02	ARS-04	ARS-06	ARS-08	ARS-10
质量	kg	180	300	500	900	950
冲击速率	ton	3	4	6.5	15	15
打击速率	rpm	1800	2000	2000	2000	2000
流量	l/min	25-40	45-75	85-105	120-170	120-170
工作压力	kg/cm²	100-130	160-180	180-200	200-240	200-240
底板尺寸	mm	650*400*14	900*500*18	1160*650*22	1350*900*28	1350*900*28
高度	mm	600	760	920	1060	1100
宽度	mm	400	500	650	900	900
适配挖机	ton	2-3	4-9	11-16	17-23	24-30



滚筒夯

- 液压驱动，无需额外发动机或动力源
- 重型钢制滚筒，可提供最大冲击力和更长使用寿命
- 挖掘机安装式设计，便于在斜坡、边缘和沟槽作业

型号	单位	ARS-04	ARS-06	ARS-08
重量	kg	500	750	900
打击速率	rpm	2000	2000	2000
流量	l/min	45-75	85-105	120-170
工作压力	kg/cm²	160-180	180-200	180-200
夯筒直径	mm	700	700	700
夯筒长度	mm	600	800	1000
适配挖机	ton	6-9	11-16	17-23

螺旋钻



螺旋钻



迷你螺旋钻



型号	单位	ARS1500	ARS2000	ARS2500	ARS3500	ARS4500	
适配挖机	ton	1.0-2.0	1.0-2.5	1.5-3.0	2.0-4.0	3.0-5.0	
扭矩	nm	511-1496	639-2190	830-2847	1205-3614	1500-4499	
压力	bar	70-205	70-240	70-240	80-240	80-240	
流量	l/min	20-45	25-57	27-65	40-85	50-95	
旋转速度	rpm	44-98	43-99	36-87	42-90	40-77	
		ARS1500-2500			ARS3500-4500		
钎杆直径		软土壤	普通土壤	硬土壤	软土壤	普通土壤	硬土壤
⌀ 100-200mm	m	1.8-2.5	1.8-2.3	1.6-2	3-4	2.7-3.6	2.4-3.2
⌀ 250-350mm	m	1.5-2.3	1.6-2.1	1.4-1.9	3-4	2.7-3.6	2.4-3.2
⌀ 400-500mm	m	1.2-1.5	1.1-1.5	1-1.3	3-4	2.7-3.6	2.4-3.2
⌀ 550-650mm	m				1.9-2.2	1.8-2.6	1.4-1.6
⌀ 700-800mm							

中号螺旋钻




型号	单位	ARS5500			ARS7000			ARS8000		
适配挖机	ton	4.5-6.0			5.0-7.0			6.0-8.0		
扭矩	nm	1685-5477			2133-6931			2717-8152		
压力	bar	80-260			80-260			80-240		
流量	l/min	40-115			60-135			70-150		
旋转速度	rpm	30-87			36-81			33-70		
		ARS5500			ARS7000			ARS8000		
钻杆直径		软土壤	普通土壤	硬土壤	软土壤	普通土壤	硬土壤	软土壤	普通土壤	硬土壤
⌀ 100-200mm	m	4	3.6	3.3	5	4.5	4	6	5.4	4.9
⌀ 250-350mm	m	4	4	3.3	5	4	3.5	6	5.4	4.9
⌀ 400-500mm	m	4	4	3.3	4	3.5	3	5	4.5	4.1
⌀ 550-650mm	m	4	3.5	3	2.5	2.3	2	4.5	4.1	3.7
⌀ 700-800mm	m	3	2.5	2.2				4	3.6	3.2

大号螺旋钻



型号	单位	ARS15000			ARS20000			ARS25000		
适配挖机	ton	10-15			13-20			15-22		
扭矩	nm	5024-15071			13043-19564			16503-24755		
压力	bar	80-260			80-240			160-240		
流量	l/min	80-170			80-170			80-170		
旋转速度	rpm	20-43			16-33			12-26		
		ARS15000			ARS20000			ARS25000		
钻杆直径		软土壤	普通土壤	硬土壤	软土壤	普通土壤	硬土壤	软土壤	普通土壤	硬土壤
⌀ 100-200mm	m	8	7	6	8.5	7.7	6.9	9	8.1	7.3
⌀ 250-350mm	m	7	6	5	8.5	7.7	6.9	9	8.1	7.3
⌀ 400-500mm	m	6	4	3.5	8	7.2	6.5	8.5	7.7	6.9
⌀ 550-650mm	m	5	4.5	3	8	7.2	6.5	8	7.7	6.3
⌀ 700-800mm	m	4.5	4	3.5	7	6.3	5.7	7.5	6.8	6.1

部件

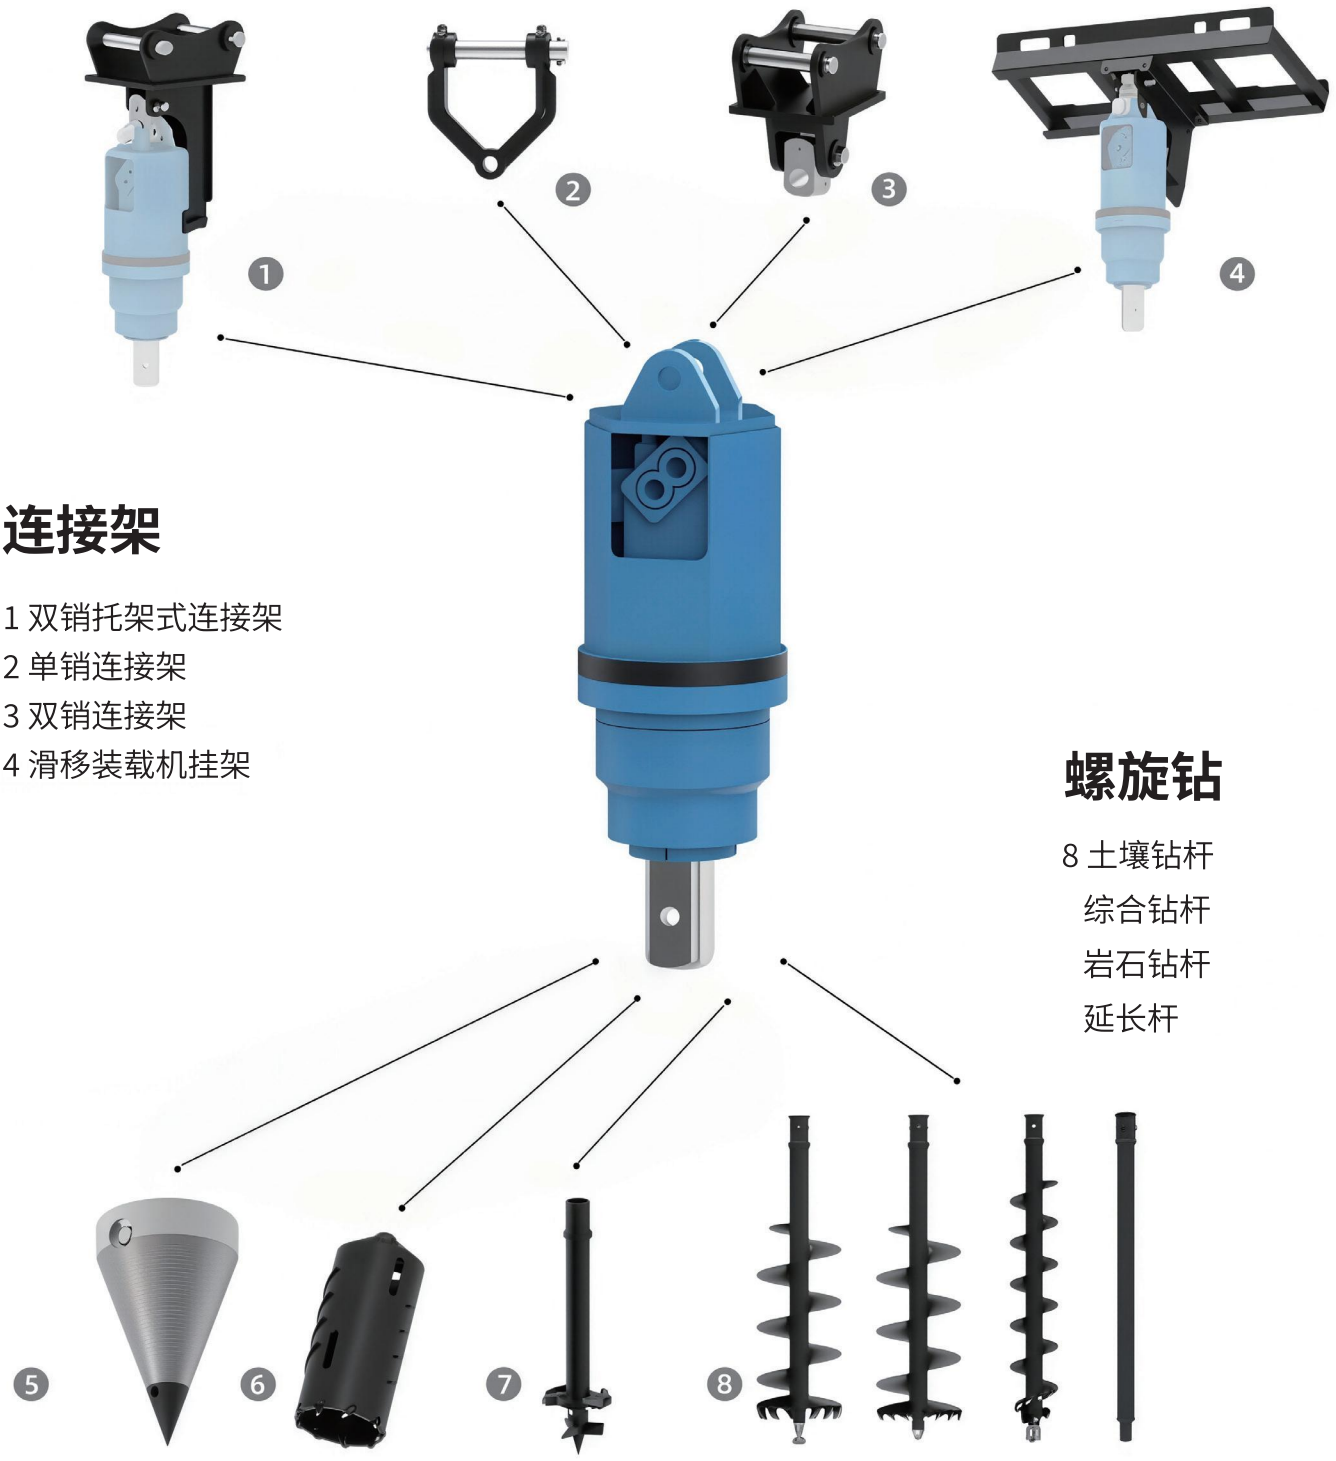

连接架

1 双销托架式连接架
2 单销连接架
3 双销连接架
4 滑移装载机挂架

螺旋钻

8 土壤钻杆
综合钻杆
岩石钻杆
延长杆

工具

5 劈木器　6 筒钻　7 树桩刨削器


拆迁剪

拆迁剪



拆迁剪



鹰嘴剪



大力剪



液压粉碎钳



活牙粉碎钳



拆车剪



高频振动锤





拆除剪

- 360°旋转，操作灵活
- 双油缸并用，剪切力道更强劲，坚固耐用
- 特殊含金刀片具有完美的切削力度和性能

型号	单位	ARS02	ARS04	ARS06	ARS08	ARS10
最大开口	mm	390	450	570	820	900
重量	kg	360	450	1000	1750	2320
旋转范围	°	360	360	360	360	360
高度	mm	1280	1365	1756	1980	2120
宽度	mm	610	750	1146	1400	1500
工作流量	l/min	40-60	60-80	100-120	200	250
工作压力	bar	150-170	180-200	280	300	300
适配挖机	ton	3-5	5-9	12-16	20-28	30-38



拆车剪

- 一次操作即可清晰切断钢筋并压碎混凝土
- 全封闭上机体，保护油缸，防止变形
- 重型液压缸可提供强大的切割和破碎力，用于剪切车辆

型号	单位	ARS04	ARS06	ARS08
最大开口	mm	502	630	783
重量	kg	550	1090	1700
高度	mm	1680	2188	2609
宽度	mm	729	798	997
工作流量	l/min	50-70	50-70	50-70
工作压力	bar	100-130	160-180	200-220
适配挖机	ton	5-9	12-16	18-24



鹰嘴剪

- 刀片采用耐磨合金钢，抗变形
- 油缸加大提高剪切力和穿透力
- 增加加速阀，提高了工作量

型号	单位	ARS06	ARS08	ARS10	ARS17	ARS20
最大开口	mm	400	450	600	700	800
重量	kg	1280	2300	3500	5150	6050
切割厚度	mm	500	550	700	780	900
工作流量	l/min	90-110	180-220	200-250	200-250	250-300
工作压力	bar	250-300	250-300	300-320	320-350	320-350
适配挖机	ton	13-17	20-29	30-39	40-49	50-59



大力剪

- 双主轴设计，剪切利度强劲
- 油缸保护套易于拆分和安装
- 特殊合金钢刀片，耐磨损切割能力强

型号	单位	ARS04	ARS06	ARS08	ARS10	ARS17	ARS20
最大开口	mm	435	600	690	740	790	800
重量	kg	750	1600	2850	3050	4050	4450
长度	mm	1420	1899	2210	2345	2590	2700
切割深度	mm	330	460	500	550	620	650
工作流量	l/min	150	250	280	280	350	350
工作压力	bar	250	300	320	320	320	320
适配挖机	ton	5-9	12-20	20-30	25-35	30-40	35-45



固定粉碎钳

- 二次拆除快速完成;在一次颚式破碎循环中粉碎钢筋混凝土并分离钢筋
- 可实现精确控制,便于调节破碎力
- 大尺寸锯齿,并于咬合面强凹齿设计

型号	单位	ARS04	ARS06	ARS08	ARS10
最大开口	mm	535	720	860	900
重量	kg	310	782	1462	1504
工作流量	l/min	85-105	120-170	160-180	160-180
工作压力	bar	100-130	150-220	180-220	180-220
适配挖机	ton	5-9	10-16	17-23	25-30



活牙粉碎钳

- 360°液压旋转:无需重新调整挖掘机即可从任意角度作业
- 窄颌精确定位:伸入舱体结构缝隙
- NM400耐磨颚板——在高循环废料加工中具有长使用寿命

型号	单位	ARS04	ARS06	ARS08	ARS10
最大开口	mm	499	641	680	776
重量	kg	640	710	1500	2085
粉碎力	kn	320	466	665	751
切割力	kn	505	1193	1181	1682
工作流量	l/min	30-40	30-50	30-50	160-200
工作压力	bar	180-200	200-240	200-240	240-280
适配挖机	ton	5-9	10-16	17-23	25-30





松土器

- 使用高强度钢板制造，易于安装，使用方便
- 一般是单齿，也可定制二齿或三齿
- 适用于硬土、次坚石、风化石的粉碎和分裂

型号	单位	ARS-03	ARS-04	ARS-06	ARS-08	ARS-10	ARS-17
轴径	mm	30~40	45~50	60/65/70	80	90	100~110
板厚	mm	50	50	60	80	90	90
护板		无	无	无	有	有	有
重量	kg	40	98	222	365	627	947
高度	mm	750	882	1140	1200	1300	1400
适配挖机	ton	1.7~3.5	5~8	9~16	17~23	25~33	35~47





拇指夹

- 夹持不规则物料：石块、混凝土碎块、原木、树根
- 耐磨钢齿，锯齿状防滑
- 适用1到30吨的挖掘机：提供液压和机械两种款式

型号	单位	ARS04	ARS06
重量	kg	170	360
工作流量	l/min	100-120	100-120
工作压力	kg/cm	120-160	160-180
缸体直径	mm	Inner65/Outer95	Inner90/Outer115
活塞直径	mm	50	60
适配挖机	ton	5-8	12-15

其他定制系列

抱夹锯



移树机



耙子



旋转倾斜快换



平地机



扫雪机



液压吸盘



叉车架

