扬振 YANG ZHEN

Product Catalogue

Yangyang Electromechanical

Professional Concrete Vibrator Manufacturer



扬扬机电制造有限公司

产品目录

混凝土振捣及软轴系列

Product Guide

Concrete Compaction & Flexible-Shaft Products

企业介绍、CE认证	**Company Profile & CE Certificates**	**03-04**
高频混凝土振动棒	**High-Frequency Concrete Vibrators**	**05**
产品介绍、爆炸图及接口	**Product Overview, Exploded Views & Couplings**	**06-08**
国际款混凝土振动棒	**International-Style Vibrator Shafts**	**09-14**
中式混凝土振动棒	**Chinese-Style Vibrator Shafts**	**15**
手持式振动棒及手提机	**Handheld Shafts & Vibrators**	**16-21**
驱动电机及附着式振动器	**Drive Motors & External Vibrators**	**22-29**
汽油机振动器及软轴泵	**Engine-Driven Vibrators & Pumps**	**30-31**

企业与产品 **Company & Products**

扬振 · 专注混凝土振实

YANG ZHEN | Built For Concrete Compaction

宁波市海曙扬扬机电制造有限责任公司

Ningbo, China

源头工厂，多系列配套

Factory Direct. A Complete Product Range.

专注混凝土振动棒、驱动电机与软轴配件，
为进口商、批发商和工程客户提供配套选择。

Concrete Vibrators, Drive Motors And Flexible-Shaft Accessories.
Product Options For Importers, Wholesalers And Contractors.

高频领衔，覆盖多种施工需求

High-Frequency Performance. Flexible Choices.

以高频振动棒为重点，配套普通振动棒、
有线及锂电手提机，满足不同供电与使用需求。

Explore Our High-Frequency And Conventional Vibrator Ranges,
With Corded And Cordless Options For Different Site Needs.

品牌与包装，按需定制

Your Brand. Your Packaging.

支持品牌标识和包装定制，可按需求沟通
型号、软管长度与配套配置，助力客户拓展市场。

OEM Branding And Packaging Available. Contact Us To Discuss
Models, Hose Lengths And Configurations For Your Market.

CE Compliance Certificates

High-Frequency Concrete Vibrator | YZ55 / YZ35 / YZ38 / YZ40 / YZ45 / YZ50 / YZ60 / YZ65

EMC | 2014/30/EU



Certificate of Compliance

Certificate No.	:	XH2608B1330597GC
Applicant	:	Ningbo Haishu Yangyang Electromechanical Manufacturing Co., Ltd. Longsan Industrial Zone, Gulin Town, Haishu District, Ningbo City, Zhejiang Province, 315177 P.R.China
Manufacturer	:	Ningbo Haishu Yangyang Electromechanical Manufacturing Co., Ltd. Longsan Industrial Zone, Gulin Town, Haishu District, Ningbo City, Zhejiang Province, 315177 P.R.China
Product Name	:	High Frequency Concrete Vibrator
Trade Name	:	/
Main Test Model	:	YZ55
Additional Model	:	YZ35,YZ38,YZ40,YZ45,YZ60,YZ50,YZ65
Test Standard	:	EN IEC 55014-1:2021 EN IEC 55014-2:2021 EN IEC 61000-3-2:2019+A1:2021+A2:2024 EN 61000-3-3:2013+A1:2019+A2:2021
As shown in the Test Report No.	:	XH2608B1330597GR

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with this EMC Directive.
The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.

Manager
Aug. 5, 2026

Xihua International Testing & Certification (Shenzhen) Co., Ltd.
Address :Building 10, No.23, North Lane 1, Beihuan Road, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Tel：4008538618 Website：www.xhit-lab.com E-mail：service@xhit-lab.com

MD | 2006/42/EC



Certificate of Compliance

Certificate No.	:	XH2608B1330598GC
Applicant	:	Ningbo Haishu Yangyang Electromechanical Manufacturing Co., Ltd. Longsan Industrial Zone, Gulin Town, Haishu District, Ningbo City, Zhejiang Province, 315177 P.R.China
Manufacturer	:	Ningbo Haishu Yangyang Electromechanical Manufacturing Co., Ltd. Longsan Industrial Zone, Gulin Town, Haishu District, Ningbo City, Zhejiang Province, 315177 P.R.China
Product Name	:	High Frequency Concrete Vibrator
Trade Name	:	/
Main Test Model	:	YZ55
Additional Model	:	YZ35,YZ38,YZ40,YZ45,YZ60,YZ50,YZ65
Test Standard	:	EN ISO 12100:2010
As shown in the Test Report No.	:	XH2608B1330598GR

The EUT described above has been tested by us with the listed standards and found in compliance with the council Machinery Directive 2006/42/EC. It is possible to use CE marking to demonstrate the compliance with this MD Directive.
The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production. It is only valid in connection with the test.

Manager
Aug.05,2026

Xihua International Testing & Certification (Shenzhen) Co., Ltd.
Address :Building 10, No.23, North Lane 1, Beihuan Road, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Tel：4008538618 Website：www.xhit-lab.com E-mail：service@xhit-lab.com

LVD | 2014/35/EU



Certificate of Compliance

Certificate No.	:	XH2608B1330599GC
Applicant	:	Ningbo Haishu Yangyang Electromechanical Manufacturing Co., Ltd. Longsan Industrial Zone, Gulin Town, Haishu District, Ningbo City, Zhejiang Province, 315177 P.R.China
Manufacturer	:	Ningbo Haishu Yangyang Electromechanical Manufacturing Co., Ltd. Longsan Industrial Zone, Gulin Town, Haishu District, Ningbo City, Zhejiang Province, 315177 P.R.China
Product Name	:	High Frequency Concrete Vibrator
Trade Name	:	/
Main Test Model	:	YZ55
Additional Model	:	YZ35,YZ38,YZ40,YZ45,YZ60,YZ50,YZ65
Test Standard	:	EN 62841-1:2015+A11:2022 EN IEC 62841-2-12:2024 + A11:2024
As shown in the Test Report No.	:	XH2608B1330599GR

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this LVD Directive.
The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.

Manager
Aug.05, 2026

Xihua International Testing & Certification (Shenzhen) Co., Ltd.
Address :Building 10, No.23, North Lane 1, Beihuan Road, Shiyan, Bao'an District, Shenzhen, Guangdong, China
Tel：4008538618 Website：www.xhit-lab.com E-mail：service@xhit-lab.com

Certificate documents reproduced from the supplied originals; scope limited to the tested sample.

高频混凝土振动棒 High-Frequency Concrete Vibrators

400 Hz 永磁电机

400 Hz Permanent Magnet Motor



技术参数 Technical Specifications

参数	Specification	40 mm	50 mm	55 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	40	50	55	60
有效振捣直径 (mm)	Compaction Diameter (mm)	400	500	550	600
转速 (rpm)	Rotational Speed (rpm)	12000	12000	12000	12000
输入电压 (V)	Input Voltage (V)	220	220	220	220
电流 (A)	Current (A)	4.5	5.5	6	10
控制器功率 (W)*	Controller Power (W)*	1000	1200	1300	2200
驱动频率 (Hz)	Motor Drive Frequency (Hz)	400	400	400	400
橡胶管长度 (m)	Rubber Hose Length (m)	1-40	1-40	1-40	1-40
电线长度 (m)	Power Cable Length (m)	15-100	15-100	15-100	15-100
电机类型	Motor Type	永磁 / PM	永磁 / PM	永磁 / PM	永磁 / PM
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*控制器功率沿用原样册的220 V × 电流取整口径；驱动频率与电网频率不同。

*Controller Power Follows The Original 220 V × Current Rounding; Drive Frequency Differs From Mains Frequency.

混凝土振动棒介绍 Concrete Vibrator Shafts



产品特点 Product Features

混凝土中振动强劲，工作负载波动小。

Strong Vibration In Concrete With Low Load Fluctuation.

软轴驱动转速约为振动频率的三分之一，有利于延长轴承使用寿命。

The Flexible Shaft Runs At About One-Third Of The Vibration Frequency, Helping Extend Bearing Life.

提供多种棒头规格，可适配不同混凝土浇筑施工需求。

A Range Of Head Sizes Is Available For Different Concrete Pouring Applications.

棒头规格 Vibrator Head Sizes



产品爆炸图


普通混凝土振动棒结构

Exploded Views & Parts

Conventional Concrete Vibrator Shaft Structure


32 / 38 / 45 / 60 系列

32 / 38 / 45 / 60 Series

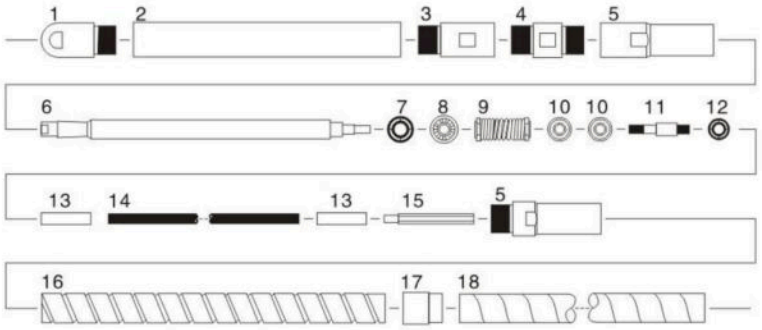

25 / 35 / 50 / 51 / 70 系列

25 / 35 / 50 / 51 / 70 Series

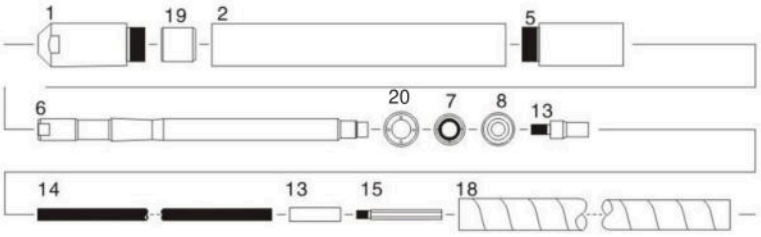


No.	零件 / Parts		数量
1	尖头	Head Cap	1
2	套管	Case	1
3	轴承座	Bearing Holder	1
4	弹簧座	Spring Holder	1
5	软管接头	Hose Joint	1
6	椎棒	Rotary Shaft	1
7	油封	Oil Seal	2
8	轴承	Bearing	1
9	反向弹簧	Counter Spring	1
10	副轴轴承	Bearing	2
11	副轴	Counter Shaft	1
12	油封	Oil Seal	1
13	软轴接头	Shaft Joint	2
14	软轴	Flexible Shaft	1
15	接头键	Shaft Joint Key	1
16	护簧	Outer Liner	1
17	护簧套	Outline Joint	1
18	软管	Hose	1
19	滚道	Steel Bush	1
20	油封座	Oil Seal Seat	1

按图中序号识别对应零件。具体结构与配件配置以实际产品为准。

Identify Parts By The Numbers In The Drawings. Structure And Components Depend On The Actual Product Configuration.

软轴结构与接口 Flexible Shaft Structure & Couplings

高扭矩软轴结构 High-Torque Shaft Structure

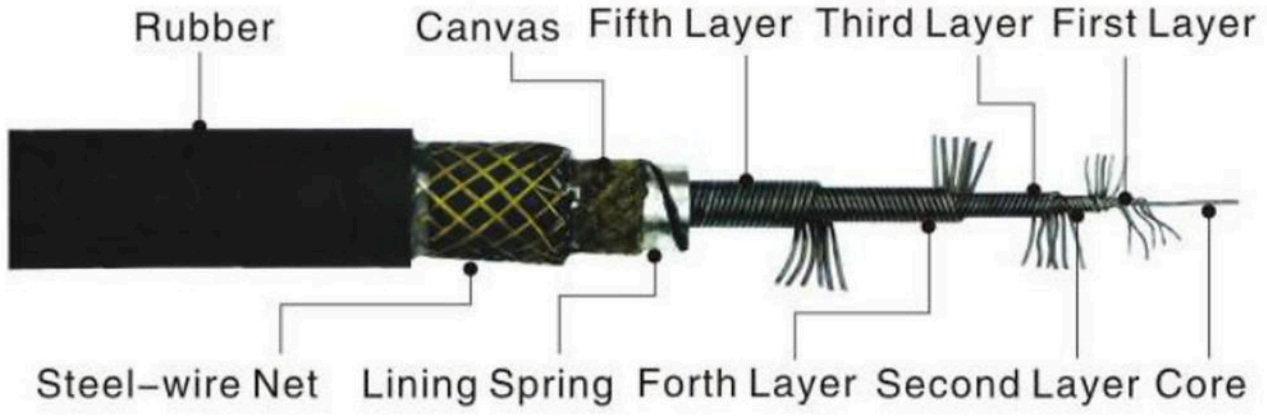

内轴采用钢丝结构，具有抗拉、抗扭和耐磨性能。

The Steel-Wire Inner Shaft Provides Tensile Strength, Torsional Strength And Wear Resistance.

外软管结构坚固，适应高速运转、振动及接触水的工况。

The Robust Outer Hose Is Designed For High-Speed Operation, Vibration And Exposure To Water.

外软管内衬为内轴提供保护，减少弯曲造成的过早损伤。

The Hose Liner Protects The Inner Shaft Against Premature Damage Caused By Bending.

连接接口形式 Coupling Types


Pin type


Pin type


Pin type


Dynapac type


Chinese type


Chinese type


Formosa type


Indian type

日式混凝土振动棒 Japanese-Style Vibrator Shafts



参考参数 Reference Specifications

参数	Specification	28 mm	35 mm	38 mm	45 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	28	35	38	45	60
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.0 / 0.9	1.0 / 0.9
重量 (kg)*	Weight (kg)*	9 / 13	8.2 / 12.5	9.2 / 13.2	11 / 14	17 / 21
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

韩式混凝土振动棒 Korean-Style Vibrator Shafts



参考参数 Reference Specifications

参数	Specification	28 mm	35 mm	38 mm	45 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	28	35	38	45	60
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.0 / 0.9	1.0 / 0.9
重量 (kg)*	Weight (kg)*	9 / 13	8.2 / 12.5	9.2 / 13.2	11 / 14	17 / 21
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

马来西亚式混凝土振动棒 Malaysian-Style Vibrator Shafts



参考参数 Reference Specifications

参数	Specification	28 mm	35 mm	38 mm	45 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	28	35	38	45	60
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.0 / 0.9	1.0 / 0.9
重量 (kg)*	Weight (kg)*	10 / 14	9.2 / 13.5	10.2 / 14.2	12 / 15	18 / 22
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

印度式混凝土振动棒 Indian-Style Vibrator Shafts



参考参数 Reference Specifications

参数	Specification	28 mm	35 mm	38 mm	45 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	28	35	38	45	60
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.0 / 0.9	1.0 / 0.9
重量 (kg)*	Weight (kg)*	9 / 13	8.2 / 12.5	9.2 / 13.2	11 / 14	17 / 21
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

土耳其式混凝土振动棒 Turkish-Style Vibrator Shafts




参考参数 Reference Specifications

参数	Specification	28 mm	35 mm	38 mm	45 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	28	35	38	45	60
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.0 / 0.9	1.0 / 0.9
重量 (kg)*	Weight (kg)*	9 / 13	8.2 / 12.5	9.2 / 13.2	11 / 14	17 / 21
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

印度尼西亚式混凝土振动棒 Indonesian-Style Vibrator Shafts

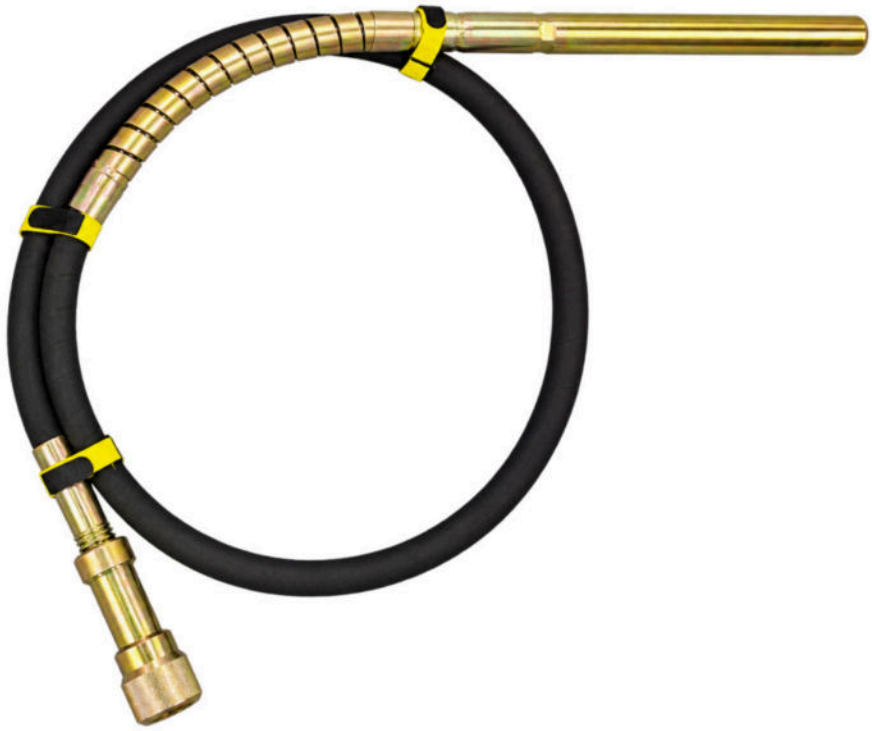

参考参数 Reference Specifications

参数	Specification	28 mm	35 mm	38 mm	45 mm	60 mm
棒头直径 (mm)	Head Diameter (mm)	28	35	38	45	60
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.0 / 0.9	1.0 / 0.9
重量 (kg)*	Weight (kg)*	9 / 13	8.2 / 12.5	9.2 / 13.2	11 / 14	17 / 21
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton	纸箱 / Carton

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

中式混凝土振动棒 Chinese-Style Vibrator Shafts





标准棒头 / 子弹头 **Standard / Bullet-Head Design**

参考参数 Reference Specifications

参数	Specification	25 mm	35 mm	50 mm	51 mm	70 mm
棒头直径 (mm)	Head Diameter (mm)	25	35	50	51	70
软轴长度 (m)*	Shaft Length (m)*	4 / 6	4 / 6	4 / 6	4 / 6	4 / 6
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000	2800-4000	2800-4000	2800-4000
振动频率 (Hz)*	Vibration Frequency (Hz)*	200 / 195	200 / 195	200 / 195	200 / 195	200 / 195
振幅 (mm)*	Amplitude (mm)*	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.2 / 1.0	1.3 / 1.2
重量 (kg)*	Weight (kg)*	13.5 / 18.5	8.2 / 12.5	13 / 17	13.5 / 18.5	14 / 19
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	编织袋 / Bag	编织袋 / Bag	编织袋 / Bag	编织袋 / Bag	编织袋 / Bag

*成对数值分别对应4 m / 6 m；重量按实际配置计算。

*Paired Values Refer To 4 m / 6 m Shafts. Weight Is Calculated Based On The Actual Configuration.

手持式振动棒 Handheld Vibrator Shafts

适配便携式驱动电机 For Portable Drive Motors





技术参数 Technical Specifications

参数	Specification	35 mm	50 mm
棒头直径 (mm)	Head Diameter (mm)	35	50
软轴长度	Shaft Length	1-4M	1-4M
驱动转速 (rpm)	Drive Speed (rpm)	2800-4000	2800-4000
振动频率 (Hz)	Vibration Frequency (Hz)	200 / 195	200 / 195
振幅 (mm)	Amplitude (mm)	1.2 / 1.0	1.2 / 1.0
包装尺寸 (cm)	Packing Size (cm)	75 × 65 × 5	75 × 65 × 5
包装方式	Packaging	编织袋和纸箱 Woven Bag And Carton	编织袋和纸箱 Woven Bag And Carton

参考参数；最终配置以确认为准。

Reference Specifications; Final Configuration To Be Confirmed.


手提机产品介绍 Handheld Vibrator Overview

适用于花园、房屋等小型混凝土施工作业。
便于携带和操作。


For Small Concrete Jobs, Including Gardens
And House Construction. Easy To Carry And Operate.



电机剖面与部件 Motor Cutaway & Components

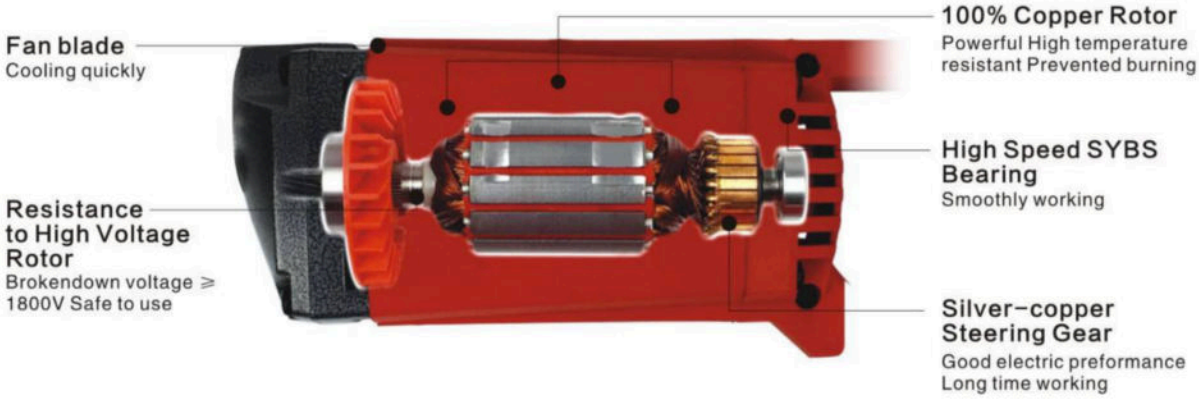

振动棒内部结构 Vibrator Head Structure

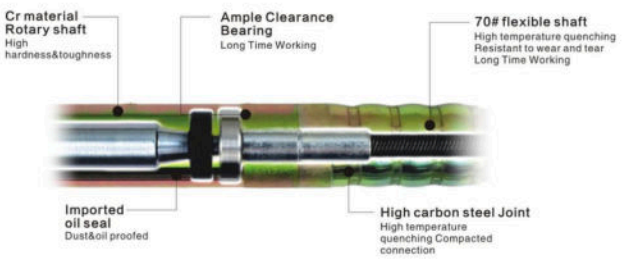

手提式混凝土振动器 Handheld Concrete Vibrators

35-1



参数 / Specification	
棒头直径 Head Diameter	35 mm
功率 Power	800-1500 W
电枢叠高 Armature Stack Height	35-50 mm
转速 Speed	4500 rpm
软管长度 Hose Length	1-4M
装箱数 Packing Quantity	10 Pcs/Ctn

35-2



参数 / Specification	
棒头直径 Head Diameter	35 mm
功率 Power	800-1500 W
电枢叠高 Armature Stack Height	35-50 mm
转速 Speed	4500 rpm
软管长度 Hose Length	1-4M
装箱数 Packing Quantity	10 Pcs/Ctn

包装：编织袋和纸箱。
Packaging: Woven Bag And Carton.

手提式混凝土振动器 Handheld Concrete Vibrators

50-1



参数 / Specification	
棒头直径 Head Diameter	50 mm
功率 Power	1000-1800 W
电枢叠高 Armature Stack Height	40-50 mm
转速 Speed	4500 rpm
软管长度 Hose Length	1-4M
装箱数 Packing Quantity	10 Pcs/Ctn

50-2



参数 / Specification	
棒头直径 Head Diameter	50 mm
功率 Power	1000-1800 W
电枢叠高 Armature Stack Height	40-50 mm
转速 Speed	4500 rpm
软管长度 Hose Length	1-4M
装箱数 Packing Quantity	10 Pcs/Ctn

包装：编织袋和纸箱。
Packaging: Woven Bag And Carton.

手提式混凝土振动器 Handheld Concrete Vibrators

50-3



参数 / Specification	
棒头直径 Head Diameter	50 mm
功率 Power	1000-1800 W
电枢叠高 Armature Stack Height	40-50 mm
转速 Speed	4500 rpm
软管长度 Hose Length	1-4M
装箱数 Packing Quantity	10 Pcs/Ctn

35-5



参数 / Specification	
棒头直径 Head Diameter	35 mm
功率 Power	800-1500 W
电枢叠高 Armature Stack Height	35-50 mm
转速 Speed	4500 rpm
软管长度 Hose Length	1-4M
装箱数 Packing Quantity	10 Pcs/Ctn

包装：编织袋和纸箱。
Packaging: Woven Bag And Carton.

锂电手提式振动器 Cordless Concrete Vibrator

35-1A

锂电款 **Lithium Battery Model**



参数	Specification	35-1A
棒头直径	Head Diameter	35 mm
功率	Power	700 W
电枢	Armature	4820
电池容量	Battery Capacity	4.0 / 4.5 / 6.0 Ah
转速	Speed	4500 rpm
软管长度	Hose Length	1-4M
装箱数	Packing Quantity	6 Pcs/Ctn

包装：编织袋和纸箱。

Packaging: Woven Bag And Carton.

驱动电机及振动器 Drive Motors & Vibrators

马式振动器

Malaysian-Style Vibrator



参数	Specification	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	14	16
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	480×280×300	480×280×300

日式振动器

Japanese-Style Vibrator



参数	Specification	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	14	16
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	480×280×300	480×280×300

孟加拉款振动器

Bangladesh-Style Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	11.5	13
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	360×280×300	360×280×300	400×280×310

驱动电机及振动器 Drive Motors & Vibrators

韩式振动器（马式接口） Korean Vibrator (Malaysian-Style Coupling)



参数	Specification	ZN-50	ZN-70
功率 (kW / hp)	Power (kW / hp)	1.1 / 1.5	1.5 / 2.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	18	20
机身材料	Body Material	铝合金 / Aluminium	铝合金 / Aluminium
包装尺寸 (mm)	Packing Size (mm)	425×225×290	425×225×290

韩式振动器（日式接口） Korean Vibrator (Japanese Coupling)



参数	Specification	ZN-50	ZN-70
功率 (kW / hp)	Power (kW / hp)	1.1 / 1.5	1.5 / 2.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	14	16
机身材料	Body Material	铝合金 / Aluminium	铝合金 / Aluminium
包装尺寸 (mm)	Packing Size (mm)	400×230×275	400×230×275

俄罗斯款振动器 Russian-Style Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	11.5	13
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	360×280×300	360×280×300	400×280×310

驱动电机及振动器 Drive Motors & Vibrators

日式振动器 Japanese-Style Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	11.5	13
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	360×280×300	360×280×300	400×280×310

插入式振动器 Plug-In Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	11.5	13
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	360×280×300	360×280×300	400×280×310

广东款振动器 Guangdong-Style Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	12	14
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	360×280×300	360×280×300	390×280×300

驱动电机及振动器 Drive Motors & Vibrators

广东款振动器 Guangdong-Style Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	12	14
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	390×280×300	390×280×300	390×280×300

插入式振动器 Plug-In Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	12	14
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	390×280×300	390×280×300	390×280×300

插入式振动器 Plug-In Vibrator



参数	Specification	ZN-50	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
毛重 (kg)	Gross Weight (kg)	11.5	11.5	13
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	360×280×300	360×280×300	400×280×310

驱动电机及振动器 Drive Motors & Vibrators

日式框架振动器 Japanese-Style Frame Vibrator



参数	Specification	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	14	16
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	480×280×300	480×280×300

框架式振动器 Frame-Type Vibrator



参数	Specification	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	14	16
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	480×280×300	480×280×300

马式框架振动器 Malaysian-Style Frame Vibrator



参数	Specification	ZN-70	ZN-90
功率 (kW / hp)	Power (kW / hp)	1.5 / 2.0	2.2 / 3.0
电压 (V)	Voltage (V)	220/380/110	220/380/110
频率 (Hz)	Frequency (Hz)	50/60	50/60
毛重 (kg)	Gross Weight (kg)	14	16
机身材料	Body Material	铸铁 / Cast Iron	铸铁 / Cast Iron
包装尺寸 (mm)	Packing Size (mm)	480×280×300	480×280×300

驱动电机及振动器 Drive Motors & Vibrators

附着式振动器 External Vibrator



参数	Specification	ZW-0.3	ZW-0.7	ZW-1
功率 (kW)	Power (kW)	0.09	0.18	0.25
电压 (V)	Voltage (V)	220/380	220/380	220/380
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
激振力 (kgf)	Exciting Force (kgf)	100	100	100
包装尺寸 (mm)	Packing Size (mm)	230×185×170	230×185×170	230×185×170

附着式振动器 External Vibrator



参数	Specification	ZW-5	ZW-7	ZW-10
功率 (kW)	Power (kW)	0.75	1.1	1.5
电压 (V)	Voltage (V)	220/380	220/380	220/380
频率 (Hz)	Frequency (Hz)	50/60	50/60	50/60
激振力 (kgf)	Exciting Force (kgf)	350	500	700
包装尺寸 (mm)	Packing Size (mm)	330×190×220	420×235×250	420×235×250

附着式振动器 External Vibrator



参数	Specification	ZW-10	ZW-14
功率 (kW)	Power (kW)	2.2	3.0
电压 (V)	Voltage (V)	220/380	220/380
频率 (Hz)	Frequency (Hz)	50/60	50/60
激振力 (kgf)	Exciting Force (kgf)	980	1380
包装尺寸 (mm)	Packing Size (mm)	480×260×280	560×280×310

驱动电机及振动器 Drive Motors & Vibrators

手提式抹光机 Portable Trowel



参数	Specification	ZB-5
功率 (kW)	Power (kW)	0.25
电压 (V)	Voltage (V)	220/380
频率 (Hz)	Frequency (Hz)	50/60
激振力 (kgf)	Exciting Force (kgf)	100
包装尺寸 (mm)	Packing Size (mm)	310×230×240

高频振动器 High-Frequency Vibrator



参数	Specification	2F75-150
适用范围	Applications	铁路、公路、桥梁 / Rail, Road, Bridge
额定转速 (rpm)	Rated Speed (rpm)	9000-12000
额定功率 (kW)	Rated Power (kW)	1.1 / 1.5 / 2.2
产品认证	Certification	CCC
额定电压 (V)	Rated Voltage (V)	380
极数	Pole Number	2

附着式振动器 External Vibrator



参数	Specification	ZW-10	ZW-14
功率 (kW)	Power (kW)	2.2	3.0
电压 (V)	Voltage (V)	220/380	220/380
频率 (Hz)	Frequency (Hz)	50/60	50/60
激振力 (kgf)	Exciting Force (kgf)	980	1380
包装尺寸 (mm)	Packing Size (mm)	480×260×280	56×28×310

驱动电机及振动器 Drive Motors & Vibrators

国内接口 Domestic Coupling



参数	Specification	TD-180
额定电压 (V)	Rated Voltage (V)	110-220
额定频率 (Hz)	Rated Frequency (Hz)	50/60
功率 (W)	Power (W)	1800
空载转速 (rpm)	No-Load Speed (rpm)	4300
适用范围	Applications	50# 1-8 m

日式接口 Japanese-Style Coupling



参数	Specification	TD-160
额定电压 (V)	Rated Voltage (V)	110-220
额定频率 (Hz)	Rated Frequency (Hz)	50/60
功率 (W)	Power (W)	1800
空载转速 (rpm)	No-Load Speed (rpm)	4300
适用范围	Applications	50# 1-8 m

螺纹接口 Threaded Coupling



参数	Specification	TD-150
额定电压 (V)	Rated Voltage (V)	110-220
额定频率 (Hz)	Rated Frequency (Hz)	50/60
功率 (W)	Power (W)	1800
空载转速 (rpm)	No-Load Speed (rpm)	4300
适用范围	Applications	50# 1-8 m

汽油机振动器及软轴泵 Engine-Driven Vibrators & Pumps

多种汽油机可选	**Various Petrol Engines Available**
可选多种连接接口	**Various Coupling Options**
棒径38 / 45 / 60 mm，长度4 / 6 / 8 m或定制	**Head Sizes: 38 / 45 / 60 mm; Lengths: 4 / 6 / 8 m Or Custom**
软轴快速连接	**Quick Shaft Connection**
无需外接电源，适合缺电施工现场	**No External Power Required; Ideal For Sites With Limited Electricity**





汽油机驱动装置 **Petrol Engine Drive**

背负式汽油混凝土振动器 Backpack Petrol Concrete Vibrator



参数	Specification	TD-139
功率 (原表 kW / hp)	Power (Original: kW / hp)	1.1
频率 (Hz)	Frequency (Hz)	50/60
转速 (rpm)	Speed (rpm)	3200
毛重 (kg)	Gross Weight (kg)	23

汽油机振动器及软轴泵 Engine-Driven Vibrators & Pumps

汽油机振动器 TD-170 Petrol Vibrator



参数	Specification	TD-170
功率（原表 kW / hp）	Power (Original: kW / hp)	5.5
频率 (Hz)	Frequency (Hz)	50/60
转速 (rpm)	Speed (rpm)	3600
毛重 (kg)	Gross Weight (kg)	22

汽油机振动器 TD-20 Petrol Vibrator



参数	Specification	TD-20
功率（原表 kW / hp）	Power (Original: kW / hp)	5.0
频率 (Hz)	Frequency (Hz)	50/60
转速 (rpm)	Speed (rpm)	3600
毛重 (kg)	Gross Weight (kg)	23

软轴泵 Flexible-Shaft Pump



参数	Specification	Rb80	Rb60	Rb50
扬程 (m)	Head (m)	12	10	6
流量 (m^3/h)	Flow (m^3/h)	40	60	8
净重 (kg/6m)	Net Weight (kg/6m)	17.0	16.8	14.5
毛重 (kg/6m)	Gross Weight (kg/6m)	18.5	17.3	16
出水口直径 (mm)	Discharge Diameter (mm)	80	60	50
软管长度 (m)	Hose Length (m)	4-10	4-10	4-10
配套动力 (hp)	Matched Power (hp)	5.5-6.5	3.5-5.5	3.5-5.5
6 m泵包装	6 m Pump Packing	855×685×215 / 2 pcs	855×685×215 / 2 pcs	855×685×215 / 2 pcs
10 m泵包装	10 m Pump Packing	855×685×215 / 2 pcs	855×685×215 / 2 pcs	855×685×215 / 2 pcs

扬振 YANG ZHEN

Product Catalogue

Yangyang Electromechanical

Professional Concrete Vibrator Manufacturer



WeChat

Factory Direct
OEM Available

+86 188 9260 5422

WhatsApp

扬扬机电制造有限公司