





江土重工
JIANGTU HEAVY INDUSTRY













江土重工
JIANGTU HEAVY INDUSTRY

www.jtzgy.com
www.jtattach.com

详细情况请与当地代理商联系

For more information,please contact local angets.

本画册最终解释权归江土重工所有

体系认证　质量管理体系认证　专利证　CE认证

公司简介
COMPANY PROFILE

烟台江土机械设备有限公司是一家集生产研发市场为一体的优秀挖掘机前端属具生产企业。公司主要生产挖掘机快速连接器，液压夯，抓木器，抓石器，液压剪，拆车剪，铲斗夹，拇指夹，松土器等。所有产品配件到发货前检验都有严格的把控。随着企业不断的发展，江土产品已遍布世界各地，企业不断创新改进先后获得了ISO9001质量体系认证、CE认证、实用新型技术专利等。

公司始终以用户满意为宗旨，以精益求精为目标，全心全意服务于广大客户，衷心希望我们精湛的专业技能和丰富的技术服务经验，让您享受到更加优质、快捷，周到的服务。

Yantai Jiangtu Mechanical Equipment Company is a leading manufacturer for excavator attachments in China. All products' quality are strictly under control from processing to delivery. By continuous innovation and improvement, the company has got ISO 9001. CE certifications and Technology Patents successively. Our products have been sold to domestic and oversea customers including America, UK, German, Russia , Japan, Korea, Ireland, Australia, New Zealand, Isreal,Vietnam etc, and long term partnerships have been developed.

Our mission is Quality first, Service foremost, and Innovation paramount. Uncompromising commitment to high quality and thoughtful service wins us a good reputation and more coming partners. And we will keep on improving the products to better serve the world market. We are looking forward to working with you!






















































We reserve the right to amend specifications without prior notice.

江土重工 JIANGTU HEAVY INDUSTRY

MS/HS连接器

MS/HS QUICK HITCH COUPLER (MECHANICAL OR HYDRAULIC)




适用对象

使挖掘机能够在数秒内完成铲斗、抓斗、破碎锤等多种附件的切换，大幅提升施工效率。

产品特点

- 铸钢外壳CNC精加工，耐磨耐用，寿命更长；
- 无间隙连接设计，结构紧密，作业更稳定；
- 低高度设计，降低挖掘力损失，提高施工效率；
- 全面兼容 Lehnhoff 系统，适配范围更广；
- MS 机械式快换：结构简单可靠，人工解锁更经济；
- HS 液压式快换：驾驶室内一键锁定/解锁，更安全高效。

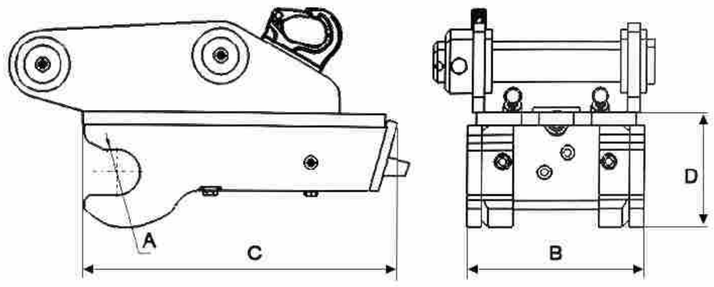

Applications

Allows the excavator to switch between buckets, grapples, breakers, and other attachments within seconds, greatly improving job-site efficiency.

Main features

- CNC-machined cast-steel body.
- Zero-play connection for stability & durability.
- Low-profile design with minimal digging force loss.
- Fully compatible with Lehnhoff system.
- MS: Manual unlock, simple & cost-efficient.
- HS: Hydraulic cab-controlled locking for safety.





MS连接器 MS QUICK HITCH COUPLER

类别/ Category		Unit	JT-MS01	JT-MS03	JT-MS08
适配挖机	Suitable Excavator	ton	0.7-2	2-5	8-12
轴径	Pin Diameter(A)	mm	40	50	60
外宽	Frame Width Outside(B)	mm	180	200	295
长度	Frame Length(C)	mm	300	390	500
高度	Frame Height(D)	mm	90	130	150

HS连接器 HS QUICK HITCH COUPLER

类别/ Category		Unit	JT-HS01	JT-HS03	JT-HS08
适配挖机	Suitable Excavator	ton	0.5 - 2	1.5 - 5	4.8 - 6
长度	Length	mm	235	295	295
宽度	Width	mm	180	200	200
重量	Weight	kg	15	30	30
适配头部规格	Adapter Model		SW01	SW03	SW03
轴径	Pin Diameter	mm	40	50	50
吊钩承重	Hook Loading Capacity	ton	1	3	3

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

CW快速连接器
CW QUICK HITCH COUPLER



CW55

适用对象
CW 系列快换能在数秒内完成不同属具的切换，适合拆除作业、采石场等恶劣工况。

产品特点
- 采用先进技术生产；
- 耐磨且强度极高；
- 破断力与穿透力的损耗极小；
- 楔形锁紧，无间隙、更强挖掘力；
- 符合全球安全标准，断油仍能安全锁定；
- 多种版本：机械式和液压式；可旋转和可倾斜的版本。



CW10




CW20




CW45

Applications
The CW quick hitch coupler allows attachment changes within seconds, making it ideal for demolition work, quarries, and other demanding applications.

Main features
- Manufactured with advanced technology.
- Highly wear-resistant with exceptional strength.
- Minimal loss of breaking force and penetration power.
- Wedge-type locking system for Zero gap and stronger digging performance.
- Meets global safety standards; remains securely locked even in case of hydraulic failure.
- Available in multiple versions: mechanical and hydraulic; rotating and tilting options.

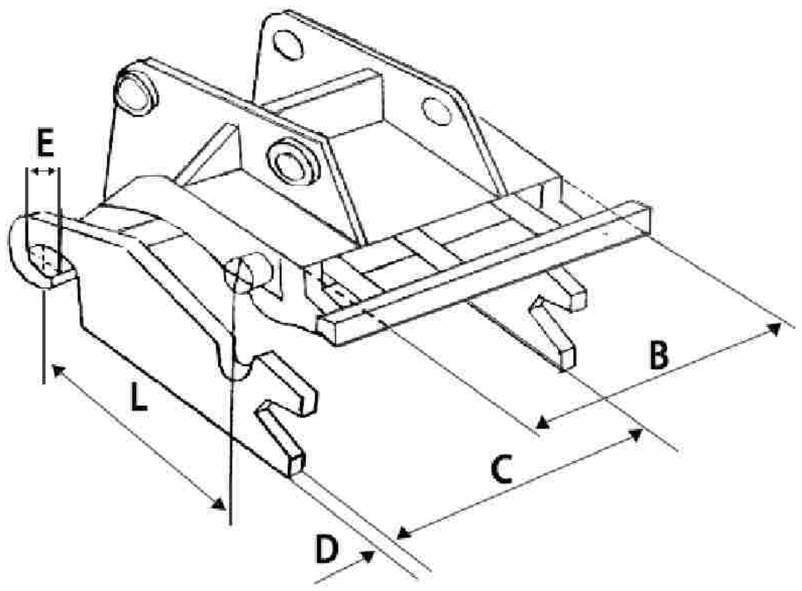

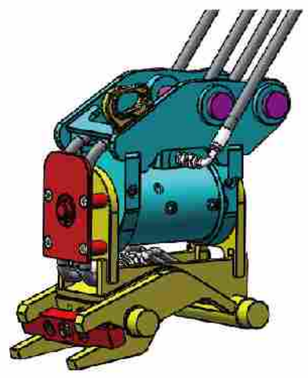

类别/ Category		Unit	CW-00	CW-05	CW-10	CW-20	CW-20S	CW-30	CW-30S
耳板内宽	Ear Plate Inner Width(C)	mm	150	180	320	560	430	560	430
外部尺寸	Outer Dimension(B)	mm		175	310	550	420	550	420
耳板厚度	Ear Plate Thickness(D)	mm	15	20	25	30	30	35	35
轴中心距	Pin Center Distance(L)	mm	150	200	300	475	475	475	475
销轴直径	Pin Diameter(E)	mm	30	40	50	60	60	60	60
适配挖机	Suitable Excavator	ton	0-1	0.8-3.5	3.5-10.5	7.5-15	7.5-15	15-25	15-25

类别/ Category		Unit	CW-40	CW-40S	CW-45	CW-45S	CW-55	CW-55S	CW-70	CW-100
耳板内宽	Ear Plate Inner Width(C)	mm	560	430	700	560	845	575	860	1230
外部尺寸	Outer Dimension(B)	mm	550	420	690	550	830	560	840	1200
耳板厚度	Ear Plate Thickness(D)	mm	40	40	50	50	60	60	70	90
轴中心距	Pin Center Distance(L)	mm	475	475	570	570	650	650	875	1275
销轴直径	Pin Diameter(E)	mm	60	60	90	90	105	105	130	170
适配挖机	Suitable Excavator	ton	20-30	20-30	25-40	25-40	35-65	35-65	65-90	120-160

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

S系列快速连接器 S QUICK HITCH COUPLER

产品介绍

适用于挖掘机对称的快速连接器标准（S 标准）是一项行业标准。S标准的主要优点是高度低、机身设计宽、重量相对较轻，尤其是与国际市场上的许多快速连接器相比，它是一种免维护连接器。

S标准是一种基于三角形的连接器，与专用支架一起确保机器驾驶员和支持人员的最高安全标准。

江土S连接器是一个安全、容易使用并与国际标准协调一致的连接器，与瑞典和北欧等国家的属具衔接顺畅。



产品特点

- “液控单向保险装置与可视性自动开关固定轴保险”两个保险保证安全性；
- S连接器结构紧凑，高度低，尽可能保持挖掘机挖掘力；
- 连接器宽度设计配适绝大多数挖机小臂和工字架宽度；
- 尺寸统一，生产高效，方便备货；
- 适合安装在液压手腕应用中的设计。

Product introduction

The S Coupler standard for excavators is an industry standard. The key benefits with the S-Standard is a low building height, wide body design, relatively low weight and especially, a maintenance-free coupler compared with many quick couplers available on the international market.

The S-Standard is a wedge based coupler that together with the dedicated Brackets assures the highest safety standards for both machine drivers and support staff.

JIANGTU S coupler is a safe, easy-to-use quick coupler that is consistent with international standards and expacially can smoothly connect with attachment from Sweden and Nordic countries.

Main features

- Hydraulic one way lock and visual auto safety switch work as two safety locks.
- The S coupler has a compact structure and low height to maintain excavator digging force as much as possible.
- S coupler width is designed to fit most excavator arm and H-link widths.
- Uniform size is friendly to produce and to stock.
- Good design for tilt-rotator.















质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST


www.jtzgy.com
www.jtattach.com


江土重工 JIANGTU HEAVY INDUSTRY


S系列快速连接器 S QUICK HITCH COUPLER

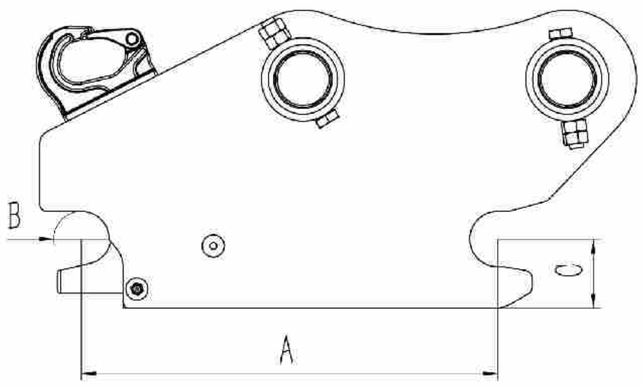


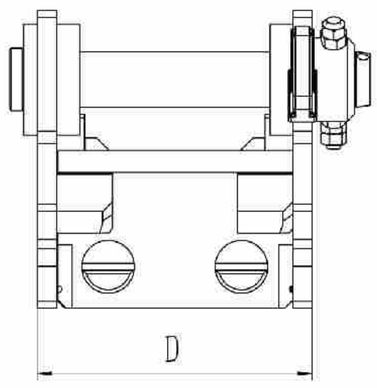

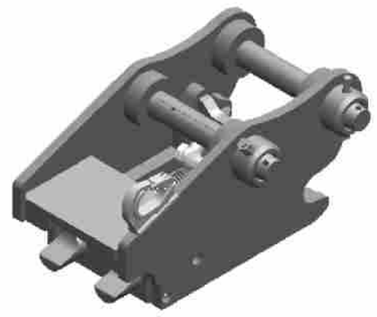

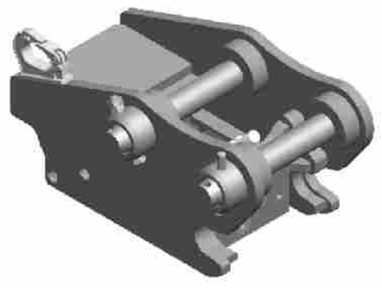

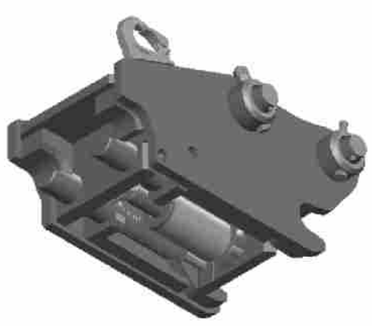

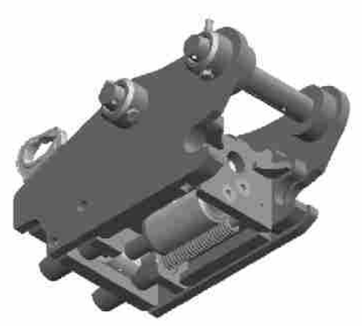

S系列液压快速连接器 S HYDRAULIC QUICK HITCH COUPLER

类别/ Category		Unit	S30/150	S30/180	S40	S40/240	S45	S50	S60	S70	S80
轴心距	A Pin Center Distance	mm	199.8 ± 0.2	229.8 ± 0.2	299.8 ± 0.2	299.8 ± 0.2	429.8 ± 0.2	429.8 ± 0.2	479.8 ± 0.2	599.8 ± 0.2	699.8 ± 0.2
轴径	B Pin diameter	mm	30	30	40	40	45	50	60	70	80
宽度	D Dipper Width	mm	148 ± 1	178 ± 1	198 ± 1	238 ± 1	288 ± 1	268 ± 1	338 ± 1	448 ± 1	588 ± 1
油压	Oil pressure	bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300
流量	Operating flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25
适配挖机	Suitable Excavator	ton	2	2	6	7	11	11	18	30	40
设备重量	Weight	kg	27	31	41	42	88	91	170	340	435

S系列机械快速连接器 S MECHANICAL QUICK HITCH COUPLER

类别/ Category		Unit	S30/150	S30/180	S40	S40/240	S45	S50	S60	S70	S80	S90
轴心距	Pin Center Distance	mm	199.8 ± 0.2	229.8 ± 0.2	299.8 ± 0.2	299.8 ± 0.2	429.8 ± 0.2	429.8 ± 0.2	479.8 ± 0.2	599.8 ± 0.2	699.8 ± 0.2	749.8 ± 0.2
轴径	Pin diameter	mm	30	30	40	40	45	50	60	70	80	90
宽度	Dipper Width	mm	148 ± 1	178 ± 1	198 ± 1	238 ± 1	288 ± 1	268 ± 1	338 ± 1	448 ± 1	588 ± 1	748 ± 1
设备重量	Weigh	kg	27	30	41	49	84	87	155	295	410	750
适配挖机	Suitable Excavatort	ton	2	2	6	7	11	11	18	30	40	70

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

可拆分式摆动快速连接器
DETACHABLE TILT QUICK HITCH COUPLER



8条螺栓结合止口安装固定
8 BOLTS COMBINED WITH SPIGOTS





大轴距范围，适配性更广
LARGE PICK-UP RANGE,
WIDER ADAPTABILITY



左右各90度倾斜
90 DEGREE TILT LEFT AND RIGHT



双重保险，更安全
DOUBLE LOCKING, SAFER

适用对象

0.8-36吨挖掘机

产品特点

●降低维修成本：任何部分出现故障，客户都可以及时更换相对应的部件，无需整体更换，从而大大降低了维修成本和时间；

●延长使用寿命：摆动缸独立化，由专业设备进行加工，配合精度提高2-3倍，漏油的概率大大降低，产品使用寿命延长2-3倍；

●便于备货与调货：上中下可分离式结构使得不同轴距、轴径、开档的快换备货与调货更加便捷，满足了客户的多样化需求；

●减少漏油：通过优化导油系统，使其精度与变形量完全可控，从本质上减少了因精度问题导致的漏油现象。

Applications

Fit to 0.8-36 ton excavator


Main features

●Reduce maintenance costs: if any part fails, the customer can replace the corresponding parts in time without replacing the entire device, which greatly reduces maintenance costs and time.

●Extend service life: our swing cylinder is independent, processed by professional equipment, which increases the matching accuracy by 2-3 times. The probability of oil leakage is greatly reduced and the product service life is extended by 2-3 times.

●Easy to prepare and adjust goods□: The upper, middle and lower detachable structure makes it more convenient to prepare and adjust goods for different pin center distance, pin diameter and ear width,which meets the diverse needs of customers.

●Reduce oil leakage:we optimize the oil passage system to make its accuracy and deformation fully controllable, which essentially reduces the oil leakage caused by accuracy problems.

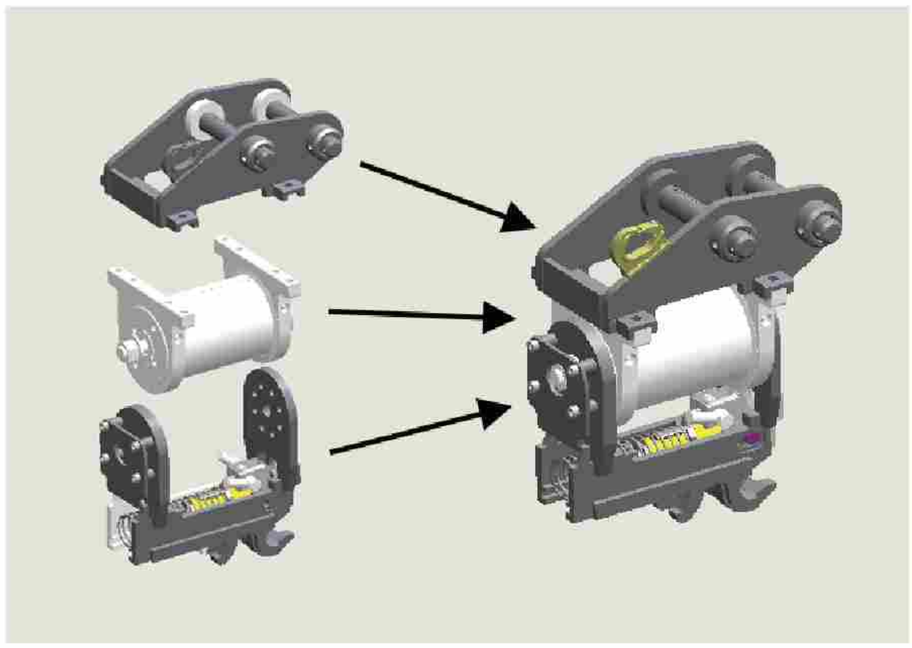











类别/ Category		Unit	JT-00	JT-01A	JT-01B	JT-02	JT-04	JT-06	JT-08	JT-08S	JT-10
摆动角度	Tilt Degree	°	180	180	180	180	180	140	140	140	140
摆动扭矩	Tilting Torque	nm	930	1600	2870	4400	7190	10623	14000	18600	43000
摆动压力	Tilt Working Pressure	bar	210	210	210	210	210	210	210	210	210
摆动流量	Tilt Necessary Flow	lpm	1.8-2.4	2.8-4.0	4.3-6.8	7.6-10	14-19	18-24	23-30	28-37	60-80
连接器工作压力	Quick Couler Working Pressure	bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300
必要流量	Necessary Flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25
适配挖机	Suitable Excavator	ton	0.8-1.8	1.8-2.5	2.5-3.6	4-6	7-9	10-15	18-22	22-25	28-36
轴直径	Pin Diameter	mm	20-30	20-30	35-40	40-45	50-55	60-65	70-80	70-80	90-100
重量	Weight	kg	56	82	120	180	220	385	594	620	1150

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

摆动快速连接器

TILTING QUICK HITCH COUPLER









适用对象

0.8-36吨挖掘机

产品特点


- 左右倾斜70-90度;
- 无外漏油缸，更稳定可靠;
- 双保险设计，弹簧保险适应更恶劣工况，保养方便;
- 高性能板材优化整机重量，产品更耐用;
- 大行程设计，可适配不同轴距属具。


Applications

Fit to 0.8-36 ton excavator

Main features

- Tilt ±70°to 90°.
- There are no exposed cylinders, It is very safe and stable.
- Double-locking safety design. The powerful spring safety lock can work in very tough working environments. Easy maintenance.
- Using high strength steel to increase durability and to reduce weight.
- Variable pin center design allows you to easily pick up attachments with different pin center distances.

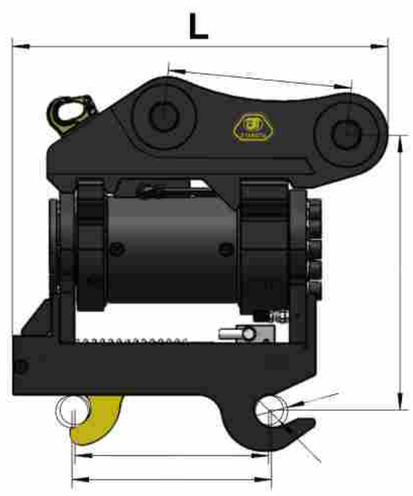

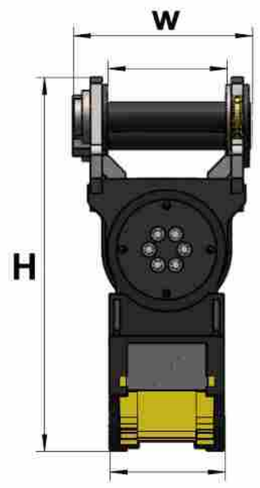













类别/ Category	Unit	JT-00	JT-01A	JT-01B	JT-02	JT-04	JT-06	JT-08	JT-10
摆动流量 Tilt Necessary Flow	lpm	1.8-2.4	2.8-4.0	4.3-6.8	7.6-10	14-19	18-24	28-37	60-80
摆动缸角度Tilt Degree	°	180	180	180	180	180	140	140	120
摆动缸工作压力Tilt Working Pressure	bar	210	210	210	210	210	210	210	210
连接器工作压力Quick Coupler Working Pressure	bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300
必要流量 Necessary Flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25
轴直径 Pin Diameter	mm	20-30	35-40	35-40	40-45	50-55	60-65	70-80	90-100
尺寸 Overall Dimension (L*W*H)	mm	396*220*436	458*283*532	458*283*532	587*322*582	634*348*640	815*396*756	830*496*822	1095*638*1075
设备重量 Weight	kg	56	82	120	180	220	385	594	1150
适用挖机 Suitable Excavator	ton	0.8-1.5	2-3.5	2-3.5	4-6	7-9	10-15	16-28	28-36

质量为先 诚信为本 服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

全自动三保险挖机快速连接器
TRIPLE LOCKING QUICK HITCH COUPLER



后保险
REAR LOCK


前保险
FRONT LOCK




活动钩止动保险
SLIDE JAW LOCK


吊钩
LIFTING HOOK


双层滑槽设计
DOUBLE LAYER SLIDING GROOVE DESIGN

适用对象

0.8-36吨挖掘机

产品特点


●三保险设计，安全耐用，不掉斗；
●轻量化设计，节约能耗；
●双层滑槽设计，延长寿命3-5倍；
●虎口部分无焊接，整体结构避免虎口断裂；
●活动钩加强加厚处理，避免拉直、断裂；
●吊钩符合欧洲标准，破断力大；
● “补偿量”概念设计，解决挖机挂快换装车“撒土”及“挖掘力下降”的问题。


Applications


Fit to 0.8-36 ton excavator

Main features


●Triple safety locks design, safe and durable, eliminate all accidents involving fall of the bucket.
●Lightweight design to save energy consumption.
●Double layer sliding groove design, extending the service life by 3-5 times.
●No welding hook structure, the overall design avoids the hook breakage.
●Strengthen and thicken slide jaw to avoid straightening an breaking.
●Lifting hook meets the European standard and has a large breaking force.
● “Compensation quantity” design concept solves the problems of “sprinkling soil” and “excavation power decreasing” when the excavator loads in a truck.



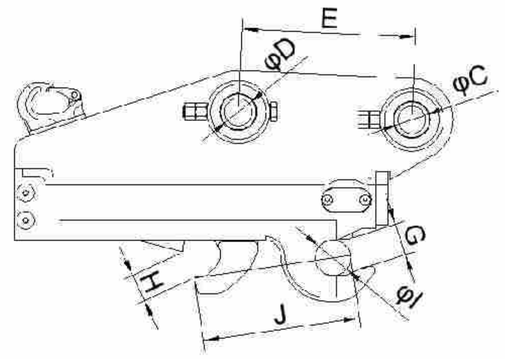

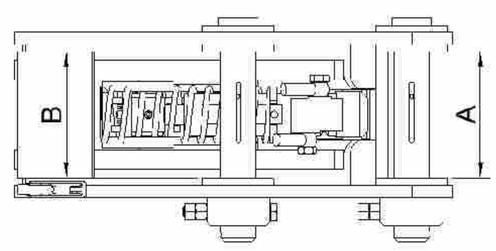



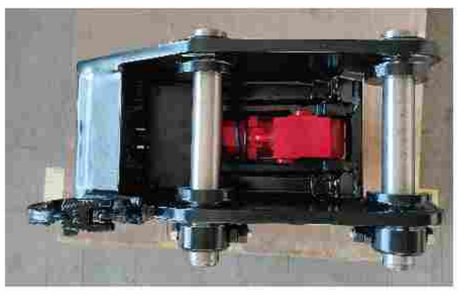



类别/ Category		Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
宽度A	Width A	mm	90-120	107-148	127-166	172-205	172-266	280-366	346-420
宽度B	Width B	mm	90-120	107-148	127-166	172-205	172-266	280-366	346-420
连接轴直径C	Pin Diameter C	mm	25/30	35/40	45	50/55	60/65	70/80	90/100
连接轴直径D	Pin Diameter D	mm	25/30	35/40	45	50/55	60/65	70/80	90/100
轴中心距E	Pins Centre Distance E	mm	85-164	107-184	180-300	172-415	240-500	320-520	500-600
下部最小宽度F	Bottom Minimum Width F	mm	89	128	138	178	218	288	390
下部轴直径I	Bottom Pin Diameter I	mm	25-30	35-40	45-50	45-55	60-65	70-80	90-100
抓取范围J	Pick Up Range J	mm	84-180	158-240	200-362	272-380	300-420	350-520	500-596
活动钩行程	Slide Jaw Stroke	mm	36	40	44	50	70	100	100
工作压力	Working Pressure	bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300
必要流量	Necessary Flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25
适配挖机	Suitable Excavator	ton	0.8-1.5	2-3.5	4-6	7-9	10-15	20-25	28-36
重 量	Weight	kg	24	44	70	96	220	340	550

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

铸造三保险快速连接器
CASTING TRIPLE LOCKING QUICK HITCH COUPLER



产品特点

•市场首创三保险设计，安全耐用，不掉斗；

●高度低，重量轻，节约能耗；

● “补偿量”概念设计，解决挖机挂快换装车“撒土”及“挖掘力下降”的问题；

●设计合理，产品使用寿命长，性价比高；

●柔性触发设计，维护保养成本低；

●轴距范围可达220-320mm，适用更多不同尺寸的挖斗等属具。



活动钩止动保险
SLIDE JAW LOCK

Main features

●The first triple locking designs in the current market. This design ensure safe and durable, never drop the bucket.

●Lower height, lighter weight, and saving more energy consumption.

●The concept design of "compensation volume" solves the problems of "scattering soil" and "decrease in excavation power" for user.

●Reasonable design, long service life and high cost performance.

●Flexible trigger design makes lower maintenance cost.


●The center to center distance range can be reached 220-320mm, which is suitable for more different attachment sizes.




后保险
REAR LOCK



前保险
FRONT LOCK

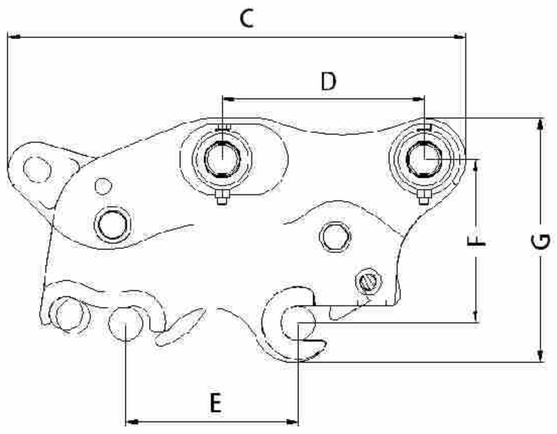











类别/ Category	Unit	JT-00	JT-01A	JT-01B	JT-02	JT-04	JT-06	JT-08
总长度 Length	mm	400	410	455	593	581-610	760	920-955
总宽度 Width	mm	240	280	295	264-270	265-283	351-454	450-483
总高度 Height	mm	185	250	258	302	318	400	512
小臂开档 Arm Open Width	mm	90-120	110-130	120-140	145-200	181-205	230-317	290-345
轴中心距 Pins Center Distance	mm	90-130	140-180	190-230	220-310	290-350	350-400	430-480
轴直径 Pin Diameter	mm	25-30	30-40	30-40	45-50	50-55	60-65	80
油缸行程 Cylinder Strok	mm	90-130	140-180	190-230	210-300	300-350	340-440	420-510
上下轴间距 Vertical Pins Center Distance	mm	90-135	100-180	170-230	180-190	200-205	240-255	300
重 量 Weight	kg	24	32	37	50-75	80-110	170-210	350-390
工作压力 Working Pressure	bar	30-400	30-400	30-400	30-400	30-400	30-400	30-400
必要流量 Necessary Flow	lpm	10-20	10-20	10-20	10-20	10-20	10-20	10-20
适配挖机 Suitable Excavator	ton	0.8-2	2-4	2-4	4-6	6-9	10-16	18-25

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

液压快速连接器 HYDRAULIC QUICK HITCH COUPLER

P型和H型连接器
P TYPE & H TYPE QUICK HITCH COUPLER

产品特点
●安全销更加精准、牢固、安全；
●油缸使用更持久，更耐用；
●伸缩虎口更加耐磨，更加坚固，防止断裂。

Main features
●Strong safety pin at accurate position.
●The cylinder is more durable.
●High-abrasive removable hook design.



P TYPE



H TYPE

手自一体连接器
MANUMATIC QUICK HITCH COUPLER

产品特点
●固定虎口采用延伸板设计，挂斗更方便，不易掉斗；
●采用符合欧盟标准的三重安全连接器结构设计，安全性能更优；
●保险结构设计优化，后保险受力时其余核心部件不受力，延长产品使用寿命。

Main features
●Longer front pin hook make it easier to catch the bucket pin.
●Triple safety design with CE certificate.
●Long service life benefits to ideal design that key parts are not stressed.



MANUMATIC



MANUMATIC











类别/ Category		Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08	JT-08S	JT-10	JT-14	JT-17	JT-20
总长度	Length	mm	365-380	440-460	520-542	581-610	760	920-955	950-1000	965-1100	980-1120	1005-1150	1100-1200
总宽度	Width	mm	205-220	235-249	260-266	265-283	351-454	450-483	445-493	543-572	550-600	602-666	610-760
总高度	Height	mm	260-270	260-270	315	318	400	512	515-540	585	550-600	560-615	620-750
小臂开档	Arm Open Width	mm	85-120	125-140	145-200	165-200	220-260	305-335	325-410	345-410	385-440	380-480	500-650
轴中心距	Pins Center Distance	mm	90-120	180-210	225-310	230-310	365-410	440-490	460-490	500-540	550-580	550-630	600-800
斗轴直径	Pin Diameter	mm	25-30	35-40	40-45	45-55	60-65	70-80	90	90-100	100-110	110-120	125-140
油缸行程	Cylinder Strok	mm	90-120	180-210	200-300	300-350	340-440	420-510	450-530	460-560	510-580	500-650	600-700
上下轴间距	Vertical Pins Center Distance	mm	185-190	185-190	200-210	205-220	240-255	300	320	350-370	370-380	370-380	370-380
重 量	Weight	kg	25-40	35-64	50-75	80-110	170-210	350-390	370-410	410-520	550-750	550-750	1300-1500
工作压力	Working Pressure	bar	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400	30-400
必要流量	Necessary Flow	lpm	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20	10-20
适配挖机	Suitable Excavator	ton	0.8-2.2	2.5-4	4-7	6-9	10-15	18-23	23-26	26-30	30-40	40-52	55-90

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

全自动双保险快速连接器
FULLY AUTOMATIC DOUBLE-LOCKING QUICK HITCH COUPLER

适用对象

0.8-52吨挖掘机

产品特点


全自动双保险，安全系数更高，使用寿命更持久。


Applications

Fit to 0.8-52 ton excavator

Main features

Fully automatic double locking safety system, more safe and durable.

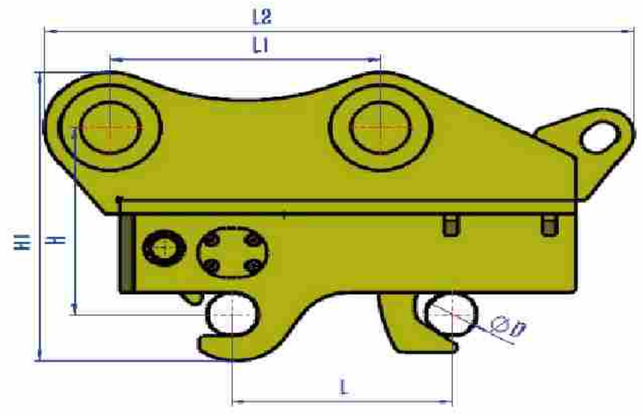

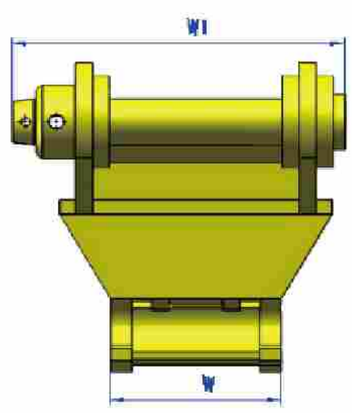





Smooth Welding



Heat Treated Pin With Accurate Grinding







类别/ Category	Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10	JT-14
工作压力 Working Pressure	bar	25-300	25-300	25-300	25-300	25-300	25-300	25-300	25-300
必要流量 Necessary Flow	lpm	15-25	15-25	15-25	15-25	15-25	15-25	15-25	15-25
适配挖机 Suitable Excavator	ton	0.8-2	2-4	4-6	6-9	10-16	18-25	26-30	30-40
斗轴直径 Pin Diameter	mm	25/30	35/40	45	50/55	60/65	70/80	100	100/110
尺寸 Overall Dimension	mm	428*250*205	439*285*247	579*342*283	670*357*349	838*432*424	993*544*508	1077*612*587	1130*648*662
重量 Weight	kg	34	45	65	78	200	316	620	600-720

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY


铸造液压/机械双保险快速连接器
CASTING HYDRAULIC/ MECHANICAL QUICK HITCH COUPLER

适用对象
0.8-25吨挖掘机

产品特点
整体铸造，无焊接点，更加美观耐用。

Applications
Fit to 0.8-25 ton excavator


Main features
Cast molding for whole body, no welding joints,more beautiful and durable.

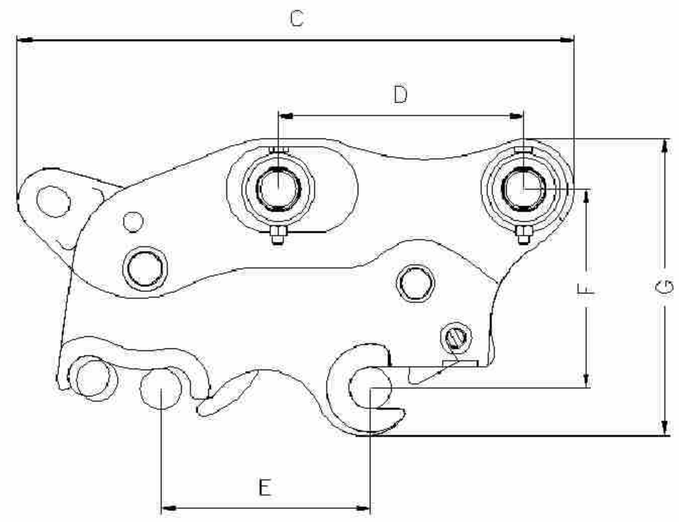







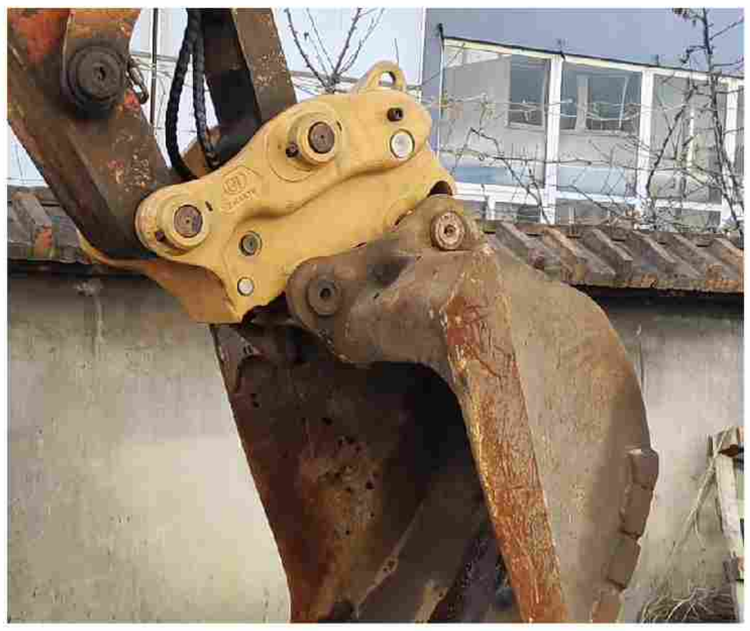





类别/ Category			Unit	JT-00	JT-01A	JT-01B	JT-02	JT-04	JT-06	JT-08
液压 Hydraulic		工作压力 Working Pressure	bar	30-400	30-400	30-400	30-400	30-400	30-400	30-400
		必要流量 Necessary Flow	lpm	10-20	10-20	10-20	10-20	10-20	10-20	10-20
	机械 Mechanical	适配挖机 Suitable Excavator	ton	0.8-2	2-4	2-4	4-6	6-9	10-16	18-25
		斗轴直径 Pin Diameter	mm	25-30	30-40	30-40	45	50-55	60-65	80
		重　　量 Weight	kg	24	32	37	50-75	80-110	170-210	350-390
		上下轴间距 Vertical Pins Center Distance	mm	90-135	100-180	170-230	200-210	200-205	240-255	300

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

倒置马达加强抓

DEMOLITION AND SORTING GRAPPLES




适用对象

建筑垃圾、废铁等强硬垃圾的装卸及分拣。

产品特点

●高度低，重量轻，节约能耗；
●采用栅栏式爪形并优化连杆装置，抓取体积大；
●提高旋转控制精准度，延长产品使用寿命为原来的1.5-2倍；
●采用高压马达，扭矩大；
●增加连杆连接轴保护装置，避免磕碰物料；
●外啮合传动机构，06级别以上比常规增大1.5--3倍扭矩。

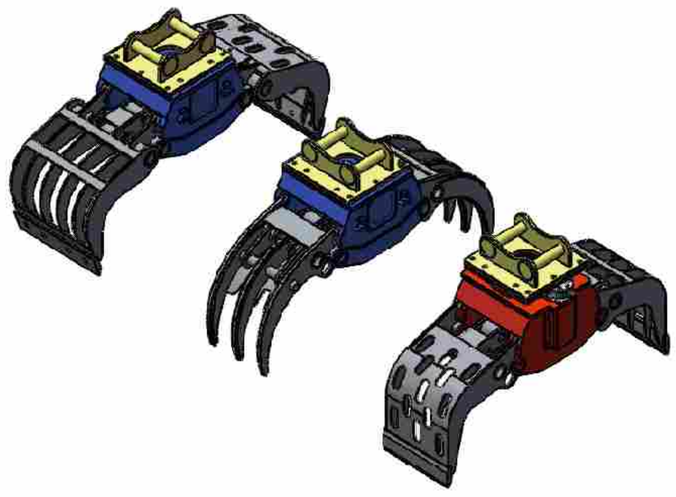


Applications

Demolition of solid structures, scrap handling,cleaning,moving,loading, sorting and organizing materials in order.

Main features

●Shorter height and lighter, saving energy consumption
●Fence-type claw shape and optimized linkage device, large grabbing volume
●Improved the accuracy of rotation control, extended the service life
●High-pressure resistant motor with large torque
●Protection device added to the connecting rod pin,avoid collision
●JT06 and above models, the torque increases by 1.5--3 times.

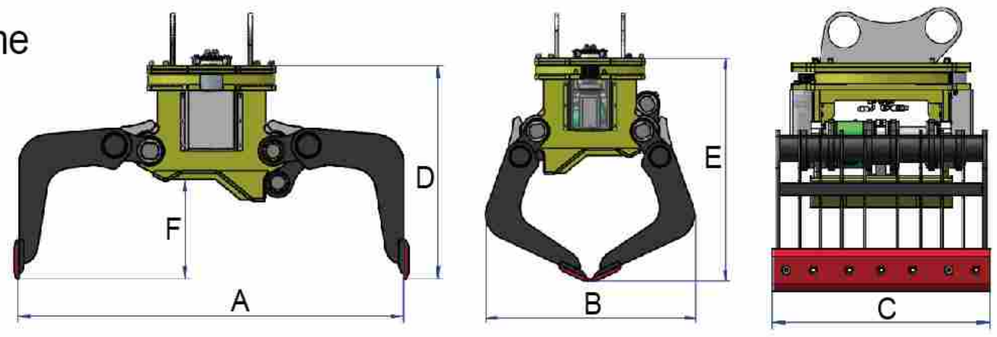









类别/ Category		Unit	JT-01	JT-02	JT-04	JT-06	JT-08
旋转角度	Rotation Angle	°	360	360	360	360	360
马达压力	Motor Pressure	bar	160	190-210	190-210	170	190
马达流量	Necessary Flow	lpm	10	12	12	25	35
油缸压力	Oil Cylinder Pressure	bar	300	300	300	350	350
油缸流量	Oil Cylinder Flow	lpm	35	40	50	100	150
爪尖夹持力	Grab Tip Clamping Force	KN	12	23	24	35	55
张开最大宽度	Open Max.Width A	mm	1160	1400	1500	1700	1950
关闭宽度	Close Width B	mm	785	700	850	1050	1250
爪子宽度	Width C	mm	450	500	600	800	1030
张开/关闭时间	Open/Close Time	s	2.5/3.5	2.5/3.5	2.5/3.5	2.5/3.5	2.5/3.5
设备重量	Weight	kg	240	365	450	775	1220
适配挖机	Suitable Excavator	ton	2.5-4	4-6	6-9	12-16	17-25

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

加强抓 DEMOLITION GRAPPLE





适用对象

建筑垃圾、废铁等强硬垃圾的装卸及分拣。

产品特点


●大小杂物可一同抓取;
●耐磨板材设计，更耐磨，使用更持久;
●M + S马达带刹车功能，油缸带美国SUN安全平衡阀;
●电控和液控系统带有减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Demolition of solid structures, scrap handling,cleaning,moving,loading, sorting and organizing materials in order.

Main features

●Capable of grabing materials of different sizes in bulk.
●Abrasion resistant steel, durable in use.
●Driven by M+S motor with brake valve;cylinder with USA safety valve (USA SUN brand).
●Pressure reducing valve, relief valve (all the valves are USA SUN brand) are in electrical and hydraulic control system, making it safer and much more stable and durable in use.

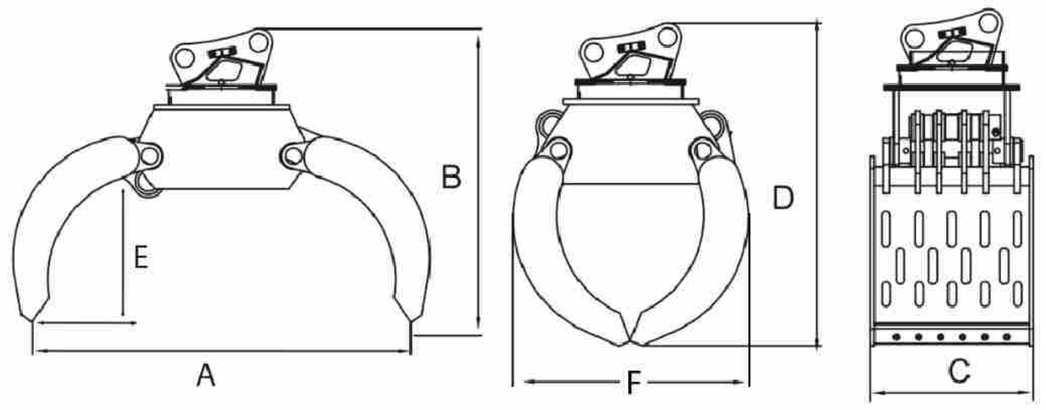













类别/ Category	Unit	JT-00	JT-00S(850)	JT-00S(950)	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
旋转角度 Rotation Angle	°	-	360	360	360	360	360	360	360	360
马达压力 Motor Pressure	bar	-	90-110	90-110	90-110	110-120	110-120	130-150	130-150	130-150
马达流量 Necessary Flow	lpm	-	20-30	20-30	20-30	30-55	30-55	40-70	40-70	40-70
油缸推力 Oil Cylinder Force	ton	3.8	3.8	3.8	5.3	8.8	10	17.2	19.6	23.7
油缸压力 Oil Cylinder Pressure	bar	160-200	160-200	160-200	160-200	160-200	160-200	200-250	250-300	250-300
油缸流量（单条）Oil Cylinder Flow	lpm	5-15	5-15	5-15	15-30	20-40	25-50	40-60	45-60	50-65
Open Width A	mm	770	850	950	1160	1400	1500	1700	1950	2400
Width C	mm	350	425	425	450	500	600	800	1030	1200
Depth E	mm	205	250	312	326	437	440	445	530	652
闭合外尺寸 F	mm	497	582	625	779	837	884	1055	1179	1379
无头不旋转重量 Fix Type Weight	kg	70	96	102	160	245	316	613	974	1500
旋转设备重量 Rotating Type Weight	kg	-	165-185	170-190	230-240	310-330	440-460	900-960	1350-1500	1700-2100
适配挖机 Suitable Excavator	ton	1-2	2-2.5	2.5-3	3-4	4-6	6-9	12-16	17-25	26-35

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

旋转抓木器
ROTATING WOOD GRAPPLE







适用对象

抓木头、抓大物件、杂物。

产品特点

●M＋S马达带刹车功能，油缸带美国SUN安全平衡阀；
●根据需求可做加宽型，下抓可定做3+2,4+3,5+4;
●电控和液控系统，带美国SUN节流阀和减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Wood and other large scraps handling, moving, loading and organizing.

Main features

●Driven by M+S motor with brake valve; cylinder with USA safety valve(USA SUN brand).
●3+2,4+3,5+4 fingers for your option.
●Throttle, pressure reducing valve, relief valve (all the valves are USA SUN brand)are in electrical






类别/ Category	Unit	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
旋转角度 Rotation Angle	°	360	360	360	360	360	360
夹口尺寸 Max Jaw Opening	mm	1108	1247	1350	1650	2375	2493
马达压力 Motor Pressure	bar	90-110	110-120	110-120	130-150	130-150	130-150
马达流量 Necessary Flow	lpm	20-30	30-40	30-40	40-50	40-50	40-50
油缸压力 Oil Cylinder Pressure	bar	160-200	160-200	160-200	180-230	180-230	200-250
油缸流量（单条）Oil Cylinder Flow	lpm	5-15	12-25	15-25	30-40	55-65	80-95
油缸推力 Oil Cylinder Force	ton	3.8	7	10	15.7	30.7	38.5
设备重量 Weight	kg	220-240	375-395	400-430	765-795	1420-1450	1700
外形尺寸 Dimension L*W*H	mm	1160*520*398	1332*595*405	1365*630*405	1765*805*550	2106*1068*675	2308*1120*812
适配挖机 Suitable Excavator	ton	3-4	4-6	6-9	12-16	17-25	26-35
单条油缸流量 Flow Per Cylinder	lpm	5-15	12-25	15-25	30-40	55-65	80-95

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

旋转抓石(钢)器

ROTATING STONE/ SCRAP STEEL GRAPPLE









适用对象

抓玉石、大理石等珍贵石材，抓废铁。

产品特点

●M+S马达带刹车功能，油缸带美国SUN安全平衡阀；
●根据需求可做加宽型，下抓可定做3+2,4+3,5+4；
●电控和液控系统带美国SUN节流阀和减压阀、溢流阀，更安全稳定，操作方便故障率低。

Applications

Stones, steel and iron scraps demoliting, Scrap handling, Cleaning, Moving, Loading, Sorting and Organizing materials in order.

Main features

●Driven by M+S motor with brake valve,cylinder with USA safety valve(USA SUN brand).
●Custom service is available.(3+2, 4+3, 5+4 fingers for your option).
●Throttle, pressure reducing valve, relief valve (all the valves are USA SUN brand)are in electrical and hydraulic control system, making it safer and much more stable and durable in use.

类别t/ Category	Unit	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
旋转角度 Rotation Angle	°	360	360	360	360	360	360
夹口尺寸 Max Jaw Opening	mm	1108	1247	1350	1650	2375	2493
马达压力 Motor Pressure	bar	90-110	110-120	110-120	130-150	130-150	130-150
马达流量 Necessary Flow	lpm	20-30	30-40	30-40	40-50	40-50	40-50
油缸压力 Oil Cylinder Pressure	bar	160-200	160-200	160-200	180-230	180-230	200-250
油缸流量（单条）Oil Cylinder Flow	lpm	5-15	12-25	15-25	30-40	55-65	80-95
油缸推力 Oil Cylinder Force	ton	3.8	7	10	15.7	30.7	38.5
外形尺寸 Dimension L*W*H	mm	1160*520*398	1342*595*405	1385*646*405	1765*805*550	2127*980*675	2330*1021*812
设备重量 Weight	kg	230-250	390*410	420-450	790-820	1450-1480	2050
适配挖机 Suitable Excavator	ton	3-4	4-6	6-9	12-16	17-25	26-35

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

莲花抓
ORANGE PEEL GRAPPLE

适用对象

汽车吊、挖机等设备，抓取废钢、废塑料、垃圾等。

产品特点

●销轴经过热处理调质；

●花瓣选用NM400—500耐磨板；

●抓举力量大，使用寿命长；

●可增加360度旋转功能。

Applications

Steel scraps,wastes handling,loading and unloading.


Main features

●Using NM400-500 steel and all pins are heat treated,high carrying capacity and making our grapple with a very long service life.

●360° rotation function available.





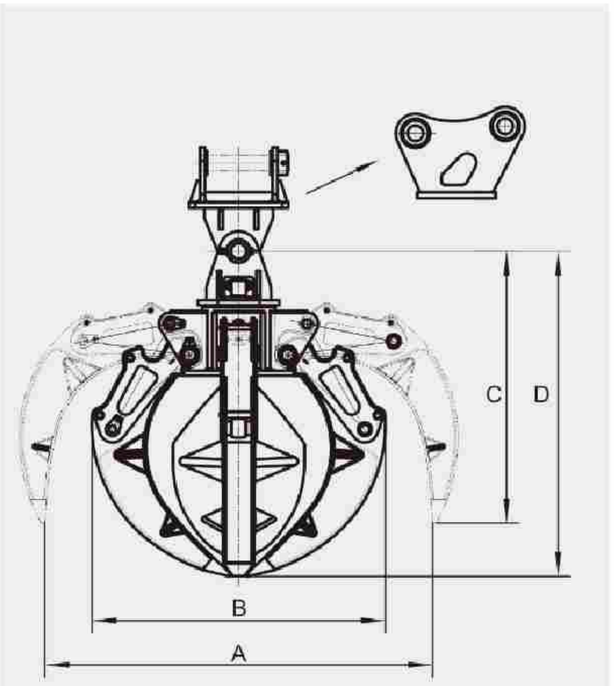









类别 / Category	Unit	JT-01	JT-04	JT-06	JT-08	JT-10
(A) Open Width	mm	1100	1275	1623	1998	2474
(B) Close Width	mm	887	1064	1283	1684	2067
(C) Hight	mm	937	990	1083	1335	1550
(D) Hight	mm	1065	1117	1255	1537	2024
油缸推力 Cylinder Thrust	ton	3.14	3.14	5.6	9	15.7
油缸压力 Oil Pressure	bar	160-200	160-200	180-230	180-230	200-250
闭合容积 Capacity (closed)	m^3	0.10	0.15	0.25	0.60	0.90
张开容积 Capacity (open)	m^3	0.39	0.61	1.08	2.24	2.99
适配挖机 Suitable Excavator	ton	3-4	4-9	12-16	17-25	26-35
设备重量 Weight	kg	200-250	400-600	900-1100	1200-1500	1800-2200

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

旋转抱式抓木器

ROTATIING LIGHT WOOD GRAPPLE



适用对象

抓木头，抓农作物等。

产品特点

●M + S马达带刹车功能，油缸带美国SUN安全平衡阀；

●电控和液控系统带美国SUN溢流阀和减压阀，更安全稳定，操作方便故障率低；

●根据需求可做加宽型。







Applications


Light duty job like waste handling cleaning and organizing.

Main features

●Driven by M+S motor with brake valve; cylinder with USA safety valve(USA SUN brand).

●Pressure reducing valve, relief valve(all the valves are USA SUN brand)are in electrical and hydraulic control system, making it safer and much more stable and durable in use.


●Custom service is available.

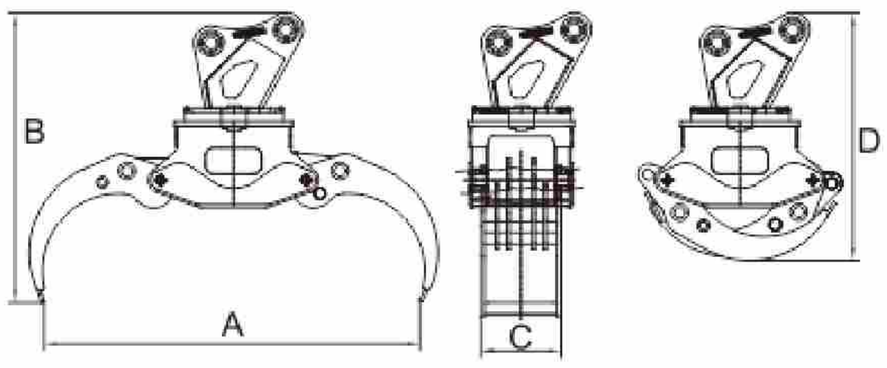


类别/ Category	Unit	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
旋转角度 Rotation Angle	°	360	360	360	360	360	360
马达压力 Motor Pressure	bar	90-110	110-120	110-120	130-150	130-150	130-150
马达流量 Necessary Flow	lpm	20-35	30-55	30-55	40-70	40-70	40-70
油缸推力 Oil Cylinder Force	ton	3	6	9	12	12	13
油缸压力 Oil Cylinder Pressure	bar	110-140	160-200	160-200	180-230	180-230	180-230
适配挖机 Suitable Excavator	ton	3-4	4-6	6-9	12-16	17-25	26-35
Open Width A	mm	1222	1322	1525	1819	1950	2530
Width C	mm	330	407	470	644	488	604
设备重量 Weight	kg	240-260	350-370	420-450	740-770	810-860	1100-1160

抱式抓木器

LIGHT WOOD GRAPPLE



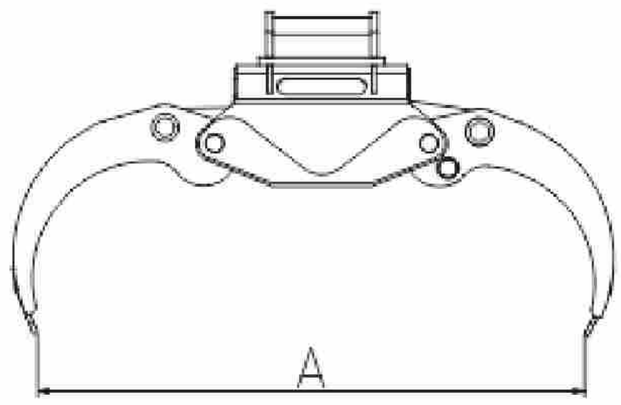

类别/ Category	Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-06S	JT-08
A	mm	906	1222	1322	1525	1833	1950	2530
工作压力 Working Pressure	bar	110-140	110-140	160-200	160-200	180-230	180-230	180-230
适配挖机 Suitable Excavator	ton	1-2	3-4	4-6	6-9	11-14	14-16	17-25
设备重量 Weight	kg	80-110	180-220	280-320	365-400	410-440	520-560	800-860

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

液压夹 HYDRAULIC GRAB-JAPAN TYPE

适用对象

木制建筑结构的拆装分类摆放以及建筑、生活垃圾杂物的清理、装卸。

产品特点

●操作方便多功能机械手；

●油缸带美国SUN平衡安全阀，更安全效率更高；

●安装方便，直接装到破碎锤管路即可；

●根据需求可做3＋4、5＋4等不同宽度不同角度。

Applications

Demolition of wooden structures, scrap handling, cleaning,moving, loading, sorting and organizing materials in order.


Main features

●Multi-functional and easy to operate.

●Equipped with balance valve (USA SUN brand), safe and high efficient.

●Easy installation.(share the same pipes with breaker).

●Custom service is available. (3+4 fingers/5+4 fingers for your option.)

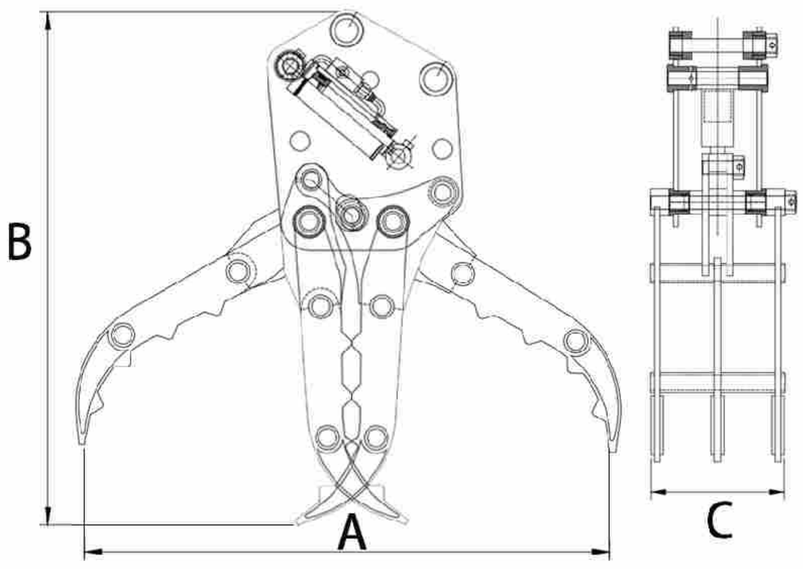











类别/ Category	Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08
油缸压力 Oil Pressure	bar	80-110	80-110	110-140	120-160	150-170	160-180
运行流量 Operating Flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140
适配挖机 Suitable Excavator	ton	1-2	2-3.5	4-6	6-9	12-16	17-23
油缸推力 Oil Cylinder Thrust	ton	3.5	4.7	6.6	8.8	24	30
开口A Open WidthA	mm	755	1135	1294	1430	1970	2080
高度B Height B	mm	760	1100	1275	1400	1790	2100
宽度C Width C	mm	280	345	398	400	630	740
设备重量 Weight	kg	80	150	240	265	700	1100

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

液压废料抓
HYDRAULIC GRAB-AUSTRALIA TYPE




适用对象
园林，垃圾场，矿山。

产品特点
结构新颖、坚固，可调轴距。

Applications
Widely used in waste recyle yards, gradens and mines.

Main features
Eccentric pin design making pin center distance adjustable.NM400 steel.

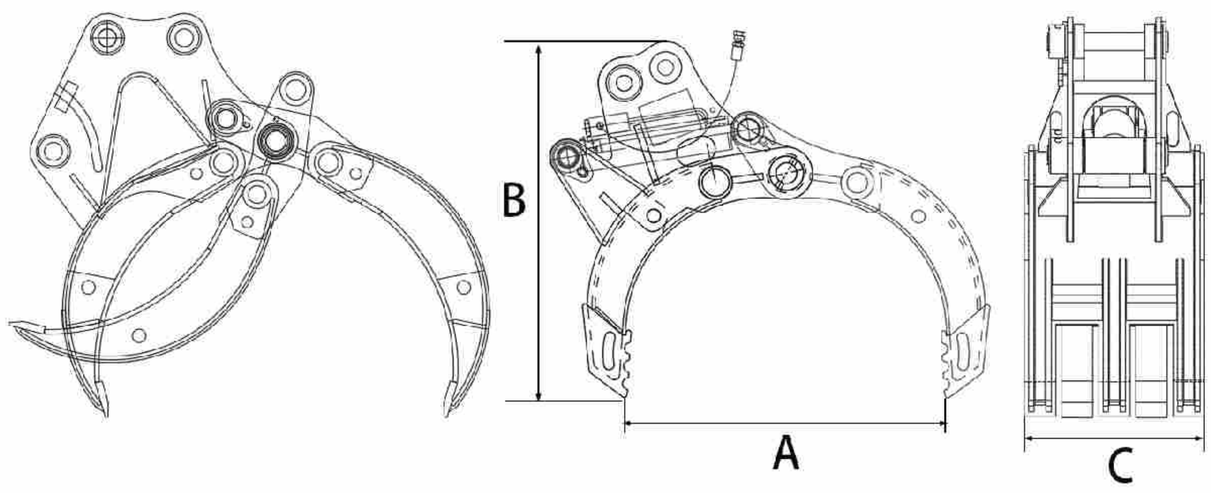







类别/ Category		Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
油缸压力	Oil Cylinder Pressure	bar	80-110	80-110	110-140	120-160	150-170	160-180	200-220
运行流量	Operating Flow	lpm	25-40	25-40	30-55	50-100	90-110	100-140	160-180
适配挖机	Suitable Excavator	ton	1-2	2-3	4-6	6-9	12-16	17-23	30-36
油缸推力	Oil Cyinder Thrunst	ton	3.9	6.6	10	10	12	24	38.8
开口A	Open Width A	mm	610	745	830	890	1225	1510	1884
高度B	Height B	mm	680	900	1000	1105	1325	1675	2050
宽度C	Width C	mm	435	400	495	545	620	820	1000
设备重量	Weight	kg	110-130	130-190	250-290	350-380	570-620	650-800	1900

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY


多功能抓具
MULTIFUNCTIONAL EXCAVATORS GRAPPLE



适用对象
抓取木材、石块、草料及各类杂物；适用于林业、石料场、拆除与回收作业，快速分拣、装卸与清理物料。

产品特点
●360°液压旋转，操作灵活高效；
●多爪可替换设计，主体配备五种类型的爪（木材、草料、石材等），可根据作业环境快速更换，做到一机多用；
●强力油缸 + 高扭矩马达，抓力更强；
●耐磨结构，适应高强度作业；
●安全阀保护，运行稳定可靠。



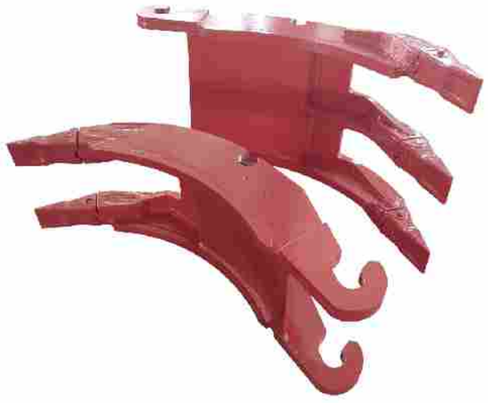

Applications
Grabbing logs, stones, grass, and various debris; suitable for forestry, quarries, demolition, and recycling operations, enabling fast sorting, loading, and site clearing.

Main features
●360° hydraulic rotation for flexible, efficient operation.
●The multi-claw interchangeable design offers five types of claws (for wood, grass, stone, etc.), allowing quick replacement based on working conditions to achieve true multi-purpose functionality.
●High-torque motor & powerful cylinder for strong gripping force
●Wear-resistant build for heavy-duty performance.
●Safety valve system for stable and secure operation.











类别/ Category	Unit	JT-02			JT-06			JT-08		
		抓木器 Log Grapple	夹石器 Rock Grapple	抓草器 Hay Grapple	抓木器 Log Grapple	夹石器 Rock Grapple	抓草器 Hay Grapple	抓木器 Log Grapple	夹石器 Rock Grapple	抓草器 Hay Grapple
外形尺寸(张开) Dimension	mm	1350x420x1100	450x400x1240	1350x615x1180	18050x600x1670	1620x500x1705	1350x615x1180	1880X700X1235	1300X360X1270	1350x615x1180
设备重量 Weight	kg	440	354	313	440	354	313	440	354	313
马达压力 Motor Pressure	bar	110-120			130-150			130-150		
马达流量 Necessary Flow	L/min	30-55			40-70			40-70		
油缸压力 Oil Cylinder Pressure	bar	160-200			180-230			180-230		
油缸推力 Oil Cylinder Force	ton	7			18			22		
适配挖机 Suitable Excavator	ton	2-4			12-16			17-25		
夹持力 Grab Tip Clamping Force	ton	1.3			2			3		

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

拇指夹 HYDRAULIC THUMB

适用对象

辅助挖斗有更强的功能特点。

产品特点

●一指多用，简单的辅助装置，成本低，效率高；
●安装方便，操作灵变，根据不同需求设计定做。


Application


This facilitates your work and makes you flexible to take on a variety of challenging new jobs.


Main features


●Multipurpose, simple auxiliary device , lower cost, higher efficiency.


●Easy to install and operate. We make it according to your machine.

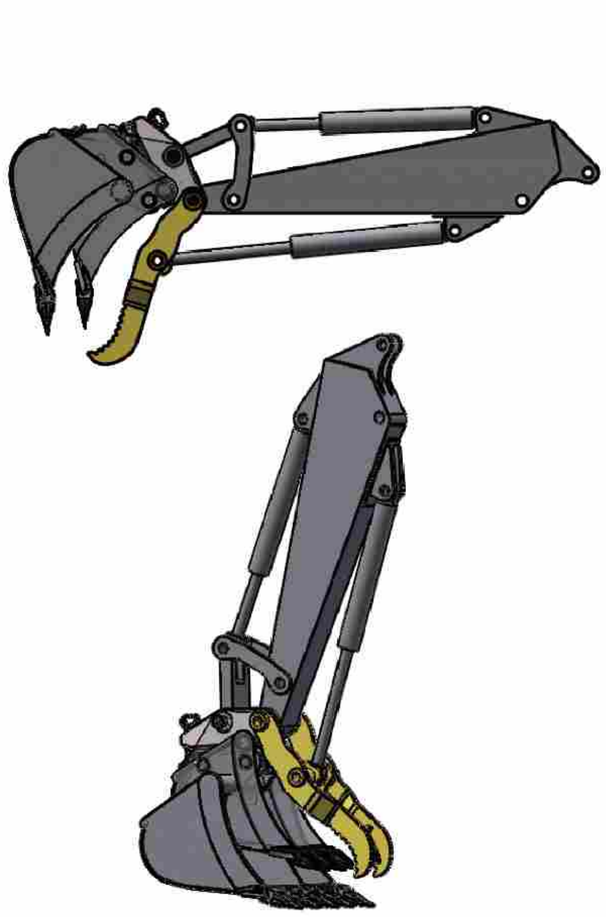


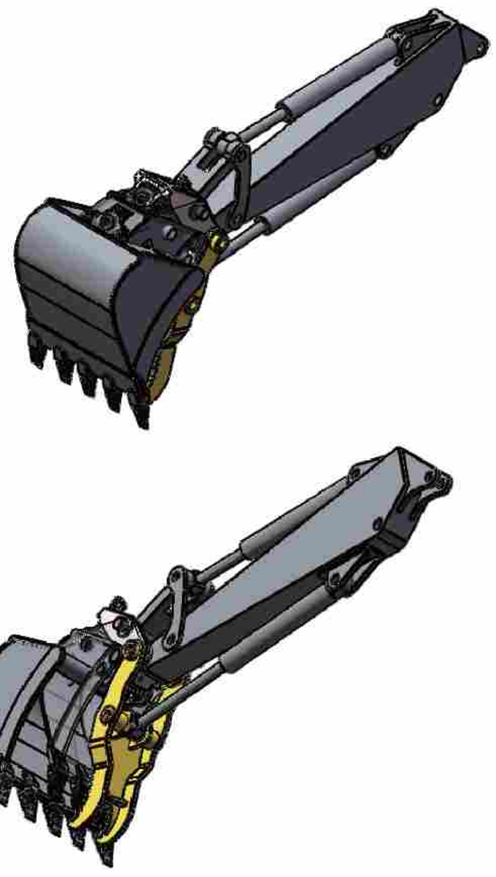

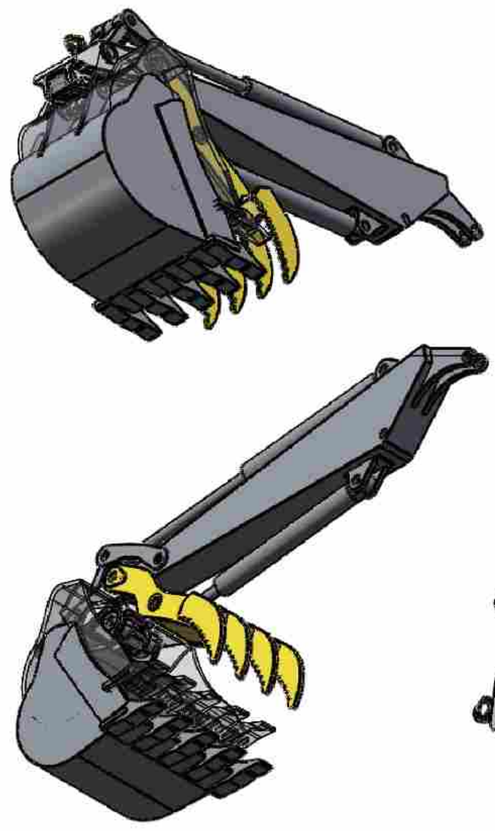

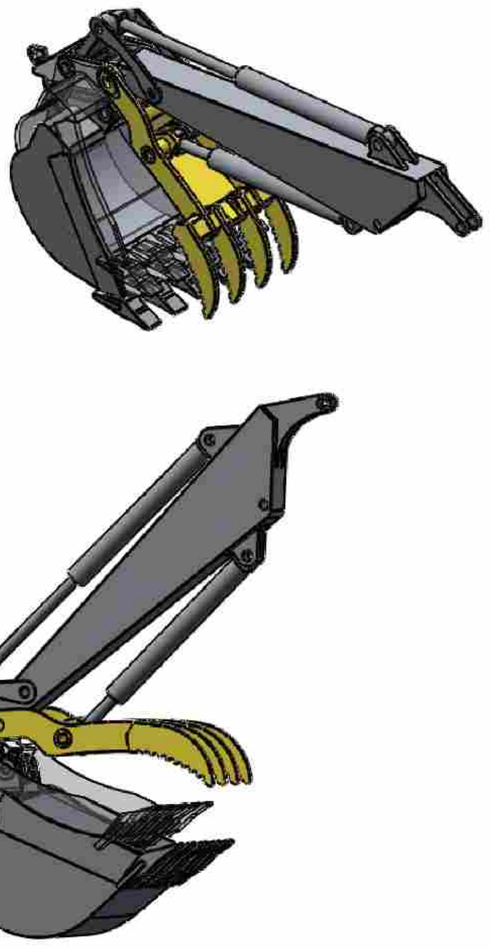

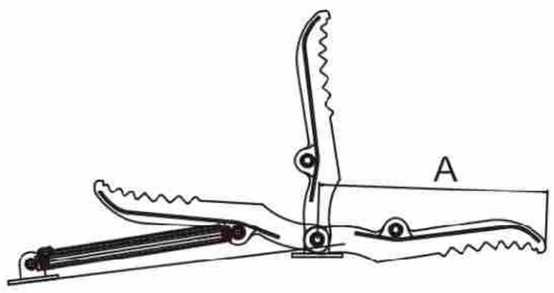

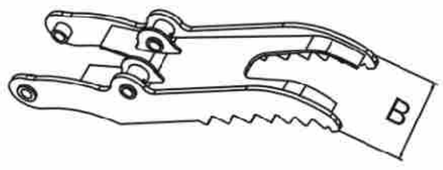







类别/ Category		Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08
工作压力	Working Pressure	bar	110-140	110-140	110-140	120-160	150-170	160-180
工作流量	Operating Flow	lpm	30-55	30-55	30-55	50-100	90-110	100-140
适用挖机	Suitable Excavator	ton	1-2	2-4	4-6	7-10	12-16	17-23
长度A	Length A	mm	582	770	915	1143	1450	1780
宽度B	Width B	mm	155	246	349	394	450	510
连杆	Base Plate Length	mm	813	1043.5	1220.5	1404.5	1845	2166
重量	Weight	kg	41	65	110	165	325	520
外形尺寸	Overall Dimension	mm	813*155*229	1044*246*322	1221*349*354	1405*392*466	1845*450*580	2166*510*657

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

筛分斗 ROTARY SCREENING BUCKET



适用对象

表土、采石、污染土壤海滩修复，废物回收再利用。

产品特点

●采用耐磨、抗撕裂的特殊钢材。

Application


Topsoil, quarrying, contaminated soil, beach remediation, demolition waste and green recycling tasks.

Main features

●Special steel that is resistant to wear and tear is used.

类别/ Category	Unit	JT-04	JT-06	JT-08	JT-10
旋转筛直径 Rotary Screen Dia	mm	810	1000	1350	1500
转速 Rotating Speed	r/s	65	65	65	65
工作压力 Working Pressure	bar	220	230	250	250
油流量 Oil Flow	lpm	60	80	110	110
适配挖机 Suitable Excavator	ton	6-10	12-17	18-23	25-36
设备重量 Weight	kg	630	1020	1920	2430

皮带粉碎斗 CRUSHER BUCKET

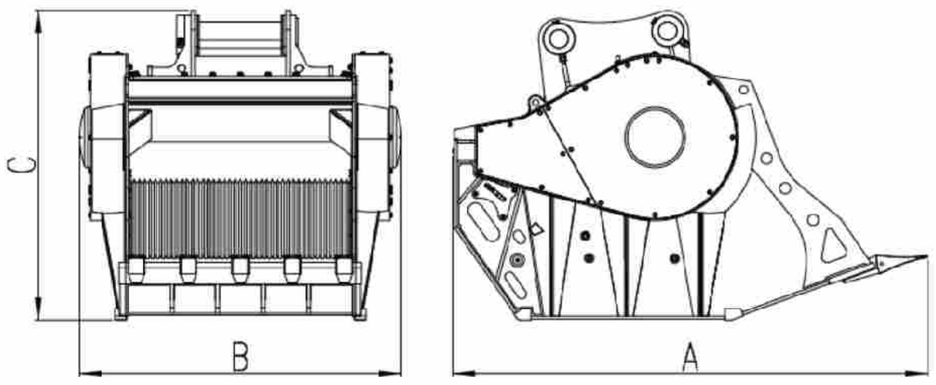

适用对象

适用于挖机拆迁、道路、回填等工况，对各类建筑废料进行就地破碎。

产品特点

●采用高速、高压柱塞马达；

●大惯量飞轮使破碎效率更高。



Application

Ideal for demolition, roadwork, backfilling, and on-site crushing of various construction debris.

Main features

●High-speed, high-pressure motor.

●Large-inertia flywheel for higher crushing efficiency.

类别/ Category	Unit	JT-02/04	JT-06	JT-08	JT-10	JT-14
总长度 Length	mm	1250	2000	2430	2580	2580
总宽度 Width	mm	1020	1160	1400	1490	1770
总高度 Heigth	mm	800	1200	1600	1680	1680
流量 Flow Rate	L/min	90-120	120-200	150-220	180-220	200-280
开口宽度 Mouth Width	mm	620	720	920	920	1220
开口高度 Mouth Height	mm	280	460	510	540	540
挖斗容量 Load Capacity	m^2	0.2	0.7	0.9	1	1.3
工作压力 Working Pressure	bar	200-280	200-350	200-350	200-350	200-350
设备重量 Wight	kg	850	2300	3600	4200	5500
适配挖机 Suitable Excavator	ton	5-8	13-18	20-24	25-30	33-50

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

破碎钳 HYDRAULIC PULVERIZER





适用对象
粉碎房屋梁柱、水泥杆等。

产品特点
●材料选用蒂森克虏伯XAR耐磨板，精加工；
破碎和剪断钢筋一体功能不变形，破碎力量大。

●可增加360度旋转功能,可更换牙齿。

Application
Crush beam columns and concrete building.

Main features
●Material:ThyssenKrupp XAR high precision,with both crush and cut functions. Durable in use.


●360°rotation function available,replaceable teeth available.









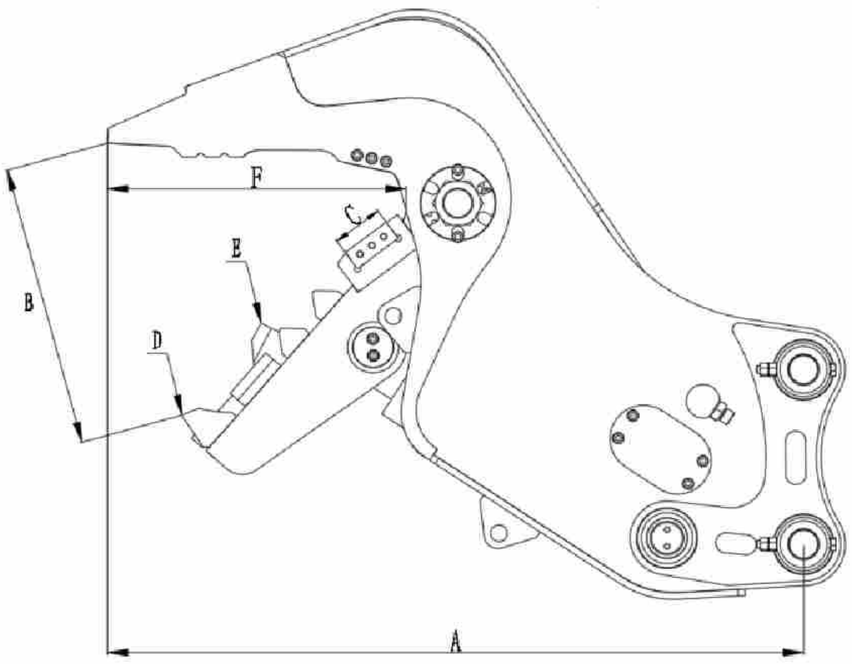

类别/ Category		Unit	JT-02	JT-04	JT-06	JT-08	JT-10
总长	Length A	mm	1032	1344	1723	2090	3210
最大开口	Max Open	mm	420	600	750	860	1100
刀片长度	Cutter Length	mm	75	95	112	180	360
中央粉碎力	Crushing Force(C)	kn	260	560	840	1170	1600
粉碎力	Crushing Force(E)	kn	170	350	520	700	1000
工作压力	Working Pressure	bar	240	240	310	320	320
工作流量	Oil Flow	lpm	80-120	100-140	120-180	180-250	200-300
适用挖机	Suitable Excavator	ton	4-6	6-9	10-15	15-25	30-36
设备重量	Weight	kg	310	510	1000	1700	2700

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

旋转破碎钳 360° ROTATING HYDRAULIC PULVERIZER

适用对象

快速有效地拆除粉碎房屋梁柱、水泥杆等混凝土，同时降低噪音和振动。

产品特点

●材料选用蒂森克虏伯XAR耐磨板，经久耐用且高度抗建筑磨损;

●一机多用，具有破碎和剪断钢筋一体功能，破碎力量大;

●可更换齿设计;

●配有加速阀，可提供快速的钳口打开和关闭运动，使工作更快、更轻松;

●360 度液压旋转可提供准确的机动性和精度。





Application

Efficient buildings and concrete structure demolition
with low noise and vibration.

Main features

●Material:ThyssenKrupp XAR wear-resistant steel, durable and highly resistant.

●Multi-purpose design with powerful force,can break structure and cutting steel bars.

●Replaceable teeth.

●Valve provides faster opening and closing speed.

●360°rotation for maneuverability and fexible.













类别/ Category		Unit	JT-04	JT-06	JT-08	JT-08S
重量	Weight	kg	600	1450	2000	2700
A开口	Max Open	mm	520	700	780	880
中间剪切力	Cutting Force(B)	ton	76	185	220	300
前端破碎力	Crushing Force(A)	ton	32	60	70	100
工作压力	Working Pressure	bar	350	350	350	350
B刀片长度	Cutter Length	mm	140	180	220	260
旋转最大流量	Max.Rotation Flow	lpm	28	28	28	28
打开/关闭	Open/Close	S	1.8/2.5	1.5/3	2/3	2/3
适用挖机	Suitable Excavator	ton	6-9	10-15	18-22	23-36

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

液压剪 HYDRAULIC CRUSHER

适用对象

破碎拆除化工设备；破碎拆除房屋。

产品特点

●刀牙选用蒂森克虏伯XAR系列耐磨板；耐用；破碎力大；加工精度高；不易变形。

●可增加360度旋转功能。


Applications


Can be used to demolish buildings chemical equipment.

Main features

●Material:ThyssenKrupp XAR steel,High precision,more durable in use.

●360°rotation function available.

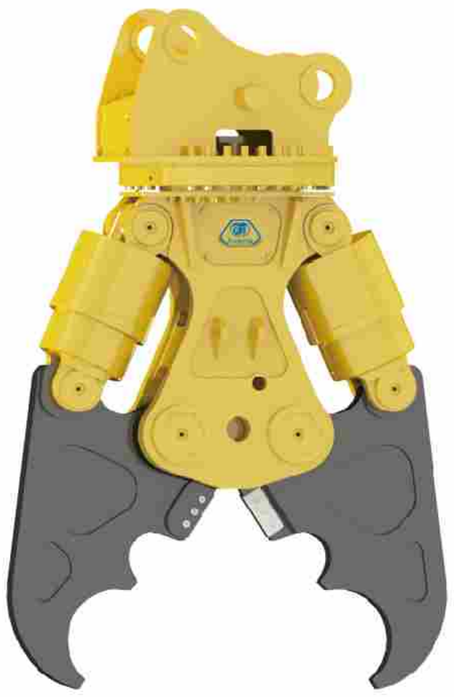

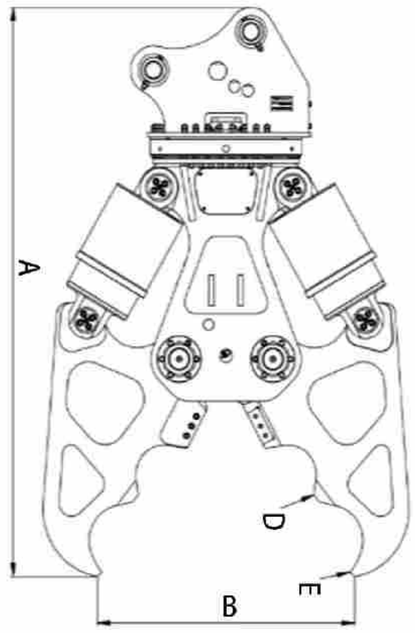

类别/ Category		Unit	JT-06	JT-08	JT-10
A 全长	Total Length	mm	2270	2575	2915
B 开口尺寸	Max.Jaw Openning	mm	1000	1300	1600
刀片长度（内侧外侧）	Cutting Blade Length	mm	160	160	240
D 中央切断力	Center Cutting Force	kn	1256	1500	1926
E 前端切断力	Tip Cutting Force	kn	780	962	1254
工作压力	Working Pressure	bar	315	315	315
设备重量	Weight	kg	2010	2580	3780
适用挖机	Suitable Excavator	ton	16-20	20-25	30-35

钢材剪 HYDRAULIC SCRAP SHEAR

适用对象

剪切各种钢结构，用于废钢厂，报废汽车厂，化工厂。

产品特点

●刀牙选用蒂森克虏伯XAR系列耐磨板；耐用；破碎力大；加工精度高；不易变形。

●可增加360度旋转功能。

Applications


Widely used in steel scrap and scrap car factories.

Main features

●Material:ThyssenKrupp XAR steel. Durable in use, high level machining precision and high breaking capacity.

●360° rotation function available.



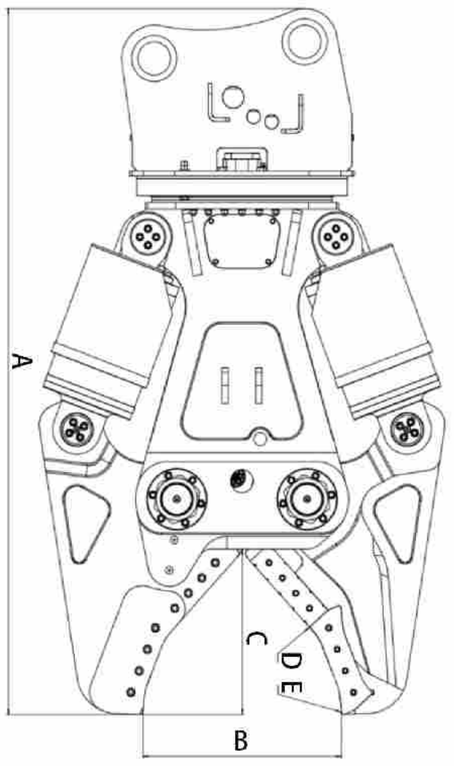

类别/ Category		Unit	JT-06	JT-06S	JT-08	JT-08S	JT-10	JT-14	JT-17
A 全长	Total Length	mm	2049	2260	2270	2440	2650	2725	3005
B 开口尺寸	Max.Jaw Openning	mm	665	660	770	740	790	820	870
C 剪口深度	Cutting Depth	mm	435	430	550	550	620	635	730
刀片长度（内侧外侧）	Cutting Blade Length	mm	290+200	300+230	350+260	350+260	350+330	370+330	380+440
D 中央切断力	Center Cutting Force	kn	1140	1410	1550	1820	2485	2495	2620
E 前端切断力	Tip Cutting Force	kn	820	950	1050	1250	1445	1500	1590
工作压力	Working Pressure	bar	315	315	315	315	315	315	315
设备重量	Weight	kg	1680	2250	2550	3050	3730	4020	4985
适用挖机	Suitable Excavator	ton	13	16	22	24	30	33	45

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

鹰嘴剪 HYDRAULIC SHEAR



适用对象

钢结构的破拆，废料钢的处理，汽车拆剪，飞机拆解，轮船拆解等。

产品特点

●可以快速，方便的更换刀片；

●强大的液压油缸加强了颚嘴的闭合力从而能剪断较硬的钢材。

Application

Breaking the steel structure, scrap steel processing and other applications, steel structure cutting, scrap steel processing and other application.


Main features

●Blades are easily replaced reduce machine downtime and optimize productivity,

●Prowerful hydraulic cylinder provides powerful shearing force.





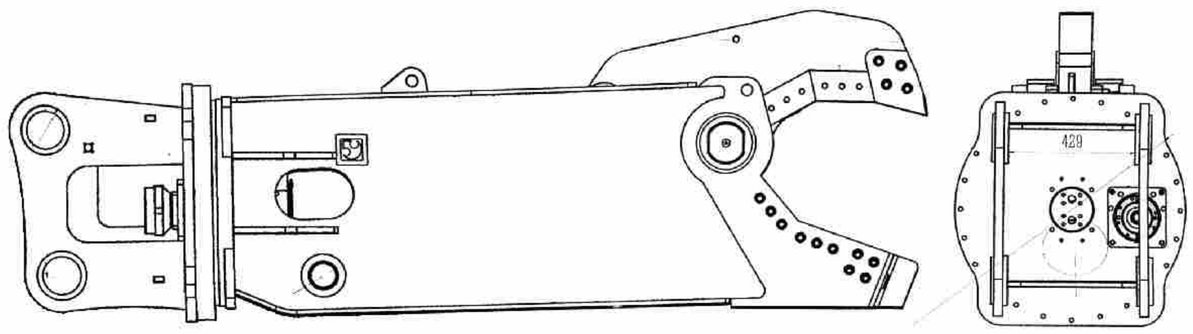









类别/ Category	Unit	JTS-04	JTS-06	JTS-08	JTS-10	JTS-14	JTS-17
油缸流量 Cylinder Flow	lpm	72-102	72-102	102-201	151-250	299-504	601-799
油缸压力 Cylinder Pressure	bar	260	270	320	320	320	320
外观尺寸 Dimensions	mm	1880*556*448	2459*600*716	2900*650*930	3300*800*1037	3725*840*1314	3891*900*1505
开口 Opening	mm	250	360	480	600	800	1030
适配挖机 Suitable Excavator	ton	6-10	10-16	20-25	20-40	30-60	40-80
设备重量 Weight	kg	580	1166	1680	2522	3766	5266

质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

多功能柱塞夯 MULTI-FUNCTIONAL COMPACTOR



适用对象

适应于恶劣施工环境中的土壤、碎石、回填土的压实加固，适配道路施工、地基处理等工程场景。

产品特点

●增加了柱塞缸，打击力提升2-3倍；
●结构坚固，抗冲击、耐磨；
●外形设计更美观；
●可实现360°旋转；
●通过快速换装底板兼具压实轮等多种功能。



Application


Designed for compacting and strengthening soil, gravel, and backfill in harsh construction environments. Ideal for road construction, foundation work, and other earthwork scenarios requiring high-impact compaction.



Main features


●Enhanced with a piston cylinder, delivering 2–3× stronger impact force.
●Robust structure with excellent impact resistance and wear resistance.
●Improved exterior design for a cleaner, more modern appearance.
●Supports full 360° rotation for flexible operation.
●Interchangeable bottom plates allow multiple functions, including use as a compaction wheel.



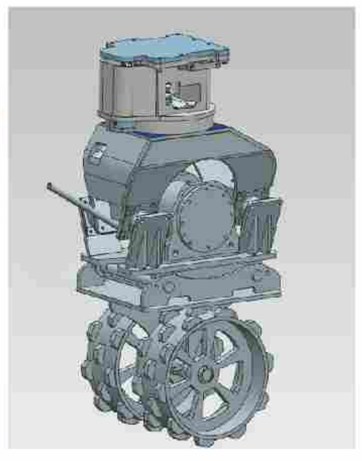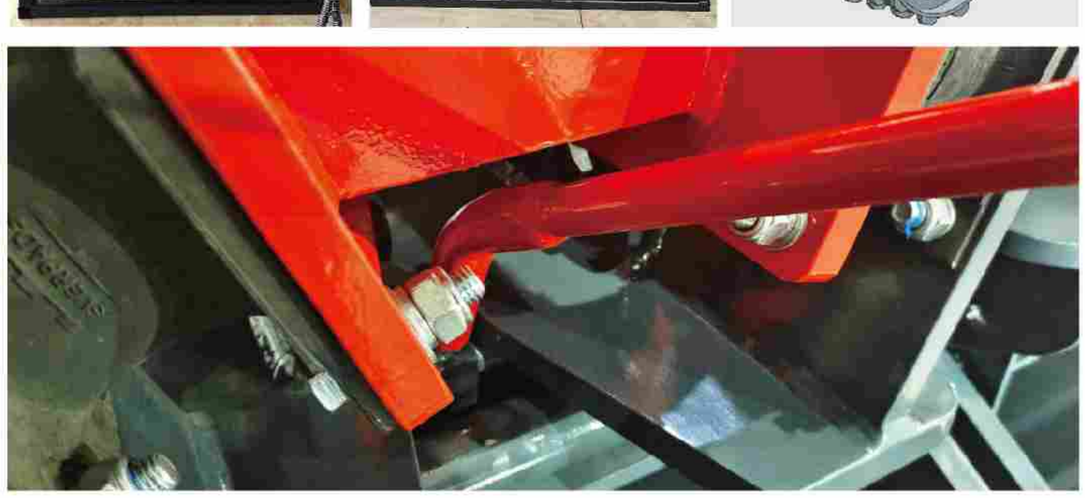

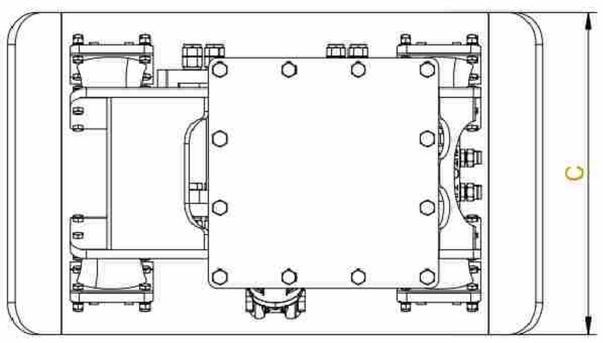

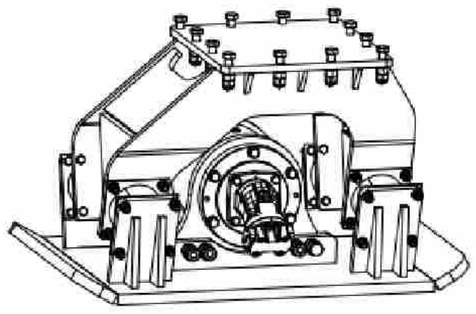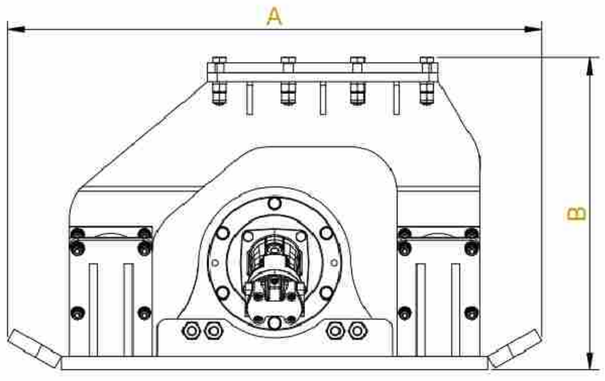类别/ Category	Unit	JT-01	JT-02	JT-R02（旋转款）	JT-06
总长度 A Lengh	mm	803	900	732	1160
总宽度 C Width	mm	474	500	490	700
总高度 B Height	mm	444	590	980	678
旋转角度 Rotation Angle		-	-	360°	-
马达排量 Motor Displacement	CC	16	23	23	45
马达流量 Necessary Flow	lpm	60	80	80	180
转速 Rotational Speed	Min^{-1}	3562	3304	3300	3800
适配挖机 Suitable Excavator	ton	3-4	4-6	4-6	12-16
设备重量 Weight	kg	220	430	572	630

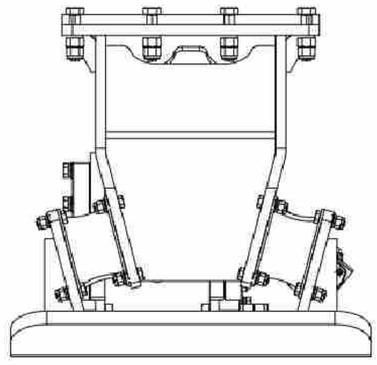质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

液压夯
HYDRAULIC PLATE COMPACTOR

适用对象

高速公路铁路护坡及路面的平整，工地及厂房地面平整。

产品特点

进口轴承，意大利节流阀、单向阀，美国的安全阀，操作稳定。旋转款的液压夯可在夯实地面时实现360度不同方向的调整，震动频率和震动力度是普通夯的2-4倍。

Application

Leveling of high-speed way and railway slopes, roads, construction sites and building floors.

Main features

Imported bearing (Japan) throttle (Italy) and safety valves(USA),stable and high efficient performance. With 360 degree rotation system, it can do job in any position. JIANGTU plate compactor performs 2-4 times better than normal compactors in compacting frequency and power.







原装进口马达，更加稳定有力

PERMCO motor,stable and powerful



原装进口阀安全可靠，操作方便

Imported relief valve protecting motor well.



减震胶块更持久耐用

Long service life rubber pads.

类别/ Category		Unit	JT-mini	JT-02/04	JT-06	JT-08	JT-10
总高	Height	mm	435	530	650	720	730
总宽	Width	mm	442	550	700	900	900
打击力	Impulse Force	ton	3	4	6.5	11	15
震动频率	Vibration Frequency	rpm/min	2000	2000	2000	2200	2200
油流量	Oil Flow	lpm	30-60	45-85	85-105	120-170	120-170
工作压力	Working Pressure	bar	100-130	100-130	100-150	150-200	150-200
打击面积	Bottom Measurement	mm	800*442	900*550	1160*700	1300*900	1500*1000
适配挖机	Suitable Excavator	ton	2-4	4-10	12-16	18-24	30-40
设备重量	Weight	kg	200	350-500	650-800	900-1000	1100-1300









质量为先　诚信为本　服务至上

QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com

www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

液压破碎锤 HYDRAULIC BREAKER

适用对象

应用于矿山、拆除、建筑、采石场等，可安装于所有普通液压挖掘机、小型挖掘机及其它载货设备上，如滑移装载机、反铲装载机、起重机、伸缩式装卸机、轮式装载机等机械。

产品特点

●缸和主阀：精密加工，防止拉伤；
●活塞与中缸体一对一配磨；
●钎杆： 42CrMo，性能可靠；
●油封：原装进口NOK油封。

Applications

Used for mining,building demolition,quarry.
It can be mounted on all common hydraulic excavator and other carrier, like skid steer loader, backhoe loader, crane, telescopic loader,wheel loader and other machinery.

Main features

●Cylinder & valves: prevents scuffing with precision finishing treatment.
●Piston:every piston tolerance machined perfectly according to each cylinder.
●Chisel:42CrMo, exceptional performance and reliability.
●Seal kit: NOK.



BACKHOE TOP SILENCED SIDE SKID LOADER











类别/ Category	Unit	JTB450	JTB530	JTB680	JTB750	JTB850	JTB1000	JTB1250	JTB1350	JTB1400
机芯重量 Body Weight	kg	67	85	152	210	278	475	616	846	916
总重量Total Weight (Side/Top/Box)	kg	99/121/139	132/148/168	275/321/325	418/407/413	561/638/629	842/979/948	1381/1463/1427	1609/1698/1650	1950/2050/1978
工作压力Working Pressure	bar	88-117	88-117	108-137	118-147	127-157	147-167	147-167	157-176	157-176
工作流量Working Flow	lpm	20-30	25-50	40-70	50-90	60-100	80-110	90-120	130-150	120-180
冲击频率 Impact Rate	bpm	700-1200	600-1100	500-900	400-800	400-800	350-700	350-650	400-800	350-500
油管直径 Hose Diameter	inch	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1
钎杆直径 Chisel Diameter	mm	45	53	68	75	85	100	125	135	140
适用挖机 Suitable Excavator	ton	1.2-3.0	2.5-4.5	4-7	6-9	7-14	10-15	15-18	18-26	18-26


类别/ Category	Unit	JTB1400A	JTB1500	JTB1550	JTB1650	JTB1650F	JTB1750	JTB1850F	JTB1950	JTB2100
机芯重量 Body Weight	kg	952	1088	1309	1438	1586	1929	2411	2626	3396
总重量Total Weight (Side/Top/Box)	kg	1950/2050/1978	2359/2271/2279	2655/3059/2896	2735/3151/2983	3289/3503/3399	4167/4216/4390	4376/4809	5039/5164	7183/7393
工作压力Working Pressure	bar	157-176	157-176	176-196	176-196	176-196	176-196	186-216	186-216	196-235
工作流量Working Flow	lpm	120-180	150-190	200-260	200-260	200-260	210-290	220-270	220-290	290-350
冲击频率 Impact Rate	bpm	350-500	350-700	250-400	250-400	250-380	200-350	200-250	180-200	150-200
油管直径 Hose Diameter	inch	1	1	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/4
钎杆直径 Chisel Diameter	mm	140	150	155	165	165	175	185	195	210
适用挖机 Suitable Excavator	ton	18-26	27-35	28-36	30-40	30-40	35-40	35-45	40-55	60-80

质量为先 诚信为本 服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

破碎锤配件 HYDRAULIC BREAKER PARTS

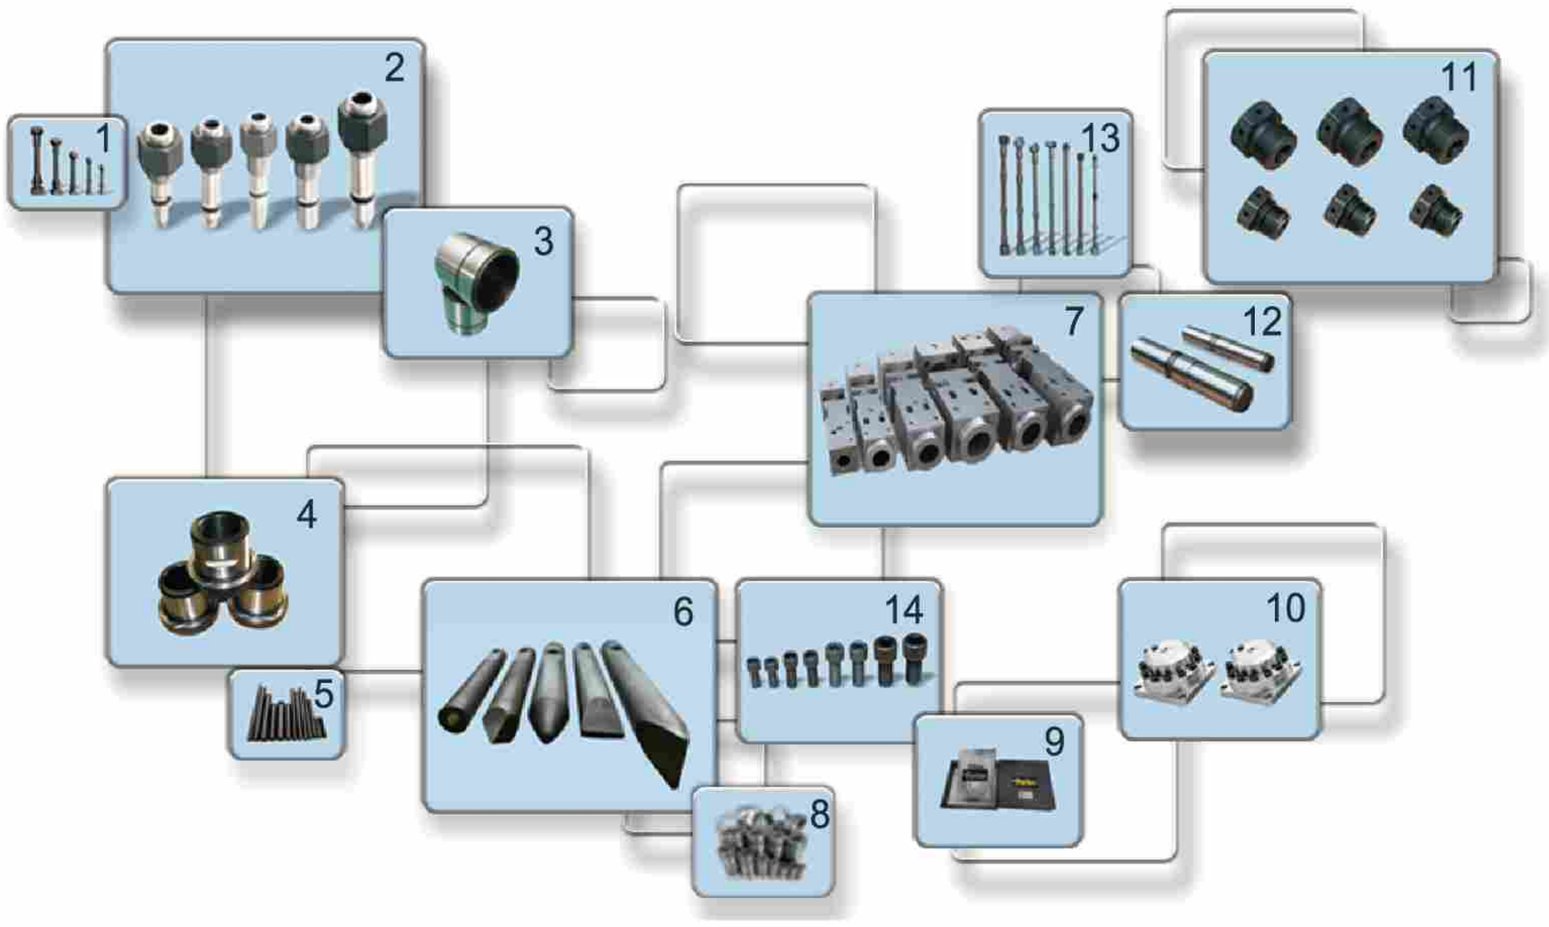

1. 夹板螺栓Side bolt
2. 充气阀Charging valve
3. 内套Inner bush
4. 外套Outter bush
5. 圆销Round pin
6. 钎杆Chisel
7. 上下缸体Front&back head
8. 换向阀Valve
9. 油封Seal kit
10. 蓄能器Accumulator
11. 排气阀Air check valve
12. 活塞Piston
13. 贯穿螺栓Through bolt
14. 蓄能器螺丝Accumulator nuts











破碎锤生产率 HYDRAULIC BREAKER EXCAVATOR PRODUCTIVITY RATE(BREAKER CAPACITY)

生产率/ Productivity	Unit	400	450	530	680	750	850	1000	1350	1400	1550	1650	1750	1800	1900
非钢筋混凝土 Non-Rein-Forced Concrete(t:30cm)	m³/8hr	2-5	4-8	8-16	20-25	20-50	20-55	30-60	90-200	100-220	250-400	300-550	300-700	350-800	380-950
钢筋混凝土Reinforced Concrete(t:30cm)	m³/8hr	4-16	6-23	12-45	30-75	30-80	30-85	50-110	120-300	150-350	300-600	300-720	300-750	350-950	380-1050
硬石 Hard Rock	m³/8hr	8-20	12-30	24-60	60-100	60-105	60-110	90-200	200-420	220-450	400-800	400-900	450-930	500-1050	550-1150

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

钻机 EARTH AUGER

适用对象

螺旋钻机是一种适合适建筑基础工程中快速成孔作业的施工机械，适用于多种土质地面。应用于园林，绿化，植树， 电力线杆桩基，光伏桩基，高速路及高铁护栏、栅栏，小型房屋桩基引孔，采掘巷道，爆破孔引孔等。

产品特点

- ●多种安装架可供选择；
- ●伊顿品牌液压马达；
- ●持续稳定的强力扭矩输出，经久耐用；
- ●各种直径的钻杆， 多种钻具可选，适用各种地质；
- ●挖掘机、装载机、吊车、滑移等均可承载。

Application

Earth auger is a kind of construction machine suitable for rapid hole operation in the construction foundation engineering, suit to a variety of ground condition . Applies in landscaping, tree planting, power pole pile foundation, photovoltaic pile foundation, highway and high-speed rail guardrail, fencing, pile foundation hole, mining roadway, blasting hole etc.

Main features

- ●Various mounting hitches are available.
- ●Eaton-brand hydraulic motorst.
- ●Continuous and stable strong output torque,more durable.
- ● Various diameter augers, earth and tungsten wear parts required for various ground conditions .
- ●Suitable for all variety of excavator, backhoe loader, crane, skid steer loader etc carriers.



型号Model No.		JTA1500	JTA2500	JTA3000	JTA3500	JTA4500	JTA5500
适配挖机Suitable Excavator (ton)		1-2	1.5-3	2-4	2.5-4.5	3-5	4.5-6
钻杆型号Auger Model		S4	S4	S4	S4	S4	S5
钻杆直径Auger Diameter（mm）		100-400	100-500	100-600	100-750	100-900	150-750
扭矩范围Torque Range（NM）		511-1496	830-2847	958-2877	1205-3614	1500-4499	1685-5477
油压范围Oil Pressure Range（bar）		70-205	70-240	80-240	80-240	80-240	80-260
油流范围Oil Flow Range(lpm)		20-45	27-65	27-75	40-85	50-95	40-115
速度范围Speed Range(rpm)		44-98	36-87	36-100	42-90	43-81	30-87
单位高度Unit Height(mm)		585	585	665	665	665	780
单位直径Unit Diameter(mm)		200	200	244	244	244	269
单位重量Unit Weight(kg)		46	48	71	73	75	108
安装架选项 Hitch Options	单销安装架Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch
	双销安装架Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch
	防摆托架Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch
输出轴标准Output Shaft Std		65mm Round	65mm Round	65mm Round	65mm Round	65mm Round	75mm Square
输出轴选择Output Shaft Opt		2"Hex 57mm Square	2" Hex 57mm Square"	2"Hex 57mm Square	2"Hex 57mm Square	2" Hex 57mm Square	2.5"Hex
钻杆直径（mm） Auger Dia(mm)		钻孔深度（m） SOFT (M) MEDIUM (M) HARD (M)	钻孔深度（m） SOFT (M) MEDIUM (M) HARD (M)	钻孔深度（m） SOFT (M) MEDIUM (M) HARD (M)	钻孔深度（m） Soft (M) MEDIUM (M) HARD (M)	钻孔深度（m） SOFT (M) MEDIUM (M) HARD (M)	钻孔深度（m） SOFT (M) MEDIUM (M) HARD (M)
100		2 1.8 1.6	2.5 2.3 2.1	3 2.7 2.4	3 2.7 2.4	4 3.6 3.2	- - -
150		2 1.8 1.6	↓	↓	↓	↓	4 3.6 3.2
200		1.8 1.6 1.4	↓	↓	↓	↓	↓
225		1.8 1.6 1.4	↓	↓	↓	↓	↓
250		1.5 1.4 1.3	↓	↓	↓	↓	↓
300		1.5 1.4 1.3	2.5 2.3 2.1	↓	↓	↓	↓
350		1.5 1.4 1.3	2.3 2.1 1.9	↓	↓	↓	↓
375		1.5 1.4 1.3	2.1 1.9 1.7	↓	↓	↓	↓
400		1.2 1.1 1	1.9 1.7 1.5	3 2.7 2.4	↓	↓	↓
450		- - -	1.7 1.5 1.4	2.6 2.3 2.1	↓	↓	↓
500		- - -	1.5 1.4 1.3	2.3 2.1 1.9	↓	↓	↓
550		- - -	- - -	2 1.8 1.6	3 2.7 2.4	↓	↓
600		- - -	- - -	1.8 1.6 1.4	2.9 2.6 2.3	4 3.6 3.2	4 3.6 3.2
700		- - -	- - -	- - -	2.3 2.1 1.9	3 2.7 2.4	3.5 3.2 2.9
750		- - -	- - -	- - -	1.8 1.6 1.4	2.5 2.3 2.1	3 2.7 2.4
800		- - -	- - -	- - -	- - -	2 1.8 1.6	- - -
900		- - -	- - -	- - -	- - -	1.5 1.4 1.3	- - -

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY



Hitch
托架



Extensions
延长杆



Auger Drive
螺旋钻机



Augers
钻杆



Wear Parts
钻齿



Stump Planer
树桩刨具









型号Model No.	JTA7000	JTA8000	JTA15000	JTA25000	JTA50000
适配挖机Suitable Excavator (ton)	5-7	6-8	10-15	15-22	21-45
钻杆型号Auger Model	S5	S5	S6	S6	PA Series
钻杆直径Auger Diameter（mm）	150-900	150-1200	150-1200	150-1500	300-2400
扭矩范围Torque Range（NM）	2133-6931	2717-8125	5024-15071	16503-24755	23758-47515
油压范围Oil Pressure Range（bar）	80-260	80-240	80-240	160-240	160-320
油流范围Oil Flow Range(lpm)	60-135	70-150	80-170	80-170	100-280
速度范围Speed Range(rpm)	36-81	33-70	20-43	12-26	11-30
单位高度Unit Height(mm)	780	780	930	1130	1411
单位直径Unit Diameter(mm)	269	269	290	345	406
单位重量Unit Weight(kg)	112	116	173	269	472
安装架选项 Hitch Options 单销安装架Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch	Single Pin Hitch
安装架选项 Hitch Options 双销安装架Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch	Double Pin Hitch
安装架选项 Hitch Options 防摆托架Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch	Cradle Hitch
输出轴标准Output Shaft Std	75mm Square	75mm Square	75mm Square	75mm Square	110mm Square
输出轴选择Output Shaft Opt	"2.5" Hex	"2.5" Hex	----	----	100mm Square 130mm Square

钻杆直径（mm） Auger Dia(mm)	钻孔深度（m）			钻孔深度（m）			钻孔深度（m）			钻孔深度（m）			钻孔深度（m）		
	SOFT (M)	MEDIUM (M)	HARD (M)	SOFT (M)	MEDIUM (M)	HARD (M)	SOFT (M)	MEDIUM (M)	HARD (M)	SOFT (M)	MEDIUM (M)	HARD (M)	SOFT (M)	MEDIUM (M)	HARD (M)
150	5	4.5	4.1	6	5.4	4.9	7.5	6.8	6.1	9	8.1	7.3	-	-	-
200													-	-	-
225													-	-	-
250													-	-	-
300													12	10.8	9.7
350															
375															
400				6	5.4	4.9	7.5	6.8	6.1	9	8.1	7.3	12	10.8	9.7
450				5	4.5	4.1	7	6.3	5.7	8.5	7.7	6.9	11.5	10.4	9.4
500	5	4.5	4.1	5	4.5	4.1	7	6.3	5.7	8.5	7.7	6.9	11.5	10.4	9.4
550	4	3.6	3.2	5	4.5	4.1	7	6.3	5.7	8.5	7.7	6.9	11	9.9	8.9
600	4	3.6	3.2	5	4.5	4.1	7	6.3	5.7	8.5	7.7	6.9	11	9.9	8.9
700	4	3.6	3.2	4.5	4.1	3.7	6.5	5.9	5.3	8	7.2	6.5	10.5	9.5	8.6
750	3.5	3.2	2.9	4	3.6	3.2	6	5.4	4.9	7.5	6.8	6.1	10	9	8.1
800	3	2.7	2.4	4	3.6	3.2	6	5.4	4.9	7.5	6.8	6.1	10	9	8.1
900	2.5	2.3	2.1	3.5	3.2	2.9	5.5	5	4.5	7	6.3	5.7	9.5	8.6	7.7
1000	-	-	-	3.5	3.2	2.9	5	4.5	4.1	6.5	5.9	5.3	9	8.1	7.3
1200	-	-	-	3	2.7	2.4	4.5	4.1	3.7	6	5.4	4.9	8.3	7.5	6.8
1500	-	-	-	-	-	-	-	-	-	5	4.5	4.1	7.5	6.8	6.1
1800	-	-	-	-	-	-	-	-	-	-	-	-	6.5	5.9	5.3
2000	-	-	-	-	-	-	-	-	-	-	-	-	5.8	5.2	4.7
2200	-	-	-	-	-	-	-	-	-	-	-	-	5.3	4.8	4.3
2400	-	-	-	-	-	-	-	-	-	-	-	-	4.8	4.3	3.9

江土重工
JIANGTU HEAVY INDUSTRY

挖掘机割草机
EXCAVATOR FLAIL MOWER

适用对象

挖掘机带正反转的割草机非常适合高效地修剪和粉碎植被及杂草。



产品特点

●安装换向阀，可更换打草方向，减少刀片磨损；

●地脚可调节，草茬高度可根据打草要求进行调节；

●轴长覆盖600-1800mm 多尺寸，满足3-22吨不同级别挖机使用。

Applications

The Jiangtu flail mower is ideal for efficiently cuting and shredding vegetation and weeds.

Main features

●Install reversing valve, can change the direction of cutting,reduce blade wear.

●The footing can be adjusted, and the stubble height can be adjusted according to the requirements of weeding.

●The shaft length can be made of 600 to 1800mm multiple sizes, which can meet 3ton to 22 ton different excavators.








类别/ Category		Unit	JTL-70	JTL-80	JTH-100	JTH-120	JTH-140	JTH-160	JTH-180
轴长	Shaft Length	mm	600	800	1000	1200	1400	1600	1800
产品尺寸	Product Size	mm	820*470*620	1040*530*650	1260*630*820	1460*630*900	1720*650*980	1920*650*1030	2160*620*1100
马达流量	Motor Flow	L/min	36	36	36	36	88	120	240
转数	Revolutions Per Minute	r/min	2500-3000	2500-3000	2500-3000	2500-3000	2500-3000	2500-3000	2500-3000
重量	Weight	kg	120	132	230	300	418	500	552
刀片数量	Number of Blades	group	10	14	18	22	24	28	32
适配挖机	Suitable Excavator	ton	1-3	3-5	5-6	6-10	10-15	10-18	20-22

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

挖掘机开荒机
EXCAVATOR MULCHER



适用对象

挖掘机开荒机是一种液压属具，用于高效地切割、粉碎和处理树木、灌木、丛生植物及其他植被。

产品特点

●皮带传动，有缓冲功能，持久耐用；

●内部刀轴和刀头可任意搭配；

●效率高，应用广泛。

Applications

An excavator mulcher is a hydraulic attachment designed to mount on an excavator for efficiently cutting, shredding, and mulching trees, brush, shrubs, and other vegetation.

Main features

●Belt drive, with buffering function,durable and long-lasting.

●The internal blade shaft and blade head can be freely combined.

●High-Efficiency mulching for diverse applications.





类别/ Category		Unit	JTL-70	JTL-80	JTH-100	JTH-120	JTH-140
长度	Length	mm	1030	1030	1300	1660	1860
宽度	Width	mm	780	780	670	780	800
高度	Height	mm	850	850	840	860	1020
割副	Cut Width	mm	700	800	1000	1400	1600
重量	Weight	Kg	320	380	480	645	720
刀片数量	Number of Blades	group	16	18	24	34	38
马达流量	Motor Flow	L/min	36	36	69	96	240
传动方式	Transmission Mode		Direct Connection	Belt	Belt	Belt	Belt
转数	Revolutions Per Minute	r/min	2500-3000	2500-3000	2500-3000	2500-3000	2500-3000
适配挖机	Suitable Excavator	ton	2-5	3-5	6-8	12-15	20+

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工
JIANGTU HEAVY INDUSTRY

铣挖机 Drum Cutter





产品特点

●铣刀适用范围广：不同型号的铣刀可适应不同硬度的地层，也可铣削不含钢筋或少量钢筋的混凝土。

●减少振动，保护环境：可替代爆破施工，振动、噪音低，能更好地保护环境；

●开挖面精准控制：更好解决超挖欠挖问题，精确修整开挖轮廓，有利于降低成本；

●安全性好：在软岩或破碎岩层中使用铣挖机可以代替人工挖掘，使施工人员可以离开工作面，减少施工人员在挖掘过程中遇到前方落块和塌方的危险， 提高隧道施工安全性；

●结构简单、使用方便、价格相对低廉：可安装在任何现有挖掘机上，无需特殊配套设备。与隧道、盾构等机械相比，该设备价格便宜；

Main features

●Wide range of Drum Cutter: different types of Drum Cutters can adapt to strata with different hardness, and concrete without steel bars or with a small amount of steel bars can also be milled.

●Reduce vibration and protect the environment: it can replace blasting construction, has low vibration and noise, and can better protect the environment.

●Accurate control of the excavation surface: it can better solve the problems of over-excavation and underexcavation, accurately trim the excavation contour and help reduce costs.


●Good safety: the use of Drum Cutters in soft rock or broken rock formations can replace manual excavation, so that construction personnel can leave the working face and reduce the danger of falling blocks and collapses encountered by construction personnel in front of them during the excavation process , to improve the safety of tunnel construction.

●Simple structure, easy to use, and relatively low price: it can be installed on any existing excavator without special supporting equipment. Compared with tunnels, shields and other machinery, the equipment is cheap.







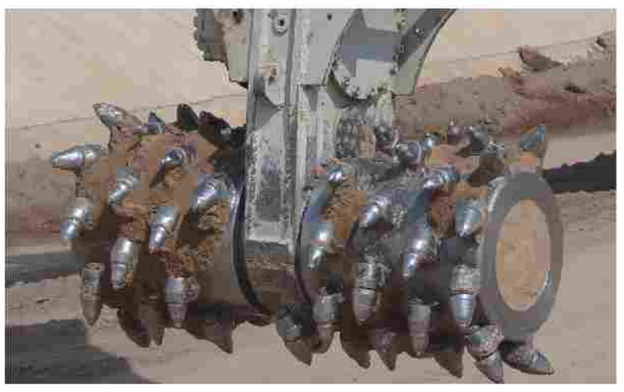

类别/ Category		Unit	JT04	JT06	JT08	JT10
马达排量	Engine Displacement	ml/r	398	1340	2099	4198
转速	Speed Range	r.min	0-90	0-130	0-85	0-140
最大供流量	Max Flow Rate	L/min	47	174	280	580
额定压力	Rated Power	Mpa	28	25	25	30
最大压力	Max Pressure	Mpa	40	30	35	45
最大扭矩	Max Torque	N.m	3200	5200	12800	23500
最大功率	Max Power	kw	40	55	70	110
刀头数量	Number of Cutting Heads	pcs	32	36-56	56	76
重量	Weight	kg	210	760	1650	2000
适应挖机	Excavator Weight	ton	3-10	12-18	20-25	30-40
刀头型号	Cutter Head Type		20-22	22-24	30	30-35

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com

江土重工 JIANGTU HEAVY INDUSTRY

挖机液压吸盘 HYDRAULIC MAGNET



适用对象

用于建筑搬迁、钢厂、废钢铁等行业的钢铁及导磁性材料的分检、调运。

产品特点

●安装简单、操作方便、故障率低；无噪音，满足环保要求；

●励磁线圈经特殊工艺处理，提高了线圈的电气和机械能，增强材料耐热等级达到了C级，使用寿命更长。

Application

Used for construction relocation, steel mills, scrap steel and other industries of steel and magnetic materials sorting, distribution and transportation.

Main features

●Simple installation, convenient operation, low failure rate, no noise, meet environmental protection requirements.

●The excitation coil has been treated with a special process to improve the electrical and mechanical energy of the coil. The heat resistance level of the reinforced material has reached level C, and the service life is longer.





类别/ Category		Unit	JT-1200	JT-1200T	JT-1300	JT-1300T
尺寸	Overall size	mm	1200*1150	1400*1200*1150	1300*1150	1500*1300*1150
磁力	Magnetic force	gs	6000(8000)	6000(8000)	8000(10000)	8000(10000)
液压油压	Hydraulic pressue	bar	200	200	200	200
油流量	Oil flow	lpm	60	60	60	60
功率	Power	w	15000	15000	20000	20000
适配挖机	Suitable Excavator	ton	18-25	18-25	25-35	25-35
设备重量	Weight	kg	1750	1850	1900	2050

挖机电磁铁 EXCAVATOR ELECTORMAGNET

适用对象

适用于废铁厂，接触器更换方便，延时开关自动断电。

产品特点

●起重能力高，自重轻；

●功耗低，使用寿命长。


Application

Suitable for scrap iron factories, contactors are easy to replace, delay switch automatically power off.

Main features

●High lifting capacity, light self-weight.

●Low power consumption, long service life.

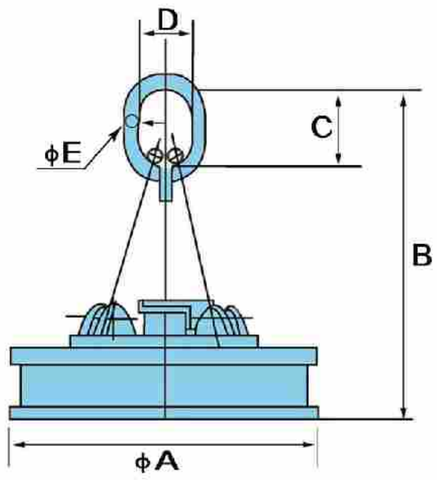






类别/ Category			Unit	JEM-110	JEM-120	JEM-130	JEM-150	JEM-165	JEM-180
外形尺寸 Size		A	mm	1100	1200	1300	1500	1650	1800
		B	mm	1400	1180	1240	1250	1590	1490
		C	mm	220	220	250	350	370	370
		D	mm	150	150	175	210	230	230
		E	mm	45	45	50	60	75	75
	重量	Weight	kg	1100	1380	1700	2209	2671	3260
电力及起重能力 Prower& lifting capacity	定电压方式 Rated voltage	冷态功率 Cold Power	kw	6.1	7.4	9	11.3	12.2	16.3
		冷态电流 Cold Current	A	27.7/18	33.6/21.9	40.9/26.6	51.4/33.4	55.5/36	74.1/48.2
		大钢锭 Big Steel Ingot	kg	6500	7500	8500	11000	12500	14500
		铸铁锭 Cast Iron Ingot	kg	1000/800	1200	1400/110	1900/1500	2300/1800	2750/2100
		切屑 Cuttings	kg	450/400	600	700/600	1100/900	1300/1100	1600/1350
	强励磁方式 Enforced Magnetic Force	功率(冷、热) Porwer(cold,hot)	kw	13.4/6.4	--	20.7/9.8	27.2/12.9	28.7/13.6	39.1/18.6
		电流(冷、热) Current(cold,hot)	A	46.3/32	--	71.3/49	93.8/64.7	98.9/68.2	135/93
		铸铁锭 Cast Iron Ingot	kg	1050/900	--	1500/1250	2000/1700	2500/2100	2900/2400
设备成套性 Supporting facillty		配电柜尺寸 Distribution Box Size	cm	110*60*38	110*60*38	100*60*38	110*60*38	110*60*38	128*65*35
		配电柜重量 Distribution Weight	kg	41	41	48	48	48	42
		电缆卷筒重量 Wire Harness Weight	kg	63	63	80	80	80	97
		电缆线型号 Wire Harness Modle		2*10²	2*10²	2*16²	2*16²	2*16²	2*25²
	总重量	Total Weight	kg	1204	1484	1836	2337	2799	3399

江土重工
JIANGTU HEAVY INDUSTRY

铲斗夹 THUMB BUCKET

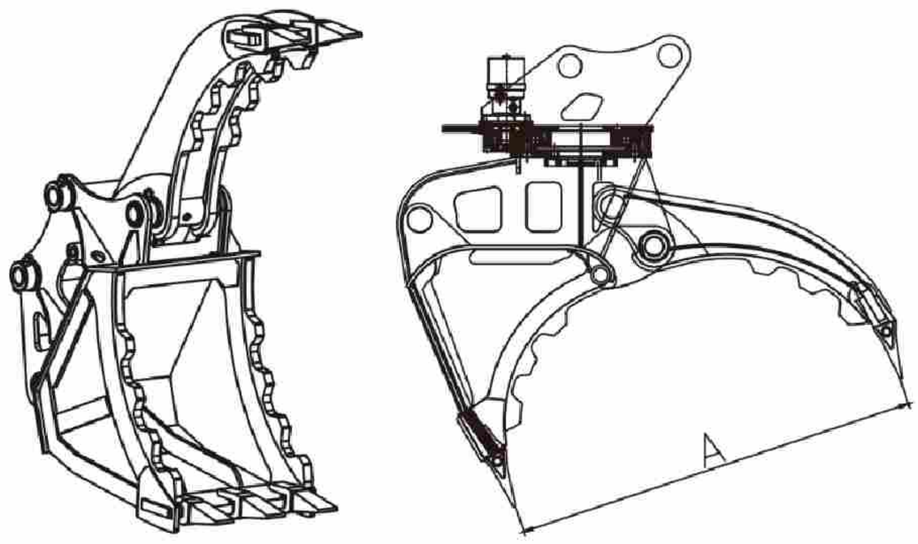

适用对象

建筑垃圾、生活垃圾等杂物的清理装卸，岩石抓斗、工程抓。

产品特点

●更先进的一体式垃圾清理斗，岩石装卸抓斗等；
●耐磨板材设计，更耐磨，使用更持久。

Application

Construction wastes and solid wastes sorting.
Digging and cleaning jobs.

Main features

●Advanced integrated bucket for rock handling and scraps cleaning.
●Abrasion resistant steel, durable in use.





类别/ Category	Unit	JT-00	JT-01	JT-02	JT-04	JT-06	JT-08	JT-10
斗宽 Bucket Width	mm	300	350/400	400	400	530	700	1000
开档A (Max Jaw Opening)	mm	770	900	1335(1300)	1335	1800	2275	2300
工作压力 Working Pressure	bar	80-120	90-150	120-160	120-160	150-170	168-180	180-200
油缸推力 Oil Cylinder Thrust	ton	1.8-2.7	2.9-4.9	6-8	6-8	11.7-13.3	21.2-23.8	27-30
工作流量 Operating Flow	lpm	20-30	25-35	50-100	50-100	90-110	100-140	140-160
适配挖机 Suitable Excavator	ton	1.5-3	3-4	4-6	6-9	9-16	17-23	25-30
设备重量 Weight	kg	90-120	156	280-330(245-260)	280-330	730	1185-1260	1420



标准斗
GP Bucket



栅栏斗
Skeleton Bucket



耙子
Rake



倾斜斗
Tilt Bucket



松土器
Ripper



起重叉
Lifting Fork

质量为先　诚信为本　服务至上
QUALITY FIRST, SERVICE FOREMOST

www.jtzgy.com
www.jtattach.com