


应用于食品行业的振动电机



多种解决方案
专用于食品加工应用

外表不锈钢材质

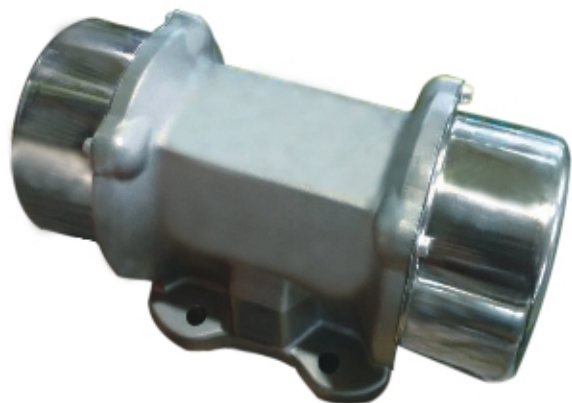

耐腐蚀



不锈钢端罩



合适的解决方案



表面光滑



防水防潮



接线盒保护



OLI-WOLONG
Vibration Equipment

随时随地 如您所需

WWW.OLI-WOLONG.COM







MVE-SS不锈钢系列三相振动电机技术参数 (380V/50Hz)

型号	激振力		输出功率	电流	重量	机座号
Type	Force		Current	Output Power	Weight	Size
	kg	kN	kW	A	kg	
MVE200/15N-SS-30A0	183	2	0.06	0.49	18.8	30A0
MVE500/15N-SS-40A0	518	5	0.25	1.06	30.4	40A0
MVE200/1N-SS-40A0	185	1.8	0.05	0.65	28.8	40A0
MVE150/075N-SS-40A0	105	1	0.08	1.14	28.7	40A0
MVE1300/3N-SS-50A0	1386	13	1.1	2.44	36.2	50A0
MVE1100/15N-SS-50A0	1045	11	0.4	1.4	48.0	50A0
MVE510/1N-SS-50A0	510	5	0.37	1.22	47.4	50A0
MVE400/075N-SS-50A0	264	2.5	0.12	0.90	47.5	50A0

型号	A	B	C	D	E	F	ΦG	H	I	L	M	ΦN	电缆接头
Type													
MVE200/15N-SS-30A0	90	125	298	156	157	17	13	82	150	170	64	132	M20X1.5
MVE500/15N-SS-40A0	105	140	333	170	205	14	13	92	174	177	78	156	M20X1.5
MVE200/1N-SS-40A0	105	140	333	170	205	14	13	92	174	177	78	156	M20X1.5
MVE150/075N-SS-40A0	105	140	333	170	205	14	13	92	174	177	78	156	M20X1.5
MVE1300/3N-SS-50A0	120	170	325	208	224	18	17	96	185	197	64	167	M20X1.5
MVE1100/15N-SS-50A0	120	170	453	208	224	18	17	96	185	197	128	167	M20X1.5
MVE510/1N-SS-50A0	120	170	453	208	224	18	17	96	185	197	128	167	M20X1.5
MVE400/075N-SS-50A0	120	170	453	208	224	18	17	96	185	197	128	167	M20X1.5

注：380V是指“Y”型接法。

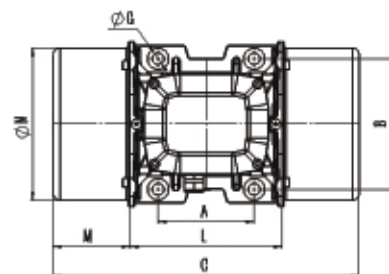

外表不锈钢材质



表面光滑

AISI316材质的机座和AISI304材质的端罩都采用便于清洁的设计



防水防潮

良好的密封性可以防水和防潮



接线盒保护

在电机底脚底部设计有接线盒保护 (小尺寸系类)