



EPDM Elbows

Description: 90° and 45° EPDM air intake elbow that complies with the increased expectations of modern diesel and gas powered engines. Available for OEM and aftermarket applications.

- Specifically formulated EPDM compound.
- Available in nitrile and chloroprene and silicone compounds.
- Vacuum collapse rating exceeds 4" Hg. mercury.
- Recommended for temperatures: -60°F to +300°F duty.
- Complies with physical properties requirements of ASTM D2000 3BA715A14B13C12F17; 70 ±5 Shore A hardness, 1500 PSI Tensile, min., 250% Elongation, minimum, Air age, 70 Hrs. at 100 degrees C, Durometer Change, +10, max., Tensile Change, -25%, max., Elongation Change, -25%, max., Comp. Set, Method B, at 70 degrees C. 25% max., Ozone Resistance, D1171, Method B, Quality Retention Rating: 100%, Low Temp. Brittleness, D2137, Method A. Non Brittle After 3 Min. at -40 degrees C.

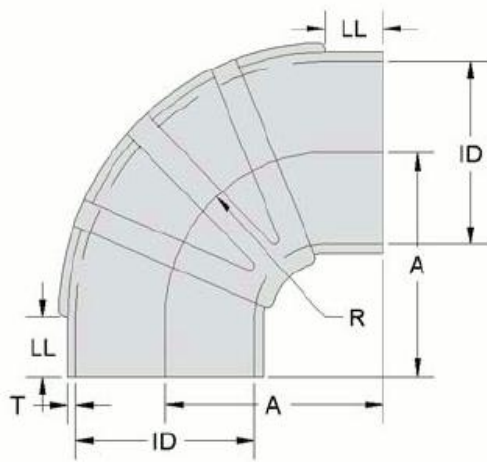

Part #	ID	A	LL	R	T
90L20	2	3.5	1.5	2	0.2
90L225	2.25	3.75	1.5	2.25	0.2
90L25	2.5	4	1.5	2.5	0.25
90L30	3	5.25	1.5	3.75	0.25
90L35	3.5	5.5	2	3.5	0.25
90L40	4	5.75	1.25	4.5	0.25
90L40SR	4	5.75	2.75	3	0.25
90L45	4.5	5.5	2	3.5	0.25
90L50	5	6.12	1.62	4.5	0.25
90L55	5.5	6.5	1.75	4.75	0.25
90L60	6	6.75	1.75	5	0.25
90L60SR	6	5	1.62	3.5	0.25
90L65	6.5	7.62	2	5.56	0.31
90L70	7	7.56	2	5.56	0.31
90L80	8	8.5	2	6.5	0.37
90L100	10	10.5	2	8.5	0.37

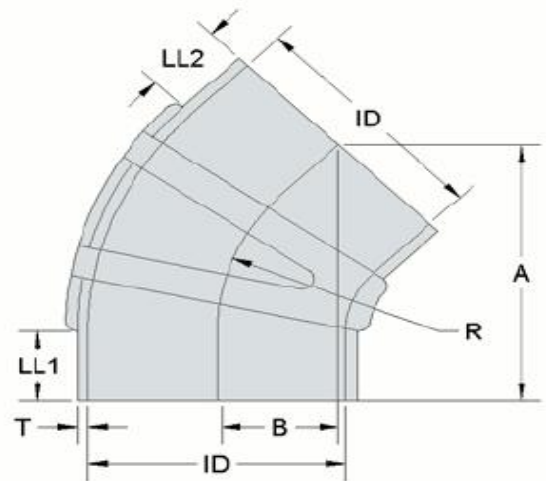


Part #	ID	A	B	LL1	LL2	R	T
45L20	2	4	1.65	1.52	1.51	2	0.2
45L225	2.25	4.12	1.72	1.5	1.47	2.25	0.2
45L25	2.5	4.31	1.79	1.5	1.48	2.5	0.2
45L30	3	5.5	2.28	1.6	1.6	3.75	0.25
45L35	3.5	5	1.88	1.68	1.2	3.5	0.25
45L40	4	5.5	2.34	1.46	1.46	4.25	0.25
45L45	4.5	5.03	2.08	1.5	1.5	3.5	0.25
45L50	5	5.5	2.28	1.36	1.36	4.5	0.25
45L55	5.5	6.25	2.6	1.7	1.7	4.75	0.25
45L60	6	6.5	2.69	1.74	1.74	5	0.25
45L70	7	8	3.31	2.34	2.34	5.56	0.31
45L80	8	8.06	3.34	2.03	2.03	6.5	0.37
45L100	10	10.5	4.35	2.63	2.63	8.5	0.37


4” 也有不帶筋的

Custom-cut lengths available.

EPDM - 45° and 90° Reducing Elbows

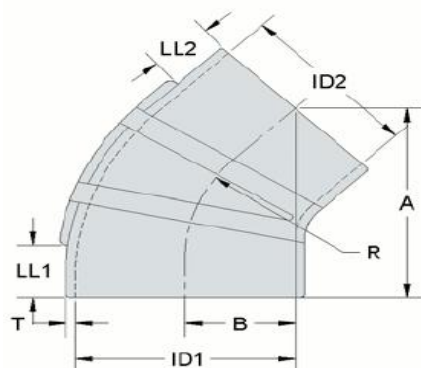

45° Reducing Elbow

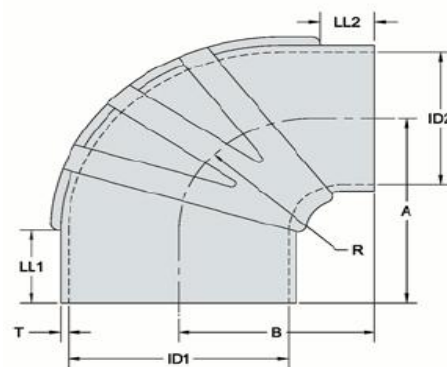

90° Reducing Elbow



Description: 45° and 90° EPDM air intake reducing elbow that complies with the increased expectations of modern diesel and gas powered engines.

- Specifically formulated EPDM compound.
- Available in nitrile and chloroprene and silicone compounds.
- Vacuum collapse rating exceeds 4" Hg. mercury.
- Recommended for temperatures: - 60°F to +300°F duty.
- Complies with ASTM D2000 3BA715A14B13C12F17; 70 ±5 Shore A hardness, 1500 PSI Tensile, min., 250% Elongation, min., Air age 70 Hrs. at 100° C, Durometer Change, +10, max., Tensile Change, -25%, max., Elongation Change, -25%, max., Comp. Set, Method B, at 70° C. 25% max., Ozone Resistance, D1171, Method B, Quality Retention Rating: 100%, Low Temp. Brittleness, D2137, Method A. Non Brittle After 3 Min. at -40 degrees C.

Part #	ID1	ID2	A	B	LL1	LL2	R	T
45L60R40	6	4	9.3	-	1.5	1.5	5	0.28
45L60R50	6	5	6.44	2.61	2.06	1.56	4.88	0.25
45L60R55	6	5.5	6.44	2.61	2.02	1.57	4.88	0.25
45L70R50	7	5	7.25	3.5	2	2	5.31	0.31
45L70R60	7	6	7.25	3.5	2	2	5.31	0.31
90L30R20	3	2	3	3	1	1	2	0.25
90L30R236	3	2.36	3	3	0.68	1	2	0.25
90L30R25	3	2.5	3	3	1	1	2	0.25
90L30LR25	3	2.5	3	5	1	2.75	2	0.25
90L35R30	3.5	3	3.25	3.5	1	1	2.25	0.25
90L40R275	4	2.75	6.5	1.81	1.53	1.06	1.38	0.25
90L40R30	4	3	4.5	3.62	1	0.62	3	0.25
90L40R35	4	3.5	4.5	3.62	1.25	0.62	3	0.19
90L50R40	5	4	5.75	6	1.75	1.75	3.75	0.25
90L50R40SR	5	4	8.25	3.63	1.75	1.5	3.75	0.31
90L55R35	5.5	3.5	6	4.88	2	1.37	4.35	0.31
90L55R40	5.5	4	8	3.63	2.25	1.25	2.3	0.19
90L55R50	5.5	5	5.2	6.5	1.18	2.5	4	0.25
90L60R40	6	5	7	6	1.75	1.75	4.25	0.25
90L60R50	6	5	7	6	1.75	1.75	4.25	0.25
90L60R50SR	6	5	4.75	4.75	1.25	1.75	3.5	0.25
90L60R55SR	6	5.5	5	5	1.38	1.63	3.5	0.25
90L60R55SR	6	5.5	6.7	6.7	1.5	1.75	5	0.25
90L70R50	7	5	7	6.25	2.74	1.75	4.25	0.25
90L70R55	7	5.5	5.75	6.25	1.5	1.5	3.68	0.31
90L70R60	7	6	7.5	9	3	4.5	4.38	0.38
90L80R70	8	7	8.5	8.5	2	2	6.5	0.42

Custom-cut lengths available.


Single Hump EPDM



Description: Single Hump EPDM provides standard connections for an air intake system that require articulation or vibration isolation.

Feature Benefits


- Specifically formulated EPDM compound.
- Available in nitrile and chloroprene and silicone compounds.
- Vacuum collapse rating exceeds 4" Hg. mercury.
- Recommended for temperatures: -60°F to +300°F duty.
- Complies with physical properties of ASTM D2000 3BA715A14B13C12F17.

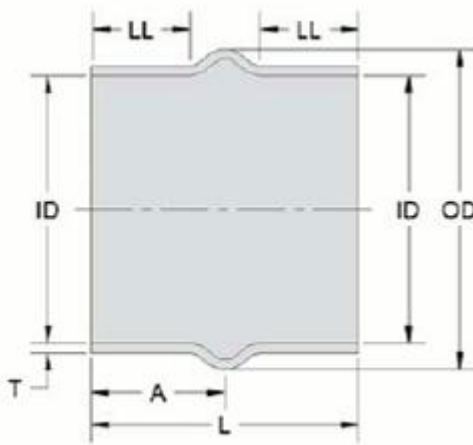

Part #	ID	L	A	LL	OD	T
25H25	2.5	3.5	1.75	1.1	3.65	0.2
3H3	3	5.25	2.62	1.87	4.5	0.25
35H35	3.5	5.25	2.62	1.92	5	0.25
4H4	4	5.25	2.63	2	5.25	0.25
45H45	4.5	6	3	2.32	5.88	0.25
5H5	5	6	3	2.25	6.1	0.25
55H55	5.5	6	3	2.13	7	0.25
6H6S	6	4	2	1.32	7.38	0.25
6H6	6	6	3	2.25	7.38	0.25
6H6L	6	7	3.5	2.75	7.38	0.25
65H65						0.25
7H7	7	7	3.5	2.58	8.3	0.25
8H8S	8	5	2.5	1.35	10	0.31
8H8	8	8	4	2.86	10	0.28
10H10	10	6	3	1.67	12.2	0.25

6.5寸也有

Reducing Hump EPDM

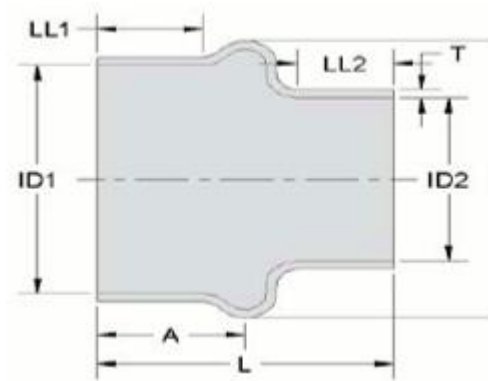

Part #	ID1	ID2	L	A	LL1	LL2	OD	T
3H236	3	2.36	6	3	2.35	2.25	4.25	0.25
3H25	3	2.5	4.5	2.25	1.6	1.51	4.25	0.25
3H275	3	2.75	3.5	1.75	1.09	1.06	4.38	0.25
35H25	3.5	2.5	6	3.13	2	2	5	0.25
35H275	3.5	2.75	4	2.25	1.59	1.06	4.88	0.25
35H3	3.5	3	5	2.5	1.79	1.75	5	0.25
4H275	4	2.75	4	1.75	1.57	1.06	5.5	0.25
4H3	4	3	5.25	2.63	1.94	1.88	5.38	0.25
4H35	4	3.5	5.25	2.63	1.94	1.88	5.38	0.25
45H4	4.5	4	6	3	2.13	2.03	6	0.25
5H4	5	4	6	3	2.13	1.81	6.25	0.25
55H4	5.5	4	6	3	2.13	1.88	7	0.25
55H5	5.5	5	6	3	2.13	1.88	7	0.25
6H5	6	5	6	3	2.13	1.88	7.5	0.25
6H55	6	5.5	6	3	2.13	1.88	7.5	0.25
7H5	7	5	7	3.5	2.5	2.28	8.5	0.25
7H55	7	5.5	7	3.5	2.5	2.28	8.5	0.25
7H6	7	6	6	2.75	2.25	1.53	8.5	0.25
8H55	8	5.5	7.05	3.5	2.5	2.25	9.6	0.25
8H6	8	6	6	3	2	1.75	9.6	0.25
8H7	8	7	6	3	2	1.78	9.5	0.25
10H8	10	8	6	3	2	1.75	11.6	0.25