



品质改变世界

QUALITY CHANGES THE WORLD

无锡天原力机械有限公司
Wuxi G-force Machinery.,LTD

电话: 0510-83341001
手机: 18012470688 / 18151513827
邮箱: sl_yu_zhu@163.com
网址: www.wx-tyl.com
地址: 江苏省无锡市惠山区滨神路5号

 天原力机械
G-Force Machinery

 天原力机械
G-Force Machinery

品质改变世界 | QUALITY CHANGES THE WORLD



混凝土输送缸
CONCRETE PUMP CYLINDER

中国·无锡



持续改善、精益求精

Continuous improvement, strive for perfection

混凝土输送缸制造的领跑者

企业简介

Company Profiles

无锡天原力机械有限公司座落于美丽的太湖之畔无锡市惠山区,这里人杰地灵,有美丽的自然风光,交通十分便利。是一家专业生产混凝土输送缸的企业,公司主要产品:各种规格混凝土输送缸、耐磨套、高中低压油缸。主要服务于工程机械、矿山机械、建筑机械、冶金机械等行业。产品加工工艺先进,质量稳定,深得用户信赖,已和长沙,武汉,厦门,广州等各个城市的企业配套并且取得了很好的口碑。公司配有精良的工程技术人员,有着非常丰富的从业经验。

本公司拥有一流的生产设备,完善的检测手段,适应环保要求,采用先进技术开发生产的更新替代产品,技术质量指标达到国际标准,追求用户至上,顾客满意的经营理念,公司还正处于不断的扩大和自我更新中,所以相信不断的自我进取和学习中的我们,能为大家带来更加好的产品一如既往的好质量。

公司的宣传语是“安全第一、质量第一,信誉第一,合作共赢”。精心打造“天原力”品牌,真诚欢迎各地新老客户来公司洽谈订货。我们以严谨高效的生产管理模式,创造卓越品质。

Wuxi day force machinery co., LTD is located in the side of beautiful taihu lake in wuxi city mountain, here, here, there are beautiful natural scenery, the traffic is very convenient. is an enterprise specializing in the production of concrete cylinder, the company main products: all kinds of concrete conveying, wear resistance, high and low pressure oil cylinder. Mainly in the service of engineering machinery, mining machinery, construction machinery, metallurgical machinery and other industries. Advanced processing technology, product quality is stable, deeply trusted by the user, and changsha, wuhan, xiamen, guangzhou and other cities supporting enterprises and achieved a good reputation. Company is equipped with a sophisticated engineering and technical personnel, has a very rich experience.

The company has first-class production equipment, perfect detection means, to adapt to the requirements of environmental protection, the use of advanced technology update substitute products development, production, technical quality indicators meet international standards, the pursuit of the user is supreme, customer satisfaction business philosophy, the company also is in constant expansion and self-renewal, so believe in constantly improving themselves and study in the us, can bring us more good products and good quality as always.

The company's slogan is "safety first, quality first, credit first, win-win cooperation". Elaborate "days of the force" brand, sincerely welcome all new and old customers to negotiate orders. With our rigorous and efficient production management mode, to create excellent quality.

天原力输送缸

- 自动环缝焊接
- 进口镀铬工艺
- 质量稳定
- 10万方寿命



产品特点

Product Feature

1. 精良铸造工艺, 先进生产设备, 产品质量稳定。
2. 原材料只选用天津大无缝钢管有限公司和中信泰富集团的优质热扎钢管。
3. 拥有自主配套的电镀厂, 厂内实行统一质量标准, 电镀铬层厚度控制为单边: 0.2-0.25mm。

质量保证

Quality Assurance

1. 产品质保方量10万方或者一年(自出厂之日起), 以先到为准。
2. 我公司每年都进行设备的更新换代, 采用最先进的设备, 保障加工的精准度, 保证产品尺寸精准。

安装方法

Installation Method

1. 每次更换输送缸前, 先清理干净料斗及洗涤室内部, 尤其注意安装口接连处。
2. 安装输送缸时, 拉杆螺丝遵循先中间再两侧对角拧紧的原则。
3. 拉杆螺丝拧到一半时, 接上所有油管及砗活塞密封体, 启动泵机20%排量空泵。
4. 空泵同时拧紧拉缸螺母, 同样遵循先中间后两侧对角拧紧的原则。
5. 如果安装有法兰的输送缸, 最后固定法兰螺母。

保养方法

Maintenance Method


1. 每天清洗更换洗涤室的水, 保持洗涤室清洁。
2. 保持输送缸润滑充分, 及时更换砗活塞密封体。
3. 当洗涤室的水出现浑浊, 有砂浆水漏到洗涤室内时, 应立即检查输送缸的活塞和缸体, 及时进行更换活塞密封体, 以免造成缸体拉伤。每次泵送前后应退出砗活塞检查, 清洗, 涂抹锂基脂。



生产车间
Production workshop



产品流程
The work flow

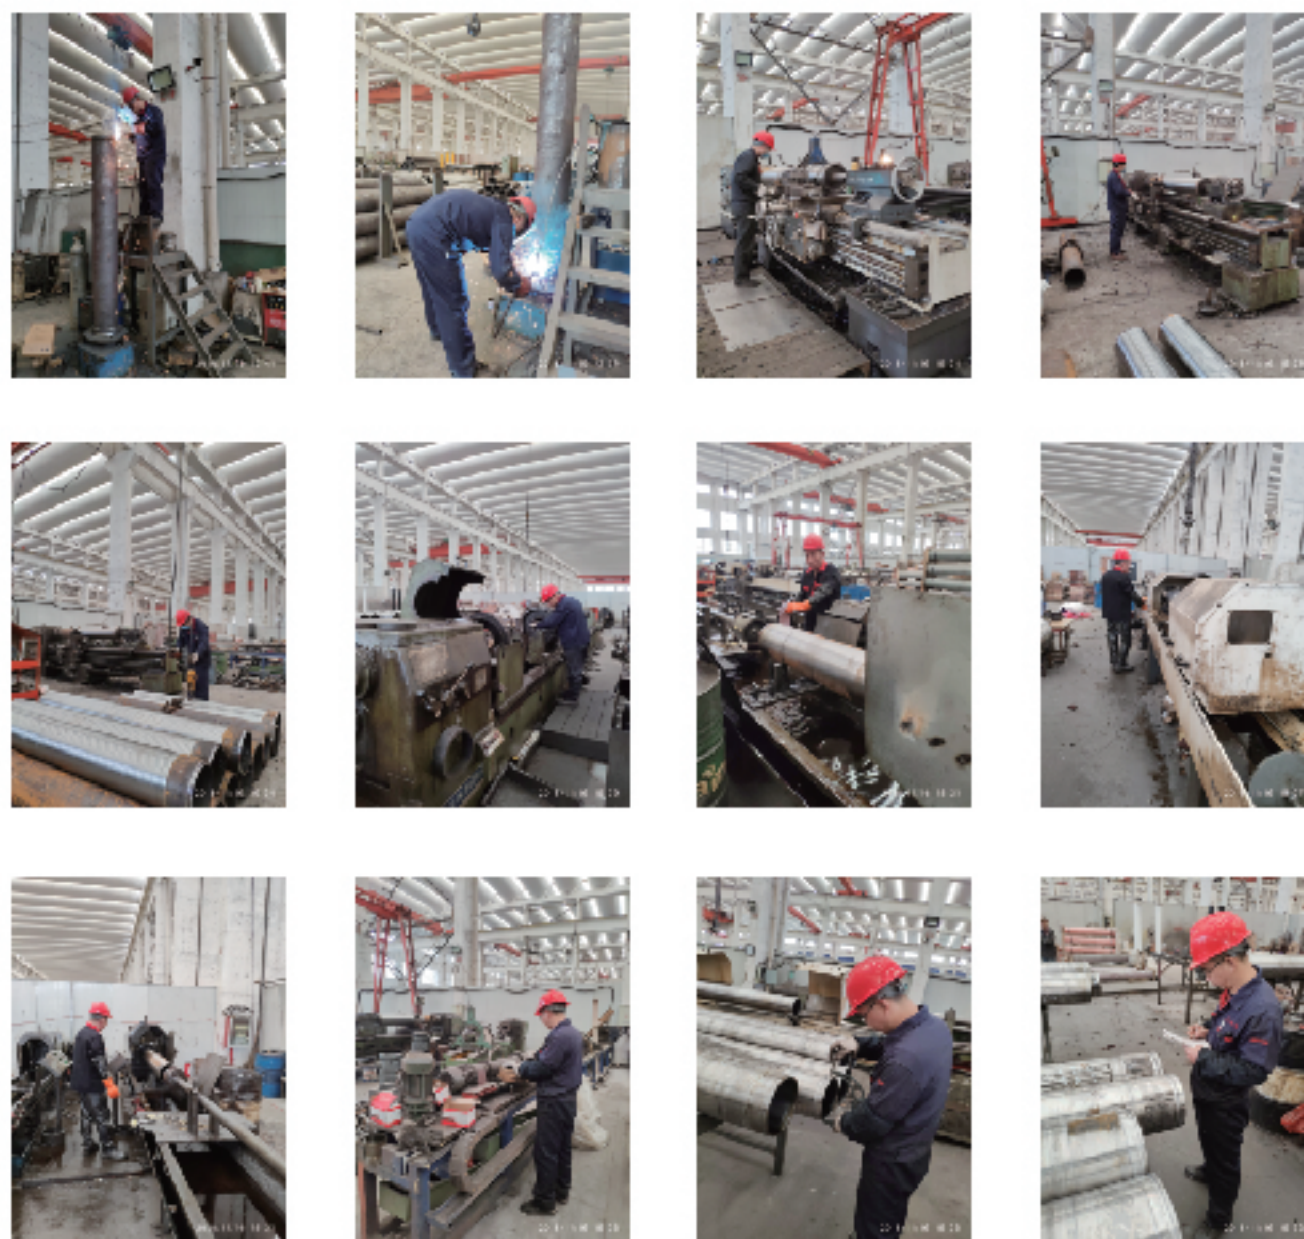


细心、精心、用心，品质永保称心！
Carefully, carefully and attentively, the quality be gratified!



产品展示
Product display



三一重工
Sany

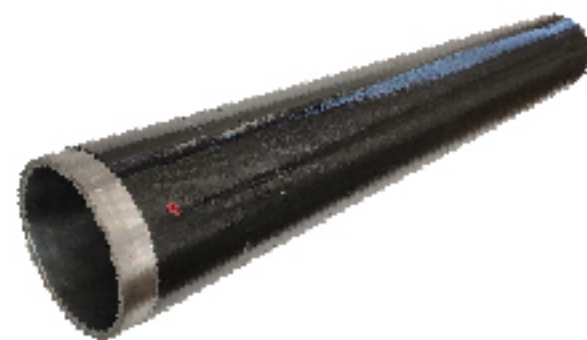

Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
280	260	2345	2200
280	260	2245	2100
280	260	2145	2000
280	260	2045	1900
258	230	2146	2000
258	230	1946	1800
258	230	1746	1600
226	200	1946	1800
226	200	1746	1600
226	200	1546	1400

中联重科
Zoomlion



Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
280	260	2250	2100
250	230	2250	2100
258	230	1800	1600
219	200	1960	1800
219	200	1800	1600
219	200	1587	1400

混凝土输送缸

混凝土输送缸



徐工
XCMG



Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
290	260	2342	2270
290	260	2142	2070
256	230	2245	2170
256	230	2145	2070
256	230	1745	1660
256	230	1945	1860
230	200	1745	1660

普茨迈斯特 (大象)
Putzmeister



Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
305	280	2355	2200
278	250	2710	2500
278	250	2310	2100
254	230	2320	2100
254	230	1600	1400
219	200	2305	2100
219	200	1585	1400
203	180	2305	2100

鸿得利
Hold-LiuGong



Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
290	260	2093	2025
290	260	2280	2210
273	250	2330	2280
252	230	1942	1900
252	230	1972	1900
252	230	2175	2100
222	200	1947	1900
222	200	1943	1900
222	200	1942	1900

施维英
Schwing



Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
270	250	2635	2500
270	250	2135	2000
251	230	2125	2000
251	230	2133	2000
253	230	1175	1000
219	200	2125	2000
219	200	1775	1600
210	180	2125	2000
203	180	2125	2000
202	180	1775	1600
200	180	1520	1400
196	180	1320	1200
200	180	1175	1000

日本极东
Kyokuto



Outer diameter 外径(Φmm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Travel 行程(mm)
245	225	2218	2100
245	225	1768	1600
225	205	2218	2100
225	205	1768	1600
230	205	1840	1700
225	205	1228	1000



国内专用

Domestic models

Inner diameter 内径(Φmm)	Length 长度(mm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Inner diameter 内径(Φmm)	Length 长度(mm)
110	320	160	1120	200	1165	230	1175
110	400	160	1120	200	1165	230	1175
120	316	160	1120	200	1165	230	1200
120	425	160	1122	200	1192	230	1226
120	510	160	1157	200	1200	230	1262
120	524	160	1164	200	1356	230	1496
120	530	160	1165	200	1370	230	1595
120	548	160	1170	200	1415	230	1606
120	598	160	1180	200	1454	230	1610
120	646	160	1187	200	1505	230	1610
120	646	160	1187	200	1605	230	1650
120	685	160	1200	200	1606	230	1768
120	1502	160	1200	200	1610	230	1785
120	1545	160	1335	200	1650	230	1795
140	513	160	1380	200	1764	230	1862
140	691	180	815	200	1775	230	1862
140	695	180	920	200	1785	230	1862
140	820	180	1102	200	1790	230	1935
140	945	180	1120	200	1800	230	1956
140	945	180	1120	200	1806	230	1962
140	945	180	1160	200	1810	230	1965
140	946	180	1165	200	1817	230	1985
140	965	180	1170	200	1817	230	2012
140	1000	180	1180	200	1821	230	2022
140	1075	180	1345	200	1946	230	2152
140	1120	180	1370	200	1946	230	2160
140	1120	180	1565	200	2020	230	2165
140	1145	180	1765	200	2021	230	2173.5
152	460	195	1376	200	2021	230	2176
160	290	195	1636	200	2060	250	1226
160	565	195	1640	200	2246	250	1265
160	700	200	410	205	1030	250	1415
160	918	200	580	205	2190	250	1615
160	975	200	580	210	1730	250	1626
160	977	200	977	220	1660	260	1265
160	987	200	992	225	1768	260	2368
160	1030	200	1146	225	2218	280	1583
160	1070	200	1160	230	977	360	2856
160	1080	200	1160	230	1165		

出口专用

Export models

Inner diameter 内径(Φmm)	Length 长度(mm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Inner diameter 内径(Φmm)	Length 长度(mm)	Inner diameter 内径(Φmm)	Length 长度(mm)
100	551	200	1785	180	2125		
100	900	200	1800	180	2125		
120	550	200	1800	180	1775		
120	673	200	1800	180	1520		
120	932	200	2060	180	1320		
125	1050	200	2260	180	1175		
130	490	203	1477.4				
150	1050	203	1524				
152.4	646	204.5	1228				
152.4	958.85	204.5	1840				
152.4	964.5	204.5	2218				
152.4	1187.45	204.6	1840				
152.4	1193	205	1228				
160	535	205	1300				
160	940	205	1390				
160	985	205	1537				
160	1172	205	1737				
160	1372	205	1768				
174.5	964.5	210	1230				
174.5	1194	220	1700				
174.6	958.85	220	2302				
174.6	1187.45	220	2330				
175	1194	225	1768				
178	1279	230	2160				
180	1103	280	2355				
180	1185	250	2710				
180	1585	250	2310				
180	1768	230	2320				
180	2247	230	1600				
195	910	200	2305				
195	1000	200	1585				
195	1570	180	2305				
195	1600	250	2635				
200	550	250	2135				
200	1204	230	2125				
200	1262	230	2133				
200	1426	230	1175				
200	1714	200	2125				
200	1760	200	1775				