

Building hoist

施工升降机

SC serial building hoist is a machinery for vertical transportation, driven by pinion and rack system, applied to passenger or material lifting at high rise construction sites, and it is efficient construction machinery for vertical transportation of building materials and personnel.





Product Series

Model	SC200	Erecting Payload(kg)	1500/1500	Mast Section (mm)	650x650x1508
Payload(kg)	2000	Cage Inner Size(m)	3.2x1.5x2.2	Lifting Speed(m/min)	0-60m/min
Motor Control	VFD	Max. Lifting Height(m)	250m	Power Supply(V)	3P,380V,60Hz
Motor Power (kw)	2x15	Rated Current(A)	2x32	Cage Weight(kg) (Inclu. Driving Unit)	1950
	3x11		3x24		
Safety Device	SAJ40-1.2	Inverter	Toshiba/Inovance Brand 55kw for 2x15kw motor, 75kw for 3x11kw motor		


SC200



Product Series

Model	SC200	Erecting Payload(kg)	1500/1500	Mast Section (mm)	650x650x1508
Payload(kg)	2000/2000	Cage Inner Size(m)	3.2x1.5x2.2	Lifting Speed(m/min)	0-60m/min
Motor Control	VFD	Max. Lifting Height(m)	250m	Power Supply(V)	3P,380V,60Hz
Motor Power (kw)	2-2x15	Rated Current(A)	2-2x32	Cage Weight(kg) (Inclu. Driving Unit)	1950
	2-3x11		2-3x24		
Safety Device	SAJ40-1.2	Inverter	Toshiba/Inovance Brand 55kw for 2x15kw motor, 75kw for 3x11kw motor		

SC200 200

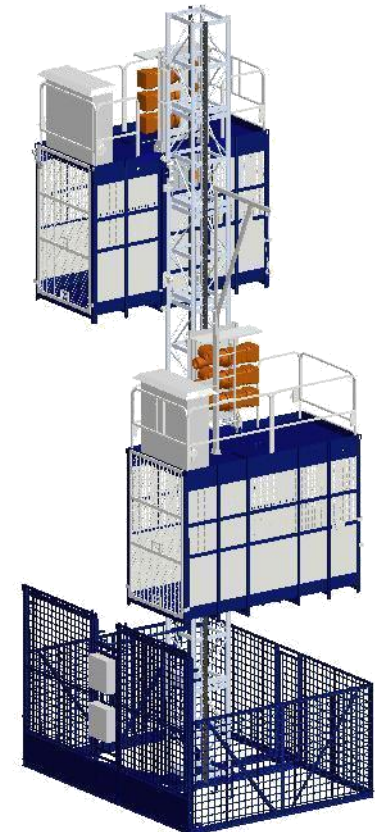

Application Cases

