

# ROCKSTER® TS250

## REVERSIBLE FAN

Included! Efficient engine cooling and cleaning for a significantly longer lifetime



## SHREDDING UNIT

Large-volume hopper with proven two-shaft system including reinforced quick change cassette



## WATER SPRINKLER

Included! Connection to reduce dust generation when the shredded material is discharged



## OVERBELT MAGNET

Included! Strong permanent magnet for effective Fe separation



## DRIVE

Powerful VOLVO PENTA 5 litre diesel engine for low fuel consumption and maximum efficiency





## SCU CONTROL SYSTEM

Including remote control and predefined shredding programs that adjust rotation and speed of shafts




## CRAWLER CHASSIS

Included! Guarantees optimum mobility on every surface; rubber tracked crawler systems optionally available

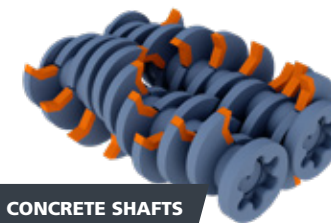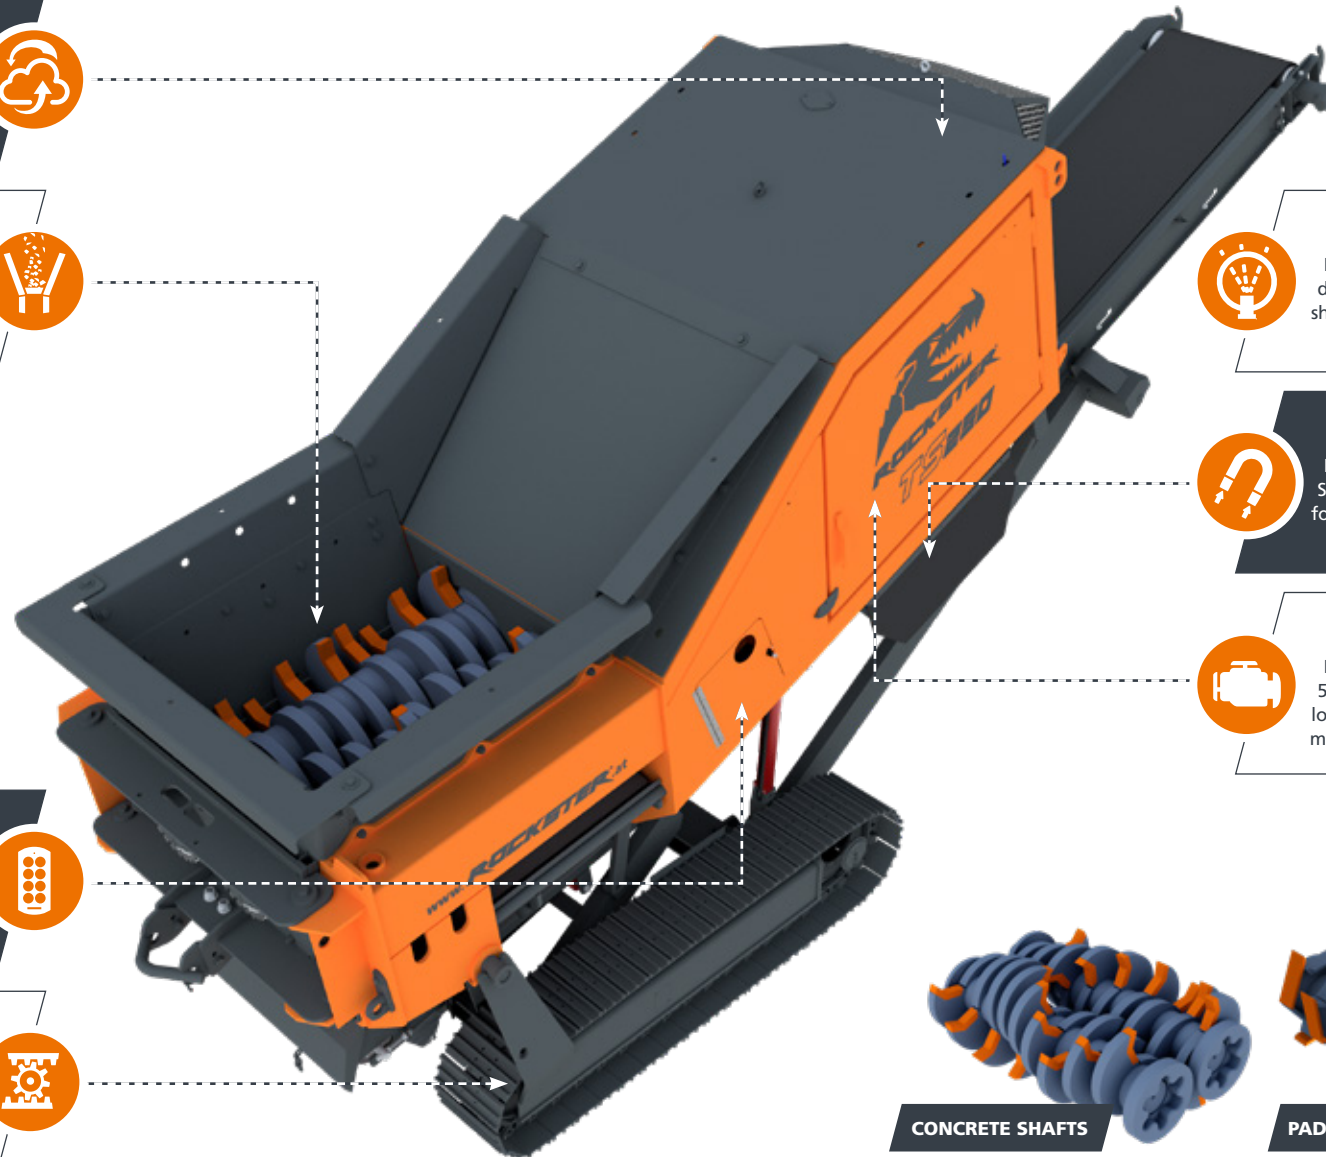

CONCRETE SHAFTS

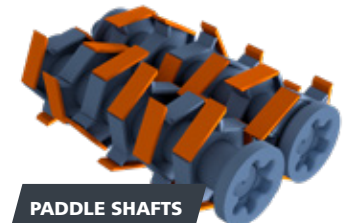

PADDLE SHAFTS




### Fields of application

- Construction & demolition waste
- Natural and waste wood
- Commercial waste
- Rubber and old tires
- Paper and cardboard



### Mechanically adjustable side combs

The side combs can be opened or closed, depending on material and customer requirements; decreasing the output size or increasing the throughput rate.

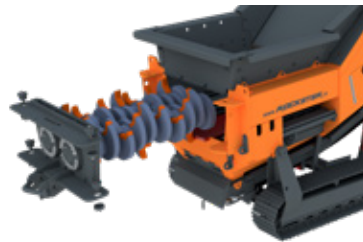

### Quick change system for tool shafts

Simplify maintenance, reprocessing and type change of your shredding shafts with an effortless mounting and dismantling of the pair of shafts in record time.



### Easy transport to any place of work

Due to the low empty weight and the hydraulically lowerable chassis, transport with hook lift attachment is possible without any problems.

## TECHNICAL DATA

DIMENSIONS	
Version	Crawler track system and hook lift
Length (mm)	7,800 / 7,200 (transport)
Width (mm)	2,300 / 2,300 (transport)
Height (mm)	3,700 / 2,600 (transport)
Total weight (kg)	15,000

DRIVE	EU / US	ROW*
Engine (Volvo Penta)	TAD 582 VE	TAD 551 VE
Emission standard	EU Stage V / EPA Tier IV	Stage III A
Power (kW/HP)	160/220	
Fuel capacity (l)	330	
Gearbox	Bonfiglioli	

DISCHARGE BELT	
Discharge height (mm)	3,100
Width (mm)	800
Included	Overbelt magnet and water sprinkler system

SHREDDING UNIT	
Hopper volume (m3)	2.25
Shaft length (mm)	1,500
Shaft diameter (mm)	680
Weight (kg / cassette)	3,100
Rotation speed (rpm)	38

\* Rest of the world (country-specific requirements);  
Disclaimer: We reserve the right to make technical changes, misprints; Status: August 2024