




TSL系列

额定耐压值：60bar

材 质：铝合金

基 材：硬度 < 280HB 工艺孔公差
需控制在 0/+0.12mm
硬度 ≥ 280HB 工艺孔公差
需控制在 +0.05/+0.15mm

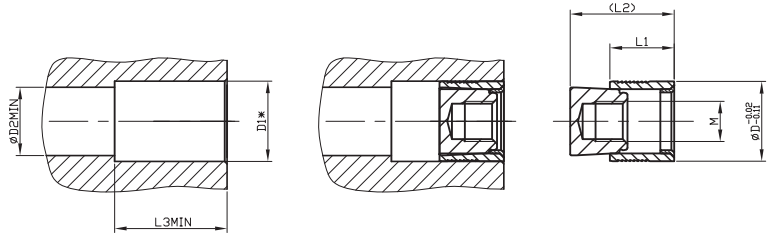

单位：毫米

产品型号	D ^{-0.02} _{-0.11}	L1±0.2	(L2)	M	D1*	L3 Min	D2 Min
TSL080	8.0	7.3	11.5	M4	8	13	6.8
TSL100	10.0	7.6	12.5	M5	10	14	8.5
TSL120	12.0	8	13.5	M6	12	14.5	10.5
TSL140	14.0	8.5	14.5	M6	14	15	11.9
TSL160	16.0	9	15.5	M8	16	16	14

承压性能

TSL系列 (MM)	工件基材						
	1 易削钢 ETG-100/44SMn28 AISI 1144	2 结构钢 C 15Pb 1.0403	3 灰铸铁250 EN-GJL-250 EN 1561	4 球铁250 EN-GJS-500-7 EN 1563	5 硬铝合金 AlCu4Mg1 EN AW-2024-T3	6 变铝合金 AlMgSiPb EN AW-6012-T6	7 铸铝合金 G-AlSi7Mg EN AC-42100/A356
Ø8-Ø16	180 bar/2600Psi			60 bar/850Psi			