

拆除分拣斗

适用对象:

各种大型、散装物料装卸或搬运作业。

主要特点:

采用NM450钢材，强度高、耐腐蚀；


采用进口旋转马达，360度双马达液压回转，扭矩更大，提供更灵活抓取效果；

油缸内置平衡阀，保持夹力，安全性更高；


油缸和控制连杆内置，外壳提供保护，保持抓取同步。




A型

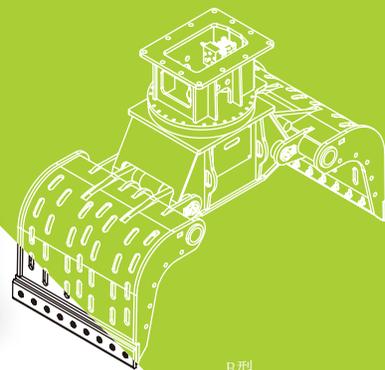


B型

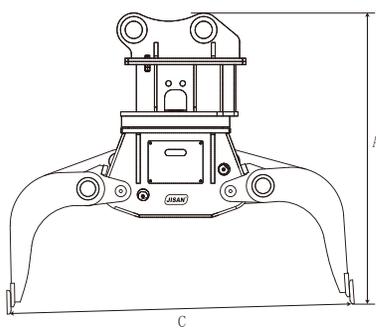


C



B

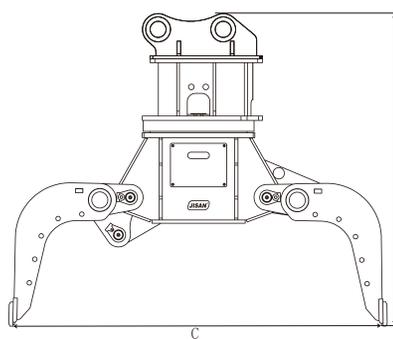

C



B



项目/型号	Unit	JSSG1400	JSSG1800	JSSG2200	JSSG2300	JSSG1400B	JSSG1800B	JSSG2200B	JSSG2300B
适用挖掘机	ton	5-9	9-16	18-26	28-35	5-9		18-26	28-35
重量	kg	530	1130	1880	2410	530		1880	2410
高度 A	mm	1370	1860	2130	2470	1370		2130	2470
宽度 B	mm	620	850	1100	1380	620		1100	1380
开口 C	mm	1400	1800	2200	2300	1400		2200	2300
工作压力	bar	200-240	220-260	240-280	240-280	200-240		240-280	240-280
工作流量	lpm	100	160	200-250	200-250	100		200-250	200-250
回转直径	mm	360	593	690	690	360		690	690