pneubig.com

PNEUMATIC & HYDRAULIC

WIN–WIN FUTURE

OVERVIEW OF THE GLOBAL





pneubig.com

Ningbo Pneubig Pneumatic Co.,Ltd.

ADD:NO.8 Tongzhou Road Xikou Industry Park,Ningbo City,315502,China
TEL:0086-13656747331 FAX:0086-574-88863007
Email:pneubig@pneubig.com sales@pneubig.com
MSN:adwin259@hotmail.com SKYPE:edwin259
www.pneubig.com

Ningbo Pneubig Pneumatic Co.,Ltd.

CE ISO9001:2000







pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Cylinder Kits

Model	Product	Specification	Model	Product	Specification
DNC Kits (ISO6431)		Bore size: ϕ 32,40, 50,63,80,100,125	SI Kits (ISO6431)		Bore size: ϕ 32,40,50, 63,80,100,125, 160,200
SQ Kits (ISO6431)		Bore size: ϕ 32,40, 50,63,80,100	DSN Kits (ISO6432)		Bore size: ϕ 8,10, 12,16,20,25
ADVU Kits		Bore size: ϕ 16,20, 25,32,40,50, 63,80,100	SC Kits		Bore size: ϕ 32,40,50, 63,80,100,125, ,200,250,320
MA/MAL Kits		Bore size: ϕ 16,20, 25,32,40	SDA Kits		Bore size: ϕ 12,16,20, 25,32,40,50,63,80,100


■ If you need different color for cylinder cover,pls inform us and we can produce according to your requirement.

Tube and piston rod for pneumatic cylinder

DNC Square Aluminum Tube		Bore size: ϕ 32,40,50, 63,80,100,125	SI/SQ Mickey Mouse Aluminum Tube		Bore size: ϕ 32,40,50, 63,80,100, 125,160,200
SC,MAL Round Aluminum Tube		Bore size: ϕ 16,20, 25,32,40,50,63, 80,100,125,160, 200,250,320	SDA Aluminum Tube		Bore size: ϕ 12,16,20,25, 32,40,50,63,80,100
DSN Stainless Steel Tube		Bore size: ϕ 8,10,12, 16,20,25,32,40	Piston rod		Bore size: ϕ 6,8,10,12, 16,20,25,32,40,45, 50,60,70,etc. Material:#45 and stainless steel



ISO 6431 Cylinder Accessories

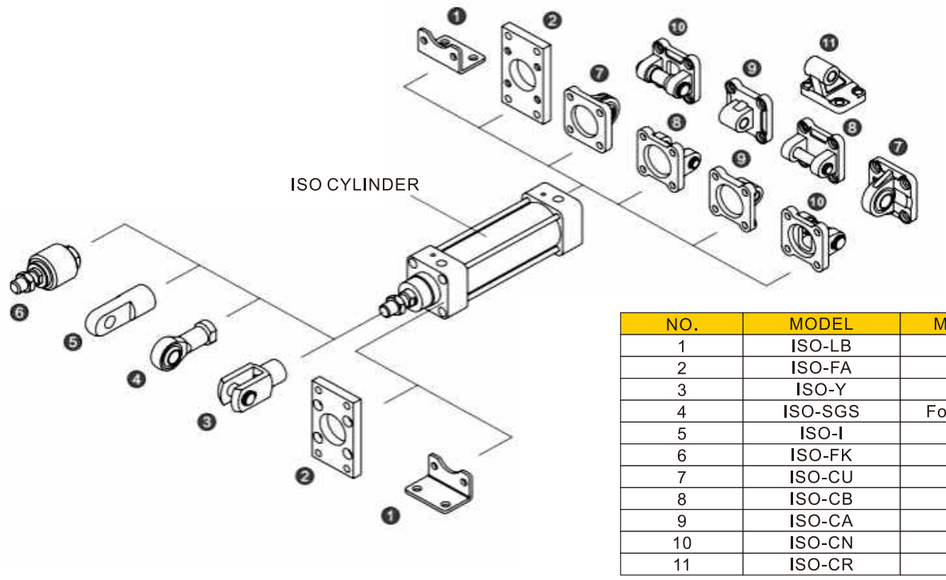

NO.	MODEL	MATERIAL
1	ISO-LB	STEEL
2	ISO-FA	STEEL
3	ISO-Y	STEEL
4	ISO-SGS	Forged Steel
5	ISO-I	STEEL
6	ISO-FK	STEEL
7	ISO-CU	ADC12
8	ISO-CB	ADC12
9	ISO-CA	ADC12
10	ISO-CN	ADC12
11	ISO-CR	ADC12

ISO-LB	ISO-FA	ISO-Y	ISO-SGS	ISO-I	ISO-FK
					
Ordering Code	Ordering Code	Ordering Code	Ordering Code	Ordering Code	Ordering Code
ISO-LB32	ISO-FA32	ISO-Y32	ISO-SGS32	ISO-I32	ISO-FK32
ISO-LB40	ISO-FA40	ISO-Y40	ISO-SGS40	ISO-I40	ISO-FK40
ISO-LB50	ISO-FA50	ISO-Y50	ISO-SGS50	ISO-I50	ISO-FK50
ISO-LB63	ISO-FA63	ISO-Y63	ISO-SGS63	ISO-I63	ISO-FK63
ISO-LB80	ISO-FA80	ISO-Y80	ISO-SGS80	ISO-I80	ISO-FK80
ISO-LB100	ISO-FA100	ISO-Y100	ISO-SGS100	ISO-I100	ISO-FK100
ISO-LB125	ISO-FA125	ISO-Y125	ISO-SGS125	ISO-I125	ISO-FK125
ISO-LB160	ISO-FA160	ISO-Y160	ISO-SGS160	ISO-I160	ISO-FK160
ISO-LB200	ISO-FA200	ISO-Y200	ISO-SGS200	ISO-I200	ISO-FK200



ISO-CU	ISO-CB	ISO-CA	ISO-CN	ISO-CR
				
Ordering Code	Ordering Code	Ordering Code	Ordering Code	Ordering Code
ISO-CU32	ISO-CB32	ISO-CA32	ISO-CN32	ISO-CR32
ISO-CU40	ISO-CB40	ISO-CA40	ISO-CN40	ISO-CR40
ISO-CU50	ISO-CB50	ISO-CA50	ISO-CN50	ISO-CR50
ISO-CU63	ISO-CB63	ISO-CA63	ISO-CN63	ISO-CR63
ISO-CU80	ISO-CB80	ISO-CA80	ISO-CN80	ISO-CR80
ISO-CU100	ISO-CB100	ISO-CA100	ISO-CN100	ISO-CR100
ISO-CU125	ISO-CB125	ISO-CA125	ISO-CN125	ISO-CR125
ISO-CU160	ISO-CB160	ISO-CA160	ISO-CN160	ISO-CR160
ISO-CU200	ISO-CB200	ISO-CA200	ISO-CN200	ISO-CR200

SC/SU Standard Cylinder Accessories



LB | CA-Aluminum | CA-Iron | CB-Aluminum | CB-Iron | Y Type Joint | I Type Joint | FA/FB | TC | TC-M

Mini Cylinder Accessories



M-FA-A | M-LB | M-CR | M-U | M-Y+Pin | M-Y+Clip | M-FA | M-I | M-FK | M-SGS

Sensor Switch



PG-01 | PG-02 | PG-03 | PG-04 | Fixed metalband | Fixed Clamp

PG-01 use for DNC cylinder
PG-02 use for SI cylinder
PG-03 use for SDA cylinder
PG-04 use for MA/MAL cylinder



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Standard Cylinder

DNC Series ISO6431 Cylinder



DNC32x50

Ordering Code

DNC — 32 × 50 — 25 — S — LB

Series Code
DNC:ISO6431 Standard Double Action Type
DNCD:ISO6431 Standard Two Axis Double Action Type
DNCJ:ISO6431 Two Axis Stroke Adjust Type

Cylinder Bore
Φ32-125mm

Stroke
100-2000mm

Adjust Storke
25:25mm
50:50mm
75:75mm

Magnet Code
Blank:Without Magnet
S:With Magnet

Fixed Type
Blank:Normal type
LB:front and back fixed type
FA:front cover fixed type(Front flange type)
FB:back cover fixed type(Back flange type)
CA:back cover fixed type(Single Earring)
CB:back cover fixed type(Double Earring)

DNT Series ISO6431 Economical Type Cylinder



DNT63x50

Ordering Code

DNT — D — 63 x 50 — 25 — LB — MT

Series
DNT:ISO 15552 Standard cylinder

Blank:Standard
Double acting
D:Double-shaft Doubleacring
J :Double-shaft With adjustable stroke

Bore
32
40
50
63
80
100

Stroke
25-1000mm

Adjustable stroke

Mountings
Blank:Basic mountings
LB:Front and back mounting
FA:Frony mounting flange
FB:Rear mounting flange
CA:Rear clevis (Single earring)
CB:Rear hinge (Double earring)
YB:Rear hinge

Sensor
Blabk:Without Sensor
PG-01 Type

SI Series ISO6431 Cylinder



SI50x50

Ordering Code

SI — 50 × 50 — 25 — S — LB

Series Code
SI:ISO6431 Standard Double Action Type
SID:ISO6431 Standard Two Axis Double Action Type
SIJ:ISO6431 Two Axis Stroke Adjust Type

Cylinder Bore
Φ32-200mm

Stroke
Φ32: 1-500mm
Φ40-50: 1-1200mm
Φ63-200: 1-1500mm

Adjust Storke
25:25mm
50:50mm
75:75mm

Magnet Code
Blank:Without Magnet
S:With Magnet

Fixed Type
Blank:Normal type
LB:front and back fixed type
FA:front cover fixed type(Front flange type)
FB:back cover fixed type(Back flange type)
CA:back cover fixed type (Single Earring)
CB:back cover fixed type(Double Earring)
TC:Central Trunnion Type
TC-M:Central Trunnion type attaching foot seat

DSN Series ISO6432 Cylinder

Note:the Minimum Distance Of Hte Air Cylinder With Position Sensing Is 10mm To Ensuere Reliable Measure Sensing.



DSN12x50

Ordering Code

DSN — 12 — 50 — P — A — S2 — MQ

Type
DSN:Standard double action type(without position sensing)
DSNU:standard double action type(with position sensing)
ESN:single action drawing-in type(without position sensing)
ESNU:single action drawing-in type(with position sensing)

Piston Diameter
Φ8-25mm

Stroke
Standard Double Action Type:
Φ8, Φ10:1-100mm
Φ12, Φ16:1-200mm
Φ20:1-300mm
Φ25:1-500mm
Single Action

P:Buffer type
PPV:adjustable buffer

Magnet Code
Blank:not Attach Magnet
A:attach Magnet

Plunger Code
Blank:singe End Connecting Rod
S2:both End Connecting Rod

Derived Type
Blank:basic Type
MA:Axial Gas Interface
MQ:Side Air Interface



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Compact Cylinder

ADVU Series



ADVU32x50

Ordering Code

ADVU — 32 × 50 — A — S

Type
ADUV:Double Action Type
AEVU:Single Action Extrusion Type
AEVUZ:Single Action Drawing-in Type

Cylinder Bore
Φ16-Φ100mm

Stroke
Basic Type:
Φ16-25:1-200mm
Φ32-63:1-300mm
Φ80-100:1-400mm
Single Action:
Φ12:1-10mm
Φ16-100:1-25mm

Cog Type
Blank:Internal Thread
A:External Thread

Magnet Code
Blank:Without Magnet
S:With Magnet

Compact Cylinder

SDA Series



SDA32x50

Ordering Code

SDA — 32 — 50 — 5 — S — B

Type
SDA: Double Action Type
SSA: Single Action Extrusion Type
STA: Single Action Drawing-in Type
SDAD: Double-shalf Double Action Type
SDAJ:Double-shalf and Adjustable Stroke Type

Cylinder Bore
12mm~100mm

Stroke

Adjust Stroke
5mm
15mm
25mm

Magnet Code
Blank:Without Magnet
S:Attach Magnet

Cog Type
Blank:Inner Thread
B:outer Thread
N:no Thread

CQ2B Series



CQ2B40x50-M



CQ2B32x50

Ordering Code

CQ2 — □ — 12 — 10 — D — □

Type
CQ2:Normal Type
CDQ2:Attach magnet Type

Basic model
B:with through bore
A:with female thread on both ends

Cylinder Bore
Single action:
Φ12-Φ50mm
Double action:
Φ12-Φ100mm

Stroke
0~100mm

Action
D:double action
S:single action (with spring return)
T:single action (with spring extent)

Cylinder body (optional)
Blank:Inner Thread Type
M:Thread outer Type
C:With cushion

SC/SU Series Standard Cylinder



SC32X50



SU40X50

Ordering Code

SC — 32 × 50 — 25 — S — LB

Series Code
SC:Standard double action(Tie-rod Type)
SCD:Double-shaft double action (Tie-rod Type)
SCJ:Double axis double acting adjustable type(Tie-rod Type)
SU:Standard double acting (Micky Mouse Type)

Cylinder Bore
Φ32-320mm

Stroke

Adjust Storke
25:25mm
50:50mm
75:75mm

Magnet Code
Blank:Without Magnet
S:With Magnet

Fixed Type
Blank:Normal type
LB:front and back fixed type
FA:front cover fixed type(Front flange type)
FB:back cover fixed type(Back flange type)
CA:back cover fixed type (Single Earring)
CB:back cover fixed type(Double Earring)
TC:Central Trunnion Type
TC-M:Central Trunnion Type attaching foot seat



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Mini Cylinder

MA/MAL Series



MA32X50



MAL32X50

Ordering Code

MA — □ — 32 × 50 — 25 — S — LB

Type
MA:Double Action Type
MSA:Single Extrusion Type
MAD:Double Shaft Double Action Type
MAJ:Double-shaft And Adjustable Stroke Type
MAC:With Cushion Type
MACD:Double Shaft Double Action Damping Type

Type
MAL: Double Action type
MSAL: Single Extrusion Type
MALD: Dual Double Action Type
MALJ:Double-shaft And Adjustable Stroke Type
MALC:With Cushion Type
MALCD: Dual Shaft Action Damping Type

Back Cover Type
Blank:Fishtail type
CM:Rounded type
U:Horizontal type

Cylinder Bore
16mm~40mm

Stroke

Adjustable Stroke Type
0~100mm

Magnet Code
Blank:Without Magnet
S:With Magnet

Fixed Type
Blank:Normal type
LB:Front and back fixed type
FA:Front cover fixed type
SDB:Back cover swinging type
U:Back cover fixed type

Cj2 Series Needle Cylinder



Ordering Code

CJ2 — 16 — 80 — □ — □

Type
CJ2B:Normal Type
CDJ2B:Attach magnet Type

Cylinder Bore
6-Φ16mm

Stroke
0~200mm

Model
Blank:Normal Type
S:single action (with spring return)
T:single action (with spring extent)

The type of air hole on the head cover end

Mark \ Bore	Φ6	Φ10	Φ16
Blank	-	Vertical	
R	Horizontal		

CJP Series Needle Cylinder



Ordering Code

CJP — 6 — 10 — B

Type
CJPB:Panel mount Type
CJPS:Invisible Type

Cylinder Bore
6-Φ6mm
10-Φ10mm
15-Φ15mm

Stroke
0~30mm

Thread Type
Blank:With Thread
B:No. Thead

CYI Series Rodless Cylinder



Ordering Code

CY1 — B — 32 × 50 — B

Model
Rodless Cylinder

Type
B:Normal Type
S:Sliding Type
L:Sliding Type Ball guide bearing Type
R:Magnetically Coupled-Direct Mout type
RG:Magnetically Coupled-Direct mout-Single Joint Type

Cylinder Bore
6-Φ6mm
10-Φ10mm
15-Φ15mm
20-Φ20mm
25-Φ25mm
32-Φ32mm
40-Φ40mm
50-Φ50mm
63-Φ63mm

Stroke
0~1000mm

Magnet Code
Blank:Without magnet
S:Attach magnet



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

CXS Series Double -Shaft Cylinder



Ordering Code

CXS — M — 32 — 50

Type
CXS:Attach magnet Type

Type of Bearing
M:Slide Bearing Type
L:Ball Guide Bearing Type

Cylinder Bore
6-Φ6mm
10-Φ10mm
16-Φ16mm
20-Φ20mm
25-Φ25mm
32-Φ32mm

Stroke
0~100mm

TN Series Double -Shaft Cylinder



Ordering Code

TN — 32 × 50 — S


Type
Double-Shalf Double Action Type

Cylinder Bore
Φ10~-Φ32mm

Stroke

Magnet Code
Blank:Without Magnet
S:Attach Magnet

CU Series Free Installation Cylinder



Ordering Code

CU — □ — 32 — 50 — □

Model
CU:Normal Type
CDU:Attach magnet Type

Kinds
Blank:Normal Type
K:Non-Rotating piston rod Type

Cylinder Bore
6-Φ6mm
10-Φ10mm
16-Φ16mm
20-Φ20mm
25-Φ25mm
32-Φ32mm

Stroke
0~50mm

Action
D:Double action
S:Single Action Spring Drawing-in Type
T:Single Action Spring Extusion Type

MGP Series Three.Shaft Cylinder



Ordering Code

MGP — M — 32 × 50 — S

Type
MGP:Attach magnet Type

Type of Bearing
M:Slide Bearing
L:Ball Guide Bearing

Cylinder Bore
12-Φ100mm

Stroke
10~200mm

Always with magnet



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

RSQ Series Stopper Cylinder



Ordering Code

RSQ — B — 32 × 20 — D — R

Type
RSQ:Basic Type
RSDQ:Magnet Within Type

Installation
B:hole
A:Intermal thread on both ends

Cylinder Diameter
20-Φ20mm
32-Φ32mm
40-Φ40mm
50-Φ50mm

Stroke

Action
D:double action
S:single action (with spring return)
T:single action (with spring extent)

Rod end Type
Blank:Round bar type(Φ20-Φ50)
K:Chamfored Type(Φ20-Φ50)
R:Roller type(Φ20-Φ50)
L:Level type with shock absorber(Φ32-Φ50)
B:Level type with adjustable shock absorber(Φ32-Φ50)
C:Level type with adjustable shock absorber, with cancel cap(Φ32-Φ50)
D:Level type with adjustable shock absorber, with lock menchanism(Φ32-Φ50)
E:Level type with adjustable shock absorber, with cancel cap & lock(Φ32-Φ50)

MSQ Series Rotary Table,Rack& Pinion Cylinder



Ordering Code

MSQ — B × 10 — A — S

MSQ Type

Basic Type

Size Code
10~200mm

Magnet Code
A:With Adjustable Angle Screw
R:With Shock Absorber

Always with magnet

Parallel Style Wide Opening Air Gripper



Ordering Code

MHL – 2 — 32 — D — □

Cylinder Diameter

10-ϕ10mm
16-ϕ16mm
20-ϕ20mm
25-ϕ25mm
32-ϕ32mm
40-ϕ40mm

Stroke

Finger Opens/closes Stroke

Mark	ϕ10	ϕ16	ϕ20	ϕ25	ϕ32	ϕ40
With Mark	20	30	40	50	70	100
1	40	60	80	100	120	160
2	60	80	100	120	160	200

Pneumatic Gripper

MHZ Series Pneumatic Gripper



MHZ　　MHC　　MHY

Ordering Code

MHZ — 2 × 32 — D — □

Model
MHZ:MHZ Parrallel Type Gripper
MHC:MHC Point Type Gripper
MHY Type Gripper

Finger Quantity
2PCS

Bore
6-40mm

Acting Type
D:Double-acting
S:Single-acting(Normally open)
C:Single-acting(Normally closed)

Dusty Seal Material
Blank:CR
F:FKM
S:Si



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

MHS3 Series Three Fingers Air Gripper



Ordering Code

MHS3 — 20 D — M9BW

Number of fingers

3	3 fingers

Bore size

16	16mm
20	20mm
25	25mm

Action

D	Double acting

Action switch

Nil	Without Auto Switch (built-in Magnet)

FENG Guide Type Pneumatic Cylinder Guide



Ordering Code

FENG - 50 - 160 - GF

Type	
FEN	Guide unit to ISO 6432
FENG	Guide unit to ISO 15552

Piston diameter[mm]

Stroke[mm]

Guidance

GF	Plain-bearing guide
KF	Recirculating ball bearing guide

MRHQ Rotary Clamping Cylinder



MRH Q 10 D 90 S M9NV L□ M9N L

Single Blade
Swing Angle
Action Mode
Cylinder Bore
Air Claw: Parallel Opening And Closing Type (2claws)
Swing Cylinder
Magnetic Switch For Air Claw Opening And Cosing
Magnetic Switch For Swing Detection



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

MXQ Series Slide Table Cylinder

Ordering Code

MXQ | 12 | □ × 50 | □ ——— FR

Series Code
MXQ:Air Slide Table

Cylinder Bore
6mm-25mm

Body Option
Blank:Standard
L:Symmetric Type

Stroke
10mm~150mm

Adjuster Type(optional)
Blank: Standard
AS: Buffer on extensinon end
AT: Buffer on retraction end
A:Buffer on Both ends
BS: Absorber on extension end(not available forΦ6)
BT: Absorber on retraction end(not available forΦ6)
B:Absorber on both ends(not available forΦ6)
CS: Metal stopper on extension end
CT: Metal stopper on retraction end
C: Metal stopper on both ends

Function Option
Blank: Standard
F: With Buffer
R: With end lock(not available forΦ6)
P: Axial piping type
FR: With buffer and end lock(not available forΦ6)
FP: With buffer and axial piping type



MXH Series Slide Table Cylinder

Ordering Code



MXH | 10 × Stroke

Series Code
MXH:Air Slide Table

Cylinder Bore
6mm-20mm

Series Code
5mm-60mm

MXS Series Slide Table Cylinder

Ordering Code

MXS | 12 × 50 | □ — □

Series Code
MXQ:Air Slide Table

Cylinder Bore
6mm~20mm

Stroke
10mm~150mm



Adjuster Option
Blank: Standard
AS: Adjuster on extensinon end
AT: Adjuster on retraction end
A: Adjuster on Both ends
BS: Absorber on extension end(not available forΦ6)
BT: Absorber on retraction end(not available forΦ6)
B: Absorber on both ends(not available forΦ6)

Function Option
Blank: Standard
F: With Buffer
R: With end lock
(not available forΦ6)
P: Axial piping type
FR: With buffer and end lock(not available forΦ6)
FP: With buffer and axial piping type



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Solenoid Valve

Ordering Code

4V | 2 | 10 — 08 | □ — AC220V — W

Specification Code
4V:Two(Three)-position Five-way Solenoid Valve
4A:Two(Three)-position Five-way Air Control Valve
3V:Two-position Three-way Solenoid Valve
3A:Two-position Three-way Air Control Valve

Body Size
1:M5 and 1/8" Valve body
2:1/8" and 1/4" Valve body
3:1/4" and 3/8" Valve body
4:1/2" Valve body

Coil and Places
10:Single-head Double-position
20:Double-head Double-position
30C:Double-head Three-position Close Type
30E:Double-headThree-position Exhaust Type
30P:Double-head Three-position Pressure Type

Port Size
M5:M5×0.8
06:G1/8"
08:G1/4"
10:G3/8"
15:G1/2"

Port connection and Initial State
Blank:Pipe Connection Type
NC:Two-position Three-way Normal Close Type
NO:Two-position Three-way Normal Open Type

Standard Voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Wiring Form
Blank:standard Connector
LD:Brown with Lighting Connector
LD1:White with Lighting Connector
W:Lead Wire Type

Model	4V110-4V410 4A110-4A410	4V120-4V420 4A120-4A420	4V130-4V430C/P/E 4A130-4A430C/P/E
Position and Way NO.	Two-position Five-way		Three-position Five-way
Working Medium	40 Micron Filtered Air		
Motion Pattern	Inner Guide Type		
Working-pressure	0.15~0.8 M Pa		
Max. Pressure Resistance	1.2MPa		
Operating Temperature	5~50° C		
Voltage Range	±10%		
Power Consumption	AC: 4.5VA DC: 3W		
Insulation & Protection Class	F Class. IP65		
Wiring Form	Lead Wire or Connector type		
Highest Action Frequency	5 Cycle / Second		
Shortest Excitation Time	0.05 Second		



3A110-06
3A210-08
3A310-10
3A410-15



3V110-06
3V210-08
3V310-10
3V410-15



3V120-06
3V220-08
3V320-10
3V420-15



4A110-06
4A210-08
4A310-10
4A410-15




4A120-06
4A220-08
4A320-10
4A420-15



4A130-06
4A230-08
4A330-10
4A430-15



4V110-06
4V210-08
4V310-10
4V410-15



4V120-06
4V220-08
4V320-10
4V420-15



4V130-06
4V230-08
4V330-10
4V430-15



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

4S Series Die Casting Valve

Ordering Code



4S110-06
4S210-08
4S310-10
4S410-15



4S120-06
4S220-08
4S320-10
4S420-15



4S130-06
4S230-08
4S330-10
4S430-15

ASCO TYPE VALVE

Ordering Code



AS4V110-06
AS4V210-08
AS4V310-10
AS4V410-15



AS4V120-06
AS4V220-08
AS4V320-10
AS4V420-15



AS4S110-06
AS4S210-08
AS4S310-10
AS4S410-15



AS4M310-08W



AS4M310-08B

4V Series White Valve
W means white

Ordering Code



4V110-06W
4V210-08W
4V310-10W
4V410-15W



W4V120-06W
W4V220-08W
W4V320-10W
W4V420-15W



W4V130-06W
W4V230-08W
W4V330-10W
W4V430-15W



4M310-08W



2V025-08W



3V110-06W
3V210-08W
3V310-10W
3V410-15W



3V1-06W



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

SY Series Solenoid Valve

Ordering Code

SY 5 1 2 0 — 5 L — 01 □ □

Series
3:3000 Series
5:5000 Series
7:7000 Series
9:9000 Series

Directly Piping Type

Function



1:Two-position Single Type



2:Two-position Double Type



3:Three-position Closed Type



4:Three-position Exhaust Type



5:Three-position Pressurized Type

Nominal Voltage

1	AC100V
2	AC200V
3	AC110V
4	AC220V
5	DC24V
6	DC12V

*Only DC24V and DC12V are avallable for D and DO type
*Only DC is available for W type

A、B Connection Thread

Mark	ConnectionThread	Applicable Series
M5	M5x0.8	SY3000
01	1/8	SY5000
02	1/4	SY7000
02	1/4	SY9000
03	3/8	

Quick Connector

Mark	ConnectionThread	Applicable Series
C4	Φ4 Quick Connector	SY3000
C6	Φ6 Quick Connector	
C4	Φ4 Quick Connector	SY5000
C6	Φ6 Quick Connector	
C8	Φ8 Quick Connector	
C8	Φ8 Quick Connector	SY7000
C10	Φ10 Quick Connector	
C8	Φ8 Quick Connector	SY9000
C10	Φ10 Quick Connector	
C12	Φ12 Quick Connector	

Thread Type

Nil	RC
F	G
N	NPT
T	NPTF

Bracket

Nil	Without Bracket
F	F1:Bottom Bracket (Only For Two-position Single Type)
	F2:Side Bracket

Wiring Type

DC24V、12V、6V、5V、3V/AC100V、100V、200V、220V

L Plug-in Type	M Plug-in Type
L:With Wire,Length300mm	M:With Wire,Length 300mm





2V025-08 Series Solenoid Valve



2V025-08

Ordering Code

2V 025 — 06 — AC 110V

Specification Code
2V:Two-position Two-way

Apertuer of Flow Rate
0.10:10mm
0215:2.5mm
130:13mm
250:25mm

06:1/8
08:1/4

Standard voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Two Way Two Position Big Flow Solenoid Valve



SY2V025-08



SY2V025-08



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

3V1 Series Solenoid Valve



3V1-06

Ordering Code

3V	1	06	—	B	AC220V	—	L

Specification Code
3V: Two-position Three-way Solenoid Valve

Series Code
1:100 Series

Port Size
M5:M5×0.8
06:G1/8"

Connecting Type
Blank:Pipe Connection Type
B:Plate Connection Type


Standard Voltage
DC12v
DC24v
AC24v 50Hz/60Hz
AC110v 50Hz/60Hz
AC220v 50Hz/60Hz
AC380v 50Hz/60Hz

Wiring Form
Blank:standard Connector
G:Lead Wire Type Oil
L:With Lighthing Connector Oil

4M Series Namur Valve



4M210-08



4M220-08

Ordering Code

4M	2	10	—	06	—	AC220V	—	W

Specification Code
4M:Two(Three)-position Five-way Plate Type Valve

Body Size
2:1/8" and 1/4" Valve body
3:1/4" and 3/8" Valve body
4:1/2" Valve body

Coil and Places
10:Single-head Double-position
20:Double-head Double-position

Port Size
06:G1/8"
08:G1/4"
10:G3/8"
15:G1/2"

Standard Voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Wiring Form
Blank:standard Connector
LD:Brown with Lighting Connector
LD1:White with Lighting Connector
W:Lead Wire Type

VF/VZ Series Solenoid Valve



VF3130



VF3230

Ordering Code

VF3	1	—	30	AC220V	—	W

Series No.
VF3 Series
VF5 Series
VZ5 Series

Coil and Places
1:Single-Coil Double-position
2:Double-Coil Double-position
3:Double-Coil Three-position Close Type
4:Double-Coil Three-position Exhaust Type
5:Double-Coil Three-position Pressure Type

Order No.
VF3:30
VF5:20
VZ5:20

Standard Voltage
DC12v
DC24v
AC24v 50Hz/60Hz
AC110v 50Hz/60Hz
AC220v 50Hz/60Hz
AC380v 50Hz/60Hz

Wiring Form
Blank:standardConnector
LD:Brown with Lighting Connector
LD,:White with Lighting Connector
W:Lead Wire Type

MVSD Series Solenoid Valve



MVSD260-4E1



MVSD220-4E2

Ordering Code

MVSD	—	300	—	4E1	—	AC110	—	W

Model

Body Width
180:18mm
220:22mm
260:26mm
300:30mm
460:46mm

E1:Single Coil
E2:Double Coil

Pressure kind
AC22V(50/60)Hz
AC110V(50/60)Hz
DC24V

Wiring Form
Blank:standardConnector
LD:Brown with Lighting Connector
LD,:White with Lighting Connector
W:Lead Wire Type



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

4H Series Hand-pull Valve



Ordering Code

4H	2	10	—	06	—	L

Specification Code
4H:Two(Three)-position Five-way Hand Pull Valve

Button Type
2:200 Series
3:300 Series
4:400 Series

Specification Code
10:Single-head Double-position
30:Single-head Three-position

Port Size
06:G1/8"
08:G1/4"
10:G3/8"
15:G1/2"

Type Code
Blank:Three-position Five-way Reset Type
L:Three-position Five-way Locking Type

TSV Series Hand-pull Valve



TSV98322S

TSV86522S

Ordering Code

TSV86	52	2	—	M

Specification Code
Hand-pull Valve

Position and Way NO.
Two-position Five-way

Port Size
1:G1/8"
2:G1/4"

Type Code
M:Machinery Locking Type
S:Spring Return Type

TSV98	32	2	—	M

Specification Code
Hand-pull Valve

Position and Way NO.
Two-position Three-way

Port Size
1:G1/8"
2:G1/4"

Type Code
M:Machinery Locking Type
S:Spring Return Type

4R Series Hand-draw Valve



3R210-08



4R210-08

Ordering Code

4R	2	10	06

Specification Code
4R:Two-position Five-way Hand-draw Valve
3R:Two-position Three-way Hand-draw Valve

Series Code
200 Series
300 Series
400 Series

Number of Places
10:Single-head Double-position

Port Size
06:G1/8"
08:G1/4"
10:G3/8"
15:G1/2"

HV、K3 Series Hand-switching Valve



HV400-02/03/04



HV-02/03/04



K24R8-06/08



K34R8-06/08

Ordering Code

HV	—	02	B

Specification Code
Hand-switching Valve

Port Size
02:G1/4"
03:G3/8"
04:G1/2"

Joint Pipe Type
Blank:Pipe Connection Type
B:Plate Connection Type

Ordering Code

K	34	—	R_8	L8	D

Specification Code
Hand-switching Valve

Position and way NO.
24:Two-position Four-way
34:Three-position Four-way

Type Code
R_c:Hand-switching Valve

Port Size
L6:G1/8"
L8:G1/4"

Base Joint



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

4F Series Foot Valve


4F210-08


4F210-08L


4F210-08LG


FV320

Ordering Code

4F	2	10	—	08	—	L	FV	—	320

Specification Code
4F:Two position Five-way Foot Valve

Series NO.
2:200 Series

Number of Places
10:Single-head
Double-position

Port Size
08:G1/4"

Type Code
Blank:standard type
L:with lock
G:with cover
LG:with lock and cover

Specification Code
FV:Foot Valve

Position Number
320:Two-position Three-way
420:Two-position Four-way

JM Series


JM-05


JM-06


JM-06A


JM-07

Ordering Code

JM	—	05

Specification Code
Stop-type Machinery Valve

Button Type
05:Selective Knob
06:With Lock Button
06A:Plat Round Button
07:Roller Type

Ordering Code

MOV	—	01

Specification Code
Machine-Control, Hand-Control Valve

Button Type
01:Selective Knob
02:Roller Type
03:With Lock Button
04:Plat Round Button


MOV-01


MOV-02


MOV-03


MOV-04

MSV Series

Ordering Code

MSV	86	32	1	R

Specification Code
Mechanical Valve

Series Code
86 Series
98 Series

Position and Way Number
32:Two-position Three-way
52:Two-position Five-way

Port Size
1:G1/8"
2:G1/4"

Button type
Blank:Normal Type
R: Roller Type
TB:Selective Knob
LB:Strengthened Knob
PB:Large Round Boutton
PP:Plat Round Button
PPL:Convex Round Button
EB:With Lock Button


MSV98322-TB


MSV98322-R


MSV98322-EB


MSV98322-PPL


MSV98322-PP


MSV98322-PB


MSV86522-TB


MSV86522-R


MSV86522-EB


MSV86522-PPL


MSV86522-PP


MSV86522-PB



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Other valves


ST-01:G1/8"
ST-02:G1/4"
ST-03:G3/8"
ST-04:G1/2"
ST-06:G3/4"
ST-08:G1"


RE-01:G1/8"
RE-02:G1/4"
RE-03:G3/8"
RE-04:G1/2"


ASC-06:G1/8"
ASC-08:G1/4"
ASC-10:G3/8"
ASC-15:G1/2"


AS1000-M5:M5×0.8
AS2000-01:G1/8"
AS2000-02:G1/4"
AS3000-02:G1/4"
AS3000-03:G3/8"
AS4000-02:G1/4"
AS4000-03:G3/8"
AS4000-04:G1/2"


KA-06:G1/8"
KA-08:G1/4"
KA-10:G3/8"
KA-15:G1/2"
KA-20:G3/4"
KA-25:G1"
KA-32:G1-1/4"
KA-40:G1-1/2"
KA-50:G2"


CV-03:M5″
CV-06:G1/8″
CV-08:G1/4″
CV-10:G3/8″
CV-15:G1/2″


XQ170600:G1/8"
XQ170800:G1/4"
XQ171000:G3/8"
XQ171500:G1/2"


QE-01:G1/8"
QE-02:G1/4"
QE-03:G3/8"
QE-04:G1/2"


KLA-06:G1/8"
KLA-08:G1/4"
KLA-10:G3/8"
KLA-15:G1/2"


KP-L6:G1/8"
KP-L8:G1/4"
KP-L10:G3/8"
KP-L15:G1/2"
KP-L20:G3/4"


KP-L25:G1"
KP-L32:G1-1/4"
KP-L40:G1-1/2"
KP-L50:G2"


HSV-01:G1/8"
HSV-02:G1/4"
HSV-03:G3/8"
HSV-04:G1/2"
HSV-06:G3/4"


M5Y210-08


CV-10
CV-15
CV-20
CV-25
CV-30

EDWIN Series Pressure Controller

EDWIN110
EDWIN506
EDWIN506M

EDWIN530
EDWIN530D
EDWIN530M
EDWIN830

EDWIN830HLM
EDWIN830HM
EDWIN830M

Vibrator

K08/K10/K16/K20/K25/K36

GT8/GT10/GT16/GT20/GT25/GT36

Solenoid Valve Accessories

Timer A

4V210 Coil

4V110 Coil

Timer B

Armature

Manifold 100M-□F
200M-□F
300M-□F
400M-□F

FP,FAL Series Pneumatic Vibrator

K-FP-12M
K-FP-18M
K-FP-25M
K-FP-35M

K-FP-32
K-FP-40
K-FP-50
K-FP-60
K-FP-80
K-FP-100

K-FAL-8
K-FAL-18
K-FAL-25
K-FAL-35

Pneumatic Hammer

SK-30
SK-40
SK-60
SK-80
SK-100

SK-X-30
SK-X-40
SK-X-60
SK-X-80
SK-X-100



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

2W Series

Direct Drive Type
Working pressure:0-0.7MPa
Temperature Range:-5-+80°C



2W025-08

Ordering Code

2W	025	08	AC220V	E

Specification Code
2W:Two-position Two-way solenoid valve direct drive type
2WH:Two-position Two-way solenoid valve(High pressure Type)
2S:Stainless steel two postion two way solenoid valve (direct drive type)
2SH:Stainless steel two position two way solenoid valve (high pressure direct drive type)

Aperture of Flow Rate
012:1.2mm
020:2.0mm
025:2.5mm
040:4.0mm

Port Size
06:G1/8"
08:G1/4"
10:G3/8"

Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC36V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Oil Seal Code
Blank:NBR
E:EPDM(for steam)
V:VITON(for high-temperature gas and vacuum)

2W(Large Aperture) Series

Direct Drive Type
Working pressure:0-0.7MPa
Temperature Range:-5-+80°C



2S160-15

2W160-15

Ordering Code

2W	160	15	AC220V	V

Specification Code
2W:Two-position two-way solenoid valve direct drive type
2S:Stainless steel two postion two way solenoid valve(direct drive type)

Aperture of Flow Rate
160:16mm
200:20mm
250:25mm
350:35mm
400:40mm
500:50mm

Port Size
10:G3/8"
15:G1/2"
20:G3/4"
25:G1"
35:G1 1/4"
40:G1 1/2"
50:G2"

Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC36V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Oil Seal Code
Blank:NBR
V:VITON(for high-temperature)

Two-position Two-Way Solenoid Valve

2V Series

Working pressure:0.05-0.7MPa
Temperature Range:-10-+80°C



2V130-15

2V025-08

Ordering Code

2V	025	08	AC220V	V

Specification Code
2V:Two-positionTwo-way Solenoid Valve

Aperture of Flow Rate
010:1.0mm
025:2.5mm
130:13mm
250:25mm

Port Size
M4:M4×0.7
06:G1/8"
08:G1/4"
10:G3/8"
15:G1/2"
20:G3/4"
25:G1"

Standard Voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Oil Seal Code
Blank:NBR
V:VITON(For High temperature)

2P Series

Direct Drive Type
Working pressure:0-0.7MPa
Temperature Range:-5-+80°C



2P025-08

Ordering Code

2P	025	08	AC220V	W

Specification Code
2P:Two-position Two-way Solenoid Valve (Reinforced plastic steel type)

Aperture of Flow Rate
025:2.5mm

Port Size
06:G1/8"
08:G1/4"

Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Wiring Form
Blank:Standard Connector
LD:Brown with Lighting Connector
LD1:White with Lighting Connector
W:Lead Wire Type



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Two-position Two-Way Solenoid Valve

2L Series

Guide Type
Working Pressure:0.1-1.5MPa
Temperature Range:-5~+80°C



Ordering Code

2L	170	15	AC110V

Specification Code
2L:Steaml type Two-position Two-way Solenoid Valve

Aperture of Flow Rate
170:17mm
200:22mm
300:30mm
500:50mm

Port Size
10:G3/8"
15:G1/2"
20:G3/4"
25:G1"
35:G1 1/4"
40:G1 1/2"
50:G2"

Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC36V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

PU Series

Working Pressure:0-0.7MPa
Temperature Range:-5~+80°C



PUT220-04

PU220-01

PU220-04

Ordering Code

PU	220	01	AC110V	E

Specification Code
PU:Two -position Two -way solenoid valve

Motion Pattem
200:Direct dive Type
225:Guid Type

Port Size
01:G1/8"
02:G1/4"
03:G3/8"
04:G1/2"
06:G3/4"
08:G1"
12:G1 1/4"
14:G1 1/2"
20:G2"

Standard Voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Oil Seal Code
Blank:NBR
V:VITON
E:EPDM

VX/VXF Series

Guide Type
Working Pressure:0-1MPa
Temperature Range:-5~+150°C



VX Series

VXF Series

Ordering Code

VX2120	08	AC220V

Specification Code

Port Size
06:G1/8"
08:G1/4"
10:G3/8"
15:G1/2"

Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Ordering Code

VX2150	06	AC220V	□

Specification Code

Port Size
06:G3/4"
10:G1"
14:G1 1/2"


Standard Voltage
DC12V DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

Working Form
Blank:Lead Wire Type
D:Join Counector

2Q/5404 Series

Working Pressure:0-0.7MPa
Temperature Range:-5~+100°C

Working Pressure:0.1-5MPa
Temperature Range:-5~+150° C



2Q Series

PNEUBIG 5404 Series

Ordering Code

2Q	200	25	PNEUBIG	5404	04	AC110V	D

Specification Code
2Q:Two position two way Air Control valve

Aperture of Flow Rate
200:22mm
300:30mm
350:35mm
500:50mm

Port Size
25:G1"
40:G1 1/2"
50:G2"

Factory Code

Model

Port Size
04:G1/2"
06:G3/4"
08:G1"

Standard Voltage
DC12V
DC24V
AC24V 50/60Hz
AC110V 50/60Hz
AC220V 50/60Hz
AC380V 50/60Hz

Wiring Form
Blank:Lead Wire Type
D:Join Connector



Solenoid Valve

6213 Series Diaphragm Type Solenoid Valve



Ordering Code

PNEUBIG	6213	04	AC110V	D
Factory Code	Model	Port Size	Standard Voltage	Wiring Form

Port Size
02:G1/4"
03:G3/8"
04:G1/2"
06:G3/4"
08:G1"

Standard Voltage
DC12V
DC24V
AC24V 50/60Hz
AC110V 50/60Hz
AC220V 50/60Hz
AC380V 50/60Hz

Wiring Form
Blank:Lead Wire Type
D:Join Connector

MCF Series Pulse Valve



Ordering Code

MCF	25	AC220V
MCF Series	Joint pipe bore	Standard voltage

Joint pipe bore
25:G1
40:G1`/2
50:G2
65:G2`/2

Standard voltage
DC12V
DC24V
AC24V 50Hz/60Hz
AC110V 50Hz/60Hz
AC220V 50Hz/60Hz
AC380V 50Hz/60Hz

YMF Series Pulse Valve



Ordering Code

YMF	50	AC220V
YMF Series	Joint pipe bore	Standard voltage

Joint pipe bore
50:G2
62:G2`/2
76:G3

Standard voltage
AC110V
AC220V
AC380V
DC24V

Piston Valve



SSJZF Series

JZF Series

Ordering Code

JZF	20	□
JZF Series Plastic Piston Valve	Orifice Size & Port Size	Type

Orifice Size & Port Size
15:G1/2"
20:G3/4"
25:G1"
32:G1-1/4"
40G1-1/2"
50:2"

Type
SC:Single Action Normal Close
DO:Double Action Normal Open

Ordering Code

SSJZF	10	50	□
SSJZF Series Stainless Steel Piston Valve	Port Size	Actoator Size	Type

Port Size
10:G3/8"
15:G1/2"
20:G3/4"
25:G1"
32:G1-1/4"
40:G1-1/2"
50:G2"

Actoator Size
40:40mm
50:50mm
63:63mm
80:80mm
100:100mm

Type
SC:Single Action Normal Close
SO:Single Action Normal Open
DC:Double Action Normal Close
DF:Double Action Free Instanllation

pneubig.com
NINGBO PNEUBIG PNEUMATIC CO.,LTD.



Automatic Water Drain Valve



OPT-A



OPT-B



HAD-20B



PA-68



QAD400-04



SA6D

Limit Switch box



APL-210N



APL-310N



APL-410N (E Exd IIB T6)



APL-510N (E Exd IIC T6)

Actuator Magnetic Switch



ALS200D

Manual Gearbox Operator



HDM



HGB

Pneumatic Electric Positioner



YT-1000R



YT-1000L

AT Series Pneumatic Actuator



Features are as follows:
Working Pressure: 2.5-8bar
Type: Double Acting and Spring Return
Model:AT32D-AT300D, AT50S-300S
Torque: From 8N.m to 2862N.m (at 5.5 bar)
Bottom Mounting Connection: ISO-5211 / Namur
Springs can be easily removed from end caps
Can be fitted with limit switches, solenoid valves,positioners
±5° strcke acjustment from 0° to 90°
Life Time:one Milion

Double Acting Model:AT32D、AT50D、AT63D、AT75D、AT88D、AT100D、AT125D、AT145D、AT160D、AT190D、AT240D、AT270D、AT300D.
Single Acting Model:AT50S、AT63S、AT75S、AT88S、AT100S、AT115S、AT125S、AT145S、AT160S、AT190S、AT210S、AT240S、A270S、AT300S.



NAMUR VALVE



4M310-08W



AS4M310-08W



4M310-08B




3/4M310-08B



4M320-08



ASC-DA



4M210-08L



3/4M210-08
3/4M310-08



SS4M310-08

Pneumatic Actuated Ball Valve





O Series Air Preparation

Max Pressure :16 Bar
FR.L Combination



Ordering Code

O	—	U	—	1/4	—	□	—	MINI
Series O Series		**Function code** FR.L Combination		**Port Size** G1/8" G1/2" G1/4" G3/4" G3/8" G1"		**Grade of filtration** Blank:40 μ m 5M:5 μ m		**Size** MINI MIDI MAXI

Ordering Example
OU-MINI-G1/8"、G1/4"、G3/8"
OU-MIDI-G3/8"、G1/2"、G3/4"

Filter & Regulator



Ordering Code

O	—	FR	—	1/4	—	□	—	MINI
Series O Series		**Function code** Filter&Regulator		**Port Size** G1/8" G1/2" G1/4" G3/4" G3/8" G1"		**Grade of filtration** Blank:40 μ m 5M:5 μ m		**Size** MINI MIDI MAXI

Ordering Example
OFR-MINI-G1/8"、G1/4"、G3/8"
OFR-MIDI-G3/8"、G1/2"、G3/4"

Regulator



Ordering Code

O	—	R	—	1/4	—	MINI
Series O Series		**Function code** Regulator		**Port Size** G1/8" G1/4" G3/8" G1/2" G3/4" G1"		**Size** MINI MIDI MAXI

Ordering Example
OR-MINI-G1/8"、G1/4"、G3/8"
OR-MIDI-G3/8"、G1/2"、G3/4"

Filter



Ordering Code

O	—	F	—	1/4	—	□	—	MINI
Series O Series		**Function code** Filter		**Port Size** G1/8" G1/4" G3/8" G1/2" G3/4" G1"		**Grade of filtration** Blank:40 μ m 5M:5 μ m		**Size** MINI MIDI MAXI


Ordering Example
OF-MINI-G1/8"、G1/4"、G3/8"
OF-MIDI-G3/8"、G1/2"、G3/4"



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Lubricator

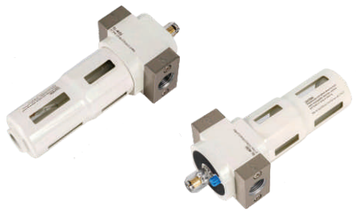

Ordering Code

O	—	L	—	1/4	—	MINI

Series
O Series

Function code
Lubricator

Port Size
G1/8"
G1/4"
G3/8"
G1/2"
G3/4"
G1"

Size
MINI
MIDI
MAXI

Ordering Example
OL-MINI-G1/8"、G1/4"、G3/8"
OL-MIDI-G3/8"、G1/2"、G3/4"

A Series Air Preparation

Ordering Code

A	C	3000	—	04	□

Series
A series

Function
C:Filter+ Regulator+lubricator
W:Filter+Regulator
F:Filter
R:Regulator
L:Lubricator

Specification Code
1000
2000
3000
4000
5000

Port Size
M5:M5×0.8
01:G1/8"
02:G1/4"
03:G3/8"
04:G1/2"
06:G3/4"
10:G1"

Drain Type
Blank:Manual Drain Type
D:Auto Drain Type (Avaible for 2000 or above)



MODEL
AC2000-01
AC2000-02



MODEL
AC3000-02
AC3000-03
AC4000-03
AC4000-04
AC4000-06
AC5000-06
AC5000-10



MODEL
AC2010-01
AC2010-02



MODEL
AC3010-02
AC3010-03
AC4010-03
AC4010-04
AC4010-06
AC5010-06
AC5010-10



MODEL
AF2000-01
AF2000-02



MODEL
AF3000-02
AF3000-03
AF4000-03
AF4000-04
AF4000-06
AF5000-06
AF5000-10



MODEL
AL2000-01
AL2000-02



MODEL
AL3000-02
AL3000-03
AL4000-03
AL4000-04
AL4000-06
AL5000-06
AL5000-10



MODEL
AR2000-01
AR2000-02
AR3000-02
AR3000-03
AR4000-03
AR4000-04
AR4000-06
AR5000-06
AR5000-10



MODEL
AW2000-01
AW2000-02



MODEL
AW3000-02
AW3000-03
AW4000-03
AW4000-04
AW4000-06
AW5000-06
AW5000-10

AC2000 Series Metal Guard



AC2000-01M
AC2000-02M



AC2010-01M
AC2010-02M



AW2000-01M
AW2000-02M



AF2000-01M
AF2000-02M



AL2000-01M
AL2000-02M



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

B Series Air Preparation

Ordering Code

BC	—	3000	—	D

Series
AC:Small Size
BC:Middle Size

Port Size
1500:G1/8"
2000:G1/4"
3000:G3/8"
4000:G1/2"

Drain Type
Blank:Manual Drain Type
D:Auto Drain Type



AC1500
AC2000



BC2000
BC3000
BC4000



AFC1500
AFC2000



BFC2000
BFC3000
BFC4000



AFR1500
AFR2000



BFR2000
BFR3000
BFR4000



AF1500
AF2000



BF2000
BF3000
BF4000



AR1500
AR2000



BR2000
BR3000
BR4000



AL1500
AL2000



BL2000
BL3000
BL4000

G Series Air Preparation



GC2-01 GC3-03
GC2-02 GC3-04
GC2-03



GWL2-01
GWL2-02



GWL3-02
GWL3-03
GWL3-04



GFR2-01
GFR2-02



GFR3-02
GFR3-03
GFR3-04



GF2-01
GF2-02



GF3-02
GF3-03
GF3-04



GR2-01
GR2-02



GR3-02
GR3-03
GR3-04

GL2-01
GL2-02

GL3-02
GL3-03
GL3-04



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Metal Cup Series Air Preparation



MAC2000-01
MAC2000-02
MAC3000-02
MAC3000-03

MAC4000-03
MAC4000-04
MAC4000-06
MAC5000-06
MAC5000-10



MAC2010-01
MAC2010-02
MAC3010-02
MAC3010-03

MAC4010-03
MAC4010-04
MAC4010-06
MAC5010-06
MAC5010-10



MAF2000-01
MAF2000-02
MAF3000-02
MAF3000-03

MAF4000-03
MAF4000-04
MAF4000-06
MAF5000-06
MAF5000-10



MAL2000-01
MAL2000-02
MAL3000-02
MAL3000-03

MAL4000-03
MAL4000-04
MAL4000-06
MAL5000-06
MAL5000-10



MAW2000-01
MAW2000-02
MAW3000-02
MAW3000-03

MAW4000-03
MAW4000-04
MAW4000-06
MAW5000-06
MAW5000-10

Stainless Steel Series Air Preparation



SFRL-02
SFRL-04



SFR-02
SFR-04



SR-02
SR-04

High Pressure Series Air Preparation.

Max Pressure :35 Bar



BFRH-08
BFRH-10
BFRH-15
BFRH-20
BFRH-25



QSLH-08
QSLH-10
QSLH-15
QSLH-20
QSLH-25



QTYH-08
QTYH-10
QTYH-15
QTYH-20
QTYH-25

Other Series Air Preparation



Model
SL2000
SL3000
SL4000



Model
SFR2000
SFR3000
SFR4000



Model
SFC2000
SFC3000
SFC4000



Model
NL2000-02



Model
NF2000-02



Model
NFC2000-02



Model
NW2000-02



Model
NAR1500
NAR2000



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

IR Series Precision Regulator



IR

Model	IR1000-01	IR1010-01	IR1020-01	IR2010-02	IR2020-02	IR3010-03	IR3010-03	IR3020-03
Working Media	Compressed Air							
Min.Working Pressure	0.05Mpa							
Pressure Range	0.005-0.2Mpa	0.01-0.4Mpa	0.01-0.8Mpa	0.01-0.4Mpa	0.01-0.8Mpa	0.005-0.2Mpa	0.01-0.4Mpa	0.01-0.8Mpa
Max.Working Pressure	1.0Mpa							

EPV Proportional Valve

EPV – 1 – 0 – 0 – 1 – □ – 2 – S – □

- EPV — Series
- 1 — ADJ range: 1 1:0.1MPa; 2 2:0.5MPa; 3 5:0.9MPa
- 0 — Voltage: 1 0:DC24V
- 0 — Input signal: 1 0:DC4-10mA; 2 1:DC0-20mA; 3 2:DC0-5V; 4 3:DC0-10V
- 1 — Output signal: 1 1:DC1-5V; 2 2:NPN output; 3 3:PNP output; 4 4:DC4-20mA
- □ — Port thread type: 1 Blank:thread RC; 2 N:thread NPT; 3 T:thread NPTF; 4 F:thread G
- 2 — Port Size: 1 2:1/4"; 2 3:3/8"
- S — Cable Port: 1 S:straight 3m; 2 L:right-angle 3m; 3 Blank:no cable
- □ — Accessory: 1 Blank:no bracket; 2 B:Flat bracket; 3 C:L bracket



EPV

Auto Drain



AD402-02
AD402-03
AD402-03



AH402-02
AH402-03
AH402-04



EDWIN-A



EDWIN-B

Air Preparation Accessories



T-Type Bracket



Spacer With
T-Type bracket



Spacer



Spacer With
L-Type bracket



L-Type Bracket



Bracket for AR/AW



Bracket for AL/AF



Pressure Gauge



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Pressure Gauge

Carbon Steel Dry Gauges



DRY GAUGE 1



DRY GAUGE 2



DRY GAUGE 3

Stainless Steel Liquid Filled Gauges



STAINLESS GAUGE 1



STAINLESS GAUGE 2

Pneumatic Tube Fittings



PC POC PL PLL PLF PCF PB PD PX PKB

PKD PH PHF PMF PGJ PLJ PLGJ PYJ PWJ PIJ

PKJ PDJ PXJ PSJ PTJ PP PIG PM PZA PKG

PK PXG PXT PLM PHL(2) PHL(3) PPF PU PV PE

PY PG PGE PEG PW

Pneumatic Tube Fittings With G Thread(O-ring)



PC-G PL-G PB-G PD-G PLH-G PLL-G PX-G PKD-G PH-G XPHF-G

PCF-G PLF-G POC-G PXT-G PHL-G(2) PHL-G(3)



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Mini Fittings



PC-C PB-C PCF-C PD-C POC-C PLL-C PL-C PE-C PU-C PY-C

Mini Fittings




PG-C PL-G-C PW-C PUL-C PC-G-C

Speed Controllers



JSC JSC-G PA

Hand Valve

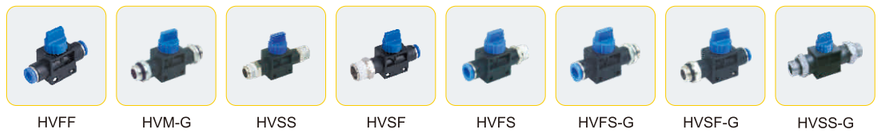

HVFF HVM-G HVSS HVSF HVFS HVFS-G HVSF-G HVSS-G

Stop Fittings




SPC SPC-G SPL-G SPL SPU

Check Valves



CVPC CVPF-G CVPC-G CVPU CVPF

Multipass Quick Coupler

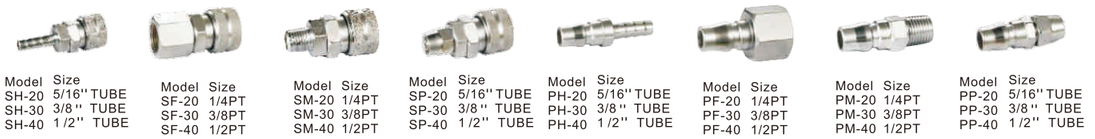

Model	Size
SH-20	5/16'' TUBE
SH-30	3/8'' TUBE
SH-40	1/2'' TUBE

Model	Size
SF-20	1/4PT
SF-30	3/8PT
SF-40	1/2PT

Model	Size
SM-20	1/4PT
SM-30	3/8PT
SM-40	1/2PT

Model	Size
SP-20	5/16'' TUBE
SP-30	3/8'' TUBE
SP-40	1/2'' TUBE

Model	Size
PH-20	5/16'' TUBE
PH-30	3/8'' TUBE
PH-40	1/2'' TUBE

Model	Size
PF-20	1/4PT
PF-30	3/8PT
PF-40	1/2PT

Model	Size
PM-20	1/4PT
PM-30	3/8PT
PM-40	1/2PT

Model	Size
PP-20	5/16'' TUBE
PP-30	3/8'' TUBE
PP-40	1/2'' TUBE



SMY 1/4PT 3/8PT SML 1/4PT SMV 1/4PT 3/8PT SMT 1/4PT SMM 1/4PT SMX 1/4PT



pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Metal Fitting



MPC MPOC MPCF MPL MPLN MPLL MPLF MPT MPD MPX



MPGJ MPLGJ MPTGJ MPDGJ MPXGJ MPLJ MPTJ MPDJ MPXJ MBJ



MPUC MPUT MPM MPPF MPG MPUL MPY MPZA MPP MPTG



MPMF MPCJ MPCFJ MPH MDPH MTPH MPHF MPK MDPK MTPK

Metal Fitting With G therad(O-Ring)



MPC-G MPL-G MPT-G MPOC-G MPLL-G MPD-G MPX-G PHF-G MDPK-G MTPK-G



MPCJ-G MDPH-G MPH-G MTPH-G MPK-G

Metal Speed Controllers



MNSE MNSE-G MNSP MNSP-G MNSR MNSF

PU TUBE



Model:
PU 4x2.5, 6x4,8x5,8x6,
10x6.5,12x8,14x10,16x12
Type:Roll type
Length:200M, 100M
Color:Blue,Orange,Red,Black,
Transparent,Yellow

PU Spring Hose



Model:
Tvpe:SpringType
(With Fitting Optional)
Length:15M, 12M, 9M,
7.5M, 6M
Color;Blue,Orange, Red,Black
Transparent,Yellow

Nylon Tube



Model:
PA4x25, 5x3, 6x4,8x5,8x6,
10x7.5、12x8, 14x10,16x12
Type:Roll type
Length:200M, 100M
Color:Blue,Orange,Red,Black,
Transparent,Yellow

PE Tube



Model:
PE 4x2.5,6x4,8x5, 8x6,
10x6.5,12x8
Type:Roll type
Length:200M, 100M
Color:Blue,Orange,Black
Transparent,Yellow

Tube Cutter





pneubig.com

NINGBO PNEUBIG PNEUMATIC CO.,LTD.

Muffler



BSL BSLM SD SU PSU SC SCQ SET SEB A



B C D E V-1 V-2 SEB-B-1 SSM SS-V SSDV



SDV DS SS-PDK PSE

Air Gun



PAG-01 PAG-02 PAG-03 PAG-04 PAG-04-Long



DG-01 DG-02 DG-03 BG-1 NPN-989



PG-01 PG-A PG-B PG-C PG-D


AC220V 4.5VA
Amp. 25mA
100% ED
IP 65
EVI 7/9
24V DC
4.8W
100% ED
IP 65
DC24V 4.8W
100%ED
IP65
DC24V 4.8W
100%ED
IP65