



V2000

Product Advantages

1158mm

Body width is 1158mm, maneuver in narrow spaces freely.

2514mm

Pin height is 2514mm, enable loading onto high-sided trucks.

218mm

The undercarriage has a ground clearance of 218mm.

EPA & Euro V

Engine: Cummins QSF2.8 Engine, 55kW

ITA HANSA

Hydraulic system adopts Italian HANSA closed-loop system.

Pilot Control Handle

Allows single-handed, easy and precise control.

Safety Lock

Leave the vehicle and it locks immediately; the equipment won't move.

Bucket Float

When using sweeping attachment, can follow the ground's contours.

Water Cooling

Engine cooling is water-cooled, enabling the machine to work 24h.

V2000

Product Parameters




Engine Brand	QSF2.8
Rated Power(KW)	55
Displacement(CC)	2800CC
Fuel	Diesel
Engine Cooling	Liquid
Number of cylinders	4
Fuel tank capacity(L)	60
Rotating speed (rpm)	2500

Item	Metric	U.S.
Bucket Capacity	0.23m ³	8.12ft ³
Max Lifting Force	1000kg	2204.62Lb
Travel Speed	0-7Km/h	0-4.35mile/h
Operating Weight	2724kg	6005.38 Lb



V2000

Product Parameters

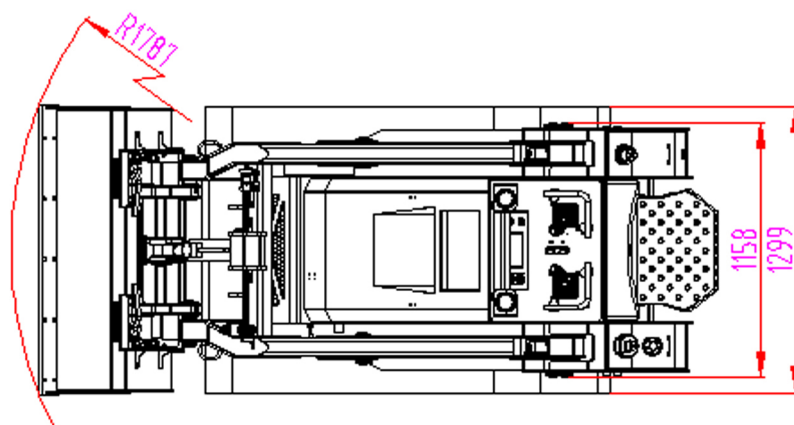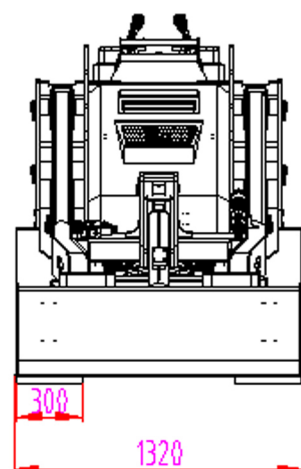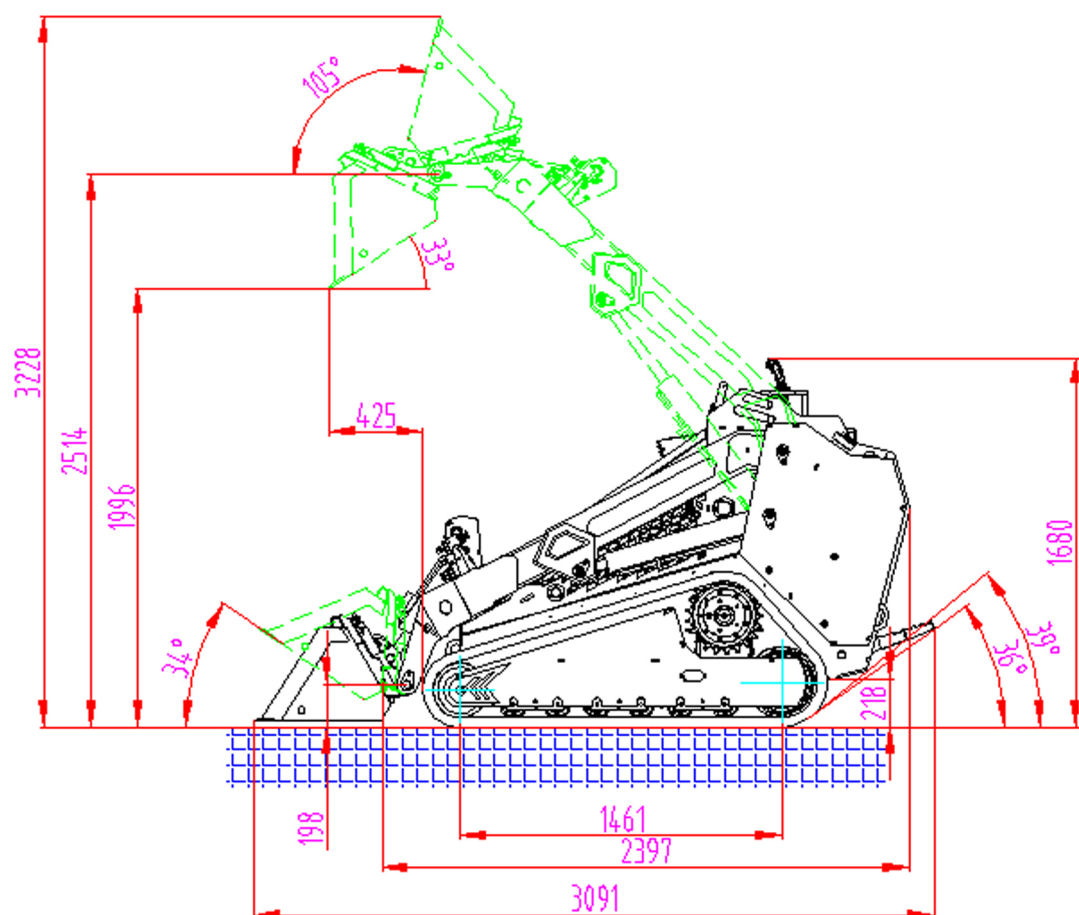



» Auxiliary hydraulic lines are routed inside the loader arm for optimal protection. Case drain is standard. Auxiliary hydraulic couplers are pressure release type.

» Attachment hose guide is standard



» Welded track frame has angled top for debris shedding and the dual flange front idler provides better stability and weight distribution.



» Shock-absorbing and anti-slip standing board

» When operator leaves the platform, the parking brake is automatically engaged.



» Trailer safety hook with four-point positioning

» Built-in pressure spring hook without abnormal noise





» Vertical lift loader arms reach higher and further than the competition with a hinge pin height of 84.25" and a reach of 20" (at 45° dump angle).

» Custom Molded Seat Cushions: Ergonomic cushions are molded to fit and open easily for interior inspection and maintenance.



» Hydraulic pilot-operated loader and drive control valves offer precise and responsive control of the machine.

» LCD touch screen displaying oil quantity, temperature and pressure, with a cigarette lighter and a 12V battery port.



» Openable operating platform for easier maintenance and servicing

» Operating baffle switch



» Safety lock for hydraulic cylinder

» Kubota engine oil filter quick-change port

