



V800 S/T

Product Advantages

1020mm

Body width is 1020mm, maneuver in narrow spaces freely.

2195mm

Pin height is 2195mm, enable loading onto high-sided trucks.

225mm

The undercarriage has a ground clearance of 225mm.

EPA & Euro V

Engine: Yanmar 3TNV80F or Japanese Kubota D1105, 18.5KW.

ITA HANSA

Hydraulic system adopts Italian HANSA closed-loop system.

Pilot Control Handle

Allows single-handed, easy and precise control.

Safety Lock

Leave the vehicle and it locks immediately; the equipment won't move.

Bucket Float

When using sweeping attachment, can follow the ground's contours.

Water Cooling

Engine cooling is water-cooled, enabling the machine to work 24h.

TV-V800 S/T

Product Parameters

Item	Metric	U.S.
Bucket Capacity	0.15m³	5.31ft³
Max Lifting Force	4.5KN	1012Lb
Travel Speed	0-4Km/h	0-2.49mile/h
Operating Weight	1729kg	3812Lb


Engine Brand	Kubota D1105
Rated Power(KW)	18.2
Displacement(CC)	1123
Fuel	Diesel
Engine Cooling	Liquid
Number of cylinders	3
Fuel tank capacity(L)	33
Rotating speed (rpm)	3000

All technical parameters are subject to a ± 3% margin of error, and the actual specifications shall prevail.



TV-V800 S/T

Product Parameters

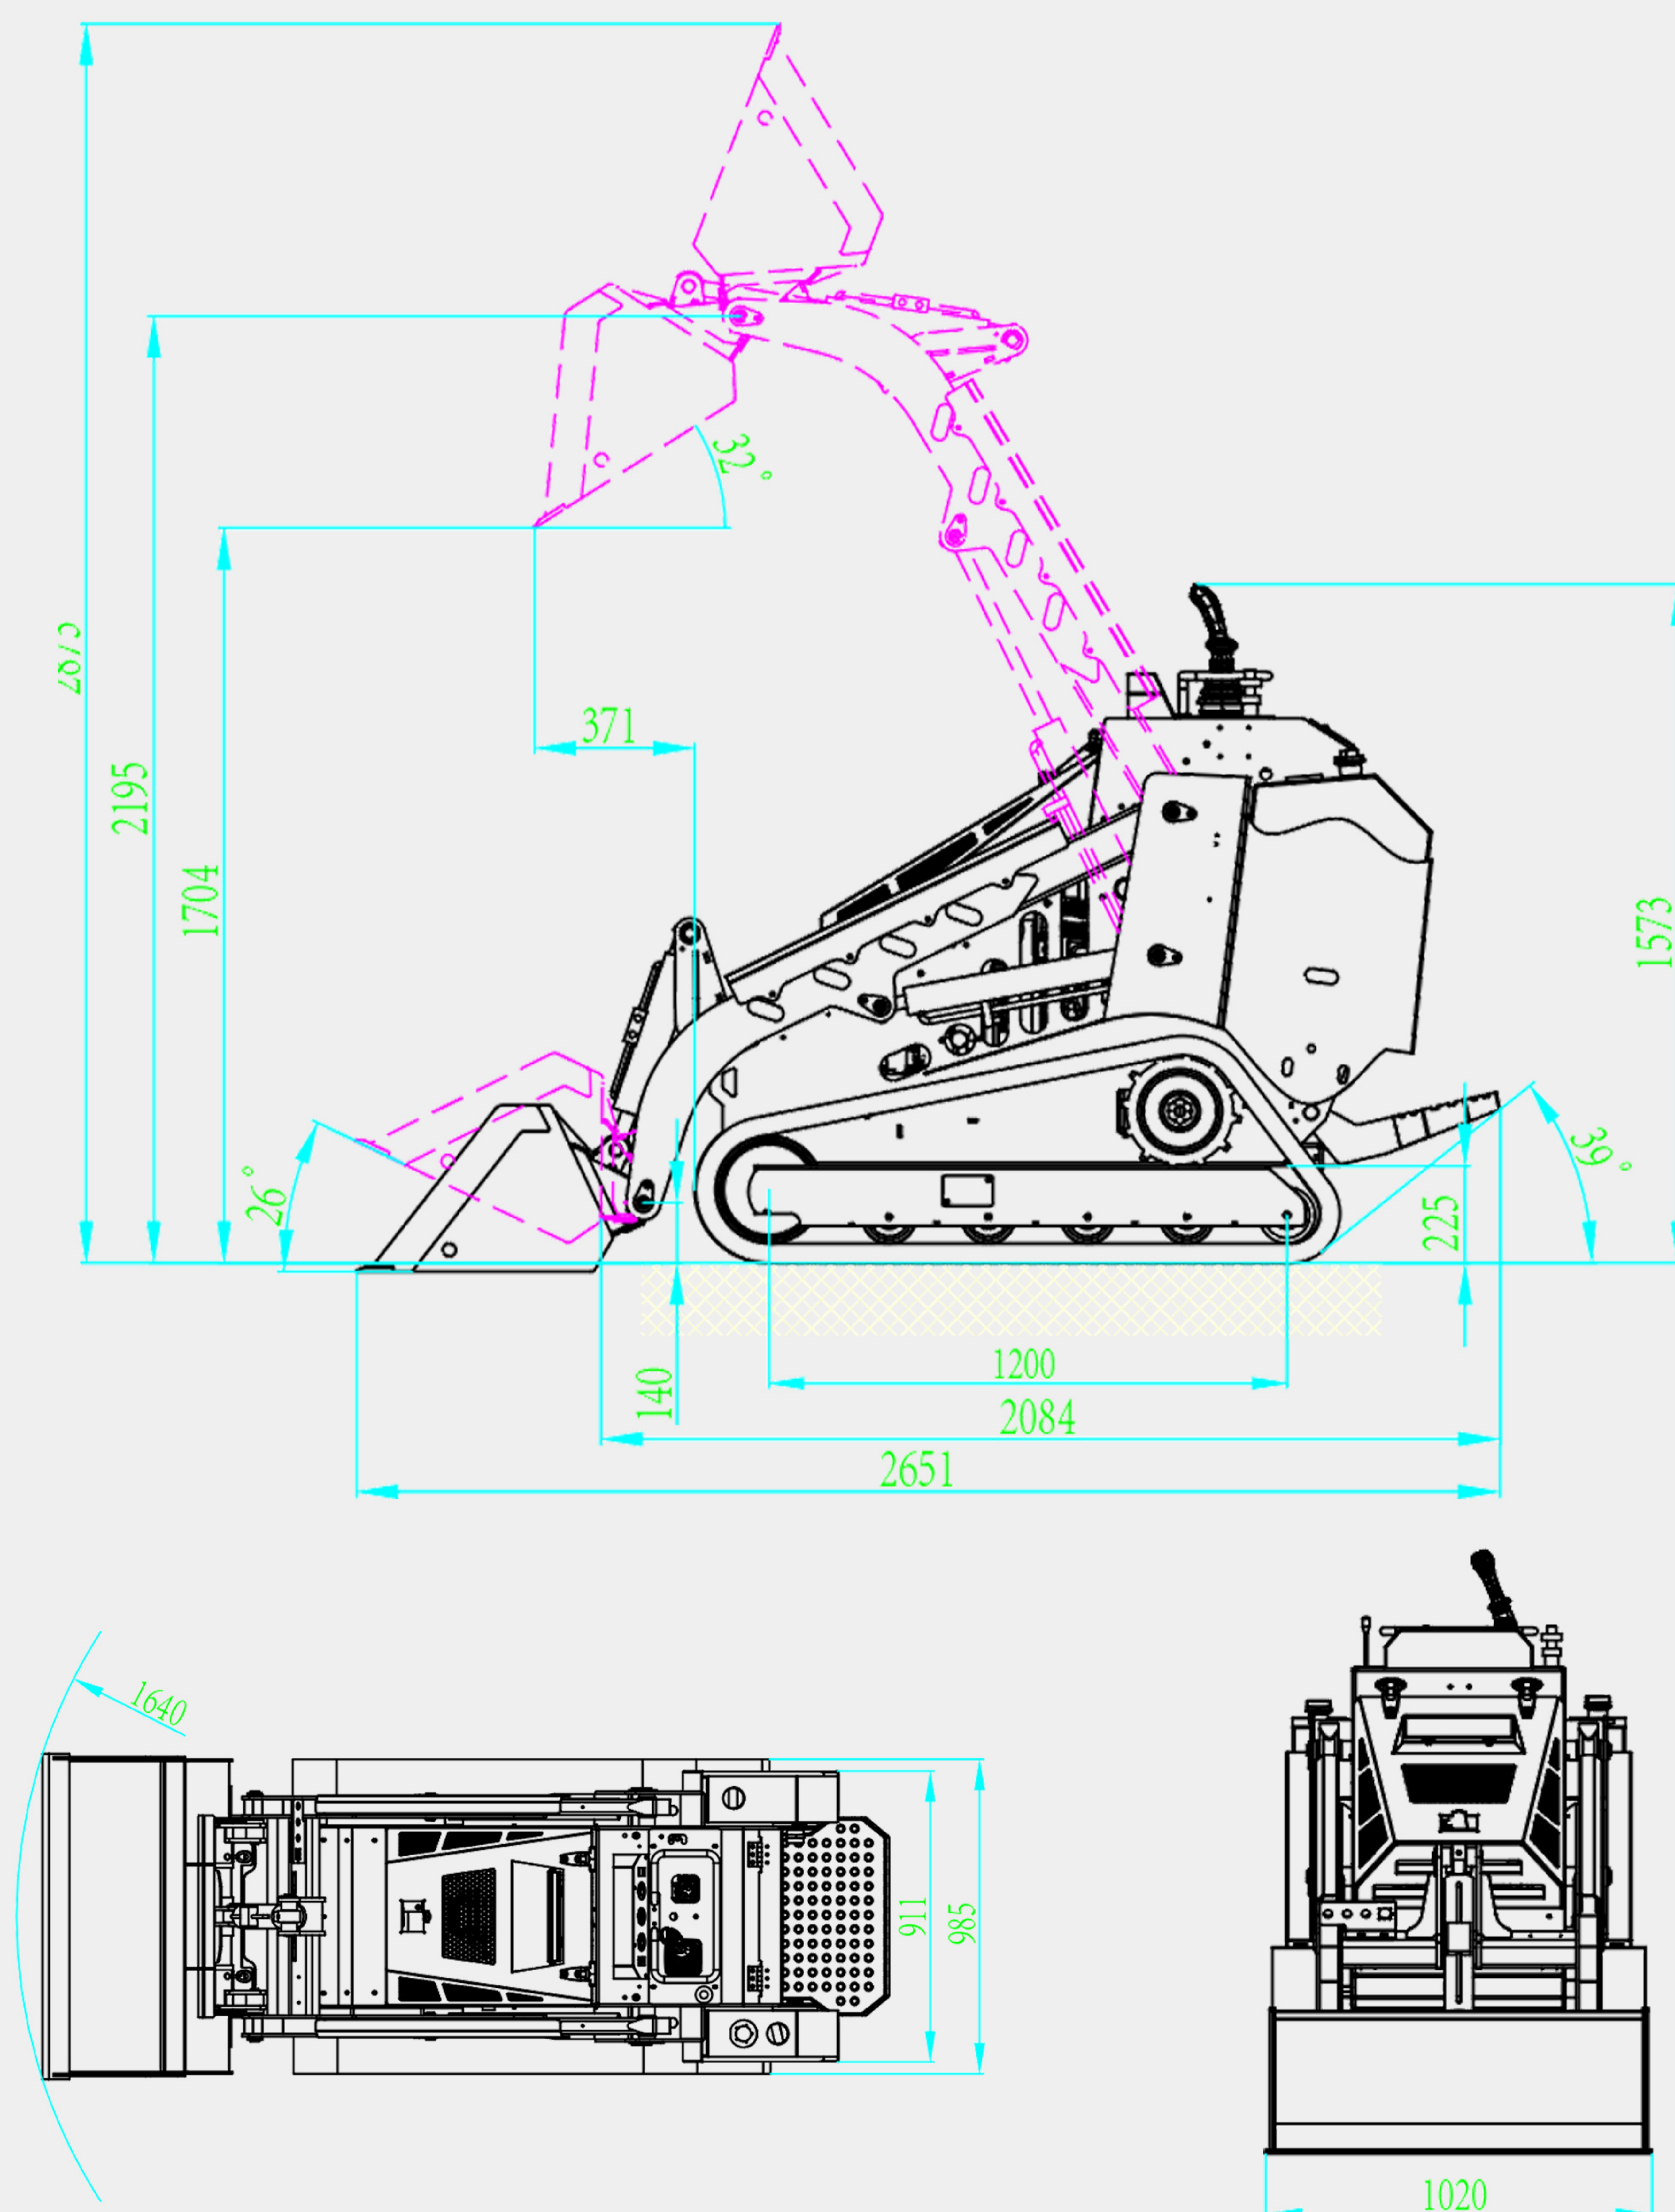




» Auxiliary hydraulic lines are routed inside the loader arm for optimal protection. Case drain is standard. Auxiliary hydraulic couplers are pressure release type.

Upgradable Dual Hydraulic Pilot Control «




» Welded track frame has angled top for debris shedding and the dual flange front idler provides better stability and weight distribution.

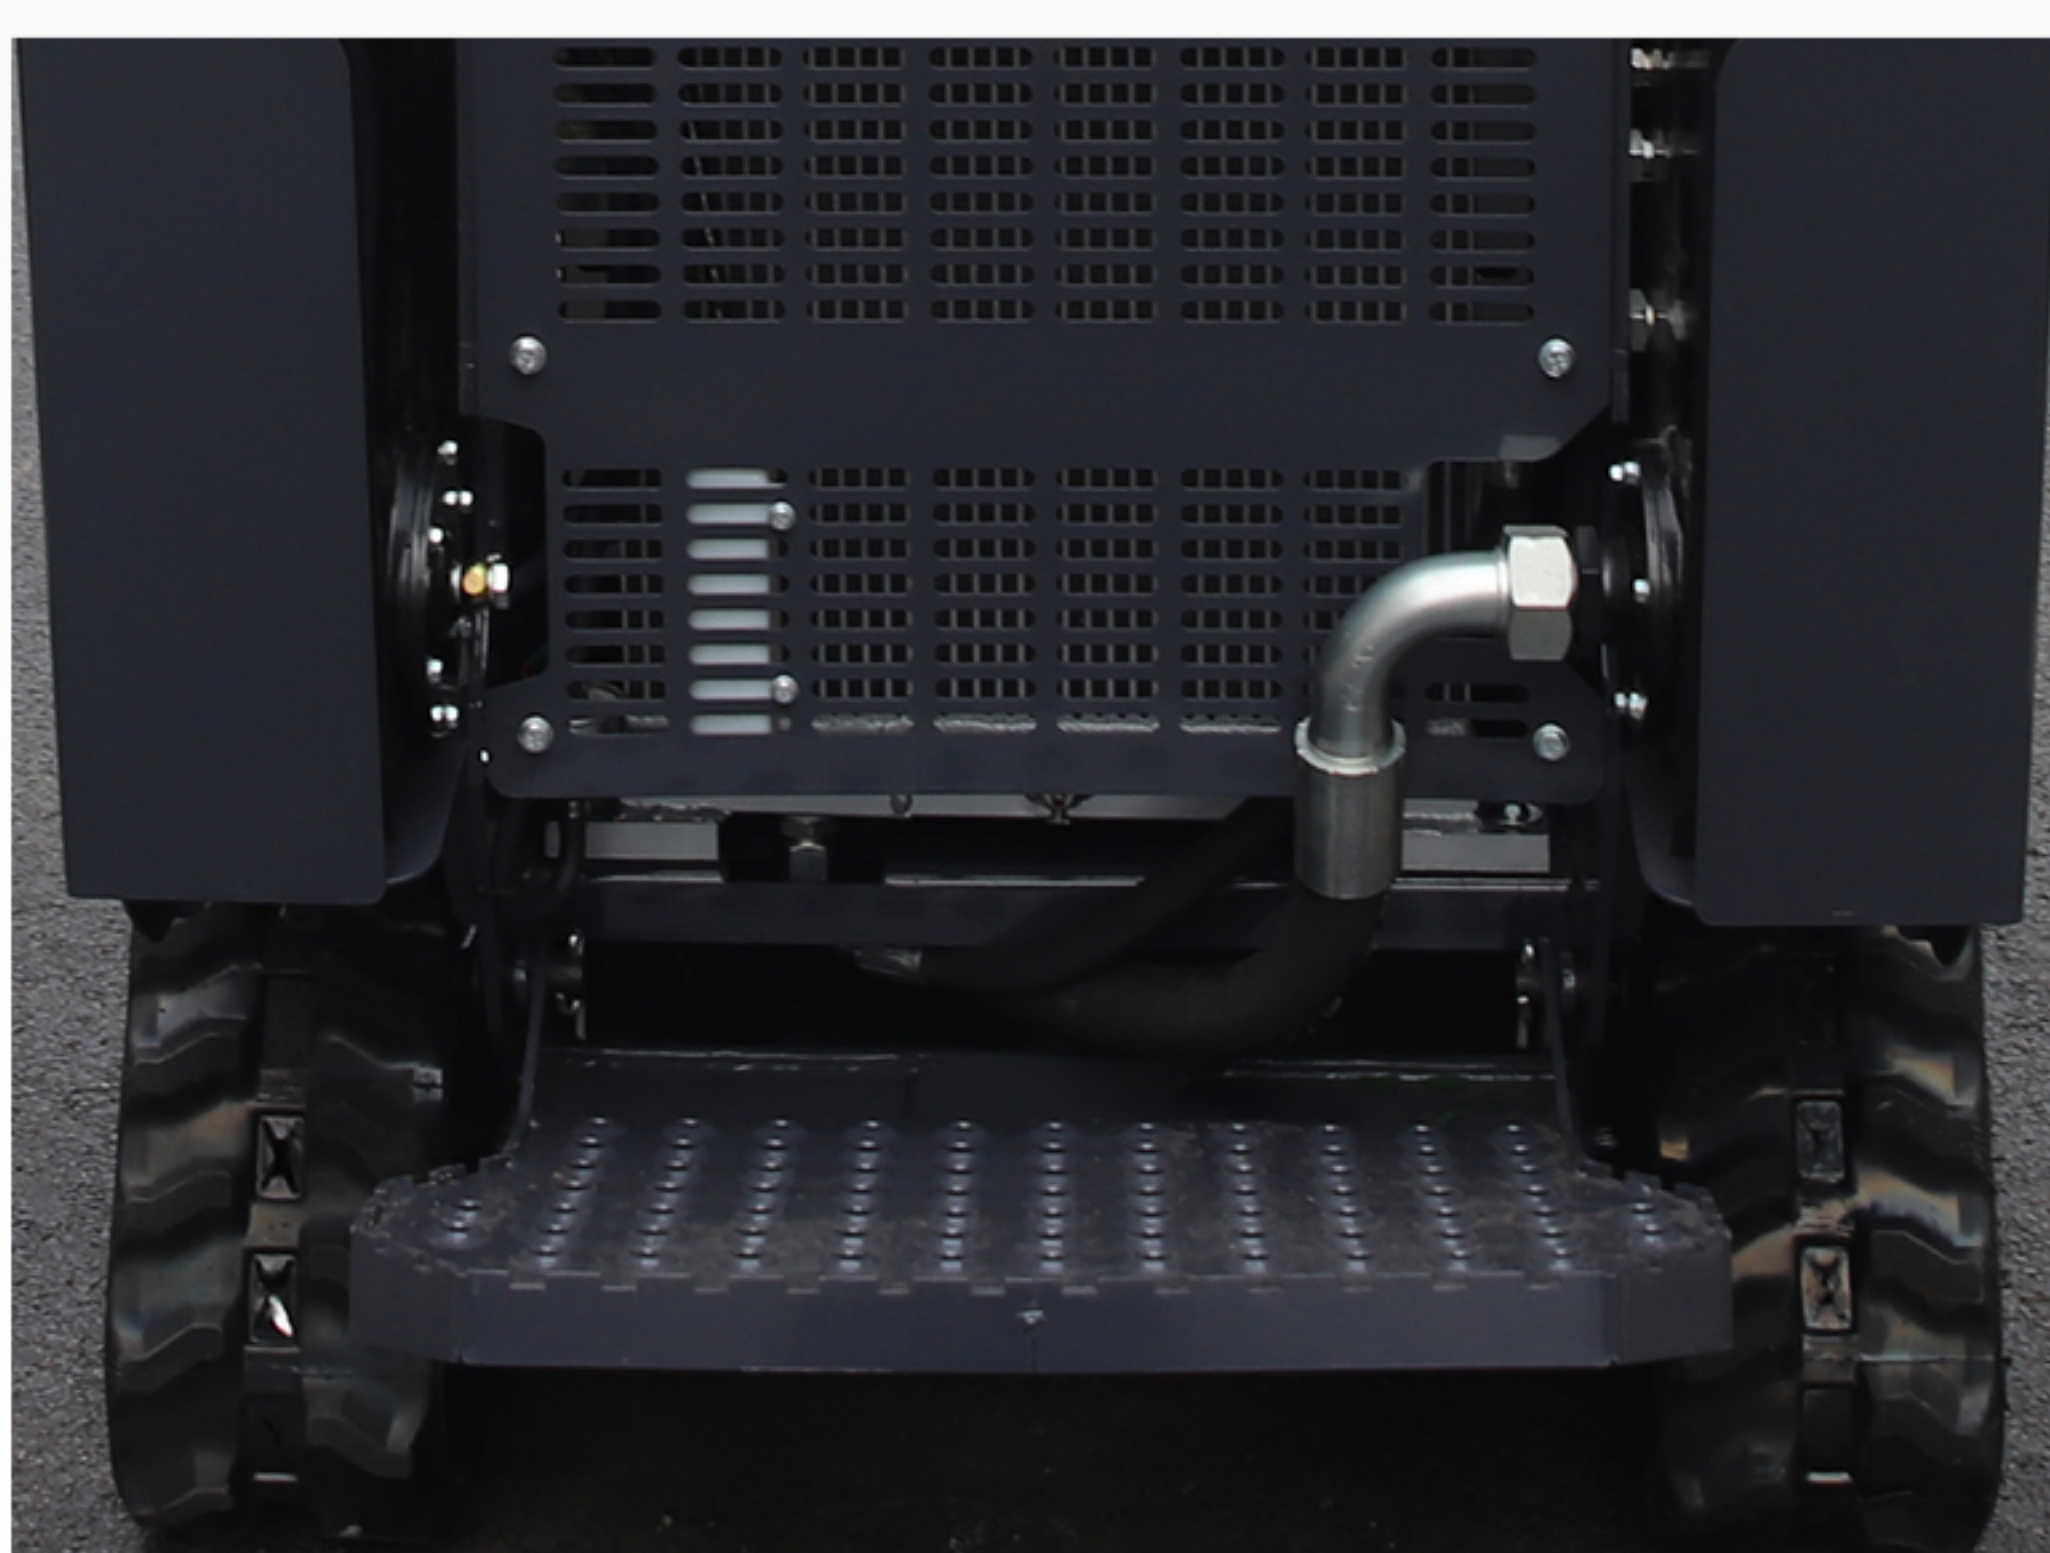

» Shock-absorbing and anti-slip standing board

KUBOTA D1105 Engine «

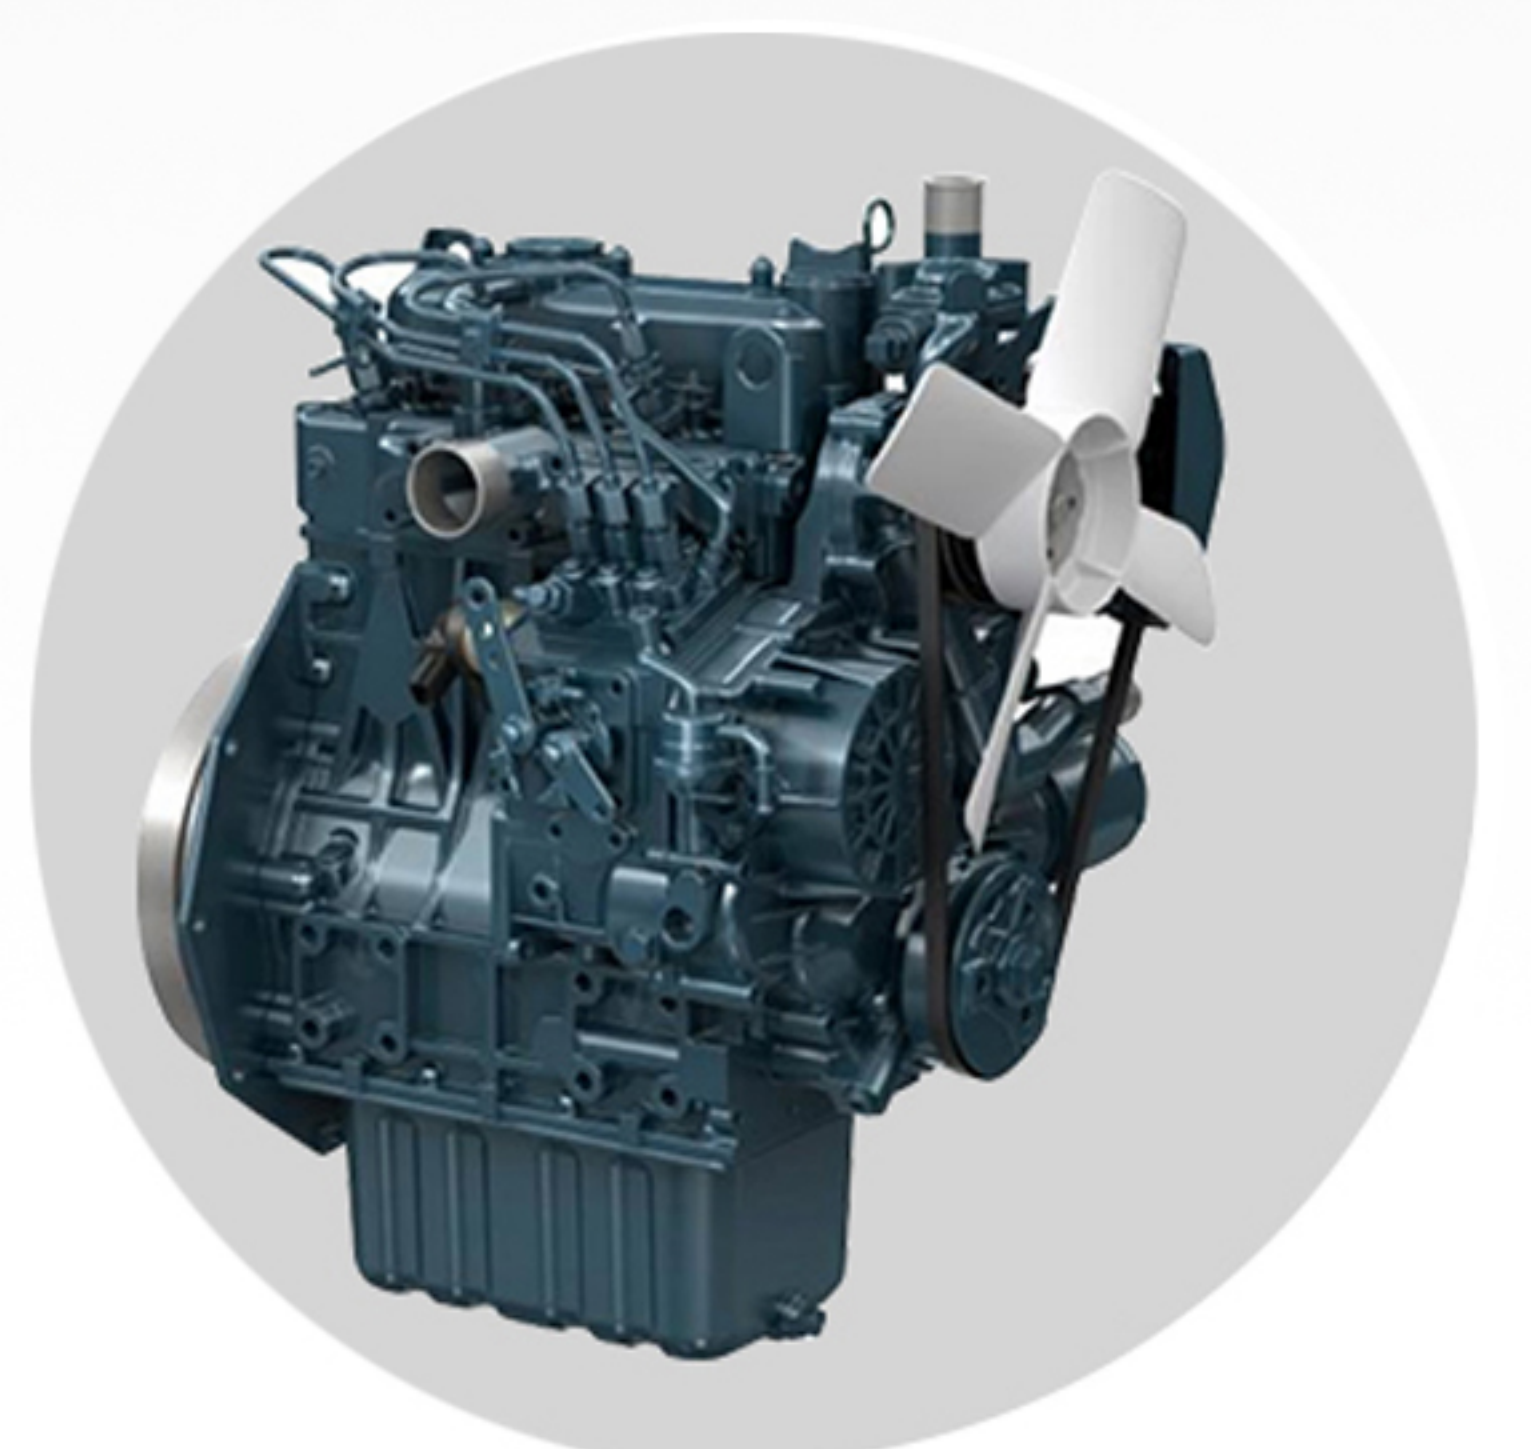

» LED headlight

