



V1000

Product Advantages

960mm

Body width is 960mm, maneuver in narrow spaces freely.

2140mm

Pin height is 2140mm, enable loading onto high-sided trucks.

200mm

The undercarriage has a ground clearance of 200mm.

EPA & Euro V

Engine: Yanmar 3TNV80F or Japanese Kubota D1105, 18.5KW.

ITA HANSA

Hydraulic system adopts Italian HANSA closed-loop system.

Pilot Control Handle

Allows single-handed, easy and precise control.

Safety Lock

Leave the vehicle and it locks immediately; the equipment won't move.

Bucket Float

When using sweeping attachment, can follow the ground's contours.

Water Cooling

Engine cooling is water-cooled, enabling the machine to work 24h.

V1000

Product Parameters




Engine Brand	Yanmar 3TNV80F	Kubota D1105
Rated Power(KW)	17.8	18.2
Displacement(CC)	1267	1123
Fuel	Diesel	Diesel
Engine Cooling	Liquid	Liquid
Number of cylinders	3	3
Fuel tank capacity(L)	40	40
Rotating speed (rpm)	3000	3000

Item	Metric	U.S.
Bucket Capacity	0.19m³	6.71ft³
Max Lifting Force	650kg	1433Lb
Travel Speed	0-4.5Km/h	0-2.8mile/h
Operating Weight	1658kg	3655Lb



V1000

Product Parameters

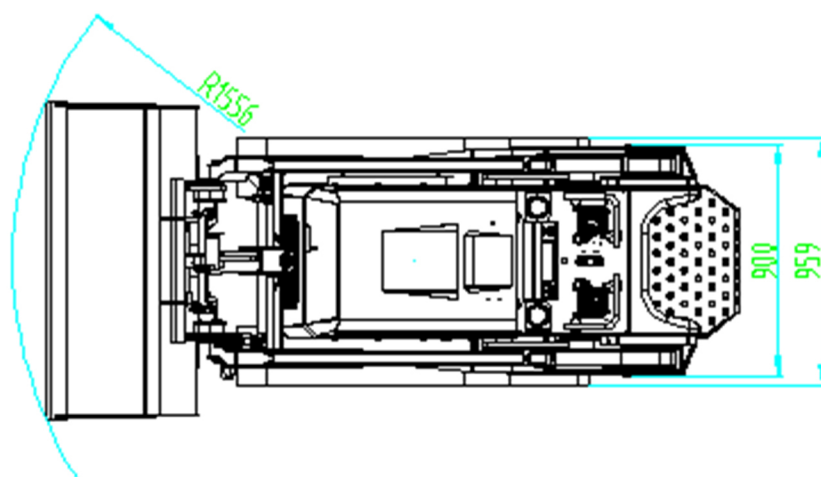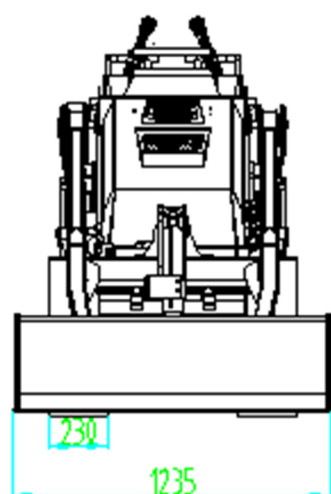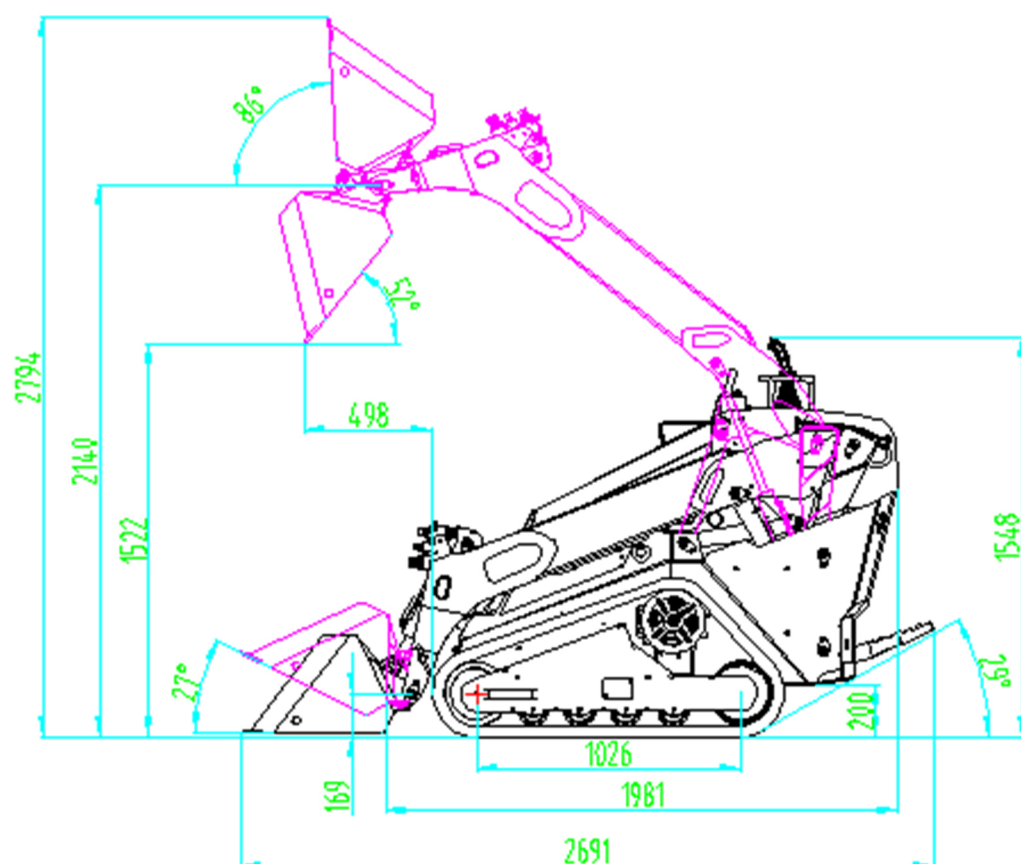



» Auxiliary hydraulic lines are routed inside the loader arm for optimal protection. Case drain is standard. Auxiliary hydraulic couplers are pressure release type.

» Attachment hose guide is standard



» Welded track frame has angled top for debris shedding and the dual flange front idler provides better stability and weight distribution.



» Shock-absorbing and anti-slip standing board

» When operator leaves the platform, the parking brake is automatically engaged.



» Trailer safety hook with four-point positioning

» Built-in pressure spring hook without abnormal noise





» Vertical lift loader arms reach higher and further than the competition with a hinge pin height of 84.25" and a reach of 20" (at 45° dump angle).

» Custom Molded Seat Cushions: Ergonomic cushions are molded to fit and open easily for interior inspection and maintenance.



» Hydraulic pilot-operated loader and drive control valves offer precise and responsive control of the machine.

» LCD touch screen displaying oil quantity, temperature and pressure, with a cigarette lighter and a 12V battery port.



» Openable operating platform for easier maintenance and servicing

» Operating baffle switch



» Safety lock for hydraulic cylinder

» Kubota engine oil filter quick-change port

