



高压泵

High pressure pump

样 本

Brochure



微商城



公众号



Whatsapp

高压泵

High pressure pump

安曼钻机提供多款的高压注浆泵产品系列，功率范围覆盖 90 kW 至 450 kW 以上，工作压力最高可达 90 MPa，流量范围覆盖 10 L/min 至 800 L/min，可满足从低压注浆到高压旋喷的各类施工需求。

产品采用低冲次、大行程的设计理念，动力端与液力端结构经过优化，更适合输送含颗粒介质，显著提高密封件寿命，降低现场维护频率。传动系统可选链条传动或齿轮传动，配备10速机械变速，气动离合与远程控制，润滑系统由油齿轮泵强制供油，确保长期重载工况下的可靠性。

控制方面，可选配带触摸屏的控制面板，实现工作压力、流量、浆液密度的实时显示、存储、打印及远传功能，满足现代化施工对数据管理与远程监控的需求。

ANMAN applies a series of high-pressure grouting pumps, with power ranging from 90 kW to over 450 kW, a maximum working pressure of up to 90 MPa, and a flow rate covering 10 L/min to 800 L/min, meeting various construction requirements from low-pressure grouting to high-pressure jet grouting.

The product adopts a low-frequency, long-stroke design concept. The power end and fluid end structures are optimized to better convey particle-laden media, significantly extending seal life and reducing on-site maintenance frequency. The transmission system is available in either chain drive or gear drive options, featuring a 10-speed mechanical transmission, pneumatic clutch, and remote control. The lubrication system is force-fed by an oil gear pump, ensuring reliability under long-term heavy-load conditions.

For control, an optional touchscreen control panel enables real-time display, storage, printing, and remote transmission of working pressure, flow rate, and slurry density, meeting the requirements of modern construction for data management and remote monitoring.

参数	Parameters	AMP-600	AMP-400E	AMP-230E	单位 / Unit
功率	Engine power	410 D / 450 E	400	200	kW
最大压力	Max pressure	90	56	45	MPa
最大流量	Max flow rate	800	388	230	L/min

参数	Parameters	AMP-165E	AMP-90E		单位 / Unit
功率	Engine power	132	90		kW
最大压力	Max pressure	43	35		MPa
最大流量	Max flow rate	165	129		L/min



高压泵

High pressure pump


AMP-600



参数	Parameters	AMP-600	单位 / Unit
运输尺寸 (长*宽*高)	Dimensions(L*W*H)	6058*2438*2591	mm
运输重量	Weight	16500	kg
柴油机功率 ★	Diesel power ★	410	kW
电动机功率 ☆	Electric power ☆	450 (AMP-600E)	kW
最大压力	Max pressure	90	MPa
最大流量	Max flow rate	800	L/min
活塞直径	Piston diameter	3"、4"、4-1/4"、4-1/2"、5" / 76.2、101.6、107.95、114.3、127 mm	/
行程	Stroke	177.8	mm
最大行程速率	Max stroke rate	124	spm
抽吸直径	Suction diameter	100	mm
输出直径	Output diameter	1-1/2" / 38.1 mm	/
油箱容积	Fuel tank capacity	500	L
7英寸PLC控制面板	7" PLC control panel	√	/
数据记录装置	Data recording kit	√	/

(★表示标配, ☆表示选配 ★ means standard, ☆ means optional)

参数表仅供参考, 具体请与销售 / 技术确认
Specifications subject to change; please confirm with sales/technical.

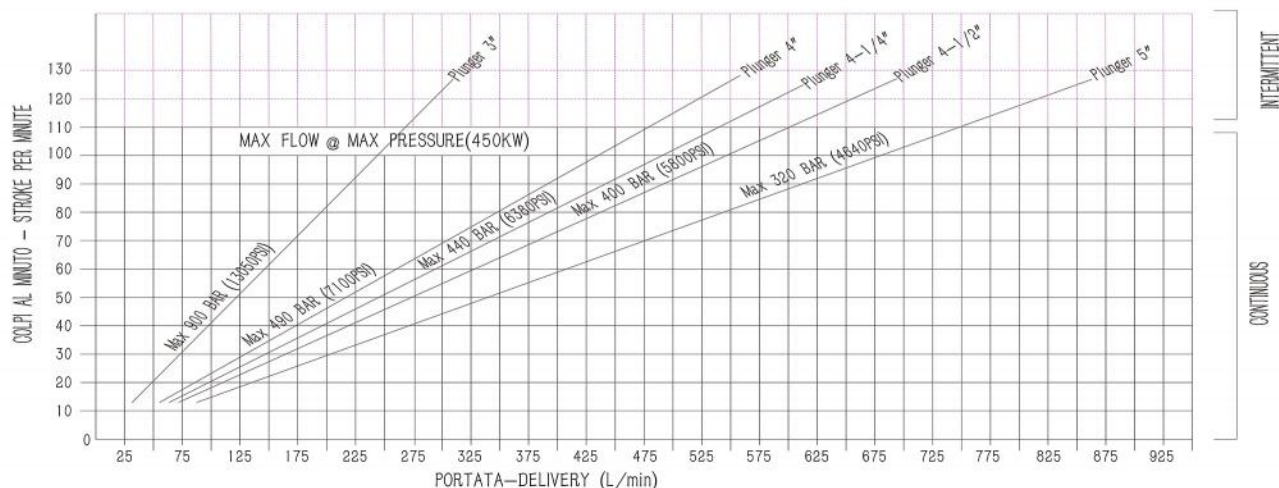

产品给客户创造财富
Products create wealth for customers

企业给员工创造幸福
Enterprises creat happiness for employees



研发中心：江苏省无锡市锡山区羊尖工业园区天佑路 11 号

R&D ADD: NO.11 TianYou Road, XiShan District, WuXi City, JiangSu Province

制造工厂：江苏省扬州市江都区武坚工业园区飞龙路 16 号

Factory: NO.16 FeiLong Road, WuJian, JiangDu District, YangZhou City, JiangSu Province

营销中心：江苏省无锡市新吴区深港都会广场 10 楼 1602

MC ADD: Room 1602, 10th Floor, Shengang Duhui Plaza, Xinwu District, Wuxi City, Jiangsu Province

客服热线 :400-100-5187

Service hotline:400-100-5187

网址 :www.wxanman.com

Http://www.anmandrill.com

版本号：AM/YB 2026 年 07 月

Edition: AM/YB 07.2026