




**YIFENG<sup>®</sup>**

***UNDERCARRIAGE PARTS,  
BUCKET PIN & BUCKET BUSHING***



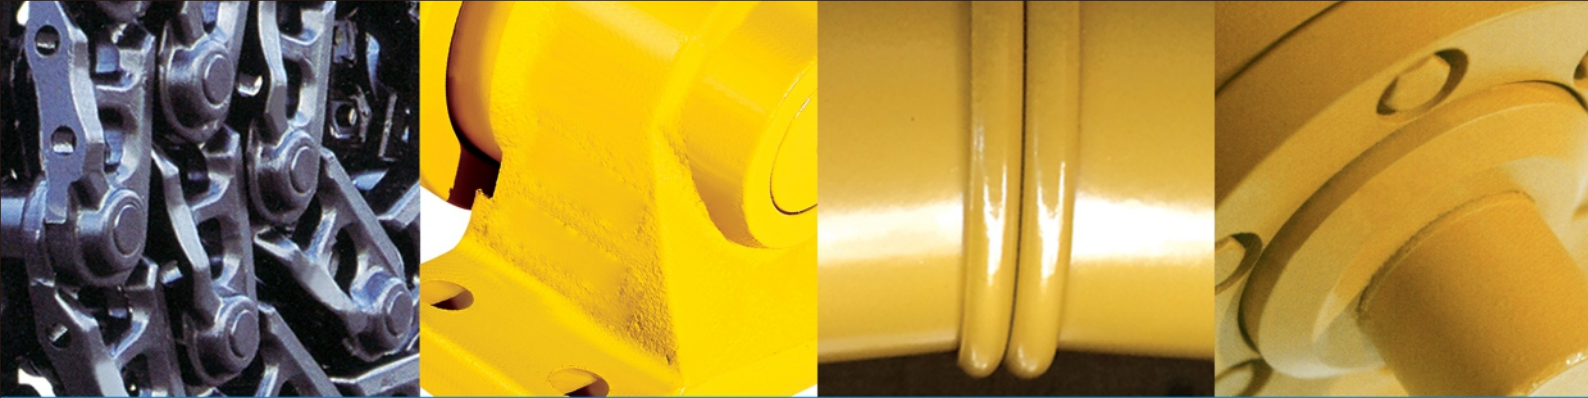

## DIAGRAM OF UNDERCARRIAGE PARTS




**YIFENG®**

**SHANGHAI YIFENG MACHINERY CO.,LTD**


No.2370, Yueluo Rd, Shanghai, China (201908)  
 Tel: +86 (0)21 5187 2627 Fax: +86 (0)21 5686 6975  
 E-mail: sales@yifeng.cc  
 Website: www.yifeng.cc




## Oil-Groove Shape

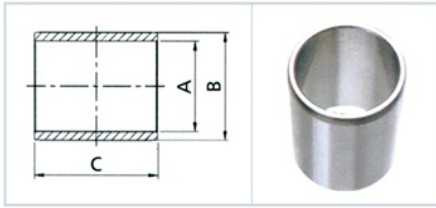


Groove Type. 1

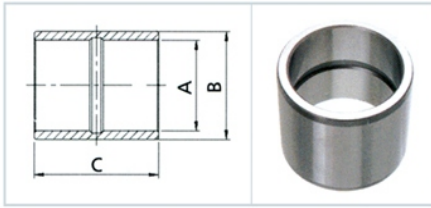


Groove Type. 2

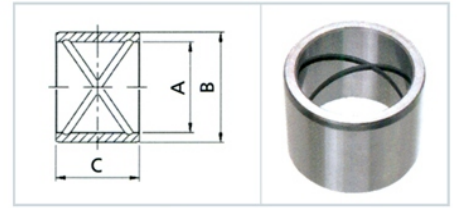


Groove Type. 3

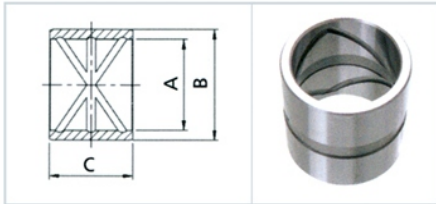


Groove Type. 4

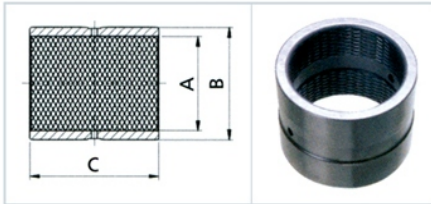

Groove Type. 5

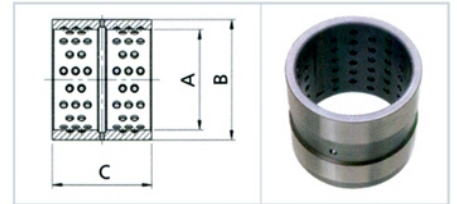

Groove Type. 6

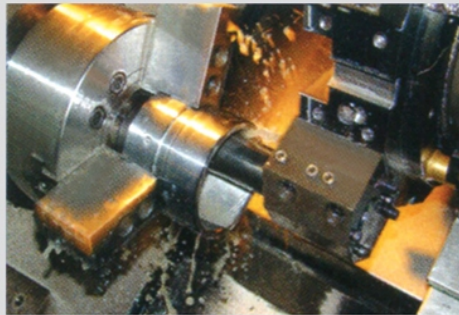

## Standard Products

| Inner Diameter (A) | Outer Diameter (B) | Length (C) |
|--------------------|--------------------|------------|
| 20                 | 30                 | 15-45      |
| 25                 | 38                 | 15-60      |
| 35                 | 45                 | 15-70      |
| 40                 | 50                 | 15-75      |
| 45                 | 55                 | 15-85      |
| 50                 | 60                 | 15-90      |
| 55                 | 68                 | 15-105     |
| 55                 | 75                 | 15-115     |
| 60                 | 70                 | 15-105     |
| 60                 | 75                 | 15-115     |
| 60                 | 80                 | 15-120     |
| 65                 | 75                 | 15-115     |
| 65                 | 80                 | 15-120     |
| 65                 | 90                 | 15-135     |
| 70                 | 80                 | 15-120     |

| Inner Diameter (A) | Outer Diameter (B) | Length (C) |
|--------------------|--------------------|------------|
| 70                 | 85                 | 15-130     |
| 75                 | 85                 | 15-130     |
| 75                 | 90                 | 15-135     |
| 80                 | 90                 | 15-135     |
| 80                 | 95                 | 15-145     |
| 85                 | 95                 | 15-145     |
| 85                 | 100                | 15-150     |
| 90                 | 105                | 15-160     |
| 90                 | 110                | 15-165     |
| 90                 | 120                | 15-180     |
| 95                 | 110                | 15-165     |
| 95                 | 115                | 15-175     |
| 95                 | 120                | 15-180     |
| 100                | 110                | 15-175     |
| 100                | 115                | 15-175     |

| Inner Diameter (A) | Outer Diameter (B) | Length (C) |
|--------------------|--------------------|------------|
| 100                | 125                | 15-190     |
| 100                | 130                | 15-195     |
| 110                | 125                | 15-190     |
| 110                | 130                | 15-195     |
| 110                | 135                | 15-205     |
| 115                | 135                | 15-205     |
| 120                | 135                | 15-205     |
| 120                | 140                | 15-210     |
| 120                | 150                | 15-225     |
| 120                | 155                | 15-235     |
| 130                | 143                | 15-215     |
| 130                | 145                | 15-220     |
| 130                | 155                | 15-235     |
| 130                | 160                | 15-240     |
| 140                | 170                | 15-255     |

\* All dimensions are in (mm)

\* For the items beyond the above ranges are also available

## Standard Products



| Diameter | Length Range |
|----------|--------------|
| 13       | 45-160       |
| 15       | 45-158       |
| 20       | 48-165       |
| 25       | 71-173       |
| 28       | 45-125       |
| 30       | 75-193       |
| 32       | 88-241       |
| 35       | 103-260      |
| 38       | 123-227      |
| 40       | 150-285      |
| 45       | 185-298      |
| 50       | 79-371       |
| 52       | 115-805      |
| 55       | 105-900      |
| 57       | 122-1020     |
| 60       | 170-1020     |
| 65       | 119-699      |

| Diameter | Length Range |
|----------|--------------|
| 70       | 113-650      |
| 76       | 146-463      |
| 80       | 210-740      |
| 85       | 210-1050     |
| 88       | 140-710      |
| 90       | 133-800      |
| 95       | 210-990      |
| 100      | 120-960      |
| 105      | 315-1001     |
| 110      | 260-1040     |
| 115      | 290-1040     |
| 120      | 282-870      |
| 126      | 300-925      |
| 130      | 256-980      |
| 134      | 278-980      |
| 145      | 295-1080     |
| 150      | 338-1290     |

