



HDCX-600S

Gasoline Dumpster



Maximum Carry Capacity: 600KG Honda Power: 13.5HP

Ningbo Yinzhou Chuangxin Construction Machinery Co.,Ltd

The new HTDS is a compact, ride-on, high-tip, Gasoline-powered Dumpster designed to save you time, energy and money. Our new optional SmartStep feature maximises comfort and on-side safety.



OPTIMISED TRACK MOTORS

New and improved track motors optimise the tracking performance allowing increased power on site, while two-speed tracking provides precision and accuracy.



STRONG LIFTING FRAME

We use this bending reinforced structural lifting frame to increase the force and ensure the safety of lifting.



IDEAL FOR ALL INDUSTRIES.
Our gasoline Dumpster is ideal for the rental, housebuilding, landscaping, agricultural industries and many more.



EASY ACCESS

A machine width of just 706mm allows you to fit through any standard doorway or gate.




EASY TIPPING

A high-tip capacity of 1.45m makes it easy to tip directly into a high sided vehicle or high side skip.

STATIC DIMENSIONS

ENGINE		
Engine Model	kW(hp)	Honda / Briggs&Stratton25T2 (13.5HP)
Fuel		Gasoline
Cooling		Air Cooled
UNDERCARRIAGE		
No of bottom rollers		2
Track width rubber (STD)	mm	180
Track tensioning		Mechanical
Travel speed – high	kph	3

STATIC DIMENSIONS			
A	Overall Length Step Up (without/with Bucket)	mm	1645/1760
B	Undercarriage overall Length - Rubber	mm	1215
C	Maximum height (tipping position)	mm	2720
D	Skip ground clearance (tipping position)	mm	1525
E	Minimum Skip height (transport position)	mm	780
F	Overall Height (transport position)	mm	1115
G	Single Track width	mm	180
H	Track spacing	mm	330
I	Maximum Track Width	mm	700
J	Overall Length Step Down	mm	1840
K	Overall Length Step Down (Bucket down)	mm	2415
L	Overall Hight	mm	1518

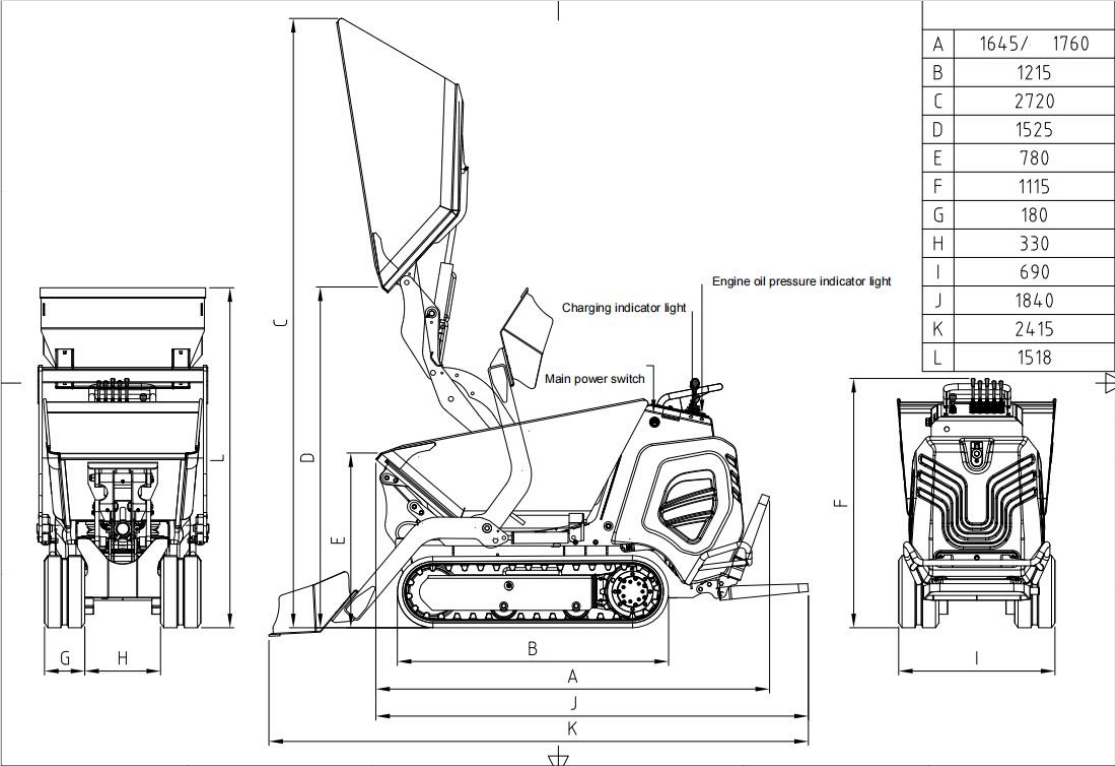

HYDRAULIC		
Pump		Triple
Nominal output @ 3000rpm	lpm (gallons)	27 (6)
Main relief pressure	bar	150
WEIGHTS		
Machine mass without step	kg	613
Machine mass with step	kg	633
SERVICE CAPACITIES		
Fuel tank	ltr	4.3
Engine oil	ltr	1.2
Hydraulic system	ltr	13
Hydraulic tank	ltr	11.5
OPERATOR ENVIRONMENT		
Two speed tracking provides precision and accuracy at low speeds Higher speeds allow for quicker travel around site Optimised track motors for enhanced tracking performance Individual levers for ease of use and precise control Compact turning circle for easy manoeuvring Large carry capacity of 600kg. Tip height of 1.45m allowing you to empty into a skip or high sided vehicle Machine width of just 706mm allowing you to fit through any standard doorway or gate Large opening panel for easy checks, servicing and maintenance (13.5 hp) Honda / Briggs&Stratton 25T2 gasoline engine 1 year standard manufacturers warranty New starter motor – better starts in cold environments New enhanced track motors – improved track motors for optimised tracking performance New machine isolator – a removable and securable isolator the same as all standard machines New horn system – Horn delivers an instant high pitch sound allowing workers to communicate in loud environments or in case of emergency		
LIFT CAPACITIES		
Maximum carry capacity	kg (lb)	600 (1,102)
Max machine load without step	kg (lb)	1,015 (2,238)
Max machine load with step	kg (lb)	1,090 (2,403)
OPTIONAL EQUIPMENT		
SmartStep		
Hour Meter		
Bullbar		

Ningbo Yinzhou Chuangxin Construction Machinery Co.,Ltd



NINGBO YINZHOU CHUANGXIN CONSTRUCTION MACHINERY CO.,LTD

Add: DABIPU VILLAGE, TANGXI TOWN, YINZHOU DISTRICT, NINGBO

Tel: 86-15858493716

E-mail: cxix@nb-cx.com

Website: www.nb-cx.com

