



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

Laizhou LUZUN Machinery Co.,Ltd.

Was established in September 2009,which is located in the national engineering machinery production base of Laizhou City,Shandong Province.Our factory is beside of National Highway 206,and covers an area of 30000 square meters with more than 50 employees.Also has convenient transportation and pleasant scenery.LUZUN machinery is mainly engaged in the research and development and manufacturing of construction machinery.In 2014,it independently developed the first self-loading concrete mixer truck for hydraulic walking type in China.Through the continuous improvement of the company.The company's products were officially put into the market in 2015. It is applied to concrete road paving and concrete mixing of construction projects,which has won widespread praise from customers and created good production benefits for customers.At present,it is the largest self loading concrete mixer industry,with the most complete varieties,the most competitive and influential company in China.





LAIZHOU LUZUN MACHINERY CO.,LTD

Add: Tushan town, Laizhou city, Shandong province, China

Contact person: Emily fang 86 18253539619 emily.fang@lzluzun.com

JBC 1.6R/3200


Self Propelled Concrete Mixer



1.6方(带旋转)自动上料搅拌机

JBC1.6/1.6R

Self Propelled Concrete Mixer

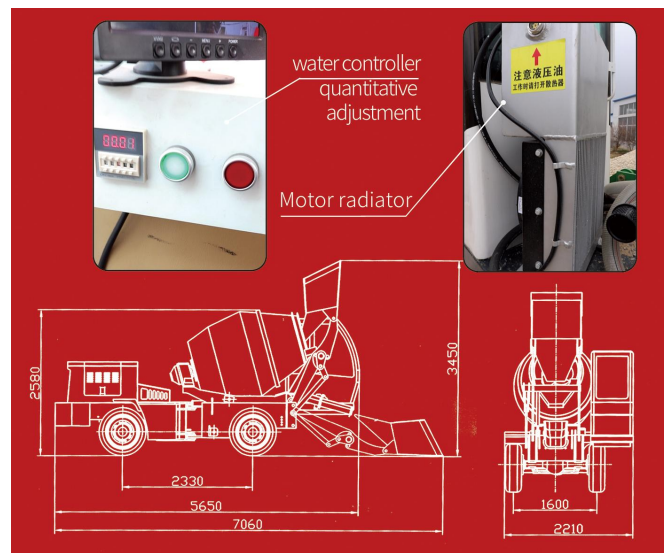



LAIZHOU LUZUN MACHINERY CO.,LTD

Add: Tushan town, Laizhou city, Shandong province, China

Contact person: Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode: YCD4T22T-105 Maximum power: 78 kW (106 hp) Maximum torque: 330 Nm @ 2400 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry: 2900 Liters Drum rotation speed: 16 Rev / min. Concrete production: 1.6-1.8 Cubic Meters / Drum
Electrical System	Steering
Generator: 28V--800W (28A) Battery: 2×12V--60AH (272A) Road lighting system	Articulated steering
4*4 four-wheel drive	Water supply system
Full-time four-drive speed is 0-23 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Shaft and tire	Operating Cab
Wheel-side Deceleration Bridge with planetary reduction gears on the bridge and flanged gearbox. Tires: ... 20.5-16PR. Maximum loads: 2840kg	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 100 liters Total hydraulic system capacity: 100 liters Engine oil: 16 liters
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight: 5800 kg Maximum total weight: 9600 kg Maximum load: 3900 kg





LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

JBC 2. 4R/4000

Self Propelled Concrete Mixer

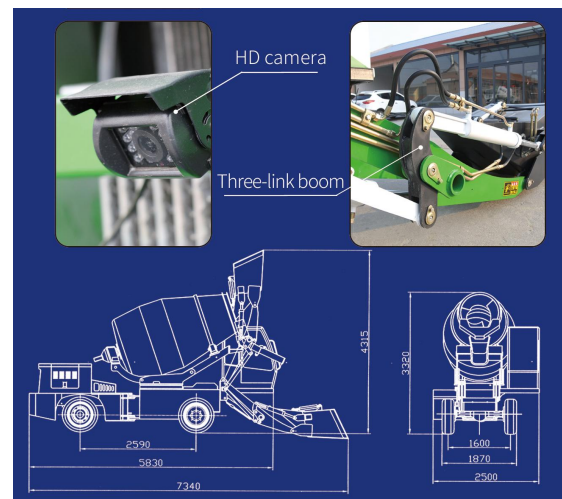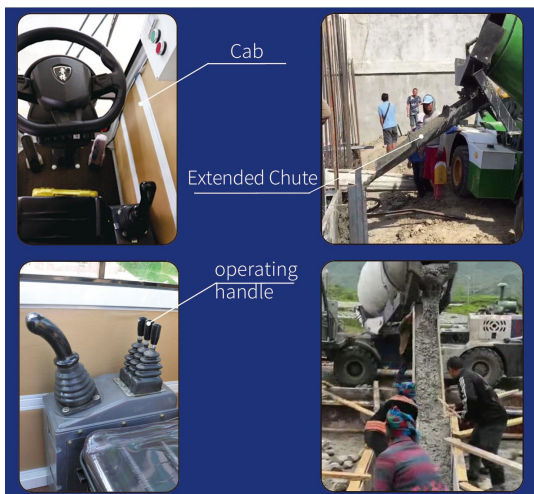



LAIZHOU LUZUN MACHINERY CO.,LTD

Add: Tushan town, Laizhou city, Shandong province, China

Contact person: Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode: YCD4T22T-105 Maximum power: 78 kW (106 hp) Maximum torque: 330 Nm @2400 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry..... 4000 Liters Drum rotation speed:18 Rev / min. Concrete production:2.2-2.4 Cubic Meters / Drum
Electrical System	Steering
Generator: 28V--800Wa (28A) Battery: 2×12V--60AH (272A) Road lighting system	Articulated steering
4*4 four-wheel drive	Water supply system
Full-time four-drive speed is 0-23 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Shaft and tire	Operating Cab
Aggravated special bridge, the planetary reduction gear, the flanged gear box Rear axle, swing ($\pm 28^\circ$), and swinging frame on the bridge. Tires... 20.5-16PR, Maximum load: 2840kg.	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 100 liters Total hydraulic system capacity..... 100 liters Engine oil..... 16 liters
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight:6800 kg Maximum total weight:12500 kg Maximum load:5200 kg




LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

JBC 3. 5R/5500

Self Propelled Concrete Mixer

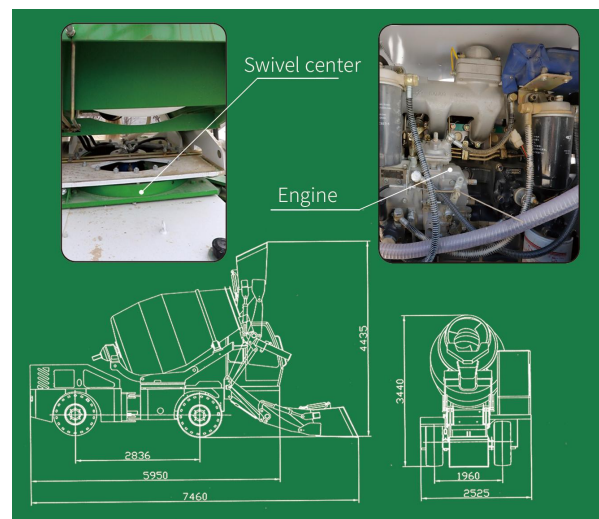



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode:YD4J22G Maximum power: 85 kW (116 hp) Maximum torque:390 Nm @2800 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry..... 5500 Liters Drum rotation speed:.....20 Rev / min. Concrete production:3.5-3.8Cubic Meters / Drum
Electrical System	Steering
Generator:28V--1500Wa (53.5A) Battery:2×12V--60AH (272A) Road lighting system	Articulated steering
4*4four-wheel drive	Water supply system
Full-time four-drive speed is 0-36 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Shaft and tire	Operating Cab
Aggravated special bridge, the planetary reduction gear, the flanged gear box Rear axle, swing ($\pm 28^\circ$), and swinging frame on the bridge.Tires..... 122R22.5, Maximum load: 5150kg. 450kPa	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 120 liters Total hydraulic system capacity..... 100 liters Engine oil..... 20 liters Rear enlarged water pump.....850 升
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight:8200 kg Maximum total weight:.....16500 kg Maximum load:8200 kg



LAIZHOU LUZUN MACHINERY CO.,LTD


Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

LZ 3500 升级款 3.5 立方/LZ3500 Updated

Version for 3.5cbm

Self Propelled Concrete Mixer

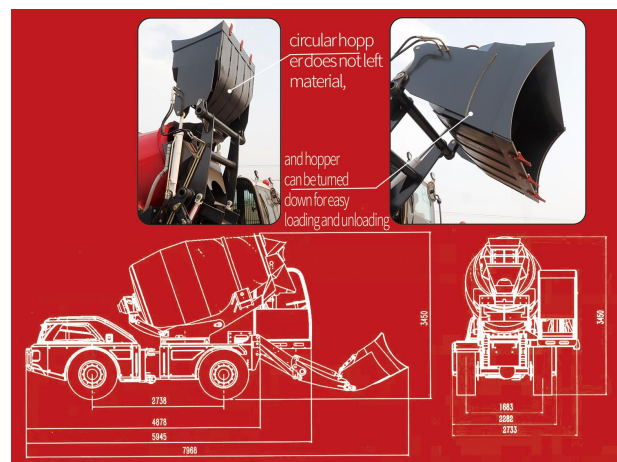



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode:YD4J22G Maximum power: 85 kW (116 hp) Maximum torque:390 Nm @2800 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry..... 5500 Liters Drum rotation speed:.....20Rev / min. Concrete production:3.5-3.8Cubic Meters / Drum
Electrical System	Steering
Generator:28V--1500Wa (53.5A) Battery:2×12V--60AH (272A) Road lighting system	Articulated steering
4*4four-wheel drive	Water supply system
Full-time four-drive speed is 0-36 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Shaft and tire	Operating Cab
Aggravated special bridge, the planetary reduction gear, the flanged gear box Rear axle, swing ($\pm 28^\circ$), and swinging frame on the bridge.Tires... 16-70-20PR, Maximum load: 5150kg. 450kPa	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 120 liters Total hydraulic system capacity..... 100 liters Engine oil..... 20 liters
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight:8800 kg Maximum total weight:.....16700 kg Maximum load:8200 kg





LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

JBC 3.5SR/5500 (同步旋转) /Synchronous Rotation Type

Self Propelled Concrete Mixer

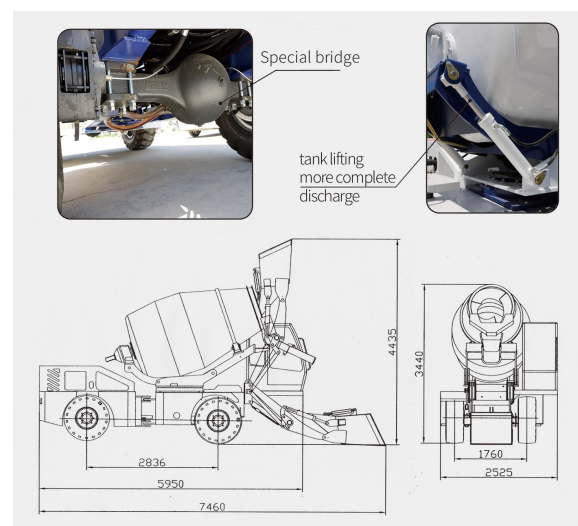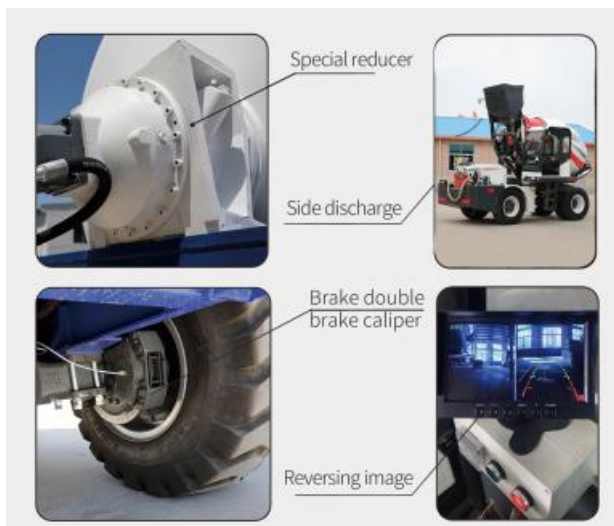



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode:YD4J22G Maximum power: 85 kW (116 hp) Maximum torque:390 Nm @2800 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry.....5500 Liters Drum rotation speed:.....20 Rev / min. Concrete production:3.5-3.8Cubic Meters / Drum
Electrical System	Steering
Generator:28V--1500Wa (53.5A) Battery:2×12V--60AH (272A) Road lighting system	Articulated steering
4*4four-wheel drive	Water supply system
Full-time four-drive speed is 0-36 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Shaft and tire	Operating Cab
Aggravated special bridge, the planetary reduction gear, the flanged gear box Rear axle, swing ($\pm 28^\circ$), and swinging frame on the bridge.Tires..... 122R22.5, Maximum load: 5150kg. 450kPa	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 120 liters Total hydraulic system capacity..... 100 liters Engine oil..... 20 liters
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight:8200 kg Maximum total weight:.....16700 kg Maximum load:8200 kg




LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

JBC 4.0AR/6100（铰接式）/Articulated Type

Self Propelled Concrete Mixer

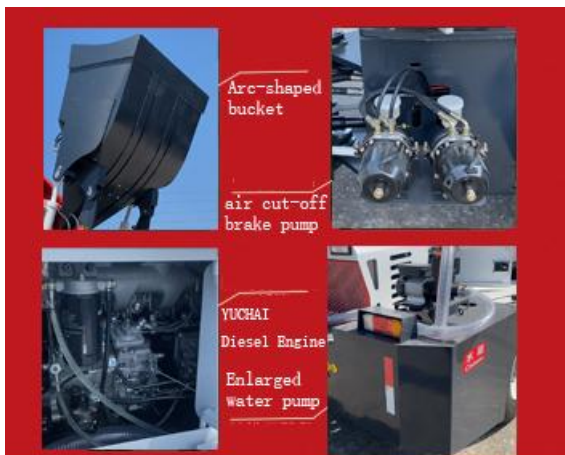



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode:YD4J22G Maximum power: 91kW (125 hp) Maximum torque:410 Nm @2800 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry..... 6100 Liters Drum rotation speed:.....20 Rev / min. Concrete production:4.0Cubic Meters / Drum
Electrical System	Steering
Generator:28V--1500Wa (53.5A) Battery:2×12V--60AH (272A) Road lighting system	Articulated steering
4*4four-wheel drive	Water supply system
Full-time four-drive speed is 0-36 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Shaft and tire	Operating Cab
Aggravated special bridge, the planetary reduction gear, the flanged gear box Rear axle, swing ($\pm 28^\circ$), and swinging frame on the bridge.Tires..... 122R22.5, Maximum load: 5150kg. 450kPa	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 120 liters Total hydraulic system capacity..... 100 liters Engine oil..... 20 liters Rear enlarged water pump.....850 升
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight:8500 kg Maximum total weight:.....16500 kg Maximum load:8500 kg




LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

JBC 4.0R/6500 (整体式) /Integrated Type

Self Propelled Concrete Mixer

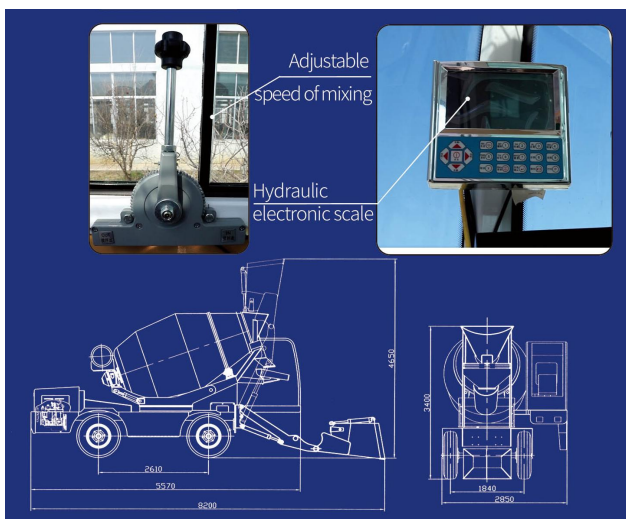



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com

参数说明 Parameter description

Diesel engines	Stirring and unloading
Mode:YD4J22G Maximum power: 91 kW (126 hp) Maximum torque:440 Nm @2800 rev / min	The double cone Drum has a double spiral agitating screw and a convex bottom. Drum geometry..... 6500 Liters Drum rotation speed:.....22 Rev / min. Concrete production:4.0-4.5 Cubic Meters / Drum
Electrical System	Steering
Generator:28V--1500Wa (53.5A) Battery:2×12V--100AH (454A) Road lighting system	Front wheel steering
4*4four-wheel drive	Water supply system
Full-time four-drive speed is 0-36 km / h Torque converter gearbox, open hydraulic gear pump.	"Self-suction" 24V large capacity pump with quick suction function. Quantitative water supply controller, the mixing is more uniform and more in line with the standard
Axles and tires	Operating Cab
Aggravated special bridge,the planetary reduction gear,the flanged gearbox Rear axle, swing($\pm 28^\circ$), and swinging frame on the bridge.Whole car is full frame,rear wheel double spring shock plate Tires... 16-70-20PR, Maximum load:5150kg,450kPa	The enclosed operating room is available with a heated/cold system and a tilted front window. Humanize seat with flexible suspension and height adjustment.
Brake	Maintenance amount
The device uses a butterfly service brake and an emergency brake to act on four wheels and uses a separate double parking brake.	Fuel tank. 135 liters Total hydraulic system capacity..... 240 liters Engine oil..... 20 liters
Equipment hydraulic system	Weight
Aluminum heat exchanger is used for cooling hydraulic oil. Open oil inlet, hydraulic oil filter can be replaced externally	Operating weight:8800 kg Maximum total weight:.....18400 kg Maximum load:9600 kg



LAIZHOU LUZUN MACHINERY CO.,LTD

Add:Tushan town,Laizhou city,Shandong province,China

Contact person:Emily fang 86 18253539619 emily.fang@lzluzun.com