

PRODUCT CATALOG

应用范围

CONSTRUCTION EQUIPMENT INDUSTRY 工程机械

CONCRETE PUMP TRUCKS, EXCAVATORS, LOADERS, CRANES, BREAKERS, ROTARY DRILLS, FORKLIFTS, ETC....
混凝土泵车, 挖掘机, 装载机, 起重器, 破碎锤, 旋挖钻, 叉车等

PNEUMATICS 气动元件

CYLINDER, VALVES, GAS SPRING...
气缸, 气阀, 气弹簧

MINING INDUSTRY 矿用行业

HYDRAULIC SUPPORT, EQUIPMENT FOR EXCAVATION ...
液压支架, 采掘设备

AUTO INDUSTRY 汽车行业

AXEL, BRAKING, SUSPENSION, ENGINE...
车桥, 刹车系统, 悬挂系统, 发动机

MORE APPLICATIONS & INDUSTRIES 更多的应用

PETROLEUM, WIND POWER, INJECTION MOLDING MACHINES, ETC...
石油, 风电, 注塑机, 等等



PRODUCT CATALOG

应用范围

活塞杆密封件 Rod Seals

- 33/34 NOK-IUH型密封圈
- 33/34 NOK-IDI型密封圈
- 35/36 SKF-PTB型密封圈
- 37/40 PTB型密封圈
- 41/42 SKF-ZBR型密封圈
- 43/44 SKF-RBB/HBY型密封圈
- 45/50 RBB/HBY型密封圈
- 51/52 NOK-RBB/HBY型密封圈
- 53/54 UN型密封圈
- 55/56 HBTS斯特封
- 57/58 SPN/OHM型密封圈

防尘密封件 Wiper Seals

- 59/62 DKB/HWG型防尘
- 63/64 NOK-DKB/HWG型防尘
- 65/66 DKBZ/HWGA型防尘
- 67/68 DKB型防尘
- 69/70 DHS型防尘
- 69/70 FA型防尘
- 71/72 DLJ/VAY型防尘
- 73/74 GSZ/VAY型防尘

活塞密封件 Piston Seals

- 75/76 SPGW型密封圈
- 77/78 SPGO型密封圈
- 79/80 SPGW/SPGO/KZT型密封圈
- 81/84 OUY型密封圈
- 85/86 NOK-OUY型密封圈
- 87/88 UKH型密封圈
- 89/90 NCF型密封圈
- 91/92 OKF型密封圈
- 93/94 OK/SPGA型密封圈
- 95/96 SPGW / SPGO型密封圈
- 97/98 LITTLE SPGO、SPG型密封圈
- 99/100 DAS型密封圈

旋转密封件 Rotary Seals

- 101/110 ROI型密封圈
- 111/112 GRS/ROI型密封圈

支撑导向系列 Bearing Guidance

- 113/116 WR 木拍
- 117/118 KZT防污环
- 119/120 DU杯士
- 121/122 RYT/KZT型支撑环

支撑挡圈系列 Bearing Gaskets

- 123/124 TFG/TFP型挡圈
- 125/128 BRT垫片
- 129/132 N4W垫片

O型圈系列 O-Ring Series

- 133/138 O RINGS
- 139/140 D-RING
- 141/142 FKM/NBR O-RING
- 143/144 PU O-RING

轴用骨架油封系列 Frame Oil Seal Series For Shaft

- 143/144 FKM/NBR油封
- 145/146 NOK油封
- 145/146 TC/NBR油封

联轴器系列 Coupling Series


- 147/150 COUPLING

工程机械专用 For Construction Machinery

- 01/08 液压油缸修理包 HYDRAULIC CYLINDER SEAL KIT
- 09/18 液压泵修理包 HYDRAULIC PUMP SEAL KIT
- 09/18 回转马达修理包 SWING MOTOR SEAL KIT
- 09/18 控制阀修理包 CONTROL VALVE SEAL KIT
- 09/18 行走马达修理包 TRAVEL MOTOR SEAL KIT
- 19/20 O型圈修理包 O RING SEAL KIT
- 21/23 先导阀推杆修理包 PILOT VALVE PUSHER SEAL KIT
- 24/28 破碎锤修理包 BREAKER SEAL KIT
- 29/30 中心接头修理包 CENTER JOINT SEAL KIT
- 31/32 涨紧缸修理包 ADJUST SEAL KIT
- 31/32 浮动油封 FLOATING OIL SEAL
- 151/152 GAS SEAL 气封
- 153/154 O型圈盒 O RING SEAL KITS
- 155/156 变速器密封套件 TRANSMISSION SEAL KIT
- 155/156 齿轮泵密封修理包 GEAR PUMP SEAL KIT

产品名称 PRODUCT NAME	代号 CODE	型式 TYPE	品牌 BRAND	产品描述 PRODUCT DESCRIPTION
防尘 DUST SEAL	GWJ			挖掘机斗轴防尘，特殊设计有着优秀的防尘效果；润滑时，防尘唇可以开启，释放过多的润滑油。
	HWG			挖掘机缸头防尘圈，加强加厚的骨架设计，稳定性更高，且安装不变形；密封唇带泄油口，防止困油带出防尘圈。
	PAD			标准型SKF油缸缸头双唇防尘圈。
	PADN			优化改进型的SKF防尘，在PAD防尘基础上加厚了骨架的设计，并在密封唇上设计了泄油孔。
主油封 ROD SEAL	HRN			针对挖掘机售后维修油缸开发的主油封。
	PTB			SKF加强型挖掘机主油封，专门针对维修市场使用。
	ZBR			SKF高性能挖掘机主油封，特殊的设计使产品外侧紧贴沟槽底，实现外径处良好的密封；反向压缩抱紧活塞杆实现内侧的密封，双唇设计产品工作时更稳定，密封效果更好。
	S1S			SKF高性能挖掘机主油封，特殊的设计使产品使用寿命更长。主要适用于较新的油缸使用。
	DZ			SKF加强型挖掘机主油封，特殊设计密封效果更佳；密封唇和根部分体，产品随动性更好；根部材料高硬度，抗挤出性强，可不需安装挡圈使用。
				A strenthen main seal foe excavator, specially designed for use in the repair market.
缓冲 BUFFER RING	RBB			标准型SKF油缸用缓冲密封圈。
	HRB			产品采用低压变，高回弹，综合力学性能优异的材料做成，挡圈不分正反面设计，可避免安装时装反。产品结构跟欧美设计一致。
	HRX			产品采用低压变，高回弹，综合力学性能优异的材料做成，外侧增加泄压槽设计，挡圈采用尼龙材料。产品结构跟日系设计一致。

产品名称 PRODUCT NAME	代号 CODE	型式 TYPE	品牌 BRAND	产品描述 PRODUCT DESCRIPTION
活塞封 PISTON SEAL	HPK			阶梯开口改性尼龙滑环，丁腈橡胶弹性体，抗挤出性强；滑环开口安装方便；沃尔沃挖掘机用活塞密封结构，可替代SPGO使用。
	HPG			标准型挖掘机油缸用活塞组合密封。
纳污环 CONTAMI SEAL	KZT			标准型挖掘机缸用纳污环。
支承环 WEAR RING HGR	HGR			高柔性酚醛树脂导向环，承压能力高，弯折不易断，产品经打磨处理外观手感更好。
PU-O型圈 PU-O RING	OR			聚氨酯O圈强度更高更耐磨；耐高压抗挤出性更强。特别适应挖掘机缸头静密封O圈因涨缸导致的挤出损坏，以及适用于中心接头旋转O圈更耐磨，寿命更长。
中心接头回转密封 CENTER JOINT & ROTARY MOTOR SEAL	RRS			产品采用低压变，高回弹，综合力学性能优异的材料做成，合理的尺寸设计，产品使用寿命更长更稳定。
涨紧缸活塞封 ADJUST CYLINDER PISTON SEAL	HPA			高端聚氨酯材料涨紧缸用活塞密封，产品耐冲击、耐高压；特殊的结构设计，即保证良好的密封效果，又延长密封件的使用寿命。
修理包 SEAL KIT			 	可提供各种机型的油缸密封修理包，涨紧缸修理包，中心接头修理包，泵、阀修理包，行走、回转机构修理包等密封产品。

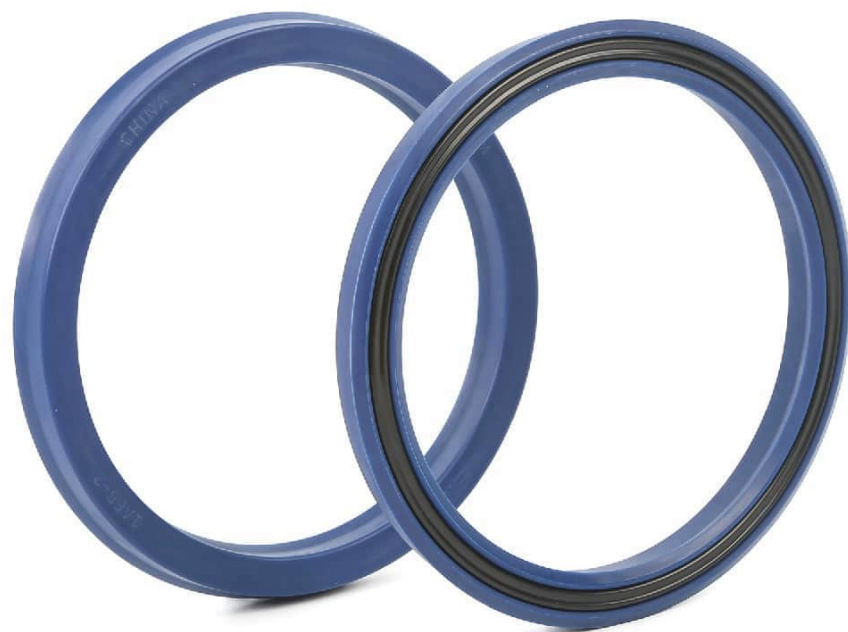

PTB

ROD SEAL


PTB型密封圈

20 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



滴油不漏
首选藏蓝色SKF
黑夜给了我藏蓝色的眼睛我用它寻找光明

No oil leakage
Preferred navy SKF
The dark night gives me dark blue eyes, and I use it to look for light

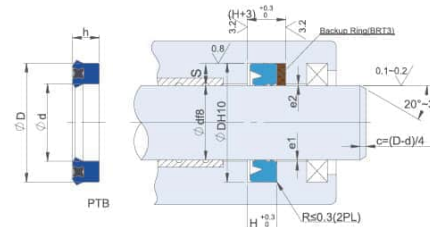

※ 使用工况 / Working condition

- ★ 材料/Material: U-1023
- ★ 星环/Star Ring: A-8501
- ★ 压力/Pressure: Up to 690bar (10000psi)
- ★ 速度/Speed: Up to 1m/s (3.2ft/s)

PTB Rod Seal

活塞杆密封件


※ 说明/Description

原装正品，独家供应，尺寸准确，密封性更好，更耐高温，不易变形，回弹性极好，一次性注塑成型无需任何其他修边处理。
Original genuine, exclusive supply! It is more resistant to high temperature, not easy to deform and has excellent resiliende. Disposable injection molding, without any other trimming treatment. Accurate size and better sealing
在较宽的温度范围内特别是在低温下具有良好的弹性
It has good elasticity in a wide temperature range, especially at low temperature
优异的压缩集和应力松弛特性，在要求的操作时间内保持密封力
Excellent compression set and stress relaxation characteristics to maintain the sealing force within the required operation time
合理的硬度和灵活性，避免泄漏，实现安装简单
Reasonable hardness and flexibility to avoid leakage and achieve simple installation
优异的抗挤压性能，可承受系统压力
Excellent extrusion resistance to withstand system pressure
适当的工作范围
Appropriate scope of work
具有良好的化学兼容性可以承受多种液压油的组合如矿物油和合成油可生物降解和水基流体或阻燃流体
Good chemical compatibility to withstand a combination of a variety of hydraulic fluids, such as mineral and synthetic oils biodegradable and water-based fluids, or flame resistant fluids

规格 Specification	规格 Specification	规格 Specification	规格 Specification
PTB-45X55X6-H8T	PTB-75X90X9-H8T	PTB-65X78X10-H8T	PTB-55X75X12-H8T
PTB-50X60X6-H8T	PTB-80X95X9-H8T	PTB-70X83X10-H8T	PTB-60X80X12-H8T
PTB-55X65X6-H8T	PTB-85X100X9-H8T	PTB-70X85X10-H8T	PTB-65X85X12-H8T
PTB-60X70X6-H8T	PTB-90X105X9-H8T	PTB-75X88X10-H8T	PTB-70X90X12-H8T
PTB-65X75X6-H8T	PTB-95X110X9-H8T	PTB-75X90X10-H8T	PTB-130X150X12-H8T
PTB-70X80X6-H8T	PTB-100X115X9-H8T	PTB-80X93X10-H8T	PTB-140X160X12-H8X
PTB-75X85X6-H8T	PTB-105X120X9-H8T	PTB-80X95X10-H8T	PTB-75X95X12-H8T
PTB-80X90X6-H8T	PTB-110X125X9-H8T	PTB-85X100X10-H8T	PTB-85X105X12-H8T
PTB-40X50X7-H8X	PTB-115X130X9-H8T	PTB-90X105X10-H8T	PTB-90X110X12-H8T
PTB-45X55X7-H8X	PTB-120X135X9-H8T	PTB-95X110X10-H8T	PTB-95X115X12-H8T
PTB-50X60X8-H8T	PTB-125X140X9-H8T	PTB-100X115X10-H8T	PTB-100X120X12-H8T
PTB-55X65X8-H8T	PTB-130X145X9-H8T	PTB-105X120X10-H8T	PTB-105X125X12-H8T
PTB-60X70X8-H8T	PTB-50X63X10-H8T	PTB-110X125X10-H8T	PTB-110X130X12-H8T
PTB-65X75X8-H8T	PTB-55X65X10-H8X	PTB-110X130X10-H8T	PTB-115X135X12-H8T
PTB-50X65X9-H8T	PTB-55X68X10-H8T	PTB-115X130X10-H8T	PTB-100X120X15-H8T
PTB-55X70X9-H8T	PTB-60X70X10-H8X	PTB-120X140X10-H8T	PTB-110X130X15-H8T
PTB-60X75X9-H8T	PTB-60X75X10-H8T	PTB-45X65X12-H8T	PTB-120X140X15-H8T
PTB-65X80X9-H8T	PTB-60X76X10-H8T	PTB-50X70X12-H8T	PTB-130X150X16-H8T
PTB-70X85X9-H8T	PTB-65X75X10-H8X	PTB-55X71X12-H8T	PTB-120X140X12-H8T

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

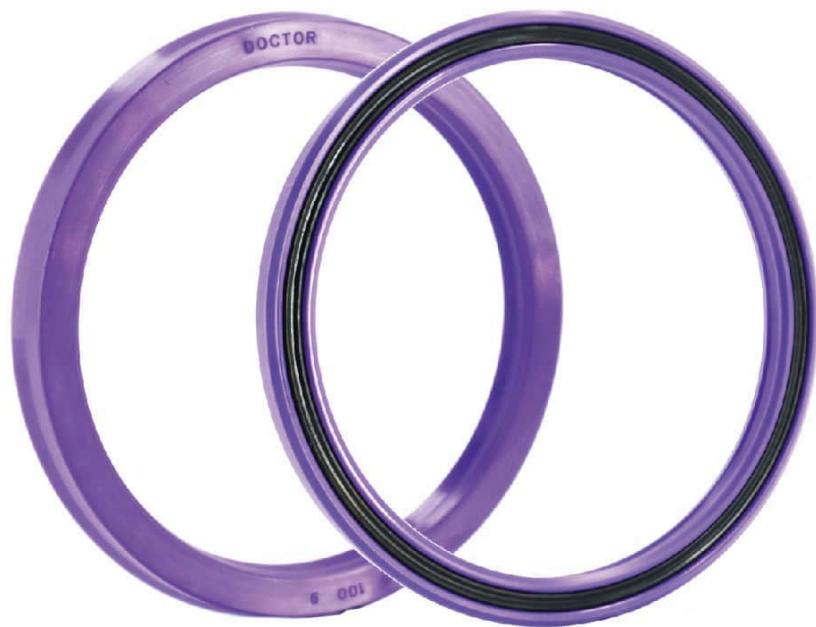

PTB

ROD SEAL


PTB型密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



高弹性油封
更耐高温不易变形，回弹性能极佳，维修后市场最佳选择。

High Elastic Oil Seal
It is more resistant to high temperature and not easy to deform and rebound. It is the best choice in the market after maintenance.

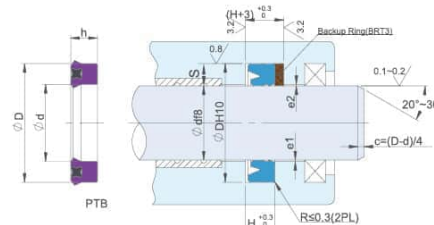

※ 使用工况 / Working condition

- ★ 材料/Material: 德国高弹性材料 (German High Elastic Material)
- ★ 温度/Temperature: -40℃~120℃
- ★ 压力/Pressure: Up to 500bar (7200psi)
- ★ 速度/Speed: 0.5m/s

※ 说明/Description

在较宽的温度范围内特别是在低温下具有良好的弹性
It has good elasticity in a wide temperature range, especially at low temperature
内双层设计, 加强密封性, 一次性注塑成型技术, 不用经过二次修边, 尺寸更精准性能更优越。

Inner double lip design, enhanced sealing, one-time injection molding technology, no secondary trimming, more accurate size and superior performance.

加强型结构设计, 对活塞杆及密封沟槽的轻微损伤不敏感, 不会发生泄露

Reinforced structure design, insensitive to slight damage of piston rod and sealing groove, and no leakage

产品带星形圈, 保证了密封唇在高低压条件下的预压缩量, 提高了密封可靠性。即使在低温工作环境下也能实现良好的密封性能。

The product is equipped with a star ring, which ensures the pre-compression shrinkage of the sealing lip under high and low pressure conditions, and improves the sealing reliability. It can achieve good sealing performance even in low temperature working environment.

具有良好的化学兼容性可以承受多种液压油组合如矿物油和合成油可生物降解和水基流体或阻燃流体

Good chemical compatibility to withstand combination of a variety of hydraulic fluids, such as mineral and synthetic oils biodegradable and water-based fluids, or flame resistant fluids

规格 Specification	规格 Specification	规格 Specification	规格 Specification
PTB-40*50*6	PTB-70*80*8	PTB-45*60*10	PTB-70*90*12
PTB-45*55*6	PTB-75*85*8	PTB-50*63*10	PTB-75*95*12
PTB-50*60*6	PTB-80*90*8	PTB-55*68*10	PTB-80*100*12
PTB-55*65*6	PTB-45*60*9	PTB-60*70*10	PTB-85*105*12
PTB-60*70*6	PTB-50*65*9	PTB-60*73*10	PTB-90*110*12
PTB-65*75*6	PTB-55*70*9	PTB-65*78*10	PTB-95*115*12
PTB-70*80*6	PTB-60*75*9	PTB-65*80*10	PTB-100*115*12
PTB-75*85*6	PTB-65*80*9	PTB-70*83*10	PTB-100*120*12
PTB-80*90*6	PTB-70*85*9	PTB-70*85*10	PTB-105*125*12
PTB-35*45*7	PTB-75*90*9	PTB-75*88*10	PTB-110*130*12
PTB-40*50*7	PTB-80*95*9	PTB-80*93*10	PTB-115*135*12
PTB-45*55*7	PTB-85*100*9	PTB-80*95*10	PTB-120*140*12
PTB-50*60*7	PTB-90*105*9	PTB-85*100*10	PTB-130*150*12
PTB-40*50*8	PTB-95*110*9	PTB-90*105*10	PTB-95*115*15
PTB-45*55*8	PTB-100*115*9	PTB-95*110*10	PTB-100*120*15
PTB-50*60*8	PTB-105*120*9	PTB-100*115*10	PTB-105*125*15
PTB-55*65*8	PTB-110*125*9	PTB-105*120*10	PTB-125*140*9
PTB-60*70*8	PTB-115*130*9	PTB-110*125*10	PTB-130*145*9
PTB-65*75*8	PTB-120*135*9	PTB-110*130*10	PTB-110*130*15


订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZ



IDI ROD SEAL IDI型密封圈


20 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



优异的抗挤压性能，可承受系统压力
Excellent anti-extrusion performance,
can withstand system pressure

合理的硬度和灵活性，避免泄漏，
实现安装简单
Reasonable hardness and flexibility to
avoid leakage and realize simple
installation

SONGZ

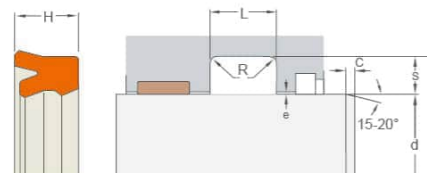

※ 使用工况 / Working condition

- ★ 材料/Material: 高弹性材料 (High Elastic Material)
- ★ 温度/Temperature: -40℃~150℃
- ★ 压力/Pressure: Up to 500bar (7200psi)
- ★ 速度/Speed: 0.5m/s

IDI Rod Seal 活塞杆密封件

※ 说明/Description

在较宽的温度范围内特别是在低温下具有良好的弹性
It has good elasticity in a wide temperature range, especially at low temperature

内双唇设计, 加强密封性, 一次性注塑成型技术, 不用经过二次修边, 尺寸更精准性能更优越。
Inner double lip design, enhanced sealing, one-time injection molding technology, no secondary trimming, more accurate size and superior performance.

加强型结构设计, 对活塞杆及密封沟槽的轻微损伤不敏感, 不会发生泄露
Reinforced structure design, insensitive to slight damage of piston rod and sealing groove, and no leakage

合理的硬度和灵活性, 避免泄漏, 实现安装简单
Reasonable hardness and flexibility to avoid leakage and achieve simple installation

优异的抗挤压性能, 可承受系统压力
Excellent extrusion resistance to withstand system pressure

适当的工作范围
Appropriate scope of work

具有良好的化学兼容性可以承受多种液压油的组合如矿物油和合成油可生物降解和水基流体或阻燃流体
Good chemical compatibility to withstand combination of a variety of hydraulic fluids, such as mineral and synthetic oils biodegradable and water-based fluids, or flame resistant fluids

规格 Specification	规格 Specification	规格 Specification	规格 Specification
40*50*6	70*80*8	45*60*10	70*90*12
45*55*6	75*85*8	50*63*10	75*95*12
50*60*6	80*90*8	55*68*10	80*100*12
55*65*6	45*60*9	60*70*10	85*105*12
60*70*6	50*65*9	60*73*10	90*110*12
65*75*6	55*70*9	65*78*10	95*115*12
70*80*6	60*75*9	65*80*10	100*115*12
75*85*6	65*80*9	70*83*10	100*120*12
80*90*6	70*85*9	70*85*10	105*125*12
35*45*7	75*90*9	75*88*10	110*130*12
40*50*7	80*95*9	80*93*10	115*135*12
45*55*7	85*100*9	80*95*10	120*140*12
50*60*7	90*105*9	85*100*10	130*150*12
40*50*8	95*110*9	90*105*10	95*115*15
45*55*8	100*115*9	95*110*10	100*120*15
50*60*8	105*120*9	100*115*10	105*125*15
55*65*8	110*125*9	105*120*10	125*140*9
60*70*8	115*130*9	110*125*10	130*145*9
65*75*8	120*135*9	110*130*10	110*130*15

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.




PTB
ROD SEAL
PTB型密封圈

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER




优异的抗挤压性能，可承受系统压力

Excellent anti-extrusion performance,
can withstand system pressure

合理的硬度和灵活性，避免泄漏，
实现安装简单

Reasonable hardness and flexibility to avoid leakage and realize simple installation

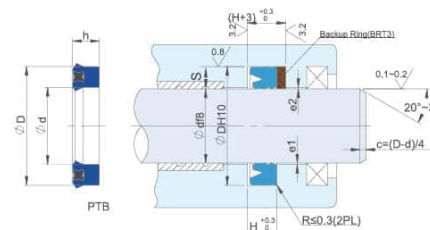

※ 使用工况 / Working condition

- ★ 材料/Material: 聚氨酯 PU/NBR
- ★ 温度/Temperature: -35℃~110℃
- ★ 压力/Pressure: 40MPa
- ★ 速度/Speed: 0.5m/s

※ 说明/Description

在较宽的温度范围内特别是在低温下具有良好的弹性

It has good elasticity in a wide temperature range, especially at low temperature

优异的压缩集和应力松弛特性，在要求的操作时间内保持密封力

Excellent compression set and stress relaxation characteristics to maintain the sealing force within the required operation time

合理的硬度和灵活性，避免泄漏，实现安装简单

Reasonable hardness and flexibility to avoid leakage and achieve simple installation

优异的抗挤压性能，可承受系统压力

Excellent extrusion resistance to withstand system pressure
适当的工作范围

Appropriate scope of work

具有良好的化学兼容性可以承受多种液压油的组合如矿物油和合成油可生物降解和水基流体或阻燃流体 Good chemical compatibility to withstand combination of a variety of hydraulic fluids, such as mineral and synthetic oils biodegradable and water-based fluids, or flame resistant fluids


规格 Specification	规格 Specification	规格 Specification	规格 Specification
PTB-13*19*4	PTB-28*34.5*5	PTB-75*85*10	PTB-95*115*10
PTB-14*22*5.7	PTB-28*36*5	PTB-75*85*12	PTB-95*115*12
PTB-15*19*6	PTB-28*36*6	PTB-75*88*10	PTB-97*112*9
PTB-16*24*5	PTB-28*36*8	PTB-75*90*6	PTB-98*112*8.5
PTB-16*26*6	PTB-28*38*6	PTB-75*90*8	PTB-100*115*6
PTB-16*26*7	PTB-28*38*8	PTB-75*90*9	PTB-100*115*7
PTB-18*22*5	PTB-30*38*5	PTB-75*90*10	PTB-100*115*9
PTB-18*26*5	PTB-30*38*6	PTB-75*90*12	PTB-100*115*10
PTB-18*26*6	PTB-30*40*6	PTB-75*95*10	PTB-100*115*12
PTB-19*27*5.7	PTB-30*40*7	PTB-75*95*12	PTB-100*120*10
PTB-20*28*5	PTB-30*40*8	PTB-80*90*6	PTB-100*120*12
PTB-20*28*6	PTB-30*40*10	PTB-80*90*7	PTB-100*120*15
PTB-20*30*6	PTB-30*43*10	PTB-80*90*8	PTB-105*120*9
PTB-20*30*8	PTB-30*45*9	PTB-80*90*9	PTB-105*120*10
PTB-20*35*9	PTB-30*45*10	PTB-80*90*10	PTB-105*120*12
PTB-20*35*10	PTB-30*50*10	PTB-80*90*12	PTB-105*125*10
PTB-20*32*5	PTB-30*50*12	PTB-80*93*10	PTB-105125*12
PTB-22*30*5	PTB-31.5*41.5*6	PTB-80*95*6	PTB-105*125*15
PTB-22*30*6	PTB-32*42*6	PTB-80*95*9	PTB-105*125*16

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

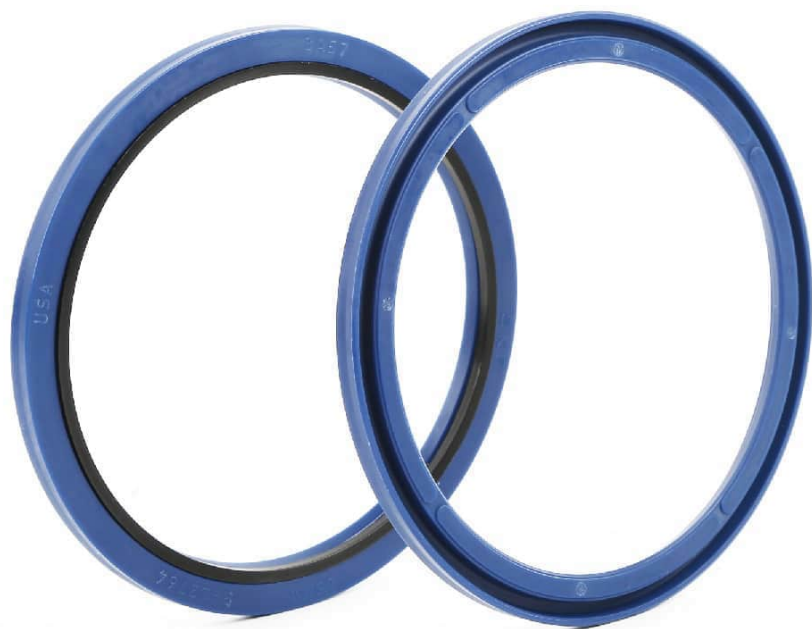

RBB/HBY


BUFFER SEAL

RBB缓冲密封

20

专注密封件二十年
SKF授权经销商


FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



精湛的结构设计
Exquisite Structural Design

抗冲击、尺寸精准、弹性好
Impact resistance, accurate size and good elasticity

SONGZ

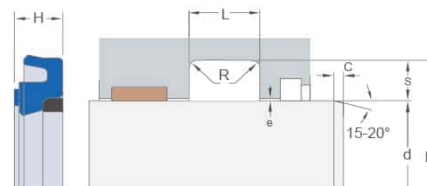

※ 使用工况 / Working condition

- ★ 材料/Material: U-1023
- ★ 压力/Pressure: Up to 690bar (10000psi)
- ★ 速度/Speed: Up to 1m/s (3.2ft/s)
- ★ 温度范围/Temperature range:



极端低温范围: 可以间歇性应用(例如, 冷启动)而不发生密封件损坏, 但在该范围内可能影响密封性能。

Extreme low temperature range: It can be applied intermittently (for example, cold start) without seal damage, but the sealing performance may be affected within this range.

低于建议工作温度范围: 密封性能取决于系统设计(推荐采用精密导向元件)

Below the recommended operating temperature range: the sealing performance depends on the system design (precision guide elements are recommended)

该密封件盒材料的建议工作温度范围

Recommended operating temperature range of the seal box material

高于建议工作温度范围: 仅可在压力盒/或速度降低的情况下适用

Above the recommended operating temperature range: only applicable when the pressure box/or speed is reduced

极端高温范围: 仅可偶尔短时间内应用(例如, 液压缸在固化炉中进行粉末涂层处理时)

Extreme high temperature range: it can only be applied in a short time occasionally (for example, when the hydraulic cylinder is powder coated in the curing furnace)

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

RBB/HBY Rod Seal

活塞杆密封件

※ 说明/Description

原装正品, 独家供应, 尺寸准确, 密封性更好, 更耐高温, 不易变形, 回弹性极好, 一次性注塑成型无需任何其他修边处理。

Original genuine, exclusive supply. It is more resistant to high temperature, not easy to deform and has excellent resilience. Disposable injection molding, without any other trimming treatment. Accurate size and better sealing.

配套挡圈强度高, 抗击出性强。选用聚氨酯材料具备耐高温的能力与耐冲击力。配套挡圈尺寸合理, 好安装, 避免了太大或太小造成的安装问题和使用问题且不容易吸水膨胀, 导致尺寸变化。

Supporting gear ring high strength, strong resistance. Polyurethane material with resistance High temperature ability and impact resistance matching gear ring size is reasonable easy to install, avoid installation problems and use problems caused by too large or too small and not easy Water absorption expansion, resulting in size change.

规格 Specification

RBB-40*55.5*6.3

RBB-45*60.5*6.3

RBB-50*65.5*6.3

RBB-55*70.5*6.3

RBB-60*75.5*6.3

RBB-65*80.5*6.3

RBB-70*85.5*6.3

RBB-75*90.5*6.3

RBB-80*95.5*6.3

RBB-85*100.5*6.3

RBB-90*105.5*6.3

RBB-95*110.5*6.3

RBB-100*115.5*6.3

RBB-105*120.5*6.3

RBB-110*125.5*6.3

RBB-115*130.5*6.3

RBB-120*135.5*6.3

RBB-125*140.5*6.3

RBB-130*145.5*6.3

SONGZ




HBV BUFFER SEAL HBV缓冲密封

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



SONGZ

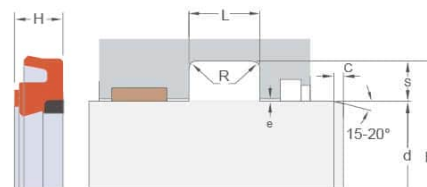

※ 使用工况 / Working condition

- ★ 材料/Material: 聚氨酯+尼龙 PU+NY
- ★ 温度/Temperature: -45℃~110℃
- ★ 压力/Pressure: 21MPa
- ★ 速度/Speed: 0.5m/s



※ 说明/Description

配套圈强度高, 抗击出性强。选用聚氨酯材料具备耐高温的能力与耐冲击力配套圈尺寸合理, 好安装, 避免了太大或太小造成的安装问题和使用寿命且不容易吸水膨胀, 导致尺寸变化。

Supporting gear ring high strength, strong resistance. Polyurethane material with resistance High temperature ability and impact resistance matching gear ring size is reasonable easy to install, avoid Avoid installation problems and use problems caused by too large or too small and not easy Water absorption expansion, resulting in size change.

HBV是与活塞杆密封件结合使用, 以吸收高负荷下的冲击和波动压力, 隔绝高温流体, 提高密封件的耐用度。

HBV is used in combination with piston rod seals to absorb impact and fluctuating pressure under high load, isolate high-temperature fluid and improve the durability of seals.

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

RBB/HBY Rod Seal
活塞杆密封件

规格 Specification

RBB-40*55.5*6.3

RBB-45*60.5*6.3

RBB-50*65.5*6.3

RBB-55*70.5*6.3

RBB-60*75.5*6.3

RBB-65*80.5*6.3

RBB-70*85.5*6.3

RBB-75*90.5*6.3

RBB-80*95.5*6.3

RBB-85*100.5*6.3

RBB-90*105.5*6.3

RBB-95*110.5*6.3

RBB-100*115.5*6.3

RBB-105*120.5*6.3

RBB-110*125.5*6.3

RBB-115*130.5*6.3

RBB-120*135.5*6.3


RBB-125*140.5*6.3

RBB-130*145.5*6.3

SONGZ

SONGZ

HBY Rod Seal
活塞杆密封件

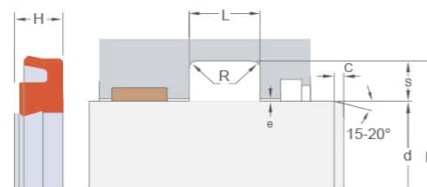

※ 使用工况 / Working condition

★ 材料/Material: 高弹性材料 (High Elastic Material)

★ 温度/Temperature: -40℃~150℃

★ 压力/Pressure: Up to 500bar (7200psi)



※ 说明/Description

完美的结构设计,良好的回油特性,避免因压选用聚氨酯材料具备耐高温,耐冲击性能。

Perfect structural design, good oil return characteristics, avoiding trapped pressure, polyurethane material with high temperature resistance and impact resistance.

极端低温范围:可以间歇性应用(例如,冷启动)而不发生密封件损坏,但在该范围内可能影响密封性能。

Extreme low temperature range: It can be applied intermittently (for example, cold start) without seal damage, but the sealing performance may be affected within this range.

低于建议工作温度范围:密封性能取决于系统设计(推荐采用精密导向元件)

Below the recommended operating temperature range: the sealing performance depends on the system design (precision guide elements are recommended)

该密封件盒材料的建议工作温度范围

Recommended operating temperature range of the seal box material

高于建议工作温度范围: 仅可在压力盒/或速度降低的情况下适用

Above the recommended operating temperature range: only applicable when the pressure box/or speed is reduced

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.


206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



HBY
BUFFER SEAL
HBY缓冲密封

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



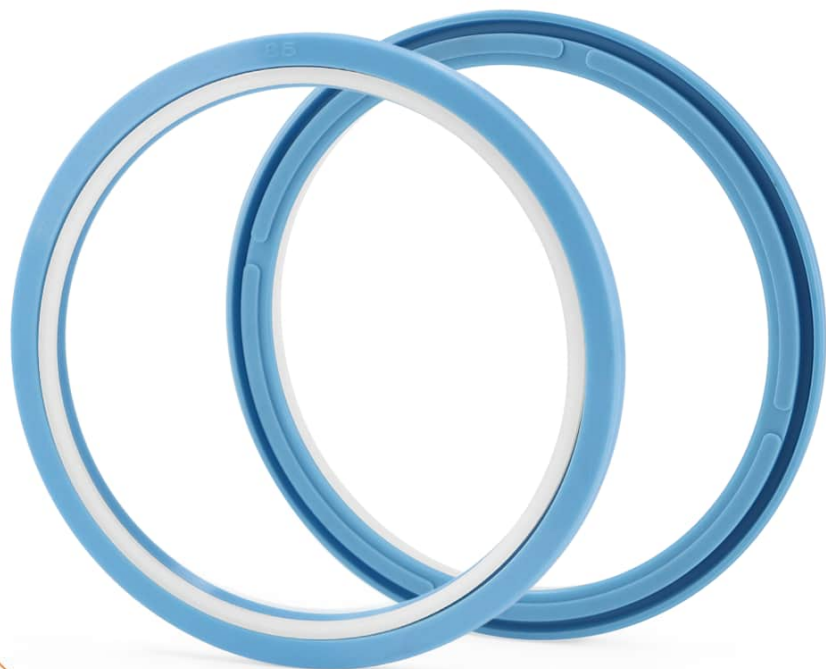



RBB/HBY

BUFFER SEAL
RBB缓冲密封

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

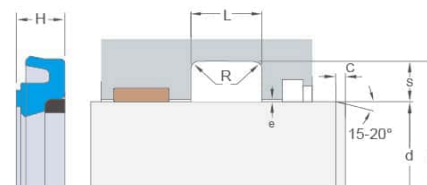

※ 使用工况 / Working condition

★ 材料/Material: U-1029

★ 耐冲击、耐磨、耐热(150~240℃)吸水率低。

Impact resistance, wear resistance, heat resistance (150~240℃), low water absorption.

★ 长期存放不易变形、膨胀，易于安装。

It is not easy to deform, expand and install after long-term storage.

★ 与SKF活塞杆密封一起使用性能更佳。

Better performance with SKF piston rod seal.

★ 温度范围:



※ 说明/Description

优质PU原料耐冲击、耐磨、耐热(150~240℃)吸水率低储存时间长，不易变形、膨胀，安装方便。使用SKF活塞杆密封，性能更佳

High quality PU raw materials are impact resistant, wear-resistant, heat resistant (150~240℃), low water absorption, long storage time, not easy to deform and expand, and easy to install. Better performance with SKF piston rod seal

规格 Specification

RBB-40*55.5*6.3

RBB-45*60.5*6.3

RBB-50*65.5*6.3

RBB-55*70.5*6.3

RBB-60*75.5*6.3

RBB-65*80.5*6.3

RBB-70*85.5*6.3

RBB-75*90.5*6.3

RBB-80*95.5*6.3

RBB-85*100.5*6.3

RBB-90*105.5*6.3

RBB-95*110.5*6.3

RBB-100*115.5*6.3

RBB-105*120.5*6.3

RBB-110*125.5*6.3

RBB-115*130.5*6.3

RBB-120*135.5*6.3

RBB-125*140.5*6.3


RBB-130*145.5*6.3

订货方式 Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

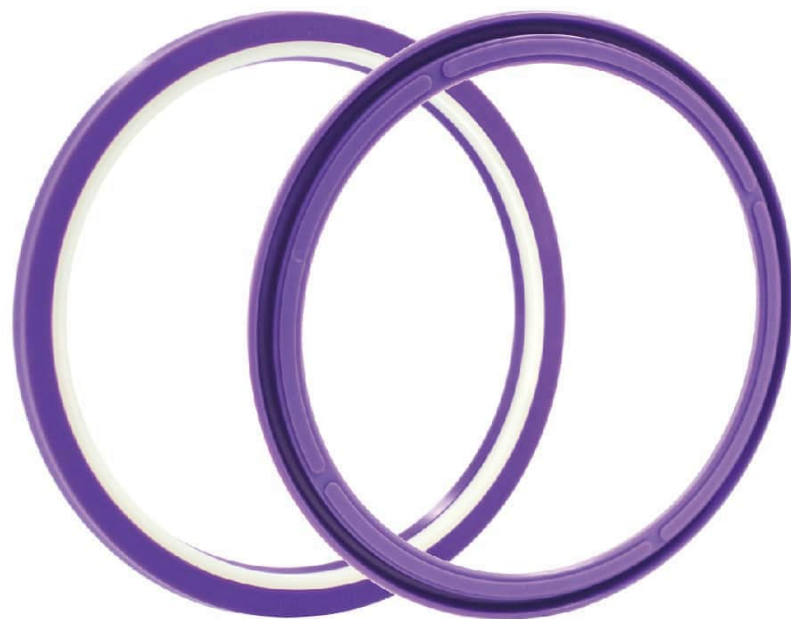

RBB/HBY


BUFFER SEAL

RBB缓冲密封

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

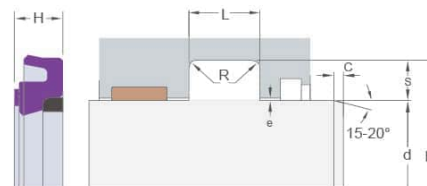

※ 使用工况 / Working condition

★ 材料/Material: 德国高弹性材料 (German High Elastic Material)

★ 温度/Temperature: -40℃~150℃

★ 压力/Pressure: Up to 500bar (7200psi)



※ 说明/Description

配套挡圈强度高, 抗挤出性强, 问题和安装问题。且不容易吸缓冲挡圈不分正反面安装。

The supporting retaining ring has high strength, strong extrusion resistance, problems and use problems. It is not easy to install the buffer retaining ring on both sides.

完美的结构设计, 良好的回油特性, 避免困压选用聚氨酯材料具备耐高温, 耐冲击性能。

Perfect structural design, good oil return characteristics, avoiding trapped pressure, polyurethane material with high temperature resistance and impact resistance.

配套挡圈尺寸精准, 易安装, 避免了太大或太小造成的安装问题和安装问题。且不容易吸水膨胀, 导致尺寸变化。

The supporting retaining ring is accurate in size and easy to install, avoiding installation and use problems caused by too large or size. It is not easy to absorb water and expand, resulting in size change.

订货方式 Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

规格 Specification

RBB-40*55.5*6.3

RBB-45*60.5*6.3

RBB-50*65.5*6.3

RBB-55*70.5*6.3

RBB-60*75.5*6.3

RBB-65*80.5*6.3

RBB-70*85.5*6.3

RBB-75*90.5*6.3

RBB-80*95.5*6.3

RBB-85*100.5*6.3

RBB-90*105.5*6.3

RBB-95*110.5*6.3

RBB-100*115.5*6.3

RBB-105*120.5*6.3

RBB-110*125.5*6.3

RBB-115*130.5*6.3

RBB-120*135.5*6.3

RBB-125*140.5*6.3

RBB-130*145.5*6.3



RBB/HBY


BUFFER SEAL

RBB缓冲密封

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

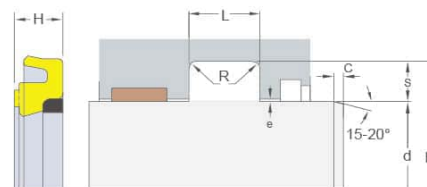

※ 使用工况 / Working condition

- ★ 材料/Material: 聚氨酯+尼龙 PU+NY
- ★ 温度/Temperature: -45℃~110℃
- ★ 压力/Pressure: 21MPa
- ★ 速度/Speed: 0.5m/s



※ 说明/Description

配套档强度高, 抗击出性强。选用聚氨酯材料具备耐高温的能力与耐冲击力配套档尺寸合理, 好安装, 避免了太大或太小造成的安装问题和使用问题且不容易吸水膨胀, 导致尺寸变化。

Supporting gear ring high strength, strong resistance. Polyurethane material with resistance High temperature ability and impact resistance matching gear ring size is reasonable easy to install, avoid Avoid installation problems and use problems caused by too large or too small and not easy Water absorption expansion, resulting in size change.

HBY是与活塞杆密封件结合使用, 以吸收高负荷下的冲击和波动压力, 隔绝高温流体, 提高密封件的耐用度。

HBY is used in combination with piston rod seals to absorb impact and fluctuating pressure under high load, isolate high-temperature fluid and improve the durability of seals.

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

RBB/HBY Rod Seal

活塞杆密封件

规格 Specification

RBB-40*55.5*6.3

RBB-45*60.5*6.3

RBB-50*65.5*6.3

RBB-55*70.5*6.3

RBB-60*75.5*6.3

RBB-65*80.5*6.3

RBB-70*85.5*6.3

RBB-75*90.5*6.3

RBB-80*95.5*6.3

RBB-85*100.5*6.3

RBB-90*105.5*6.3

RBB-95*110.5*6.3

RBB-100*115.5*6.3

RBB-105*120.5*6.3

RBB-110*125.5*6.3

RBB-115*130.5*6.3

RBB-120*135.5*6.3

RBB-125*140.5*6.3

RBB-130*145.5*6.3

TecThane



RBB/HBY

BUFFER SEAL


RBB缓冲密封

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

SONGZ

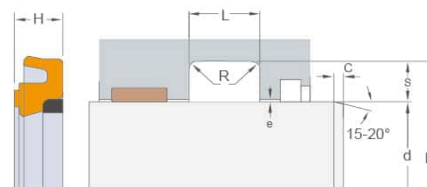

※ 使用工况 / Working condition

★ 材料/Material: U-1029

★ 耐冲击、耐磨、耐热(150-240℃)吸水率低。

Impact resistance, wear resistance, heat resistance (150-240℃), low water absorption.

★ 长期存放不易变形、膨胀，易于安装。

It is not easy to deform, expand and install after long-term storage.

★ 与SKF活塞杆密封一起使用性能更佳。

Better performance with SKF piston rod seal.

★ 温度范围:



※ 说明/Description

优质PU原料耐冲击、耐磨、耐热(150-240℃)吸水率低储存时间长，不易变形、膨胀，安装方便。使用SKF活塞杆密封，性能更佳

High quality PU raw materials are impact resistant, wear-resistant, heat resistant (150-240℃), low water absorption, long storage time, not easy to deform and expand, and easy to install. Better performance with SKF piston rod seal

RBB/HBY Rod Seal
活塞杆密封件

规格 Specification

RBB-40*55.5*6.3

RBB-45*60.5*6.3

RBB-50*65.5*6.3

RBB-55*70.5*6.3

RBB-60*75.5*6.3

RBB-65*80.5*6.3

RBB-70*85.5*6.3

RBB-75*90.5*6.3

RBB-80*95.5*6.3

RBB-85*100.5*6.3

RBB-90*105.5*6.3

RBB-95*110.5*6.3

RBB-100*115.5*6.3

RBB-105*120.5*6.3

RBB-110*125.5*6.3

RBB-115*130.5*6.3

RBB-120*135.5*6.3

RBB-125*140.5*6.3

RBB-130*145.5*6.3

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA



规格 Specification	规格 Specification
UN-3*6*2.1	UN-12*25*8
UN-4*7*2.1	UN-12*25*10
UN-4*10*4	UN-12.5*20.5*5
UN-6*12*4	UN-14*20*5
UN-8*12*5	UN-14*20*6
UN-8*14*4	UN-14*20*8
UN-8*14*6	UN-14*22*5
UN-8*14*8	UN-14*22*6
UN-8*16*4	UN-14*22*8
UN-8*16*6	UN-14*24*5
UN-8*18*8	UN-14*24*8
UN-8*22*10	UN-14*25*8
UN-10*16*4	UN-14*26*5
UN-10*16*4.5	UN-14*28*10
UN-10*16*6	UN-15*22*5
UN-10*16*8	UN-15*22*6
UN-10*18*5	UN-15*22*8
UN-10*18*6	UN-15*25*5
UN-10*18*8	UN-15*25*6
UN-10*20*5	UN-15*25*7
UN-10*20*6	UN-15*25*8
UN-10*20*7	UN-15*30*6
UN-10*20*8	UN-15*30*8
UN-10*22*6	UN-15*30*10
UN-10*22*8	UN-16*22*5
UN-11*18*6	UN-16*22*6

UN Rod seal 活塞杆密封件

规格 Specification	规格 Specification
UN-63*73*10	UN-68*80*10
UN-63*73*12	UN-67*87*12
UN-63*75*6	UN-70*78*8
UN-63*75*10	UN-70*78*10
UN-63*75*12	UN-70*80*5
UN-63*78*10	UN-70*80*6
UN-63*80*10	UN-70*80*8
UN-63*80*12	UN-70*80*9
UN-63*83*10	UN-70*80*10
UN-63*83*12	UN-70*80*12
UN-64*74*6	UN-70*82*10
UN-64*80*8	UN-70*82*12
UN-64*80*13	UN-70*83*13
UN-65*73*8	UN-70*84*10
UN-65*75*6	UN-70*85*8
UN-65*75*7	UN-70*85*9
UN-65*75*8	UN-70*85*10
UN-65*75*9	UN-70*85*12
UN-65*75*10	UN-70*90*10
UN-65*75*12	UN-70*90*12
UN-65*79*10	UN-70*90*15
UN-65*80*9	UN-70*95*12
UN-65*80*10	UN-71*80*6
UN-65*80*11	UN-71*91*12
UN-65*80*12	UN-73*85*10
UN-65*85*10	UN-75*85*6
UN-65*85*12	UN-75*85*8
UN-65*90*10	UN-75*85*10
UN-65*90*12	UN-75*85*12
UN-67*77*6	UN-75*90*9
UN-68*80*8.5	UN-75*90*10
UN-67*77*12	UN-75*90*12
UN-85*100*9	UN-95*115*15
UN-85*100*10	UN-95*120*12
UN-85*100*12	UN-95*120*15
UN-85*105*12	UN-98*112*9
UN-85*105*15	UN-100*110*5
UN-86*98*10	UN-100*110*12
UN-85*110*12	UN-100*110*8
UN-87*97*12	UN-100*110*9
UN-88*100*12	UN-100*112*9
UN-90*100*6	UN-100*110*14



规格 Specification	规格 Specification
UN-17*28*7	UN-20*30*8
UN-18*24*5	UN-20*30*10
UN-18*24*6	UN-20*32*6
UN-18*24*8	UN-20*32*8
UN-18*25*5	UN-20*33*8
UN-18*26*5	UN-20*33*10
UN-18*26*6	UN-20*34*12
UN-18*26*7	UN-20*35*6
UN-18*26*8	UN-20*35*7
UN-18*28*5	UN-20*35*8
UN-18*28*6	UN-20*35*10
UN-18*28*8	UN-20*36*8
UN-18*30*6	UN-20*38*10
UN-18*30*8	UN-28*44*8
UN-18*32*7	UN-30*36*8
UN-18*34*8	UN-30*37*6
UN-19*26*5	UN-30*38*6
UN-20*26*3.3	UN-30*38*7
UN-20*26*5	UN-30*38*8
UN-20*26*6	UN-30*40*6
UN-20*28*5	UN-30*40*7
UN-20*28*6	UN-30*40*8
UN-20*28*7	UN-30*40*10
UN-20*28*8	UN-30*40*12
UN-20*30*5	UN-30*42*7
UN-20*30*6	UN-30*42*8

UN Rod seal 活塞杆密封件

规格 Specification	规格 Specification
UN-30*42*10	UN-44*54*6
UN-30*43*10	UN-45*52*8
UN-30*45*6	UN-45*53*6
UN-30*45*7	UN-45*53*8
UN-30*45*8	UN-45*53*10
UN-30*45*10	UN-45*55*6
UN-30*46*10	UN-45*55*7
UN-30*47*10	UN-45*55*8
UN-30*48*10	UN-45*55*10
UN-30*50*8	UN-45*56*7
UN-30*50*10	UN-45*57*6
UN-30*50*12	UN-45*56*10
UN-30*52*10	UN-45*58*6
UN-30*55*10	UN-45*58*10
UN-31.5*41.5*6	UN-45*60*8
UN-31.5*46.5*10	UN-60*70*10
UN-32*38*8	UN-60*70*12
UN-32*40*5	UN-60*71*7
UN-32*40*5.5	UN-60*72*10
UN-32*40*6	UN-60*73*8
UN-32*40*8	UN-60*73*10
UN-40*53*8	UN-60*75*8
UN-40*55*7	UN-60*75*9
UN-40*55*7.2	UN-60*75*10
UN-40*55*8	UN-60*75*12
UN-40*55*9	UN-60*76*10
UN-40*55*10	UN-60*76*12
UN-40*60*10	UN-60*80*10
UN-40*60*12	UN-60*80*12
UN-40*62*12	UN-60*80*18
UN-40*65*10	UN-60*85*10
UN-40*65*12	UN-60*85*12
UN-42*50*6	UN-60*90*15
UN-42*50*8	UN-61*71*7
UN-42*52*6	UN-62*70*10
UN-42*52*8	UN-62*72*10
UN-42*52*10	UN-62*75*10
UN-42*55*7	UN-62*75*12
UN-42*55*8	UN-62*80*10
UN-42*55*10	UN-62*82*10
UN-42*62*12	UN-62*82*12
UN-43*65*10	UN-63*73*6

20


专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

SONGZ


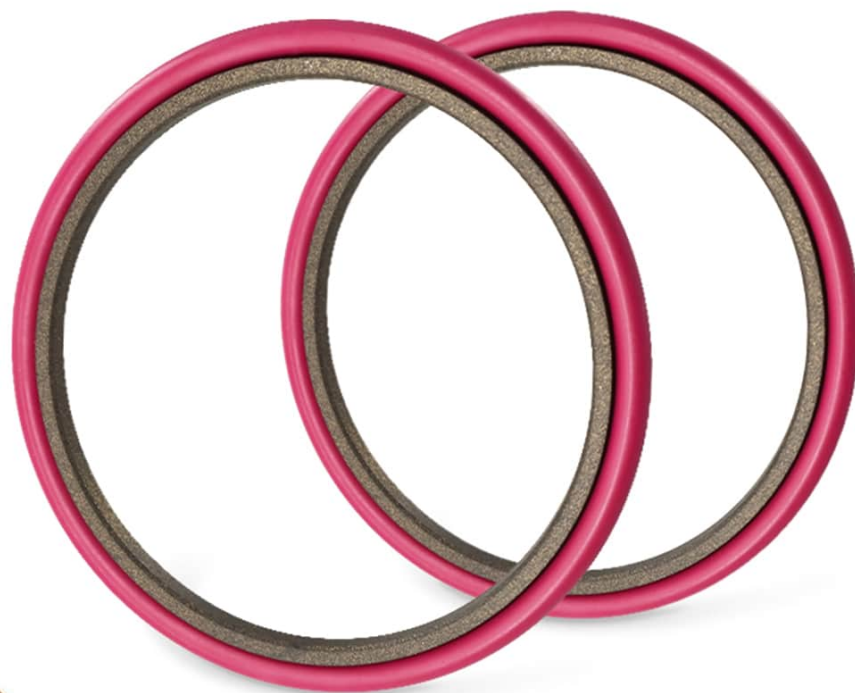


HBTS

BUFFER SEAL

HBTS缓冲环

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

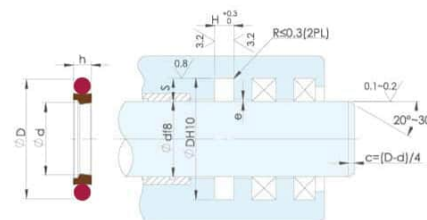

※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: 35MPa
- ★ 温度范围 Temperature range: -30 ~ 190℃
- ★ 材料: 丁腈橡胶+日本大金四氟
- ★ MATL: HNBR+PTFE

HBTS Rod seal

活塞杆密封件

※ 说明/Description

HBTS是液压往复运动系统,在高、中、低压及重载高频工况下的密封场合非常出色。适合各种行程及范围较广的流体和高温场合,可适用于较大的活塞杆间隙。

HBTS is for reciprocated hydraulic system. Posses sing excellent performance in high, medium and low pressure and in high load, high frequency conditions. Especially suitable for long stroke. Applied to bigger rod diameter in fluid sand under high pressure.

挡圈采用日本大金四氟材料,表面喷氟工艺

The retaining ring is made of Daikin PTFE material from Japan, and the surface is sprayed with fluorine technology


优良的抗疲劳性能,零件反复弯曲后,能保持原有的机械强度
Excellent anti fatigue performance, the parts can maintain their original mechanical strength after repeated bending

高强度化学抗能,耐腐蚀性、耐碱和弱酸,芳香族化合物和酒精
High strength chemical resistance, corrosion resistance, alkali and weak acid resistance, aromatic compounds and alcohol

规格 Specification	规格 Specification	规格 Specification	规格 Specification
HBTS-32*3.2	HBTS-60*6.1	HBTS-130*6.1	HBTS-190*6.1
HBTS-28*4.2	HBTS-63*6.1	HBTS-132*6.1	HBTS-80*8.1
HBTS-30*4.2	HBTS-65*6.1	HBTS-133*6.1	HBTS-85*8.1
HBTS-32*4.2	HBTS-67*6.1	HBTS-135*6.1	HBTS-90*8.1
HBTS-35*4.2	HBTS-68*6.1	HBTS-136*6.1	HBTS-95*8.1
HBTS-36*4.2	HBTS-70*6.1	HBTS-137*6.1	HBTS-100*8.1
HBTS-40*4.2	HBTS-73*6.1	HBTS-138*6.1	HBTS-105*8.1
HBTS-45*4.2	HBTS-75*6.1	HBTS-140*6.1	HBTS-110*8.1
HBTS-50*4.2	HBTS-80*6.1	HBTS-145*6.1	HBTS-115*8.1
HBTS-52*4.2	HBTS-83*6.1	HBTS-147*6.1	HBTS-120*8.1
HBTS-55*4.2	HBTS-85*6.1	HBTS-150*6.1	HBTS-125*8.1
HBTS-56*4.2	HBTS-90*6.1	HBTS-155*6.1	HBTS-140*8.1
HBTS-60*4.2	HBTS-95*6.1	HBTS-157*6.1	HBTS-150*8.1
HBTS-63*4.2	HBTS-98*6.1	HBTS-158*6.1	HBTS-160*8.1
HBTS-65*4.2	HBTS-100*6.1	HBTS-160*6.1	HBTS-180*8.1
HBTS-35*6.1	HBTS-105*6.1	HBTS-165*6.1	HBTS-210*8.1
HBTS-40*6.1	HBTS-107*6.1	HBTS-167*6.1	HBTS-220*8.1
HBTS-45*6.1	HBTS-110*6.1	HBTS-170*6.1	HBTS-240*8.1
HBTS-50*6.1	HBTS-115*6.1	HBTS-175*6.1	HBTS-230*8.1
HBTS-55*6.1	HBTS-120*6.1	HBTS-177*6.1	HBTS-250*8.1
HBTS-56*6.1	HBTS-125*6.1	HBTS-180*6.1	HBTS-280*8.1

订货方式 Order Method SPGW D*d*h(H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

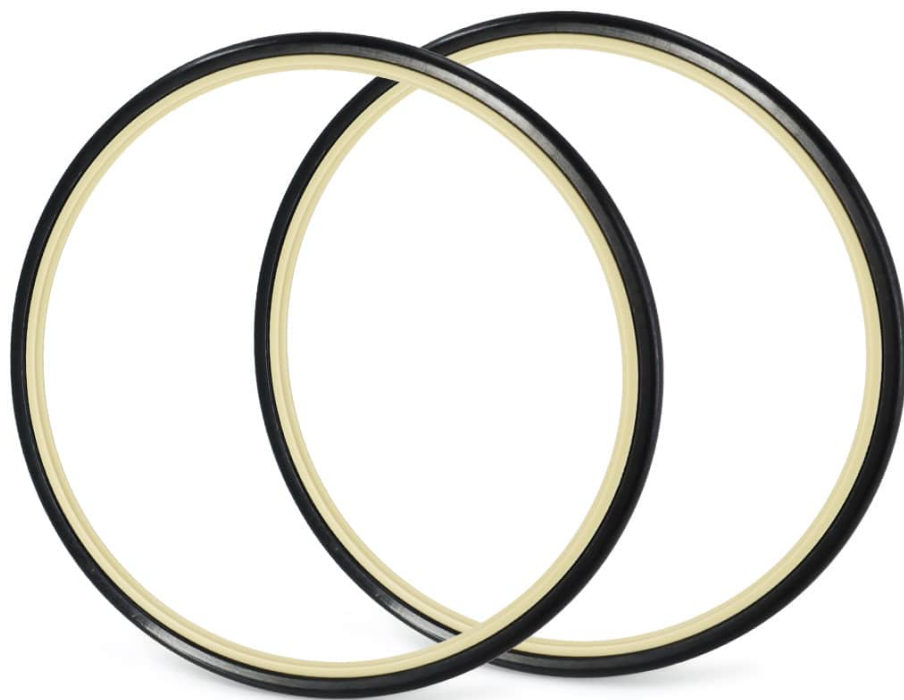

HBTS




BUFFER SEAL

HBTS斯特封

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

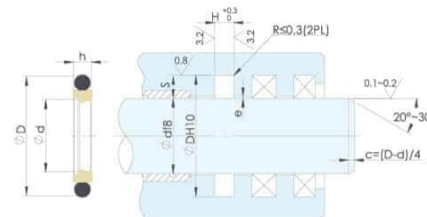

※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: 35MPa
- ★ 温度范围 Temperature range: -30 ~ 280℃
- ★ 材料: 丁腈橡胶+尼龙
- ★ MATL: NBR+NY

HBTS Rod seal

活塞杆密封件

※ 说明/Description

HBTS是液压往复运动系统，在高、中、低压及重载高频工况下的密封场合非常出色。适合各种行程及范围较广的流体和高温场合，可适用于较大的活塞杆间隙。

HBTS is for reciprocated hydraulic system. Posses sing excellent performance in high, medium and low pressure and in high load, high frequency conditions. Especially suitable for long stroke. Applied to bigger rod diameter in fluid sand under high pressure.

高软化点和耐热性，高结晶度尼龙材料，热变形温度可达280℃

High softening point and heat resistance, high crystallinity nylon material, hot deformation temperature can reach 280℃

优良的抗疲劳性能，零件反复弯曲后，能保持原有的机械强度

Excellent anti fatigue performance, the parts can maintain their original mechanical strength after repeated bending

高强度化学抗能，耐腐蚀性、耐碱和弱酸，芳香族化合物和酒精

High strength chemical resistance, corrosion resistance, alkali and weak acid resistance, aromatic compounds and alcohol

规格 Specification	规格 Specification	规格 Specification	规格 Specification
HBTS-32*3.2	HBTS-60*6.1	HBTS-130*6.1	HBTS-190*6.1
HBTS-28*4.2	HBTS-63*6.1	HBTS-132*6.1	HBTS-80*8.1
HBTS-30*4.2	HBTS-65*6.1	HBTS-133*6.1	HBTS-85*8.1
HBTS-32*4.2	HBTS-67*6.1	HBTS-135*6.1	HBTS-90*8.1
HBTS-35*4.2	HBTS-68*6.1	HBTS-136*6.1	HBTS-95*8.1
HBTS-36*4.2	HBTS-70*6.1	HBTS-137*6.1	HBTS-100*8.1
HBTS-40*4.2	HBTS-73*6.1	HBTS-138*6.1	HBTS-105*8.1
HBTS-45*4.2	HBTS-75*6.1	HBTS-140*6.1	HBTS-110*8.1
HBTS-50*4.2	HBTS-80*6.1	HBTS-145*6.1	HBTS-115*8.1
HBTS-52*4.2	HBTS-83*6.1	HBTS-147*6.1	HBTS-120*8.1
HBTS-55*4.2	HBTS-85*6.1	HBTS-150*6.1	HBTS-125*8.1
HBTS-56*4.2	HBTS-90*6.1	HBTS-155*6.1	HBTS-140*8.1
HBTS-60*4.2	HBTS-95*6.1	HBTS-157*6.1	HBTS-150*8.1
HBTS-63*4.2	HBTS-98*6.1	HBTS-158*6.1	HBTS-160*8.1
HBTS-65*4.2	HBTS-100*6.1	HBTS-160*6.1	HBTS-180*8.1
HBTS-35*6.1	HBTS-105*6.1	HBTS-165*6.1	HBTS-210*8.1
HBTS-40*6.1	HBTS-107*6.1	HBTS-167*6.1	HBTS-220*8.1
HBTS-45*6.1	HBTS-110*6.1	HBTS-170*6.1	HBTS-240*8.1
HBTS-50*6.1	HBTS-115*6.1	HBTS-175*6.1	HBTS-230*8.1
HBTS-55*6.1	HBTS-120*6.1	HBTS-177*6.1	HBTS-250*8.1
HBTS-56*6.1	HBTS-125*6.1	HBTS-180*6.1	HBTS-280*8.1

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.


※ 说明/Description

HBTS是液压往复运动系统，在高、中、低压及重载高频工况下的密封场合非常出色。适合各种行程及范围较广的流体和高温场合，可适用于较大的活塞杆间隙。

HBTS is for reciprocated hydraulic system. Posses sing excellent performance in high, medium and low pressure and in high load, high frequency conditions. Especially suitable for long stroke. Applied to bigger rod diameter in fluids and under high pressure.

Maximum extrusion gap e(最大间隙)

Radial depth S	e _{max} at 80° C (175° F) for pressures	16 Mpa	25 Mpa	40 Mpa
mm	mm			
2,45 to 2,5	0,25	0,2	0,15	
3,5 to 3,75	0,35	0,25	0,15	
5,3 to 5,5	0,4	0,3	0,2	
7,55 to 7,75	0,5	0,35	0,25	
10,25 to 12,25	0,6	0,45	0,35	

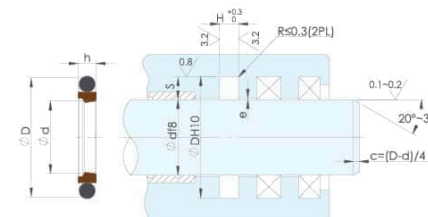

※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: 35MPa
- ★ 温度范围 Temperature range: -30 ~ 110°C
- ★ 材料: 丁腈橡胶+填充聚四氟乙烯
- ★ MATL: NBR+Filled PTFE

规格 Specification	规格 Specification	规格 Specification	规格 Specification
HBTS-32*3.2	HBTS-60*6.1	HBTS-130*6.1	HBTS-190*6.1
HBTS-28*4.2	HBTS-63*6.1	HBTS-132*6.1	HBTS-80*8.1
HBTS-30*4.2	HBTS-65*6.1	HBTS-133*6.1	HBTS-85*8.1
HBTS-32*4.2	HBTS-67*6.1	HBTS-135*6.1	HBTS-90*8.1
HBTS-35*4.2	HBTS-68*6.1	HBTS-136*6.1	HBTS-95*8.1
HBTS-36*4.2	HBTS-70*6.1	HBTS-137*6.1	HBTS-100*8.1
HBTS-40*4.2	HBTS-73*6.1	HBTS-138*6.1	HBTS-105*8.1
HBTS-45*4.2	HBTS-75*6.1	HBTS-140*6.1	HBTS-110*8.1
HBTS-50*4.2	HBTS-80*6.1	HBTS-145*6.1	HBTS-115*8.1
HBTS-52*4.2	HBTS-83*6.1	HBTS-147*6.1	HBTS-120*8.1
HBTS-55*4.2	HBTS-85*6.1	HBTS-150*6.1	HBTS-125*8.1
HBTS-56*4.2	HBTS-90*6.1	HBTS-155*6.1	HBTS-140*8.1
HBTS-60*4.2	HBTS-95*6.1	HBTS-157*6.1	HBTS-150*8.1
HBTS-63*4.2	HBTS-98*6.1	HBTS-158*6.1	HBTS-160*8.1
HBTS-65*4.2	HBTS-100*6.1	HBTS-160*6.1	HBTS-180*8.1
HBTS-35*6.1	HBTS-105*6.1	HBTS-165*6.1	HBTS-210*8.1
HBTS-40*6.1	HBTS-107*6.1	HBTS-167*6.1	HBTS-220*8.1
HBTS-45*6.1	HBTS-110*6.1	HBTS-170*6.1	HBTS-240*8.1
HBTS-50*6.1	HBTS-115*6.1	HBTS-175*6.1	HBTS-230*8.1
HBTS-55*6.1	HBTS-120*6.1	HBTS-177*6.1	HBTS-250*8.1
HBTS-56*6.1	HBTS-125*6.1	HBTS-180*6.1	HBTS-280*8.1

订货方式: Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



HBTS



ROD SEAL

HBTS斯特封

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER





※ 说明 / DESCRIPTION

SPN和HBTS有同样的性能，用于压力工作范围广，滑动速度高的情况。

SPN has same properties with HBTS. Applied to high pressure and high sliding speed conditions.


※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: 35MPa
- ★ 温度范围 Temperature range: -45~110℃
- ★ 材料: 填充聚四氟乙烯+丁腈橡胶
- ★ MAT: Filled PTFE+NBR

规格 Specification			
名称 Type	D	d	h
SPN	50.5	40.5	4.1
SPN	60.5	50.5	4.1
SPN	70.5	60.5	4.1
SPN	90.5	80.5	4.1
SPN	90.5	80.5	5
SPN	90.5	80.5	5.9
SPN	95.5	80.5	6.3
SPN	100.5	90.5	4.1
SPN	100.5	90.5	5
SPN	100.5	90.5	5.9
SPN	106.5	90.5	6.3
SPN	110.5	100.5	4.1
SPN	110.5	100.5	5
SPN	110.5	100.5	5.9




规格 Specification			
名称 Type	D	d	h
OHM	55	32	12
OHM	60	42	12
OHM	70	52	12
OHM	80	58	14.5
OHM	90	68	14.5
OHM	100	78	14.5
OHM	110	78	14.5
OHM	120	98	14.5
OHM	125	103	14.5
OHM	130	108	14.5
OHM	140	118	14.5
OHM	150	128	14.5
OHM	160	138	14.5
OHM	180	158	14.5
OHM	190	168	14.5
OHM	200	178	14.5
OHM	225	203	14.5
OHM	250	228	14.5

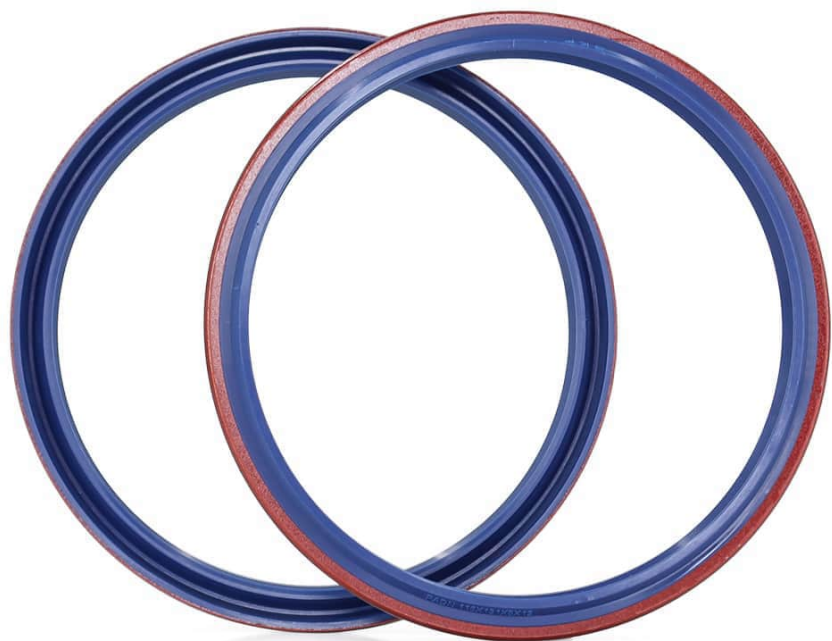

20

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

"High" pressure does not fall off
To prevent the oil pressure from falling off due to high pressure, a pressure relief hole is designed according to the engineering principle

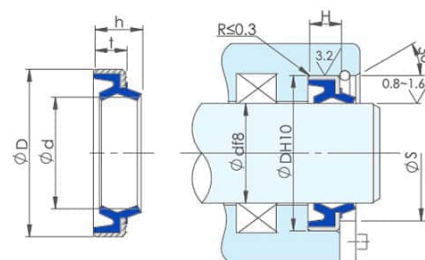

- ★ **加厚骨架设计，不易变形**
Thickened skeleton design, not easy to deform
- ★ **耐老化，使用寿命长**
Aging resistance and long service life
- ★ **磷化处理防锈**
Phosphating treatment to prevent rust
- ★ **泄压孔是为了防止高压脱落而设计的**
The pressure relief hole is designed to prevent falling off due to high oil pressure
- ★ **防尘磨臂加厚，刮尘效果好**
The dust-proof lip arm is thickened, with good dust scraping effect
- ★ **R角设计，保护油膜**
R-angle design to protect oil film

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。

The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘圈边进水，导致缸头内壁生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，盾加高防尘防污效果更佳

ipsum, 泄压孔可防止压力过高引起防尘脱落。



Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy Installation, lip with high dust and antifouling effect better IPsum, pressurerelief hole can be prevented Excessive pressure prevents dust from falling off

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

规格 Specification

DKBI-140x160x10/14

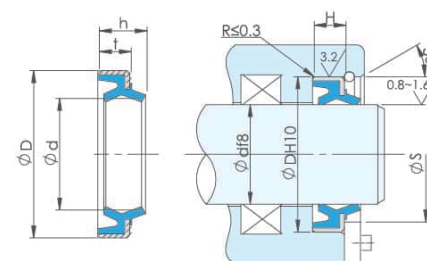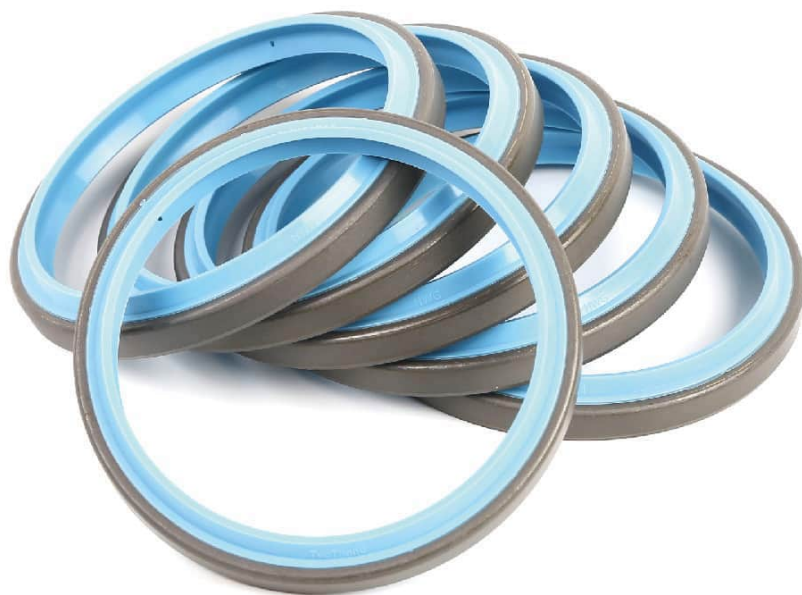

※ 使用工况 / Working condition

- ★ 加厚骨架设计，不易变形
Thickened skeleton design, not easy to deform
- ★ 耐老化，使用寿命长
Aging resistance and long service life
- ★ 磷化处理防锈
Phosphating treatment to prevent rust
- ★ 泄压孔是为了防止油压高脱落而设计的
The pressure relief hole is designed to prevent falling off due to high oil pressure
- ★ 防尘唇加厚，刮尘效果好
The dust-proof lip arm is thickened, with good dust scraping effect
- ★ R角设计，保护油膜
R-angle design to protect oil film

※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。
The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘外圈进水，导致缸头内部生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，唇加高防尘防污效果更佳
Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy installation, lip with high dust and antifouling effect better
Ifsum, pressure relief hole can be prevented Excessive pressure prevents dust from falling off

规格 Specification

DKBI-40*52*7/10

DKBI-45*57*7/10

DKBI-50*62*7/10

DKBI-55*69*8/11

DKBI-60*74*8/11

DKBI-65*79*8/11

DKBI-70*84*8/11

DKBI-75*89*8/11

DKBI-80*94*8/11

DKBI-85*99*8/11

DKBI-90*104*8/11

DKBI-95*109*8/11

DKBI-100*114*8/11

DKBI-105*121*9/12

DKBI-110*126*9/12

DKBI-115*131*9/12

DKBI-120*136*9/12

DKBI-125*141*9/12

DKBI-130*146*9/12

DKBI-140x160x10/14

DKBI/HWG

WIPER SEAL
DKBI型防尘密封件

20 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



“高”压不脱落

防止油压过高脱落设计了符合工程学原理的泄压孔

"High" pressure does not fall off
To prevent the oil pressure from falling off due to high pressure, a pressure relief hole is designed according to the engineering principle

订货方式: Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

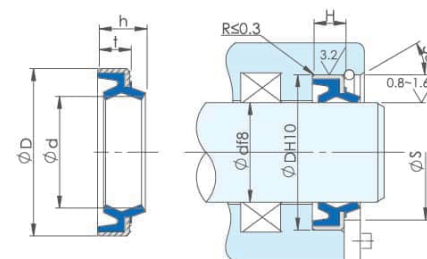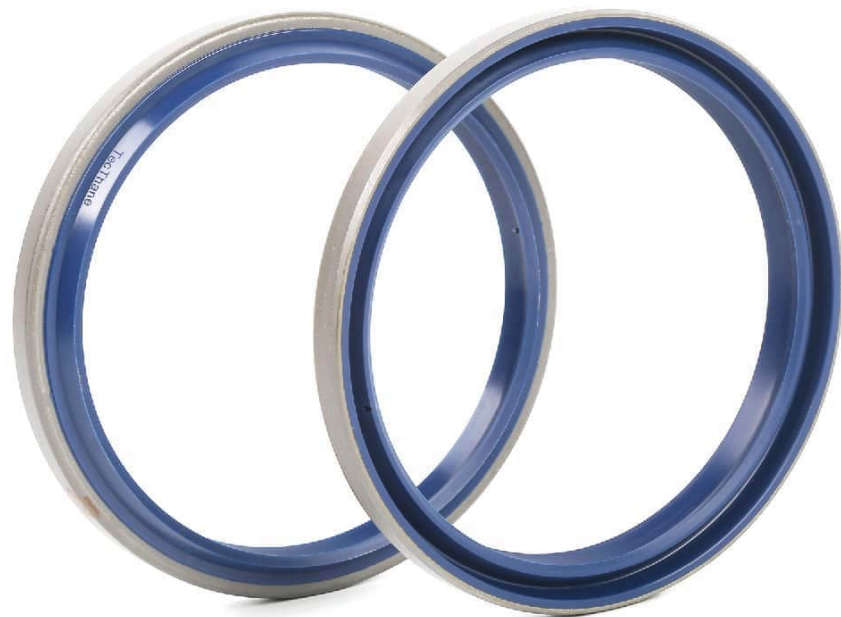

※ 使用工况 / Working condition

- ★ 加厚骨架设计，不易变形
Thickened skeleton design, not easy to deform
- ★ 耐老化，使用寿命长
Aging resistance and long service life
- ★ 磷化处理防锈
Phosphating treatment to prevent rust
- ★ 泄压孔是为了防止油压高脱落而设计的
The pressure relief hole is designed to prevent falling off due to high oil pressure
- ★ 防尘唇加厚，刮尘效果好
The dust-proof lip arm is thickened, with good dust scraping effect
- ★ R角设计，保护油膜
R-angle design to protect oil film

※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。
The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘外圈进水，导致缸头内部生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，唇加高防尘防污效果更佳
Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy installation, lip with high dust and antifouling effect better

Excessive pressure prevents dust from falling off
If the required size is not listed in the table, please kindly contact us.

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size is not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

规格 Specification

DKBI-40*52*7/10

DKBI-45*57*7/10

DKBI-50*62*7/10

DKBI-55*69*8/11

DKBI-60*74*8/11

DKBI-65*79*8/11

DKBI-70*84*8/11

DKBI-75*89*8/11

DKBI-80*94*8/11

DKBI-85*99*8/11

DKBI-90*104*8/11

DKBI-95*109*8/11

DKBI-100*114*8/11

DKBI-105*121*9/12

DKBI-110*126*9/12

DKBI-115*131*9/12

DKBI-120*136*9/12

DKBI-125*141*9/12

DKBI-130*146*9/12

DKBI-140x160x10/14

DKBI/HWG

WIPER SEAL

DKBI型防尘密封件

“高” 压不脱落

防止油压过高脱落设计了符合工程学原理的泄压孔


"High" pressure does not fall off

To prevent the oil pressure from falling off due to high pressure, a pressure relief hole is designed according to the engineering principle

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

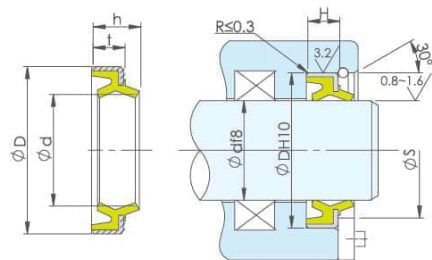

※ 使用工况 / Working condition

- ★ 加厚骨架设计，不易变形
Thickened skeleton design, not easy to deform
- ★ 耐老化，使用寿命长
Aging resistance and long service life
- ★ 磷化处理防锈
Phosphating treatment to prevent rust
- ★ 防尘唇臂加厚，刮尘效果好
The dust-proof lip arm is thickened, with good dust scraping effect
- ★ R角设计，保护油膜
R-angle design to protect oil film

※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。
The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘外圈进水，导致缸头内部生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，唇加高防尘防污效果更佳
Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy Installation, lip with high dust and antifouling effect better IPsum, pressure relief hole can be prevented Excessive pressure prevents dust from falling off

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

规格 Specification
DKBI-35*47*7/10
DKBI-40x52x7/10
DKBI-45x57x7/10
DKBI-50x62x7/10
DKBI-55x69x8/11
DKBI-60x74x8/11
DKBI-65x79x8/11
DKBI-70x84x8/11
DKBI-75x89x8/11
DKBI-80x94x8/11
DKBI-85x99x8/11
DKBI-90x104x8/11
DKBI-95x109x8/11
DKBI-100x114x8/11
DKBI-105x121x9/12
DKBI-110x126x9/12
DKBI-115x131x9/12
DKBI-120x136x9/12
DKBI-125*141*9/12
DKBI-130x146x9/12
DKBI-140x160x10/14
DKBI-145*165*10/14
DKBI-150*170*10/14
DKBI-160*180*10/14




DKBI/HWG

WIPER SEAL
DKBI型防尘密封件

20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



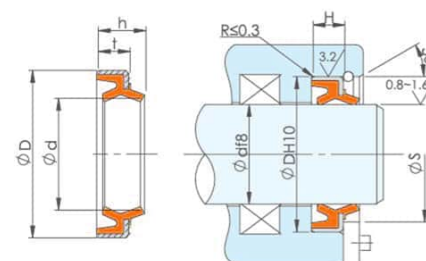

※ 使用工况 / Working condition

- ★ 加厚骨架设计，不易变形
Thickened skeleton design, not easy to deform
- ★ 耐老化，使用寿命长
Aging resistance and long service life
- ★ 磷化处理防锈
Phosphating treatment to prevent rust
- ★ 泄压孔是为了防止油压高脱落而设计的
The pressure relief hole is designed to prevent falling off due to high oil pressure
- ★ 防尘唇加厚，刮尘效果好
The dust-proof lip arm is thickened, with good dust scraping effect
- ★ R角设计，保护油膜
R-angle design to protect oil film

※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。
The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘外圈进水，导致缸头内部生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，唇加高防尘防污效果更佳
Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy Installation, lip with high dust and antifouling effect better IPsum, pressurereleief hole can be prevented Excessive pressure prevents dust from falling off

规格 Specification

DKBZ-40*52*7/10

DKBZ-45*57*7/10

DKBZ-50*62*7/10

DKBZ-55*69*8/11

DKBZ-60*74*8/11

DKBZ-65*79*8/11

DKBZ-70*84*8/11

DKBZ-75*89*8/11

DKBZ-80*94*8/11

DKBZ-85*99*8/11

DKBZ-90*104*8/11

DKBZ-95*109*8/11

DKBZ-100*114*8/11

DKBZ-105*121*9/12

DKBZ-110*126*9/12

DKBZ-115*131*9/12

DKBZ-120*136*9/12

DKBZ-130*146*9/12

DKBZ / HWGA

WIPER SEAL
DKBZ / HWGA型防尘密封件

20 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

“高”压不脱落


防止油压过高脱落设计了符合工程学原理的泄压孔

"High" pressure does not fall off

To prevent the oil pressure from falling off due to high pressure, a pressure relief hole is designed according to the engineering principle

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

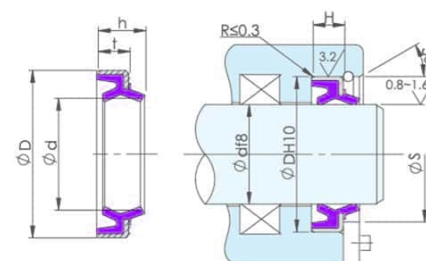

※ 使用工况 / Working condition

- ★ 加厚骨架设计，不易变形
Thickened skeleton design, noteasy to deform
- ★ 耐老化，使用寿命长
Aging resistance and long service life
- ★ 磷化处理防锈
Phosphating treatment to prevent rust
- ★ 泄压孔是为了防止油压高脱落而设计的
The pressure relief hole is designed to preventfalling off due to high oil pressure
- ★ 防尘唇臂加厚，刮尘效果好
The dust-proof lip arm is thickened, with gooddust scraping effect
- ★ R角设计，保护油膜
R-angle design to protect oil film

※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。
The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘外圈进水，导致缸头内部生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，唇加高防尘防污效果更佳
Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy Installation, lip with high dust and antifouling effect better IPsum, pressurereleief hole can be prevented Excessive pressure prevents dust from falling off

规格 Specification

DKBZ-40*52*7/10

DKBZ-45*57*7/10

DKBZ-50*62*7/10

DKBZ-55*69*8/11

DKBZ-60*74*8/11

DKBZ-65*79*8/11

DKBZ-70*84*8/11

DKBZ-75*89*8/11

DKBZ-80*94*8/11

DKBZ-85*99*8/11

DKBZ-90*104*8/11

DKBZ-95*109*8/11

DKBZ-100*114*8/11

DKBZ-105*121*9/12

DKBZ-110*126*9/12

DKBZ-115*131*9/12

DKBZ-120*136*9/12

DKBZ-130*146*9/12

DKBZ /HWGA

WIPER SEAL

DKBZ /HWGA型防尘密封件

20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

“高”压不脱落

防止油压过高脱落设计了符合工程学原理的泄压孔

"High" pressure does not fall off

To prevent the oil pressure from falling off due to high pressure, a pressure relief hole is designed according to the engineering principle

订货方式 Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.


※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。

The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

防止雨水从防尘外圈进水，导致缸头内部生锈而引起漏油，防尘铁壳表面经过精车削在磷化处理尺寸更精准易安装，唇加高防尘防污效果更佳，泄压孔可防止压力过高引起防尘脱落。

Prevent rain water from the dustproof outer ring, resulting in rust inside the cylinder head caused by leakage Oil, dustproof iron shell surface after fine turning in phosphating treatment size more accurate and easy Installation, lip with high dust and antifouling effect better IPsum, pressurerelief hole can be prevented Excessive pressure prevents dust from falling off

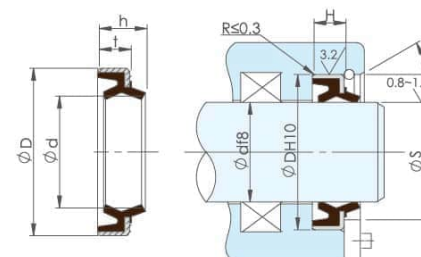

※ 使用工况 / Working condition

- ★ 加厚骨架设计，不易变形
Thickened skeleton design, noteasy to deform
- ★ 耐老化，使用寿命长
Aging resistance and long service life
- ★ 磷化处理防锈
Phosphating treatment to prevent rust
- ★ 防尘唇加厚，刮尘效果好
The dust-proof lip arm is thickened, with good dust scraping effect
- ★ R角设计，保护油膜
R-angle design to protect oil film



规格 Specification	规格 Specification	规格 Specification	规格 Specification
DKB-14*22*4.5/5.5	DKB-85x99x8/11	DKB-20*32*6/9	DKB-105x121x9/12
DKB-14*22*5/7	DKB-90x104x8/11	DKB-25*37*6/9	DKB-110x126x9/12
DKB-19*31*6/9	DKB-95x109x8/11	DKB-28*40*6/9	DKB-115x131x9/12
DKB-20*32*6/9	DKB-100x114x8/11	DKB-30*42*6/9	DKB-120x136x9/12
DKB-25*37*6/9	DKB-105x121x9/12	DKB-32*44*7/10	DKB-125*141*9/12
DKB-28*40*6/9	DKB-110x126x9/12	DKB-35*47*7/10	DKB-130x146x9/12
DKB-30*42*6/9	DKB-115x131x9/12	DKB-40x52x7/10	DKB-140x160x10/14
DKB-32*44*7/10	DKB-120x136x9/12	DKB-45x57x7/10	DKB-150*170*10/14
DKB-35*47*7/10	DKB-125*141*9/12	DKB-50x62x7/10	DKB-160*180*10/14
DKB-40x52x7/10	DKB-130x146x9/12	DKB-55x69x8/11	
DKB-45x57x7/10	DKB-140x160x10/14	DKB-60x74x8/11	
DKB-50x62x7/10	DKB-145*165*10/14	DKB-65x79x8/11	
DKB-50*64*8/11	DKB-150*170*10/14	DKB-70x84x8/11	
DKB-55x69x8/11	DKB-160*180*10/14	DKB-75x89x8/11	
DKB-60x74x8/11	DKB-170*190*10/14	DKB-80x94x8/11	
DKB-65x79x8/11	DKB-180*205*12/17	DKB-85x99x8/11	
DKB-70x84x8/11	DKB-190*215*12/17	DKB-90x104x8/11	
DKB-75x89x8/11	DKB-200*225*12/17	DKB-95x109x8/11	
DKB-80x94x8/11	DKB-210*235*12/17	DKB-100x114x8/11	

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA



DKB


WIPER SEAL

DKB型防尘密封件

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER





材料/Material:(Polyurethane)

规格 Specification	规格 Specification	规格 Specification	规格 Specification
DHS-11.2×19.2×4.5/6	DHS-35×43×5/6.5	DHS-75×85×6/8	DHS-136×149×7/9.5
DHS-12×20×64.5/6	DHS-35.5×43.5×5/6.5	DHS-80×90×6/8	DHS-140×153×7/9.5
DHS-12.5×20.5×4.5/6	DHS-38×46×5/6.5	DHS-85×95×6/8	DHS-145×158×7/9.5
DHS-14×22×64.5/6	DHS-40×48×5/6.5	DHS-88×98×6/8	DHS-150×163×7/9.5
DHS-16×24×4.5/6	DHS-45×53×5/6.5	DHS-90×100×6/8	DHS-160×173×7/9.5
DHS-18×26×4.5/6	DHS-50×58×5/6.5	DHS-95×105×6/8	DHS-165×178×7/9.5
DHS-20×28×4.5/6	DHS-53×61×5/6.5	DHS-98×108×6/8	DHS-180×193×7/9.5
DHS-22×30×4.5/6	DHS-55×63×5/6.5	DHS-100×110×6/8	DHS-190×204×7/9.5
DHS-22.4×30.4×4.5/6	DHS-56×64×5/6.5	DHS-105×115×6/8	DHS-200×213×7/9.5
DHS-23.5×31.5×4.5/6	DHS-58×66×5/6.5	DHS-110×120×6/8	DHS-204×218×7/9.5
DHS-24.2×31.5×4.5/6	DHS-60×68×5/6.5	DHS-112×122×6/8	DHS-205×214×7/9.5
DHS-25×33×4.5/6	DHS-63×71×5/6.5	DHS-115×125×6/8	DHS-210×224×7/9.5
DHS-28×36×4.5/6	DHS-65×73×5/6.5	DHS-118×128×6/8	DHS-210×226×7/9.5
DHS-30×38×5/6.5	DHS-67×75×5/6.5	DHS-120×130×6/8	DHS-212×226×7/9.5
DHS-31.5×39.5×5/6.5	DHS-70×80×6/8	DHS-125×138×7/9.5	DHS-220×234×7/9.5
DHS-32×40×5/6.5	DHS-71×81×6/8	DHS-130×143×7/9.5	DHS-230×244×7/9.5



材料/Material:(Polyurethane)

规格 Specification	规格 Specification	规格 Specification	规格 Specification
FA-8*18*4/7	FA-45*57*5/9	FA-105*121*7/13	FA-190*210*7/13
FA-10*20*4/7	FA-50*62*5/9	FA-110*136*7/13	FA-195*215*7/13
FA-12*22*4/7	FA-52*64*5/9	FA-115*131*7/13	FA-200*220*7/13
FA-14*24*4/7	FA-55*69*6/11	FA-120*136*7/13	FA-205*225*7/13
FA-16*26*4/7	FA-60*74*6/11	FA-125*141*7/13	FA-210*230*7/13
FA-18*28*4/7	FA-63*77*6/11	FA-130*146*7/13	FA-215*235*7/13
FA-20*32*5/9	FA-65*79*6/11	FA-135*151*7/13	FA-220*240*7/13
FA-22*34*5/9	FA-70*84*6/11	FA-140*160*7/13	FA-225*245*7/13
FA-25*37*5/9	FA-75*89*6/11	FA-145*165*7/13	FA-230*250*7/13
FA-28*40*5/9	FA-80*94*6/11	FA-150*170*7/13	FA-235*255*7/13
FA-30*42*5/9	FA-87*101*6/11	FA-155*175*7/13	FA-240*260*7/13
FA-32*44*5/9	FA-85*99*6/11	FA-160*180*7/13	FA-245*265*7/13
FA-35*47*5/9	FA-90*104*6/11	FA-170*190*7/13	FA-250*270*7/13
FA-36*48*5/9	FA-92*106*6/11	FA-175*195*7/13	FA-255*275*7/13
FA-38*50*5/9	FA-95*109*6/11	FA-180*200*7/13	FA-260*280*7/13
FA-40*52*5/9	FA-100*114*6/11	FA-185*205*7/13	FA-265*285*7/13

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.


SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

SONGZ

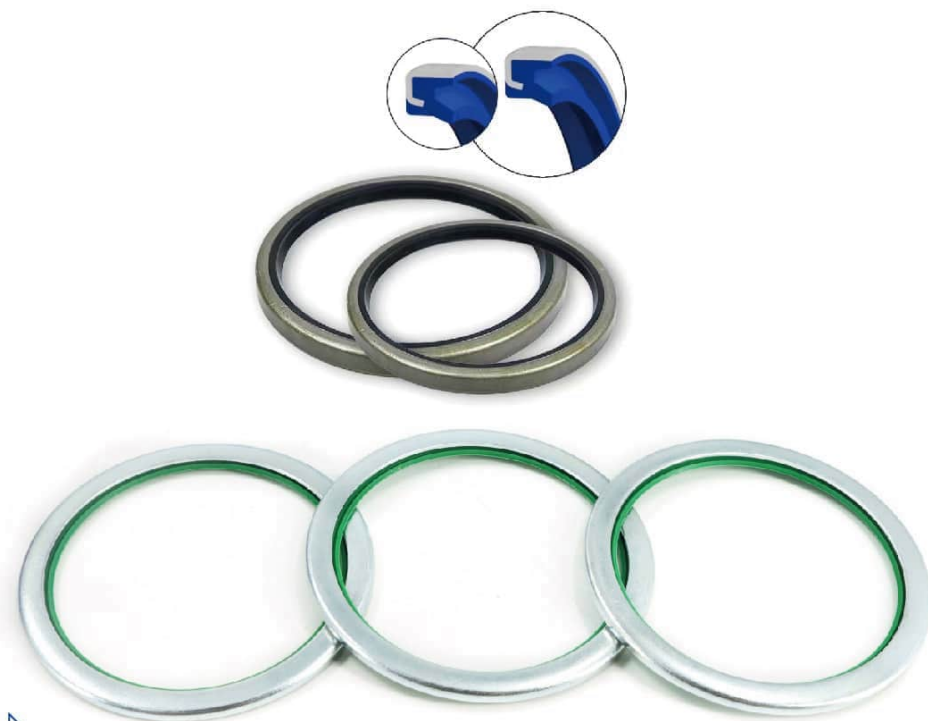

DLI/VAY

WIPER SEAL

DLI/VAY 型防尘密封件

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



※ 使用工况 / Working condition

★ 材料/Material: NBR+SPCC, PU+SPCC

★ 售后无忧(After-sales service is not excellent)

DLI/VAY Wiper seal

防尘密封件

※ 说明/Description

防尘圈是安装在液压缸内，当活塞杆缩回时，刮除活塞杆上的粉尘、脏污、杂质颗粒、碎屑和水分等，以防止外界污染物侵入液压系统。

The dust ring is installed in the hydraulic cylinder. When the piston rod retracts, dust, dirt, foreign particles, debris and moisture on the piston rod are scraped to prevent external pollutants from entering the hydraulic system.

规格 Specification	规格 Specification	规格 Specification	规格 Specification
VAY-35*45*4	VAY-60*70*8	VAY-80*95*6	DLI-65*80*5
VAY-30*38*4	VAY-60*75*4	VAY-80*95*8	DLI-70*85*5
VAY-30*40*4	VAY-60*75*8	VAY-80*100*4	DLI-71*86*5
VAY-40*50*4	VAY-65*75*4	VAY-80*100*6	DLI-75*90*5
VAY-40*50*8	VAY-60*75*8	VAY-80*100*8	DLI-80*95*5
VAY-45*55*4	VAY-65*75*4	VAY-85*100*4	DLI-90*105*5
VAY-45*55*6	VAY-65*75*6	VAY-85*100*8	DLI-70*85*8
VAY-45*55*8	VAY-65*75*8	VAY-90*105*4	DLI-80*95*8
VAY-45*60*4	VAY-65*80*4	VAY-90*105*6	DLI-90*106*8
VAY-45*60*8	VAY-65*80*8	VAY-90*105*8	
VAY-50*60*4	VAY-65*85*4	VAY-90*110*4	
VAY-50*60*6	VAY-65*85*8	VAY-90*110*6	
VAY-50*60*8	VAY-70*85*4	VAY-90*110*8	
VAY-50*65*4	VAY-70*85*5	VAY-90*115*8	
VAY-50*65*6	VAY-70*85*6	VAY-90*120*6	
VAY-50*65*8	VAY-70*85*8	VAY-90*125*6	
VAY-55*68*4	VAY-70*90*8	VAY-100*115*8	
VAY-55*70*4	VAY-70*90*4	VAY-100*120*6	
VAY-55*65*4	VAY-71*86*5	VAY-100*125*8	
VAY-55*65*8	VAY-80*90*4	VAY-100*115*4	
VAY-55*70*8	VAY-80*90*8	VAY-110*125*4	
VAY-60*70*6	VAY-80*95*4	VAY-160*180*5	

订货方式: Order Method SPGW D*d*h(H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.

206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

71/72



※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: -
- ★ 温度范围 Temperature range: -
- ★ 材料: 填充聚四氟乙烯+弹性体
- ★ MAT: Filled PTFE+Elastomer

规格 Specification			
名称 Type	d	D	L
GSZ5-115	115	127.2	8.1
GSZ5-120	120	132.2	8.1
GSZ5-125	125	137.2	8.1
GSZ5-130	130	142.2	8.1
GSZ5-140	140	156	9.5
GSZ5-145	145	161	9.5
GSZ5-150	150	166	9.5
GSZ5-155	155	171	9.5
GSZ5-160	160	176	9.5
GSZ5-165	165	181	9.5
GSZ5-170	170	186	9.5
GSZ5-175	175	191	9.5
GSZ5-180	180	196	9.5
GSZ5-185	185	201	9.5
GSZ5-190	190	206	9.5
GSZ5-195	195	211	9.5
GSZ5-200	200	216	9.5

※ 说明 / DESCRIPTION

GSZ是由一个带密封刃口和防尘刃口的耐磨圈以及一个作为预紧元件的O型圈组成的双层防尘圈，适用于尘埃严重或严寒的环境以及高频往复运动。

GSZ is for reciprocating system, especially in low friction, high frequency and heavy load conditions.

D	L+0.2	D3	a min	d2
d+7.6	4.2	d+1.5	3	2.62
d+8.8	6.3	d+1.5	3	2.62
d+12.2	8.1	d+2.0	4	3.53
d+16.0	9.5	d+2.5	5	5.33
d+24.0	14	d+2.5	8	7
d+27.3	16	d+2.5	10	8.4
d+27.3	16	d+2.5	10	8.4

规格 Specification			
名称 Type	d	D	L
GSZ5-20	20	27.6	4.2
GSZ5-25	25	32.6	4.2
GSZ5-28	28	35.6	4.2
GSZ5-30	30	37.6	4.2
GSZ5-32	32	39.6	4.2
GSZ5-36	36	43.6	4.2
GSZ5-40	40	48.8	6.3
GSZ5-45	45	53.8	6.3
GSZ5-50	50	58.8	6.3
GSZ5-55	55	63.8	6.3
GSZ5-60	60	68.8	6.3
GSZ5-63	63	71.8	6.3
GSZ5-65	65	73.8	6.3
GSZ5-70	70	82.2	8.1
GSZ5-75	75	87.2	8.1
GSZ5-80	80	92.2	8.1
GSZ5-85	85	97.2	8.1
GSZ5-90	90	102.2	8.1
GSZ5-95	95	107.2	8.1
GSZ5-100	100	112.2	8.1
GSZ5-105	105	117.2	8.1
GSZ5-110	110	122.2	8.1



规格 Specification			
名称 Type	D	d	H
VAY	40	50	4
VAY	45	55	4
VAY	50	60	4
VAY	50	65	4
VAY	55	70	4
VAY	60	75	4
VAY	65	80	4
VAY	70	85	4
VAY	75	90	4
VAY	80	95	4
VAY	85	100	4
VAY	90	105	4
VAY	95	110	4
VAY	100	115	4
VAY	105	120	4
VAY	110	125	4
VAY	60	75	8
VAY	65	80	8
VAY	70	85	8
VAY	75	90	8
VAY	80	95	8
VAY	85	100	8
VAY	90	105	8

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



SPGW PISTON SEAL SPGW密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER




SPGW Piston Seal 活塞密封件

※ 说明/Description

韩国超高磨料碳纤维，纤维复合材料表面经过强化处理同时垫片升级纤维材料更耐寒、耐压、耐磨、耐高温。

Korea ultra high abrasive carbon fiber fiber composite material surface After strengthening treatment at the same time gasket upgrade fiber material more resistant Cold, pressure resistance, wear resistance to high temperature.

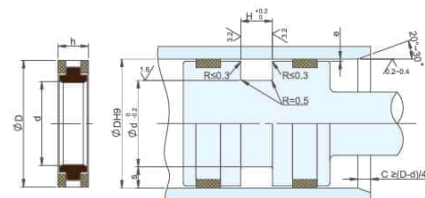

※ 使用工况 / Working condition

- ★ 材料:韩国超高磨料碳纤维，纤维复合材料
Material:Korean ultra-high abrasive carbon fiber, fiber composite
- ★ 表面经过强化处理
The surface is strengthened
- ★ 更耐寒、耐压、耐磨、耐高温
More resistant to cold, pressure, wear and high temperature

规格 Specification	规格 Specification	规格 Specification	规格 Specification
SPGW-50	SPGW-105	SPGW-160	SPGW-215
SPGW-55	SPGW-110	SPGW-165	SPGW-220
SPGW-60	SPGW-115	SPGW-170	SPGW-225
SPGW-65	SPGW-120	SPGW-175	SPGW-230
SPGW-70	SPGW-125	SPGW-180	SPGW-240
SPGW-75	SPGW-130	SPGW-185	SPGW-250
SPGW-80	SPGW-135	SPGW-190	SPGW-260
SPGW-85	SPGW-140	SPGW-195	SPGW-270
SPGW-90	SPGW-145	SPGW-200	SPGW-280
SPGW-95	SPGW-150	SPGW-205	SPGW-290
SPGW-100	SPGW-155	SPGW-210	SPGW-300

订货方式: Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



SPGO PISTON SEAL SPGO密封圈

20 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER




SPGO Piston seal 活塞密封件

※ 说明/Description

韩国超高磨料碳纤维, 纤维复合材料表面经过强化处理同时垫片升级纤维材料更耐寒、耐压、耐磨、耐高温。

Korea ultra high abrasive carbon fiber fiber composite material surface After strengthening treatment at the same time gasket upgrade fiber material more resistant Cold, pressure resistance, wear resistance to high temperature.

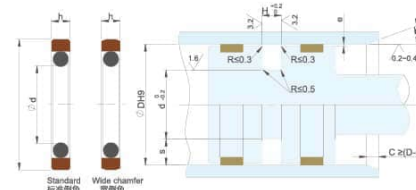

※ 使用工况 / Working condition

- ★ 材料: 韩国超高磨料碳纤维, 纤维复合材料
Material: Korean ultra-high abrasive carbon fiber, fiber composite
- ★ 表面经过强化处理
The surface is strengthened
- ★ 更耐寒、耐压、耐磨、耐高温
More resistant to cold, pressure, wear and high temperature

规格 Specification	规格 Specification	规格 Specification	规格 Specification
SPGO-25*3.2	SPGO-70*6.3	SPGO-165*6.3	SPGO-160*8.1
SPGO-30*3.2	SPGO-75*6.3	SPGO-170*6.3	SPGO-165*8.1
SPGO-32*3.2	SPGO-80*6.3	SPGO-175*6.3	SPGO-170*8.1
SPGO-35*3.2	SPGO-85*6.3	SPGO-180*6.3	SPGO-175*8.1
SPGO-40*3.2	SPGO-90*6.3	SPGO-185*6.3	SPGO-180*8.1
SPGO-70*3.2	SPGO-95*6.3	SPGO-190*6.3	SPGO-185*8.1
SPGO-32*4.2	SPGO-100*6.3	SPGO-195*6.3	SPGO-190*8.1
SPGO-40*4.2	SPGO-105*6.3	SPGO-200*6.3	SPGO-195*8.1
SPGO-42*4.2	SPGO-110*6.3	SPGO-70*8.1	SPGO-200*8.1
SPGO-45*4.2	SPGO-115*6.3	SPGO-75*8.1	SPGO-205*8.1
SPGO-50*4.2	SPGO-120*6.3	SPGO-80*8.1	SPGO-210*8.1
SPGO-52*4.2	SPGO-125*6.3	SPGO-85*8.1	SPGO-215*8.1
SPGO-55*4.2	SPGO-127*6.3	SPGO-90*8.1	SPGO-220*8.1
SPGO-60*4.2	SPGO-130*6.3	SPGO-95*8.1	SPGO-225*8.1
SPGO-63*4.2	SPGO-135*6.3	SPGO-100*8.1	SPGO-230*8.1
SPGO-65*4.2	SPGO-140*6.3	SPGO-105*8.1	SPGO-235*8.1
SPGO-68*4.2	SPGO-145*6.3	SPGO-110*8.1	SPGO-240*8.1
SPGO-70*4.2	SPGO-150*6.3	SPGO-115*8.1	SPGO-245*8.1
SPGO-75*4.2	SPGO-155*6.3	SPGO-120*8.1	SPGO-250*8.1

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA



SPGW/SPGO/ KZT

PISTON SEAL

20

专注密封件二十年
SKF授权经销商


FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

SPGW/SPGO/KZT Piston seal
活塞密封件

※ 说明/Description

OK/SPGA由一个阶梯切口尼龙密封圈与一个丁腈橡胶组成, 具有能跨越油孔的特性。

OK/SPGA is a double acting seal capable of passing over port. The NY sealing face has a step-cut joint for ease of installation. It composed a rubber energizer.

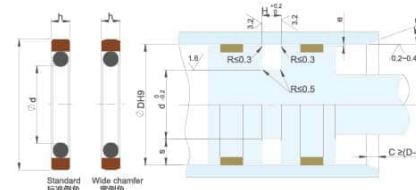

※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 5m/s
- ★ 最大压力 Max pressure: 40MPa
- ★ 温度范围 Temperature range: -30~100℃
- ★ 材料: 四氟+丁腈橡胶
- ★ MATL: PTFE+NBR


规格 Specification				规格 Specification		规格 Specification	
SPGW	50	SPGW	160	SPGO-25*3.2	SPGO-165*6.3	KZT-70*3*4	KZT-90*82*8.1
SPGW	55	SPGW	165	SPGO-30*3.2	SPGO-170*6.3	KZT-75*3*4	KZT-95*87*8.1
SPGW	60	SPGW	170	SPGO-32*3.2	SPGO-175*6.3	KZT-80*3*4	KZT-100*92*8.1
SPGW	65	SPGW	175	SPGO-35*3.2	SPGO-180*6.3	KZT-85*3*4	KZT-105*97*8.1
SPGW	70	SPGW	180	SPGO-40*3.2	SPGO-185*6.3	KZT-90*3*4	KZT-110*102*8.1
SPGW	75	SPGW	185	SPGO-70*3.2	SPGO-190*6.3	KZT-95*3*4	KZT-115*107*8.1
SPGW	80	SPGW	190	SPGO-32*4.2	SPGO-195*6.3	KZT-100*3*4	KZT-120*112*8.1
SPGW	85	SPGW	195	SPGO-40*4.2	SPGO-200*6.3	KZT-105*3*4	KZT-125*117*8.1
SPGW	90	SPGW	200	SPGO-42*4.2	SPGO-70*8.1	KZT-110*3*4	KZT-130*122*8.1
SPGW	95	SPGW	205	SPGO-45*4.2	SPGO-75*8.1	KZT-115*3*4	KZT-135*127*8.1
SPGW	100	SPGW	210	SPGO-50*4.2	SPGO-80*8.1	KZT-120*3*4	KZT-140*132*8.1
SPGW	105	SPGW	215	SPGO-52*4.2	SPGO-85*8.1	KZT-125*3*4	KZT-145*137*8.1
SPGW	110	SPGW	220	SPGO-55*4.2	SPGO-90*8.1	KZT-70*62*4	KZT-150*142*8.1
SPGW	115	SPGW	225	SPGO-60*4.2	SPGO-95*8.1	KZT-75*67*4	KZT-155*147*8.1
SPGW	120	SPGW	230	SPGO-63*4.2	SPGO-100*8.1	KZT-80*72*4	KZT-160*152*8.1
SPGW	125	SPGW	240	SPGO-65*4.2	SPGO-105*8.1	KZT-85*77*4	KZT-165*157*8.1
SPGW	130	SPGW	250	SPGO-68*4.2	SPGO-110*8.1	KZT-90*82*4	KZT-170*162*8.1
SPGW	135	SPGW	260	SPGO-70*4.2	SPGO-115*8.1	KZT-95*87*4	KZT-175*167*8.1
SPGW	140	SPGW	270	SPGO-75*4.2	SPGO-120*8.1	KZT-100*92*4	KZT-180*172*8.1
SPGW	145	SPGW	280	SPGO-80*4.2	SPGO-125*8.1	KZT-105*97*4	KZT-185*177*8.1
SPGW	150	SPGW	290	SPGO-85*4.2	SPGO-130*8.1	KZT-110*102*4	KZT-190*182*8.1
SPGW	155	SPGW	300	SPGO-90*4.2	SPGO-135*8.1	KZT-115*107*4	KZT-195*187*8.1

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

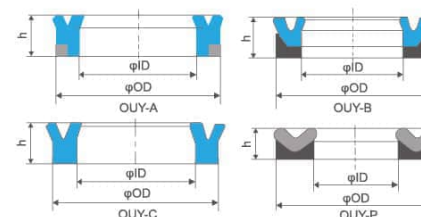

※ 使用工况 / Working condition

- ★ 材料: 丁腈橡胶/聚氨酯+尼龙/丁腈橡胶+聚甲醛
Material: Nitrile rubber/Polyurethane+Nylon/Nitrile rubber+Polyformaldehyde
- ★ 温度/Temperature: -60℃~130℃
- ★ 耐磨性、耐高压、耐高温
Wear resistance, high pressure resistance and high temperature resistance
- ★ 售后无忧 (After-sales service is not excellent)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，耐高压性，耐高温，最高可承受温度范围 130℃，最低可承受 -60℃ 维修后市场推荐产品。

Excellent wear resistance, high pressure resistance, high temperature resistance, the maximum temperature range is 130 °C, and the minimum temperature range is -60 °C, which is recommended by the market after maintenance.

规格 Specification

OUY-40*25*12

OUY-45*30*12

OUY-50*35*12

OUY-60*35*15

OUY-60*45*12

OUY-70*40*12

OUY-70*55*12

OUY-70*45*15.5

OUY-75*60*12

OUY-80*64*12

OUY-80*55*18

OUY-80*90*8

OUY-85*70*12

OUY-90*70*12

OUY-90*65*18

OUY-90*110*12

OUY-90*105*10

OUY-100*75*18

订货方式: Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



OUY

PISTON SEAL

OUY型密封圈

20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER






OUY

PISTON SEAL

OUY型密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

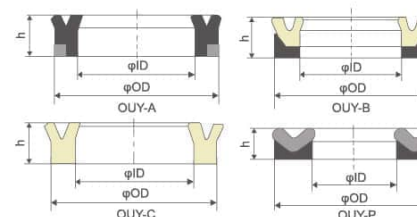

※ 使用工况 / Working condition

- ★ 材料: 丁腈橡胶/聚氨酯+尼龙/丁腈橡胶+聚甲醛
Material: Nitrile rubber/Polyurethane+
Nylon/Nitrile rubber+Polyformaldehyde
- ★ 温度/Temperature: -60℃~130℃
- ★ 耐磨性、耐高压、耐高温
Wear resistance, high pressure resistance
and high temperature resistance
- ★ 售后无优 (After-sales service is not excellent)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，耐高压性，耐高温，最高可承受温度范围 130℃，最低可承受 -60℃ 维修后市场推荐产品。

Excellent wear resistance, high pressure resistance, high temperature resistance, the maximum temperature range is 130 °C, and the minimum temperature range is -60 °C, which is recommended by the market after maintenance.

规格 Specification

OUY-40*25*12

OUY-45*30*12

OUY-50*35*12

OUY-60*35*15

OUY-60*45*12

OUY-70*40*12

OUY-70*55*12

OUY-70*45*15.5

OUY-75*60*12

OUY-80*64*12

OUY-80*55*18

OUY-80*90*8

OUY-85*70*12

OUY-90*70*12

OUY-90*65*18


OUY-90*110*12

OUY-90*105*10

OUY-100*75*18

订货方式: Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

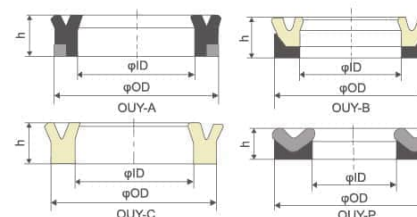

※ 使用工况 / Working condition

- ★ 材料: 丁腈橡胶/聚氨酯+尼龙/丁腈橡胶+聚甲醛
Material: Nitrile rubber/Polyurethane+
Nylon/Nitrile rubber+Polyformaldehyde
- ★ 温度/Temperature: -60℃~130℃
- ★ 耐磨性、耐高压、耐高温
Wear resistance, high pressure resistance
and high temperature resistance
- ★ 售后无优 (After-sales service is not excellent)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，耐高压性，耐高温，最高可承受温度范围 130℃，最低可承受 -60℃ 维修后市场推荐产品。

Excellent wear resistance, high pressure resistance, high temperature resistance, the maximum temperature range is 130 °C, and the minimum temperature range is -60 °C, which is recommended by the market after maintenance.

规格 Specification

OUY-40*25*12

OUY-45*30*12

OUY-50*35*12

OUY-60*35*15

OUY-60*45*12

OUY-70*40*12

OUY-70*55*12

OUY-70*45*15.5

OUY-75*60*12

OUY-80*64*12

OUY-80*55*18

OUY-80*90*8

OUY-85*70*12

OUY-90*70*12

OUY-90*65*18

OUY-90*110*12

OUY-90*105*10

OUY-100*75*18

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.


OUY

PISTON SEAL

OUY型密封圈

20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER






UKH

PISTON SEAL

UKH型密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

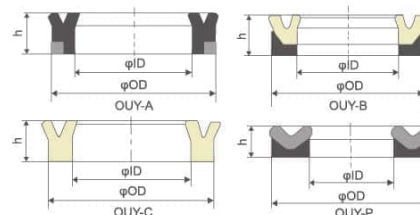

※ 使用工况 / Working condition

- ★ 材料/Material: PA+NR
- ★ 耐磨性、耐高压、耐高温
Wear resistance, high pressure resistance and high temperature resistance
- ★ 售后无忧(After-sales service is not excellent)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，耐高压性，耐高温，维修后市场推荐产品。

Excellent wear resistance, high pressure resistance, high temperature resistance, which is recommended by the market after maintenance.

规格 Specification

UKH-195-63-43392
UKH-195-63-92170
UKH-707-51-10020
UKH-707-51-65020
UKH-707-51-70020
UKH- 07190-00100
UKH-141-60-34411
UKH-154-63-52173
UKH-112-63-12462
UKH-707-42-70012
UKH-707-42-90011
UKH-707-42-11011
UKH-707-42-12011
UKH-707-42-13011
UKH-707-42-14011
UKH-707-42-15011
UKH-707-42-16011

订货方式 Order Method SPGW D*d*h(H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.




NCF

PISTON SEAL

NCF型密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

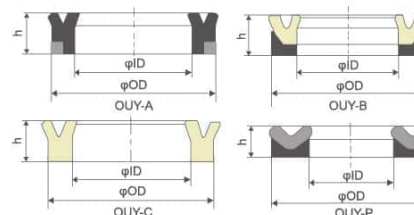

※ 使用工况 / Working condition

★ 材料/Material: PA+PTFE+NBR

★ 耐磨性、耐高压、耐高温

Wear resistance, high pressure resistance
and high temperature resistance

★ 售后无忧 (After-sales service is not excellent)

★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，耐高压性，耐高温，维修后市场推荐产品。

Excellent wear resistance, high pressure resistance, high
temperature resistance, which is recommended by the market
after maintenance.

规格 Specification

NCF 100*88*28

NCF 63*51*28

NCF 80*68*28

NCF 90*78*28

NCF 50*38*28

NCF 110*98*28

NCF 50*37*18

NCF 90*78*42

NCF 80*68*42

NCF 70*58*42

NCF 63*51*42


NCF 120*108*42

NCF 110*98*42

NCF 100*88*42

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

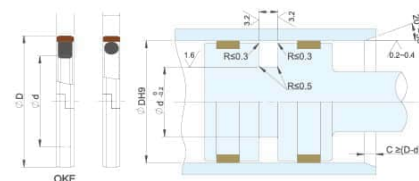

※ 使用工况 / Working condition

- ★ 耐冲击负荷 (Impact load resistance)
- ★ 耐磨性高 (High wear resistance)
- ★ 在高压和大间隙下，均有较强的抗挤压能力
Strong anti-extrusion ability under high pressure and large clearance
- ★ 符合ISO7425-1标准沟槽
Trench according to ISO7425-1

※ 说明 / Description

高压和大间隙条件下的OK密封都具有很强的抗挤压性、高冲击载荷和耐磨性，并符合ISO 7425-1标准沟槽。

OK seal under high pressure and large clearance conditions has strong extrusion resistance, high impact load and wear resistance, and conforms to ISO 7425-1 standard groove.

规格 Specification

OKF-80*6.3

OKF-90*6.3

OKF-80*8.1

OKF-85*8.1

OKF-90*8.1

OKF-95*8.1

OKF-100*8.1

OKF-110*8.1

OKF-115*8.1

OKF-120*8.1

OKF-125*8.1

OKF-130*8.1

OKF-135*8.1

OKF-140*8.1

OKF-145*8.1

OKF-150*8.1

OKF-160*8.1

OKF-165*8.1

OKF-170*8.1

OKF-175*8.1

OKF-190*8.1

OKF-220*8.1

OKF-150*133*9.5

OKF-160*143*9.5

OKF-170*153*9.5

OKF-190*173*9.5


订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

OKF
PISTON SEAL
OKF密封圈

20 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



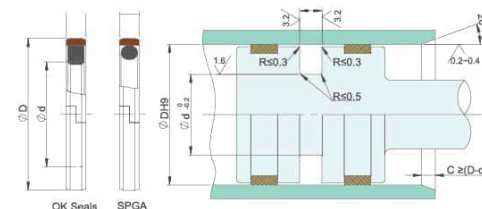

※ 说明 / DESCRIPTION

OK/SPGA由一个阶梯切口尼龙密封圈与一个丁腈橡胶组成，具有能跨越油孔的特性。

OK/SPGA is a double acting seal capable of pass ingover port.The NY sealing face has a step-cut joint for ease of installation. It composed a rubber energizer.

※ 使用工况 / Working condition

- ★ 最大速度Max speed: 5m/s
- ★ 最大压力 Max pressure: 40MPa
- ★ 温度范围Temperature range: -30 ~ 100℃
- ★ 材料: 尼龙+丁腈橡胶
- ★ MAT: NY+NBR

规格 Specification			
名称 Type	D	d	L
OK-75	75	54	8
OK-80	80	59	8
OK-85	85	64	8
OK-90	90	69	8
OK-95	95	74	8
OK-100	100	79	8
OK-105	105	84	8
OK-110	110	89	8
OK-115	115	94	8
OK-120	120	99	8
OK-125	125	104	8
OK-130	130	109	8
OK-135	135	114	8
OK-140	140	119	8
OK-145	145	124	8
OK-150	150	129	8
OK-160	160	139	8
OK-165	165	144	8
OK-170	170	149	8
OK-175	175	154	8
OK-180	180	159	8
OK-190	190	169	8

规格 Specification			
名称 Type	CAT No.	D	h
SPGA-100	9X7298	100	7.3
SPGA-110	9X7301	110	7.3
SPGA-120	9X3592	120	7.3
SPGA-130	9X3595	130	7.3
SPGA-140	9X3598	140	9.5
SPGA-150	9X3601	150	9.5
SPGA-160	9X3604	160	9.5
SPGA-170	9X3607	170	9.5
SPGA-180	9X3610	180	9.5
SPGA-190	9X3609	190	9.5
SPGA-200	8C9179	200	9.5

订货方式, Order Method SPGW D*d*h(H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

OK/SPGA

PISTON SEAL

OK/SPGA型密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 1.5m/s
- ★ 最大压力 Max pressure: 50MPa
- ★ 温度范围 Temperature range: -30 ~ 100°C
- ★ 材料: 填充聚四氟乙烯+尼龙+丁腈橡胶
- ★ MAT: Filled PTFE+NY+NBR

规格 Specification				
名称 Type	D	d	h	H
SPGW-50	50	36	8.5	9
SPGW-55	55	41	8.5	9
SPGW-60	60	46	8.5	9
SPGW-65	65	50	10.5	11
SPGW-70	70	55	10.5	11
SPGW-75	75	60	10.5	11
SPGW-80	80	65	10.5	11
SPGW-85	85	70	10.5	11
SPGW-90	90	75	10.5	11
SPGW-95	95	80	10.5	11
SPGW-100	100	85	12	12.5
SPGW-105	105	90	12	12.5
SPGW-110	110	95	12	12.5
SPGW-115	115	100	12	12.5
SPGW-120	120	105	12	12.5
SPGW-125	125	102	15.5	16
SPGW-130	130	107	15.5	16
SPGW-135	135	112	15.5	16
SPGW-140	140	117	15.5	16
SPGW-145	145	122	15.5	16
SPGW-150	150	127	15.5	16
SPGW-155	155	132	15.5	16

※ 说明 / DESCRIPTION

SPGW液压往复运动系统。在高压工况下的重载双向活塞密封场合表现出色。特别适合长行程及范围较广的流体和高温场合，可适用较大的活塞间隙，沟槽结构简单。

SPGW is for reciprocated hydraulic systems. Possessing excellent performance if applied at heavy load and double sealing under high pressure working conditions. Particularly suitable for long stroke, large range of fluids and high temperature circumstance. Applicable for bigger piston gap. Simple groove structure.

Maximum extrusion gap e(最大间隙)

Radial depth S	e _{max} at 80° C(175° F) for pressures			
	16 Mpa	25 Mpa	40 Mpa	60 Mpa
mm	mm			
5	0,7	0,45	0,25	0,15
6,15	0,7	0,45	0,25	0,15
7,5	1	0,45	0,4	0,2
9,25	1,4	0,9	0,55	0,25
10	1,4	0,9	0,55	0,25

规格 Specification				
名称 Type	D	d	h	H
SPGW-160	160	137	15.5	16
SPGW-165	165	142	15.5	16
SPGW-170	170	147	15.5	16
SPGW-175	175	152	15.5	16
SPGW-180	180	157	15.5	16
SPGW-185	185	162	15.5	16
SPGW-190	190	167	15.5	16
SPGW-195	195	172	15.5	16
SPGW-200	200	177	15.5	16
SPGW-205	205	182	15.5	16
SPGW-210	210	187	15.5	16
SPGW-215	215	192	15.5	16
SPGW-220	220	197	15.5	16
SPGW-225	225	202	15.5	16
SPGW-230	230	207	15.5	16
SPGW-240	240	217	15.5	16
SPGW-250	250	222	17	17.5
SPGW-260	260	232	17	17.5
SPGW-270	270	242	17	17.5
SPGW-280	280	252	17	17.5
SPGW-300	300	272	17	17.5



※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 5m/s
- ★ 最大压力 Max pressure: 40MPa
- ★ 温度范围 Temperature range: -30 ~ 100°C
- ★ 材料: 填充聚四氟乙烯+丁腈橡胶
- ★ MAT: Filled PTFE+NBR

规格 Specification				
名称 Type	D	d	h	H
SPGO-40	40	29	4	4.2
SPGO-45	45	34	4	4.2
SPGO-50	50	39	4	4.2
SPGO-60	60	49	4	4.2
SPGO-63	63	52	4	4.2
SPGO-70	70	59	4	4.2
SPGO-50	50	34.5	6.1	6.3
SPGO-55	55	39.5	6.1	6.3
SPGO-60	60	44.5	6.1	6.3
SPGO-65	65	49.5	6.1	6.3
SPGO-70	70	54.5	6.1	6.3
SPGO-75	75	59.5	6.1	6.3
SPGO-80	80	64.5	6.1	6.3
SPGO-85	85	69.5	6.1	6.3
SPGO-90	90	74.5	6.1	6.3
SPGO-95	95	79.5	6.1	6.3
SPGO-100	100	84.5	6.1	6.3
SPGO-105	105	89.5	6.1	6.3
SPGO-110	110	94.5	6.1	6.3
SPGO-115	115	99.5	6.1	6.3
SPGO-120	120	104.5	6.1	6.3
SPGO-125	125	109.5	6.1	6.3
SPGO-130	130	114.5	6.1	6.3

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

※ 说明 / DESCRIPTION

SPGO是一种大范围应用的标准组合密封，和SPG有相同的性能。

SPGO is a standard compact seal for wide application. Same properties with SPG.

Maximum extrusion gap e(最大间隙)

Radial depth S	e _{max} at 80° C(175° F) for pressures		
	16 Mpa	25 Mpa	40 Mpa
mm	mm		
2,45	0,35	0,25	0,15
3,75	0,35	0,25	0,15
5,5	0,4	0,3	0,2
7,75	0,5	0,35	0,25
10,5	0,6	0,45	0,35

规格 Specification				
名称 Type	D	d	h	H
SPGO-85	85	64	7.9	8.1
SPGO-90	90	69	7.9	8.1
SPGO-95	95	74	7.9	8.1
SPGO-100	100	79	7.9	8.1
SPGO-105	105	84	7.9	8.1
SPGO-110	110	89	7.9	8.1
SPGO-115	115	94	7.9	8.1
SPGO-120	120	99	7.9	8.1
SPGO-125	125	104	7.9	8.1
SPGO-130	130	109	7.9	8.1
SPGO-135	135	114	7.9	8.1
SPGO-140	140	119	7.9	8.1
SPGO-145	145	124	7.9	8.1
SPGO-150	150	129	7.9	8.1
SPGO-155	155	134	7.9	8.1
SPGO-160	160	139	7.9	8.1
SPGO-165	165	144	7.9	8.1
SPGO-170	170	149	7.9	8.1
SPGO-180	180	159	7.9	8.1
SPGO-190	190	169	7.9	8.1
SPGO-200	200	179	7.9	8.1
SPGO-210	210	189	7.9	8.1
SPGO-220	220	199	7.9	8.1



规格 Specification			规格 Specification			规格 Specification		
名称 Type	OD	HD	名称 Type	OD	HD	名称 Type	OD	HD
Little SPGO	6	2	Little SPGO	18.5	2	Little SPGO	25	2
Little SPGO	6.5	2	Little SPGO	19	2	Little SPGO	26	2
Little SPGO	7	2	Little SPGO	19.5	2	Little SPGO	27	2
Little SPGO	8	2	Little SPGO	20	2	Little SPGO	28	2
Little SPGO	9	2	Little SPGO	20.4	2	Little SPGO	29	2
Little SPGO	9	1.6	Little SPGO	20.5	2	Little SPGO	30	2
Little SPGO	10	2	Little SPGO	20.6	2	Little SPGO	31	2
Little SPGO	11	2	Little SPGO	20.8	2	Little SPGO	32	2
Little SPGO	12	2	Little SPGO	21	2	Little SPGO	36	2
Little SPGO	13	2	Little SPGO	21.5	2	Little SPGO	38	2
Little SPGO	14	2	Little SPGO	21.6	2	Little SPGO	50	2.5
Little SPGO	15	2	Little SPGO	21.8	2	Little SPGO	51	2.5
Little SPGO	16	2	Little SPGO	22	2	Little SPGO	52	2.5
Little SPGO	16.2	2	Little SPGO	22.8	2	Little SPGO	55	2.5
Little SPGO	17	1.5	Little SPGO	23	2			
Little SPGO	17	2	Little SPGO	23.5	2			
Little SPGO	18	2	Little SPGO	24	2			



※ 说明 / DESCRIPTION

SPG是一种大范围应用的标准组合密封，应用于活塞。

SPG is standard compact seal for wide application, working in the piston.

※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: 40MPa
- ★ 温度范围 Temperature range: -30 ~ 100℃
- ★ 材料: 填充聚四氟乙烯+丁腈橡胶
- ★ MAT: Filled PTFE+NBR

规格 Specification				
名称 Type	D	d	h	H
SPG-65	65	50	7.3	7.5
SPG-69	69	54	7.3	7.5
SPG-70	70	55	7.3	7.5
SPG-71	71	56	7.3	7.5
SPG-75	75	60	7.3	7.5
SPG-80	80	65	7.3	7.5
SPG-85	85	70	7.3	7.5
SPG-90	90	75	7.3	7.5
SPG-95	95	80	7.3	7.5
SPG-100	100	85	7.3	7.5
SPG-105	105	90	7.3	7.5
SPG-108	108	92	7.3	7.5
SPG-110	110	94	7.3	7.5
SPG-112	112	96	7.3	7.5
SPG-120	120	104	7.3	7.5
SPG-125	125	109	7.3	7.5
SPG-130	130	114	7.3	7.5
SPG-135	135	119	7.3	7.5
SPG-140	140	124	7.3	7.5
SPG-145	145	129	7.3	7.5
SPG-150	150	134	7.3	7.5
SPG-155	155	139	7.3	7.5
SPG-160	160	144	7.3	7.5

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.




DAS

PISTON SEAL

DAS型密封圈

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

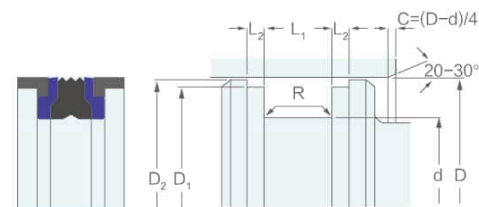



※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 0.5m/s
- ★ 最大压力 Max pressure: 35MPa
- ★ 温度范围 Temperature range: -30 ~ 100℃
- ★ 材料: 丁腈橡胶/氟橡胶+聚氨酯+聚甲醛/尼龙
- ★ MAT: NBR/FKM+PU+POM/NY

规格 Specification							
名称 Type	D	d	D1	D2	L1	L2	Rmax
DAS-32	32	22	28	31	15.5	2.6	0.4
DAS-40	40	30	36	38	12.5	4	0.4
DAS-40	40	24	35.4	38.5	18.4	6.35	0.4
DAS-50	50	34	45.5	48.5	18.4	6.35	0.4
DAS-60	60	44	55.5	58.5	18.4	6.35	0.4
DAS-63	63	47	58.4	61.5	18.4	6.35	0.4
DAS-70	70	50	64.2	68.3	22.4	6.35	0.4
DAS-80	80	60	74.15	78.3	22.4	6.35	0.4
DAS-90	90	70	84.15	88.3	22.4	6.35	0.4
DAS-100	100	75	93.15	98	22.4	6.35	0.4
DAS-105	105	80	98.1	103	22.4	6.35	0.4
DAS-110	110	85	103.1	108	22.4	6.35	0.4
DAS-120	120	95	113.1	118.1	22.4	6.35	0.8
DAS-125	125	100	118.1	123	25.4	6.35	0.8
DAS-130	130	105	122.6	127.5	25.4	9.5	0.8
DAS-135	135	110	127.6	132.5	25.4	9.5	0.8
DAS-140	140	115	132.6	137.5	25.4	9.5	0.8
DAS-145	145	120	137.6	142.5	25.4	9.5	0.8
DAS-150	150	125	143	148	25.4	6.35	0.8
DAS-150	150	125	142.6	147.5	25.4	9.5	0.8
DAS-160	160	135	152.6	157.5	25.4	9.5	0.8
DAS-180	180	155	171.7	177.1	25.4	1.27	0.8
DAS-200	200	175	191.6	197	25.4	1.27	0.8

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

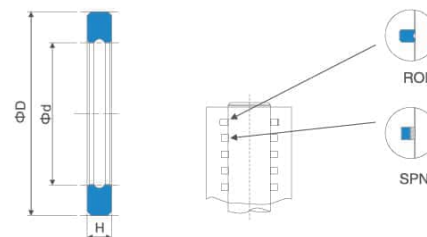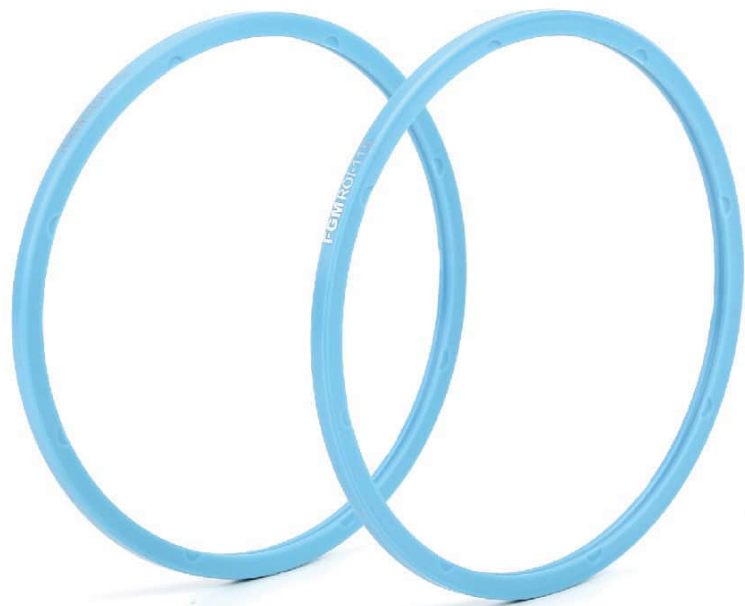

※ 使用工况 / Working condition

- ★ 材料/Material: 采用进口材料 (Imported materials are used)
- ★ 温度/Temperature: $-60^{\circ}\text{C} \sim 130^{\circ}\text{C}$
- ★ 耐高温 (Thermostability)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，最高可承受温度范围 130°C 最低可承受 -60°C ，维修后市场推荐产品。

Excellent wear resistance, the maximum temperature range is 130°C , and the minimum temperature range is -60°C . The product is recommended by the market after maintenance.

规格 Specification

ROI-60*70*5

ROI-70*80*5

ROI-75*85*5

ROI-80*90*5

ROI-90*100*5

ROI-95*105*5

ROI-100*110*5

ROI-105*115*5

ROI-110*120*5

ROI-115*125*5

ROI-120*130*5

ROI

ROTARY SEAL

ROI型密封件




20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式 Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

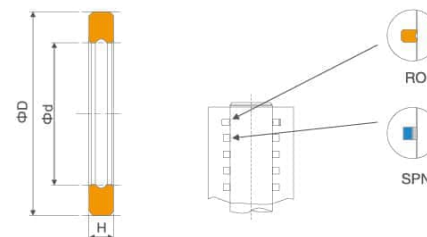

※ 使用工况 / Working condition

- ★ 材料/Material: 采用进口材料 (Imported materials are used)
- ★ 温度/Temperature: $-60^{\circ}\text{C} \sim 130^{\circ}\text{C}$
- ★ 耐高温 (Thermostability)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，最高可承受温度范围 130°C 最低可承受 -60°C ，维修后市场推荐产品。

Excellent wear resistance, the maximum temperature range is 130°C , and the minimum temperature range is -60°C . The product is recommended by the market after maintenance.

规格 Specification

ROI-60*70*5

ROI-70*80*5

ROI-75*85*5

ROI-80*90*5

ROI-90*100*5

ROI-95*105*5

ROI-100*110*5

ROI-105*115*5

ROI-110*120*5

ROI-115*125*5

ROI-120*130*5

ROI

ROTARY SEAL

ROI型密封件


20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



订货方式 Order Method SPGW D*d*h(H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

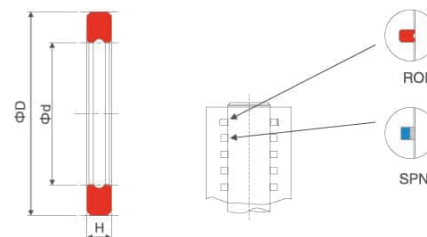

※ 使用工况 / Working condition

- ★ 材料/Material: 采用进口材料 (Imported materials are used)
- ★ 温度/Temperature: -60℃~150℃
- ★ 耐高温 (Thermostability)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，最高可承受温度范围 150℃最低可承受-60℃，维修后市场推荐产品。

Excellent wear resistance, the maximum temperature range is 150 °C, and the minimum temperature range is - 60 °C. The product is recommended by the market after maintenance.

德国高弹ROI回弹性能优于同常规材料性能提升50%

Germany's high elastic ROI rebound performance and excellent guide are 50% higher than those of conventional materials

高温高达150℃，100度以上高温高压优势更明显

The high temperature is as high as 150 °C, and the advantage of high temperature pressure change is more obvious above 100 °C

德国工业 弹性强 恢复快 不变形

German industry has strong elasticity, fast recovery and no deformation

订货方式 Order Method SPGW D*d*h(H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

规格 Specification

ROI-50*60*4.8

ROI-55*65*4.8

ROI-60*70*4.8

ROI-70*80*4.8

ROI-75*85*4.8

ROI-80*90*4.8

ROI-90*100*4.8

ROI-95*105*4.8

ROI-100*110*4.8

ROI-105*115*4.8

ROI-110*120*4.8

ROI-115*125*4.8

ROI-120*130*4.8

ROI-140*150*4.8

ROI

ROTARY SEAL

ROI型密封件

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER




德国高弹ROI

回弹性能优于同常规材料性能提升50%

German high bomb ROI

The rebound performance of the excellent guide is 50% higher than that of conventional materials

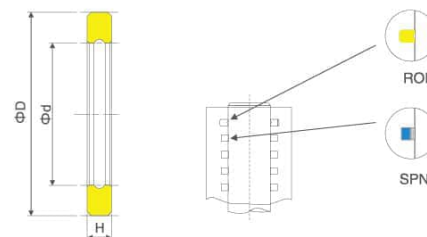

※ 使用工况 / Working condition

- ★ 材料/Material: 采用进口材料 (Imported materials are used)
- ★ 温度/Temperature: $-60^{\circ}\text{C} \sim 130^{\circ}\text{C}$
- ★ 耐高温 (Thermostability)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，最高可承受温度范围 130°C 最低可承受 -60°C ，维修后市场推荐产品。

Excellent wear resistance, the maximum temperature range is 130°C , and the minimum temperature range is -60°C . The product is recommended by the market after maintenance.

规格 Specification

ROI-60*70*5

ROI-70*80*5

ROI-75*85*5

ROI-80*90*5

ROI-90*100*5

ROI-95*105*5

ROI-100*110*5

ROI-105*115*5

ROI-110*120*5

ROI-115*125*5

ROI-120*130*5

ROI-130*140*5



ROI

ROTARY SEAL

ROI型密封件


20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式 Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

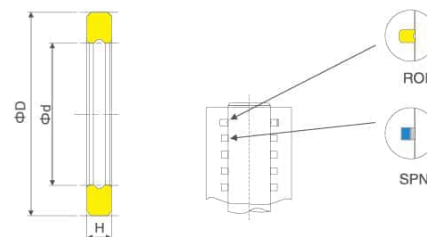

※ 使用工况 / Working condition

- ★ 材料/Material: 采用进口材料 (Imported materials are used)
- ★ 温度/Temperature: -60℃~130℃
- ★ 耐高温 (Thermostability)
- ★ 温度范围/Temperature range:



※ 说明/Description

优秀的耐磨性，最高可承受温度范围 130℃最低可承受-60℃，维修后市场推荐产品。

Excellent wear resistance, the maximum temperature range is 130 °C, and the minimum temperature range is - 60 °C. The product is recommended by the market after maintenance.

规格 Specification

ROI-50*60*5

ROI-60*70*5

ROI-70*80*5

ROI-75*85*5

ROI-80*90*5

ROI-90*100*5

ROI-95*105*5

ROI-100*110*5

ROI-105*115*5

ROI-110*120*5

ROI-115*125*5

ROI-120*130*5

ROI-130*140*5

ROI

ROTARY SEAL

ROI型密封件

20

专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 3m/s
- ★ 最大压力 Max pressure: 35MPa
- ★ 温度范围 Temperature range: -30 ~ 200°C
- ★ 材料: 聚四氟乙烯+弹性体
- ★ MAT: Filled PTFE+Elastomer

Rod Dia		Groove Dia	Groove Width	Max Radial Clearance		Radius	O-Ring Cross Sec.
Standard Application	Extended Application	d	H	32Mpa	50Mpa	r	d2
6-18.9	6-130	d+4.9	2.2	0.15	0.1	0.4	1.78
19-37.9	10-245	d+7.5	3.2	0.2	0.15	0.6	2.62
38-199.9	19-488	d+11.0	4.2	0.25	0.2	1	3.53
200-255.9	38-655	d+15.5	6.3	0.3	0.25	1.3	5.33
256-649.9	120-655	d+21.0	8.1	0.3	0.25	1.8	7
650-999.9	650-999.9	d+28.0	9.5	0.45	0.3	2.5	8.4

规格 Specification			
名称 Type	D	d	H
GRS	6	10.9	2.2
GRS	8	12.9	2.2
GRS	10	14.9	2.2
GRS	12	16.9	2.2
GRS	14	18.9	2.2
GRS	16	20.9	2.2
GRS	18	22.9	2.2
GRS	20	27.9	3.2
GRS	22	29.5	3.2
GRS	25	32.5	3.2
GRS	26	33.5	3.2
GRS	28	35.5	3.2
GRS	30	37.5	3.2
GRS	32	39.5	3.2
GRS	35	42.5	3.2
GRS	36	43.5	3.2
GRS	40	51.5	4.2
GRS	42	53.5	4.2

规格 Specification			
名称 Type	D	d	H
GRS	44	55.5	4.2
GRS	45	56.5	4.2
GRS	48	59.5	4.2
GRS	50	61.5	4.2
GRS	52	63.5	4.2
GRS	55	66.5	4.2
GRS	56	67.5	4.2
GRS	60	71.5	4.2
GRS	63	74.5	4.2
GRS	65	76.5	4.2
GRS	70	81.5	4.2
GRS	75	86.5	4.2
GRS	78	89.5	4.2
GRS	80	91.5	4.2
GRS	85	96.5	4.2
GRS	90	101.5	4.2
GRS	100	111.5	4.2



※ 说明 / DESCRIPTION

ROI和SPN有同样的性能,用于压力工作范围广,滑动速度高的情况。

ROI has same properties with SPN. Applied to high pressure and high sliding speed conditions.

※ 使用工况 / Working condition

- ★ 最大速度 Max speed: 0.3m/s
- ★ 最大压力 Max pressure: 28MPa
- ★ 温度范围 Temperature range: -30 ~ 100°C
- ★ 材料: 聚氨酯
- ★ MAT: PU

规格 Specification			
名称 Type	D	d	H
ROI	70.5	60.5	5
ROI	80.5	70.5	5
ROI	85.5	75.5	5
ROI	90.5	80.5	5
ROI	100.5	90.5	5
ROI	105.5	95.5	5
ROI	110.5	100.5	5
ROI	120.5	110.5	5
ROI	125.5	115.5	4.5
ROI	125.5	115.5	5
ROI	130.5	120.5	5
ROI	140.5	130.5	4.5
ROI	140.5	130.5	5

订货方式 Order Method SPGW D*d*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



WR


BEARING GUIDANCE

WR 木拍

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



WR Bearing Guidance

支撑导向系列


※ 说明 / DESCRIPTION

WR是非金属导向元件，有极好的耐压缩性和耐磨性，高负载承载能力，在达到脆性温度前具有弹性，简单的扣压安装。

Description :WR is nonmetallic guiding and positioning element. Excellent compression resistance and wear resistance, high load performance and still flexible before it reaches its brittleness temperature. Also easy in installation.

使用酚醛加布树脂材料制成，全夹布具有高耐磨性、耐高压性、高负荷的承载能力弹性好不易断裂安装，为XCMG、SANY配套产品。

Made of phenolic resin material, the full cloth clip has high wear resistance, high pressure resistance, high load bearing capacity, elasticity, easy to break and install, and is a supporting product of XCMG and SANY.

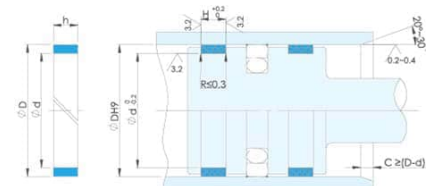

※ 使用工况 / Working condition

- ★ 最大速度Max speed: 1m/s
- ★ 温度范围Temperature range: -45 ~ 120°C
- ★ 材料: 酚醛树脂
- ★ MATL : Phenolic resin

规格 Specification	规格 Specification	规格 Specification	规格 Specification
WR-60*55*6.3	WR-105*100*9.7	WR-140*135*20	WR-110*104*25
WR-65*60*6.3	WR-110*105*9.7	WR-145*138*20	WR-135*128*25
WR-70*65*6.3	WR-105*96*9.7	WR-150*143*20	WR-165*157*25
WR-75*70*6.3	WR-115*110*9.7	WR-150*145*20	WR-170*162*25
WR-80*75*6.3	WR-120*115*9.7	WR-160*148*20	WR-175*167*25
WR-85*80*6.3	WR-125*118*9.7	WR-160*153*20	WR-185*173*25
WR-90*85*6.3	WR-125*119*9.7	WR-170*158*20	WR-185*177*25
WR-95*90*6.3	WR-125*120*9.7	WR-170*162*20	WR-190*182*25
WR-100*95*6.3	WR-130*123*9.7	WR-170*164*20	WR-225*213*25
WR-105*100*6.3	WR-130*125*9.7	WR-170*165*20	WR-225*217*25
WR-110*105*6.3	WR-135*128*9.7	WR-175*167*20	WR-190*182*28.5
WR-100*94*6.3	WR-135*130*9.7	WR-180*175*20	WR-80*74*30
WR-110*104*6.3	WR-140*135*9.7	WR-190*184*20	WR-85*79*30
WR-120*114*6.3	WR-140*133*9.7	WR-200*194*20	WR-90*84*30
WR-55*50*8.1	WR-145*140*9.7	WR-200*195*20	WR-100*94*30
WR-60*55*8.1	WR-150*145*9.7	WR-150*143*21	WR-110*104*30
WR-75*70*8.1	WR-160*155*9.7	WR-160*153*21	WR-120*114*30
WR-80*75*8.1	WR-170*165*9.7	WR-100*94*22.5	WR-165*159*30
WR-85*80*8.1	WR-75*69*9.7	WR-110*104*22.5	WR-190*184*30

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

※ 说明 / DESCRIPTION

WR是非金属导向元件，有极好的耐压缩性和耐磨性，高负载承载能力，在达到脆性温度前具有弹性，简单的扣压安装

Description :WR is nonmetallic guiding and positioning element. Excellent compression resistance and wear resistance,high loadperformance and still flexible before it reaches its brittleness temperature. Also easy in installation.

PA6 40%玻璃纤维增强注塑级，抗冲击改性，热稳定性


PA6 40% glass fiber reinforced injection molding grade, Impactmodification. Thermal stability.

性能非常稳定，能够复制在一定量数据往复运动过程中测量到的特性的平均变化

Its performance is very stable and replicates the average changes in properties measured during the reciprocating motion of a certain amount of data

适用于需要提高冲击强度、高刚度和机械强化的零件

Suitable for parts that require improved impact strength highstiffness, and mechanical strengthening

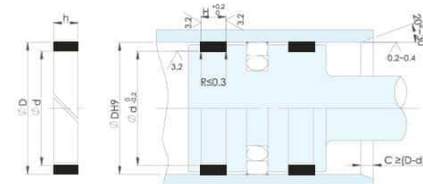

※ 使用工况 / Working condition

- ★ 拉伸模量/Tensile modulus:12500Mpa
- ★ 温度/Temperature:-10℃~220℃
- ★ 材料：尼龙+高复合纤维
- ★ MATL: Nylon+Fiber



WR

BEARING GUIDANCE

WR 木拍

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



规格 Specification	规格 Specification	规格 Specification	规格 Specification
WR-60*55*6.3	WR-105*100*9.7	WR-140*135*20	WR-110*104*25
WR-65*60*6.3	WR-110*105*9.7	WR-145*138*20	WR-135*128*25
WR-70*65*6.3	WR-105*96*9.7	WR-150*143*20	WR-165*157*25
WR-75*70*6.3	WR-115*110*9.7	WR-150*145*20	WR-170*162*25
WR-80*75*6.3	WR-120*115*9.7	WR-160*148*20	WR-175*167*25
WR-85*80*6.3	WR-125*118*9.7	WR-160*153*20	WR-185*173*25
WR-90*85*6.3	WR-125*119*9.7	WR-170*158*20	WR-185*177*25
WR-95*90*6.3	WR-125*120*9.7	WR-170*162*20	WR-190*182*25
WR-100*95*6.3	WR-130*123*9.7	WR-170*164*20	WR-225*213*25
WR-105*100*6.3	WR-130*125*9.7	WR-170*165*20	WR-225*217*25
WR-110*105*6.3	WR-135*128*9.7	WR-175*167*20	WR-190*182*28.5
WR-100*94*6.3	WR-135*130*9.7	WR-180*175*20	WR-80*74*30
WR-110*104*6.3	WR-140*135*9.7	WR-190*184*20	WR-85*79*30
WR-120*114*6.3	WR-140*133*9.7	WR-200*194*20	WR-90*84*30
WR-55*50*8.1	WR-145*140*9.7	WR-200*195*20	WR-100*94*30
WR-60*55*8.1	WR-150*145*9.7	WR-150*143*21	WR-110*104*30
WR-75*70*8.1	WR-160*155*9.7	WR-160*153*21	WR-120*114*30
WR-80*75*8.1	WR-170*165*9.7	WR-100*94*22.5	WR-165*159*30
WR-85*80*8.1	WR-75*69*9.7	WR-110*104*22.5	WR-190*184*30

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



WR

BEARING GUIDANCE

WR 木拍

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



WR Bearing Guidance
支撑导向系列


※ 说明 / DESCRIPTION

WR是非金属导向元件，有极好的耐压缩性和耐磨性，高负载承载能力，在达到脆性温度前具有弹性，简单的扣压安装。

Description :WR is nonmetallic guiding and positioning element. Excellent compression resistance and wear resistance, high loadperformance and still flexible before it reaches its brittleness temperature. Also easy in installation.

使用酚醛加布树脂材料制成，全夹布具有高耐磨性、耐高压性、高负荷的承载能力弹性好不易断裂安装，为XCMG、SANY配套产品。

Made of phenolic resin material, the full cloth clip has high wear resistance, high pressure resistance, high load bearing capacity, elasticity, easy to break and install, and is a supporting product of XCMG and SANY.

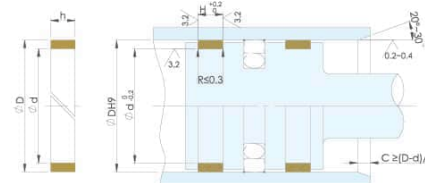

※ 使用工况 / Working condition

- ★ 最大速度Max speed: 1m/s
- ★ 温度范围Temperature range: -45~120℃
- ★ 材料: 酚醛树脂
- ★ MATL : Phenolic resin

规格 Specification	规格 Specification	规格 Specification	规格 Specification
WR-60*55*6.3	WR-105*100*9.7	WR-140*135*20	WR-110*104*25
WR-65*60*6.3	WR-110*105*9.7	WR-145*138*20	WR-135*128*25
WR-70*65*6.3	WR-105*96*9.7	WR-150*143*20	WR-165*157*25
WR-75*70*6.3	WR-115*110*9.7	WR-150*145*20	WR-170*162*25
WR-80*75*6.3	WR-120*115*9.7	WR-160*148*20	WR-175*167*25
WR-85*80*6.3	WR-125*118*9.7	WR-160*153*20	WR-185*173*25
WR-90*85*6.3	WR-125*119*9.7	WR-170*158*20	WR-185*177*25
WR-95*90*6.3	WR-125*120*9.7	WR-170*162*20	WR-190*182*25
WR-100*95*6.3	WR-130*123*9.7	WR-170*164*20	WR-225*213*25
WR-105*100*6.3	WR-130*125*9.7	WR-170*165*20	WR-225*217*25
WR-110*105*6.3	WR-135*128*9.7	WR-175*167*20	WR-190*182*28.5
WR-100*94*6.3	WR-135*130*9.7	WR-180*175*20	WR-80*74*30
WR-110*104*6.3	WR-140*135*9.7	WR-190*184*20	WR-85*79*30
WR-120*114*6.3	WR-140*133*9.7	WR-200*194*20	WR-90*84*30
WR-55*50*8.1	WR-145*140*9.7	WR-200*195*20	WR-100*94*30
WR-60*55*8.1	WR-150*145*9.7	WR-150*143*21	WR-110*104*30
WR-75*70*8.1	WR-160*155*9.7	WR-160*153*21	WR-120*114*30
WR-80*75*8.1	WR-170*165*9.7	WR-100*94*22.5	WR-165*159*30
WR-85*80*8.1	WR-75*69*9.7	WR-110*104*22.5	WR-190*184*30

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系

If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA



WR


BEARING GUIDANCE

WR 木拍

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

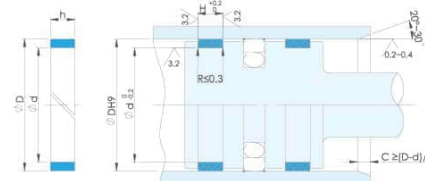

※ 使用工况 / Working condition

- ★ 最大速度Max speed: 1m/s
- ★ 温度范围Temperature range: -45~120℃
- ★ 材料: 酚醛树脂
- ★ MATL : Phenolic resin

※ 说明 / DESCRIPTION

WR是非金属导向元件，有极好的耐压缩性和耐磨性，高负载承载能力，在达到脆性温度前具有弹性，简单的扣压安装。

Description :WR is nonmetallic guiding and positioning element. Excellent compression resistance and wear resistance, high loadperformance and still flexible before it reaches its brittleness temperature. Also easy in installation.


使用酚醛加布树脂材料制成，全夹布具有高耐磨性、耐高压性、高负荷的承载能力弹性好不易断易安装，为XCMG、SANY配套产品。

Made of phenolic resin material, the full cloth clip has high wear resistance, high pressure resistance, high load bearing capacity, elasticity, easy to break and install, and is a supporting product of XCMG and SANY.

规格 Specification	规格 Specification	规格 Specification	规格 Specification
WR-60*55*6.3	WR-105*100*9.7	WR-140*135*20	WR-110*104*25
WR-65*60*6.3	WR-110*105*9.7	WR-145*138*20	WR-135*128*25
WR-70*65*6.3	WR-105*96*9.7	WR-150*143*20	WR-165*157*25
WR-75*70*6.3	WR-115*110*9.7	WR-150*145*20	WR-170*162*25
WR-80*75*6.3	WR-120*115*9.7	WR-160*148*20	WR-175*167*25
WR-85*80*6.3	WR-125*118*9.7	WR-160*153*20	WR-185*173*25
WR-90*85*6.3	WR-125*119*9.7	WR-170*158*20	WR-185*177*25
WR-95*90*6.3	WR-125*120*9.7	WR-170*162*20	WR-190*182*25
WR-100*95*6.3	WR-130*123*9.7	WR-170*164*20	WR-225*213*25
WR-105*100*6.3	WR-130*125*9.7	WR-170*165*20	WR-225*217*25
WR-110*105*6.3	WR-135*128*9.7	WR-175*167*20	WR-190*182*28.5
WR-100*94*6.3	WR-135*130*9.7	WR-180*175*20	WR-80*74*30
WR-110*104*6.3	WR-140*135*9.7	WR-190*184*20	WR-85*79*30
WR-120*114*6.3	WR-140*133*9.7	WR-200*194*20	WR-90*84*30
WR-55*50*8.1	WR-145*140*9.7	WR-200*195*20	WR-100*94*30
WR-60*55*8.1	WR-150*145*9.7	WR-150*143*21	WR-110*104*30
WR-75*70*8.1	WR-160*155*9.7	WR-160*153*21	WR-120*114*30
WR-80*75*8.1	WR-170*165*9.7	WR-100*94*22.5	WR-165*159*30
WR-85*80*8.1	WR-75*69*9.7	WR-110*104*22.5	WR-190*184*30

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

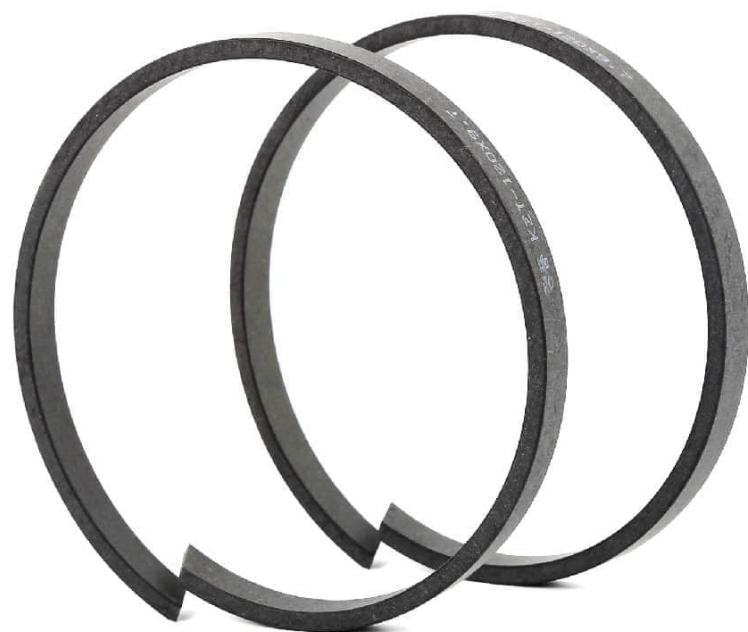


KZT

BEARING GUIDANCE

KZT防污环

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

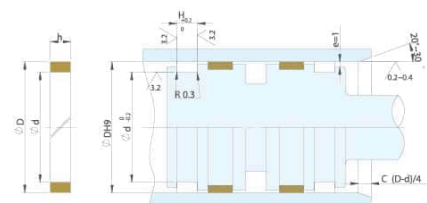

※ 使用工况 / Working condition

- ★ 材料:韩国超高磨料碳纤维, 纤维复合材料
Material:Korean ultra-high abrasive carbon fiber, fiber composite
- ★ 表面经过强化处理
The surface is strengthened

规格 Specification	规格 Specification	规格 Specification	规格 Specification
KZT-70*3*4	KZT-100*92*6.1	KZT-135*127*8.1	KZT-110*102*9.7
KZT-75*3*4	KZT-105*97*6.1	KZT-140*132*8.1	KZT-115*107*9.7
KZT-80*3*4	KZT-110*102*6.1	KZT-145*137*8.1	KZT-120*112*9.7
KZT-85*3*4	KZT-115*107*6.1	KZT-150*142*8.1	KZT-125*117*9.7
KZT-90*3*4	KZT-120*112*6.1	KZT-155*147*8.1	KZT-130*122*9.7
KZT-95*3*4	KZT-125*117*6.1	KZT-160*152*8.1	KZT-135*127*9.7
KZT-100*3*4	KZT-130*122*6.1	KZT-165*157*8.1	KZT-140*132*9.7
KZT-105*3*4	KZT-135*127*6.1	KZT-170*162*8.1	KZT-145*137*9.7
KZT-110*3*4	KZT-140*132*6.1	KZT-175*167*8.1	KZT-150*142*9.7
KZT-115*3*4	KZT-145*137*6.1	KZT-180*172*8.1	KZT-155*147*9.7
KZT-120*3*4	KZT-150*142*6.1	KZT-185*177*8.1	KZT-160*152*9.7
KZT-125*3*4	KZT-155*147*6.1	KZT-190*182*8.1	KZT-165*157*9.7
KZT-70*62*4	KZT-160*152*6.1	KZT-195*187*8.1	KZT-170*162*9.7
KZT-75*67*4	KZT-165*157*6.1	KZT-200*192*8.1	KZT-175*167*9.7
KZT-80*72*4	KZT-170*162*6.1	KZT-205*197*8.1	KZT-180*172*9.7
KZT-85*77*4	KZT-175*167*6.1	KZT-210*202*8.1	KZT-185*177*9.7
KZT-90*82*4	KZT-180*172*6.1	KZT-160*152*9	KZT-190*182*9.7
KZT-95*87*4	KZT-185*177*6.1	KZT-170*162*9	KZT-195*187*9.7
KZT-100*92*4	KZT-190*182*6.1	KZT-180*172*9	KZT-200*192*9.7
KZT-105*97*4	KZT-195*187*6.1	KZT-190*182*9	KZT-205*197*9.7
KZT-110*102*4	KZT-200*192*6.1	KZT-200*192*9	KZT-210*202*9.7

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

KZT Bearing Guidance

支撑导向系列


※ 说明 / DESCRIPTION

KZT是与活塞密封件和抗磨环结合使用, 防止油缸内的油混入外界物质而引起密封件的损坏, 并确保密封件有长的使用寿命, 与活塞杆密封件, 金属衬套结合使用时, 因聚四氟乙烯有杂质浸没功能, 故可防止活塞杆的损坏。

KZT is combined with piston seal ring and anti-wear ring. This product with the anti-wear and piston ring seals used in combination to prevent the cylinder oil mixed with foreign particles and cause damage to the seals and to ensure that the seals have a long service life. The piston rod seals, used in combine with the metal bushing, prevent damage to the rods as a result of PTFE's impurity submerge function.

韩国超高磨料碳纤维, 纤维复合材料表面经过强化处理同时垫片升级纤维材料更耐寒、耐压、耐磨、耐高温。

Korea ultra high abrasive carbon fiber fiber composite material surface After strengthening treatment at the same time gasket upgrade fiber material more resistant Cold, pressur eresistance, wear resistance to high temperature.

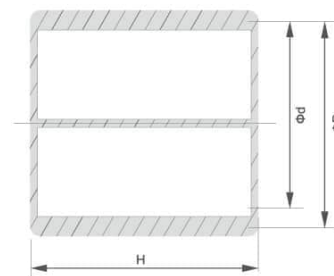

※ 使用工况 / Working condition

- ★ 最大速度Max speed: 5m/s
- ★ 材料: 金属
- ★ MATL: Metal

规格 Specification			
名称 Type	ID	OD	H
Bushing	30	34	30
Bushing	40	44	30
Bushing	45	50	30
Bushing	50	55	30
Bushing	55	60	30
Bushing	60	65	30
Bushing	65	70	30
Bushing	70	75	30
Bushing	75	80	30
Bushing	80	85	30
Bushing	85	90	30
Bushing	90	95	30
Bushing	95	100	30
Bushing	100	105	30
Bushing	105	110	30
Bushing	110	115	30
Bushing	115	120	30
Bushing	120	125	30
Bushing	130	135	30
Bushing	140	145	30
Bushing	50	55	35
Bushing	55	60	35

NBR

规格 Specification			
名称 Type	ID	OD	H
Bushing	60	65	35
Bushing	65	70	35
Bushing	70	75	35
Bushing	75	82	35
Bushing	80	85	35
Bushing	85	90	35
Bushing	90	95	35
Bushing	95	100	35
Bushing	100	105	35
Bushing	105	110	35
Bushing	110	115	35
Bushing	115	120	35
Bushing	120	125	35
Bushing	130	135	35
Bushing	140	145	35
Bushing	50	55	40
Bushing	55	60	40
Bushing	60	65	40
Bushing	65	70	40
Bushing	70	75	40
Bushing	75	80	40
Bushing	80	85	40
Bushing	85	90	40
Bushing	90	95	40
Bushing	95	100	40
Bushing	100	105	40
Bushing	105	110	40
Bushing	110	115	40
Bushing	115	120	40
Bushing	120	125	40
Bushing	130	135	40
Bushing	140	145	40



DU

BEARING GUIDANCE

DU 杯士

20

专注密封件二十年
SKF授权经销商

FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



※ 说明 / DESCRIPTION

活塞的支承环，防止其刮伤或偏心，提高密封件的耐用度，聚四氟乙烯材料可消除爬行，可根据缸径大小来切割。

Bearing rings of piston, prevent the piston from scratching, improve durability of seals. PTFE can eliminate crawling. It can be cut according to the cylinder Dia.

※ 使用工况 / Working condition

- ★ 最大速度Max speed: 5m/s
- ★ 温度范围Temperature range: -45 ~ 200℃
- ★ 材料: 填充聚四氟乙烯 注: Length 长度
- ★ MAT: Filled PTFE $L=L\pi \cdot (D-t)-s$

规格 Specification						
名称 Type	密封件尺寸 Seal size			腔体尺寸 Cylinder size		
	t	h	s	D	d	H
RYT8	2	8	1-1.5	8-63	D-4	8
RYT10	2.5	10	1-2	33-80		10
RYT15		15	1.5-3	41-130	D-5	15
RYT20		20	2-4	65-160		20
RYT25		25	2-6	85-225		25
RYT30		30	3-6.5	112-250		30
RYT35		35	3.5-8	132-300		35
RYT40		40	4-9	150-350		40
RYT45		45	4-10	165-400		45
RYT50	3	50	5-11	205-450	D-6	50
RYT55		55	6-13	230-500		55
RYT60		60	7-15	260-600		60
RYT70		70	8-28	290-1000		70



※ 说明 / DESCRIPTION

KZT是与活塞密封件和抗磨环结合使用，防止油缸内的油混入外界物质而引起密封件的损坏，并确保密封件有长的使用寿命，与活塞杆密封件，金属衬套结合使用时，因聚四氟乙烯有杂质浸没功能，故可防止活塞杆的损坏。

KZT is combined with piston seal ring and anti-wear ring. This product with the anti-wear and piston ring seals used in combination to prevent the cylinder oil mixed with foreign particles and cause damage to the seals and to ensure that the seals have a long service life. The piston rod seals, used in combine with the metal bushing, prevent damage to the rods as a result of PTFE's impurity submerge function.


※ 使用工况 / Working condition

- ★ 最大速度Max speed: 5m/s
- ★ 材料: 填充聚四氟乙烯
- ★ MAT: Filled PTFE

规格 Specification				
名称 Type	D	d	h	H
KZT	80	74	4	4.1
KZT	80	72	4	4.1
KZT	85	79	4	4.1
KZT	85	77	4	4.1
KZT	90	84	4	4.1
KZT	90	82	4	4.1
KZT	95	87	4	4.1
KZT	100	94	4	4.1
KZT	100	92	4	4.1
KZT	80	72	6.1	6.2
KZT	85	77	6.1	6.2
KZT	90	82	6.1	6.2
KZT	95	87	6.1	6.2
KZT	100	92	6.1	6.2
KZT	105	97	6.1	6.2
KZT	110	102	6.1	6.2
KZT	115	107	6.1	6.2
KZT	120	112	6.1	6.2
KZT	125	117	6.1	6.2
KZT	130	122	6.1	6.2
KZT	135	127	6.1	6.2
KZT	140	132	6.1	6.2
KZT	145	137	6.1	6.2
KZT	150	142	6.1	6.2
KZT	160	152	6.1	6.2
KZT	165	157	6.1	6.2

订货方式 Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸，请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.



※ 使用工况 / Working condition

★ 材料: 聚四氟乙烯

★ MATL: PTFE

规格 Specification
TFP-28*32*2.7
TFP-25*29*2.7
TFP-30*34*3
TFP-18*20*1.25
TFP-13*17*1.25
TFP-24*28*2.8
TFP-24*28*1.25
TFP-18*21*1.25
TFP-35*45*1.9
TFP-30*34.4*3.8
TFP-38*43*2.6
TFP-23*27.5*3
TFP-27*31*2.5
TFP-63*68*1.25
TFP-34*39*1.25
TFP-16*19*1.25
TFP-17*20*1.25
TFP-26*31*1.25
TFP-14*17*1.25
TFP-16*20*1.5
TFP-12*14*1.5
TFP-18*20.2*1.5
TFP-12*17*1.25
TFP-14*18.6*1.25
TFP-15.5*17.5*2
TFP-14*19*1.25
TFP-25*28*2
TFP-28*26*1.8

规格 Specification
TFP-3*6*1.25
TFP-4*7*1.25
TFP-5*8*1.25
TFP-6*9*1.25
TFP-7*10*1.25
TFP-8*11*1.25
TFP-9*12*1.25
TFP-10*13*1.25
TFP-10*14*1.25
TFP-11*15*1.25
TFP-11.2*15.2*1.25
TFP-12*16*1.25
TFP-12.5*16.5*1.25
TFP-14*18*1.25
TFP-15*19*1.25
TFP-16*20*1.25
TFP-17*21*1.25
TFP-18*22*1.25
TFP-19*23*1.25
TFP-20*24*1.25
TFP-21*25*1.25
TFP-22*26*1.25
TFP-22*28*1.25
TFP-22.4*28.4*1.25
TFP-23*29*1.25
TFP-24*30*1.25
TFP-25*31*1.25
TFP-25.5*31.5*1.25
TFP-26*32*1.25
TFP-27*33*1.25
TFP-28*34*1.25
TFP-29*35*1.25
TFP-29.5*35.5*1.25
TFP-30*36*1.25
TFP-31*37*1.25
TFP-31.5*37.5*1.25
TFP-32*38*1.25
TFP-34*40*1.25
TFP-35*41*1.25
TFP-35.5*41.5*1.25

规格 Specification
TFG-25*30*1.25
TFG-30*35*1.25
TFG-35*40*1.25
TFG-40*45*1.25
TFG-45*50*1.25
TFG-50*55*1.25
TFG-55*60*1.25
TFG-60*65*1.25
TFG-65*70*1.25
TFG-70*75*1.25
TFG-75*80*1.25
TFG-80*85*1.25
TFG-85*90*1.25
TFG-90*95*1.25
TFG-95*100*1.25
TFG-100*105*1.25
TFG-105*110*1.25
TFG-110*115*1.25
TFG-115*120*1.25
TFG-120*125*1.25
TFG-125*130*1.25
TFG-130*135*1.25
TFG-135*140*1.25
TFG-140*145*1.25
TFG-145*150*1.25
TFG-150*155*1.25
TFG-155*160*1.25
TFG-160*170*1.9
TFG-165*175*1.9
TFG-170*180*1.9
TFG-175*185*1.9
TFG-180*190*1.9
TFG-185*195*1.9
TFG-190*200*1.9
TFG-195*205*1.9
TFG-200*210*1.9
TFG-205*215*1.9
TFG-210*220*1.9
TFG-220*230*1.9
TFG-230*240*1.9



TFG/TFP

BEARING GASKETS


TFG/TFP垫片

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



订货方式: Order Method SPGW D*d*h*H (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

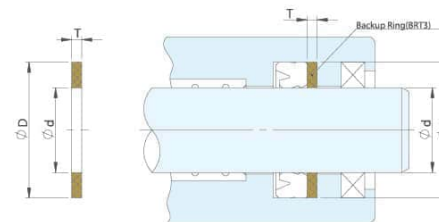

※ 使用工况 / Working condition

- ★ 材料: 尼龙
- ★ MATL: NY

规格 Specification		规格 Specification		规格 Specification	
BRT (Nylon)	40*50*3	BRT (Nylon)	70*85*3	BRT (Nylon)	110*130*3
BRT (Nylon)	40*55*3	BRT (Nylon)	70*90*3	BRT (Nylon)	115*130*3
BRT (Nylon)	45*55*3	BRT (Nylon)	75*85*3	BRT (Nylon)	115*135*3
BRT (Nylon)	45*60*3	BRT (Nylon)	75*88*3	BRT (Nylon)	120*135*3
BRT (Nylon)	50*60*3	BRT (Nylon)	75*90*3	BRT (Nylon)	120*140*3
BRT (Nylon)	50*63*3	BRT (Nylon)	75*95*3	BRT (Nylon)	125*140*3
BRT (Nylon)	50*65*3	BRT (Nylon)	80*100*3	BRT (Nylon)	125*145*3
BRT (Nylon)	55*60*3	BRT (Nylon)	80*90*3	BRT (Nylon)	130*145*3
BRT (Nylon)	55*65*3	BRT (Nylon)	80*93*3	BRT (Nylon)	130*150*3
BRT (Nylon)	55*68*3	BRT (Nylon)	80*95*3	BRT (Nylon)	135*150*3
BRT (Nylon)	55*70*3	BRT (Nylon)	85*100*3	BRT (Nylon)	140*155*3
BRT (Nylon)	55*75*3	BRT (Nylon)	85*105*3	BRT (Nylon)	140*160*3
BRT (Nylon)	60*70*3	BRT (Nylon)	90*105*3	BRT (Nylon)	145*160*3
BRT (Nylon)	60*73*3	BRT (Nylon)	90*110*3	BRT (Nylon)	150*165*3
BRT (Nylon)	60*75*3	BRT (Nylon)	95*105*3	BRT (Nylon)	150*170*3
BRT (Nylon)	60*80*3	BRT (Nylon)	95*110*3	BRT (Nylon)	160*175*3
BRT (Nylon)	65*75*3	BRT (Nylon)	95*115*3	BRT (Nylon)	160*180*3
BRT (Nylon)	65*78*3	BRT (Nylon)	100*115*3	BRT (Nylon)	170*190*3
BRT (Nylon)	65*80*3	BRT (Nylon)	100*120*3	BRT (Nylon)	180*200*3
BRT (Nylon)	65*85*3	BRT (Nylon)	105*120*3		
BRT (Nylon)	70*80*3	BRT (Nylon)	105*125*3		
BRT (Nylon)	70*83*3	BRT (Nylon)	110*125*3		

订货方式: Order Method SPGW D*d*h(H) (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.


BRT

BEARING GASKETS

BRT垫片

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER



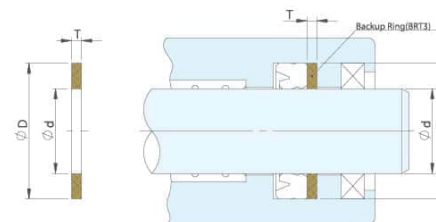

※ 使用工况 / Working condition

★ 材料: 铜粉+聚四氟乙烯

★ MATL: Bronze+PTFE

规格 Specification		规格 Specification		规格 Specification	
BRT (BRONZE)	30*40*2	BRT (BRONZE)	185*205*3	BRT (BRONZE)	100*115*3
BRT (BRONZE)	35*45*2	BRT (BRONZE)	190*200*3	BRT (BRONZE)	100*120*3
BRT (BRONZE)	35*50*2	BRT (BRONZE)	190*210*3	BRT (BRONZE)	100*130*3
BRT (BRONZE)	40*50*2	BRT (BRONZE)	195*215*3	BRT (BRONZE)	105*120*3
BRT (BRONZE)	40*53*2	BRT (BRONZE)	210*230*3	BRT (BRONZE)	105*125*3
BRT (BRONZE)	40*55*2	BRT (BRONZE)	215*235*3	BRT (BRONZE)	110*115*3
BRT (BRONZE)	45*55*2	BRT (BRONZE)	235*260*3	BRT (BRONZE)	110*125*3
BRT (BRONZE)	45*60*2	BRT (BRONZE)	255*280*3	BRT (BRONZE)	110*130*3
BRT (BRONZE)	50*65*2	BRT (BRONZE)	80*95*4	BRT (BRONZE)	115*130*3
BRT (BRONZE)	50*60*2	BRT (BRONZE)	85*100*4	BRT (BRONZE)	115*135*3
BRT (BRONZE)	50*63*2	BRT (BRONZE)	90*105*4	BRT (BRONZE)	120*135*3
BRT (BRONZE)	60*70*2	BRT (BRONZE)	95*110*4	BRT (BRONZE)	120*140*3
BRT (BRONZE)	60*73*2	BRT (BRONZE)	100*115*4	BRT (BRONZE)	125*135*3
BRT (BRONZE)	60*75*2	BRT (BRONZE)	100*135*4	BRT (BRONZE)	125*140*3
BRT (BRONZE)	65*80*2	BRT (BRONZE)	110*130*4	BRT (BRONZE)	125*145*3
BRT (BRONZE)	70*85*2	BRT (BRONZE)	115*130*4	BRT (BRONZE)	130*140*3
BRT (BRONZE)	70*90*2	BRT (BRONZE)	115*135*4	BRT (BRONZE)	130*145*3
BRT (BRONZE)	75*90*2	BRT (BRONZE)	120*140*4	BRT (BRONZE)	130*150*3
BRT (BRONZE)	80*92*2	BRT (BRONZE)	125*135*4	BRT (BRONZE)	135*150*3
BRT (BRONZE)	80*95*2	BRT (BRONZE)	130*150*4	BRT (BRONZE)	140*155*3
BRT (BRONZE)	80*100*2	BRT (BRONZE)	140*150*4	BRT (BRONZE)	140*160*3
BRT (BRONZE)	85*100*2	BRT (BRONZE)	180*205*4	BRT (BRONZE)	140*165*3

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)

若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。

If your required size are not listed in the table, please kindly contact us.



SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA

BRT

BEARING GASKETS

BRT垫片

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

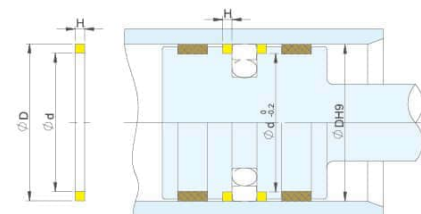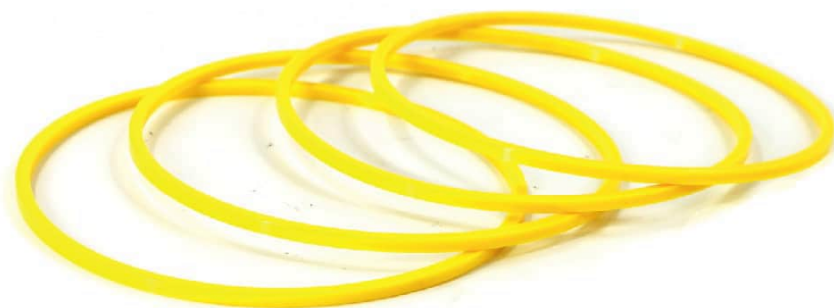

※ 使用工况 / Working condition

- ★ 材料: 尼龙/聚甲醛
- ★ MATL: NY/POM

※ 说明/Description

N4W是一款专门为格来圈 (SPGO) 而设计的一种垫片, 可以最大限度的减小活间过大带来密封环损坏失效的风险。

N4W is a gasket specially designed for SPGO, which can minimize the risk of seal ring damage and failure caused by excessive live clearance.

规格 Specification

N4W-80*85*2.5

N4W-90*85*2.5

N4W-95*90*2.5

N4W-100*95*2.5

N4W-105*100*2.5

N4W-110*105*2.5

N4W-110*104*3

N4W-115*109*3

N4W-120*114*3

N4W-125*119*3

N4W-130*124*3

N4W-135*129*3

N4W-140*134*3

N4W-145*139*3

N4W-150*144*3

N4W-160*154*3

N4W-170*164*3

N4W-180*174*3

N4W


BEARING GASKETS

N4W垫片

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式 Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.

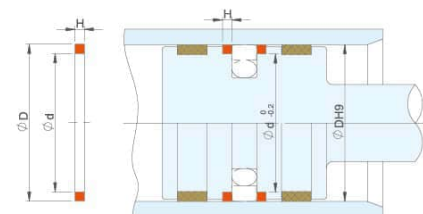

※ 使用工况 / Working condition

- ★ 材料: 尼龙/聚甲醛
- ★ MATL: NY/POM
- ★ 工艺: 车削产品
- ★ PROCESS: Turned Products

※ 说明/Description

N4W是一款专门为格来圈 (SPGO) 而设计的一种垫片, 可以最大限度的减小活间过大带来密封环损坏失效的风险。

N4W is a gasket specially designed for SPGO, which can minimize the risk of seal ring damage and failure caused by excessive live clearance.

规格 Specification

N4W-80*85*2.5
N4W-90*85*2.5
N4W-95*90*2.5
N4W-100*95*2.5
N4W-105*100*2.5
N4W-110*105*2.5
N4W-110*104*3
N4W-115*109*3
N4W-120*114*3
N4W-125*119*3
N4W-130*124*3
N4W-135*129*3
N4W-140*134*3
N4W-145*139*3
N4W-150*144*3
N4W-160*154*3
N4W-170*164*3
N4W-180*174*3

N4W

BEARING GASKETS

N4W垫片

20 | 专注密封件二十年
SKF授权经销商
FOCUS ON SEALS FOR 20 YEARS
SKF AUTHORIZED DEALER

订货方式: Order Method SPGW D*d*h (SPGW50*36*8.5*9)
若客户要求尺寸表内没有记录的尺寸, 请另行与我司联系。
If your required size are not listed in the table, please kindly contact us.

SONGZHENG SEAL (GUANGZHOU) CO., LTD.
206, BUILDING 1, NO. 1190, ZHONGSHAN AVENUE, TIANHE DISTRICT, GUANGZHOU CITY, GUANGDONG PROVINCE, CHINA.