

◎ 本手册仅用于说明产品的相关信息。公司随时可能因技术升级或采用更新的生产工艺而改进本手册有关内容，
或对本手册的印刷错误及不准确信息进行必要的更改，恕不另行通知。
◎ 未经许可，禁止全部或部分复制。
◎ 本公司拥有最终解释权，更多详细资料敬请垂询！

SONGZ

松正密封件(广州)有限公司
SONGZHENG SEAL (GUANGZHOU) CO., LTD.

中国广东省广州市天河区中山大道中1190号广珠商务楼A栋
Building A, Guangzhu Business Building, No. 1190, Zhongshan
Avenue Middle, Tianhe District, Guangzhou, Guangdong Province,
China.
www.szseal.en.alibaba.com www.songzparts.com
WhatsApp: +86 181 9893 6394 / +86 1881680 1578
+86 188 1680 4556



SONGZ

**PRODUCT
TECHNOLOGY**

SELECTION MANUAL
产品选型手册

SONGZHENG SEAL
(GUANGZHOU) CO., LTD.
松正密封件(广州)有限公司

TURNING RAW MATERIAL 密封件车削原料



**TPU:U8301/95A
-MDI/PCD**

Size:Max=Φ800mm TEMP:-25℃~110℃

It is a hydrolysis resistant casting polyurethane based on MDI, polyether polyols, and certain additives



Wind turbine seals

风电密封件

Used in wind power generation equipment, especially in the bearing seat area



Hydraulic generator seals

水电密封件

Used in hydropower engineering such as gates and other fields



Shield machine seals

盾构密封件

Used in tunnel engineering subway, railway and other fields



**NBR:
N6714
/80A**

Size:
Max=Φ8000mm

TEMP:
-30℃~110℃

Relatively low cost, good mechanical performance and basic tolerance to many common lubricants



**FKM:
F8708
/80A**

Size:
Max=Φ600mm

TEMP:
-30℃~190℃

Provides the necessary characteristics for composite seals with enhancers to withstand high pressure



**CPU:
U3301/95A
MDI/PTMEG**

Size:
Max=Φ4000mm

TEMP:
-40℃~110℃

**U5203/93A
-MDI/PTMEG**

Size:
Max=Φ800mm

TEMP:
-45℃~100℃



**TPU:U7306/95A
-MDI/PCL**

Size:Max=Φ800mm
TEMP:-40℃~110℃



**Degradable rubber:
U1000/80A**

Size:Max=Φ500mm
TEMP:30℃~170℃



**TPU:U9310/95A
-PPDI/PCD**

Size:Max=Φ800mm
TEMP:-30℃~130℃

TURNING RAW MATERIAL

TEMP:
-25°C~110°C

MDI

U8310/95A
MAX = $\Phi 800\text{mm}$

PCD



COLOUR: RED

TURNING RAW MATERIAL

TEMP:
-40°C~110°C

MDI

U7306/95A
MAX = $\Phi 800\text{mm}$

PCL



COLOUR: GREEN

TURNING RAW MATERIAL

TEMP:
-30°C~130°C

PPDI

U9310/95A
MAX = $\Phi 800\text{mm}$

PCD



COLOUR: ORANGE

TURNING RAW MATERIAL

TEMP:
-45°C~100°C

PPDI

U5203/93A
MAX = $\Phi 800\text{mm}$

PTMEG



COLOUR: BLUE

TURNING RAW MATERIAL

TEMP:
-40°C~110°C

MDI

U3301/95A
MAX=Φ4000mm
(4m)

PTMEG



COLOUR: RED

TURNING RAW MATERIAL

TEMP:
-40°C~100°C

TDI

U2201/93A
MAX=Φ12000mm
(12m)

PTMEG



COLOUR: RED

TURNING RAW MATERIAL

TEMP:
-30°C~110°C

N6714

MAX =(8m)
Φ8000mm

80A

COLOUR: BLACK



TURNING RAW MATERIAL

TEMP:
-30°C~190°C

F8708

MAX =
Φ600mm

80A

COLOUR: BLACK



TURNING RAW MATERIAL


TEMP:
-30°C~170°C

U10000

MAX =
Φ500mm

80A

COLOUR: BLACK

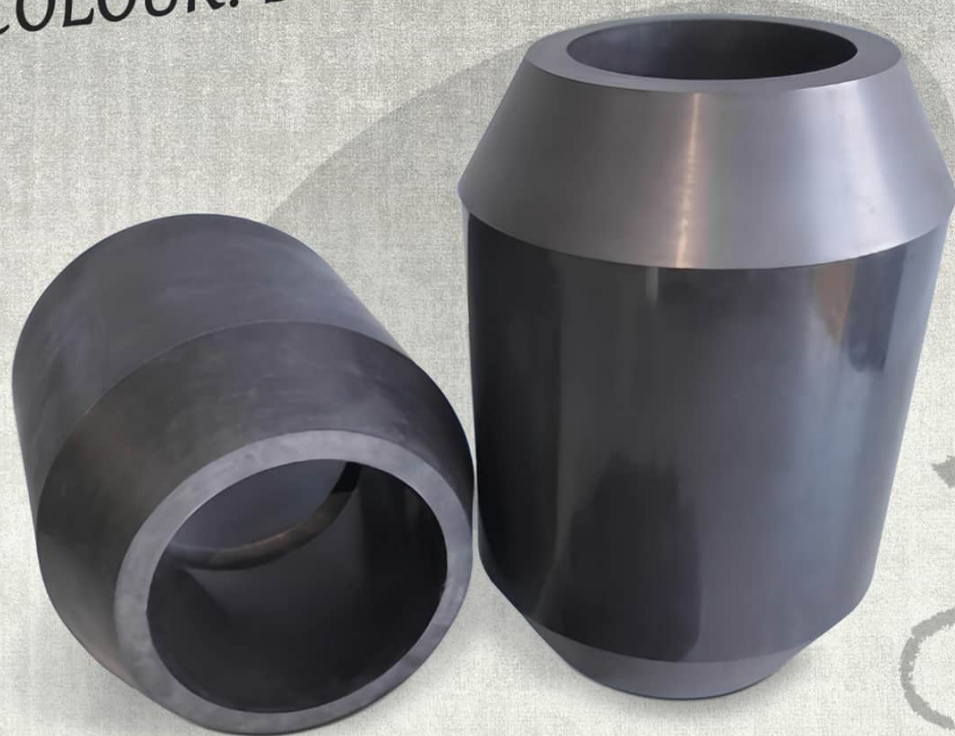

TURNING RAW MATERIAL

TEMP:
-40°C~120°C

N3601

MAX =
Φ250mm

55D

COLOUR: RED

