



Tel: +86 15252103728
Fax: +86 516 66671368
Email: kylin@everstarmachinery.com
Website: www.everstarmachinery.com
Add: No.4, Minjiang Road, The 2nd Industrial Park,
Xuzhou High-Tech Industrial Development Zone,
Xuzhou City, Jiangsu Province, China



Scan QR code to learn more



EVER STAR




Compact in Size, Powerful in Performance

**Professional Manufacturer For
Skid Steer Loader**

SKID STEER LOADER



- **Factory Area: 40,000 m²**
- **18+ Years of Manufacturing Experience**

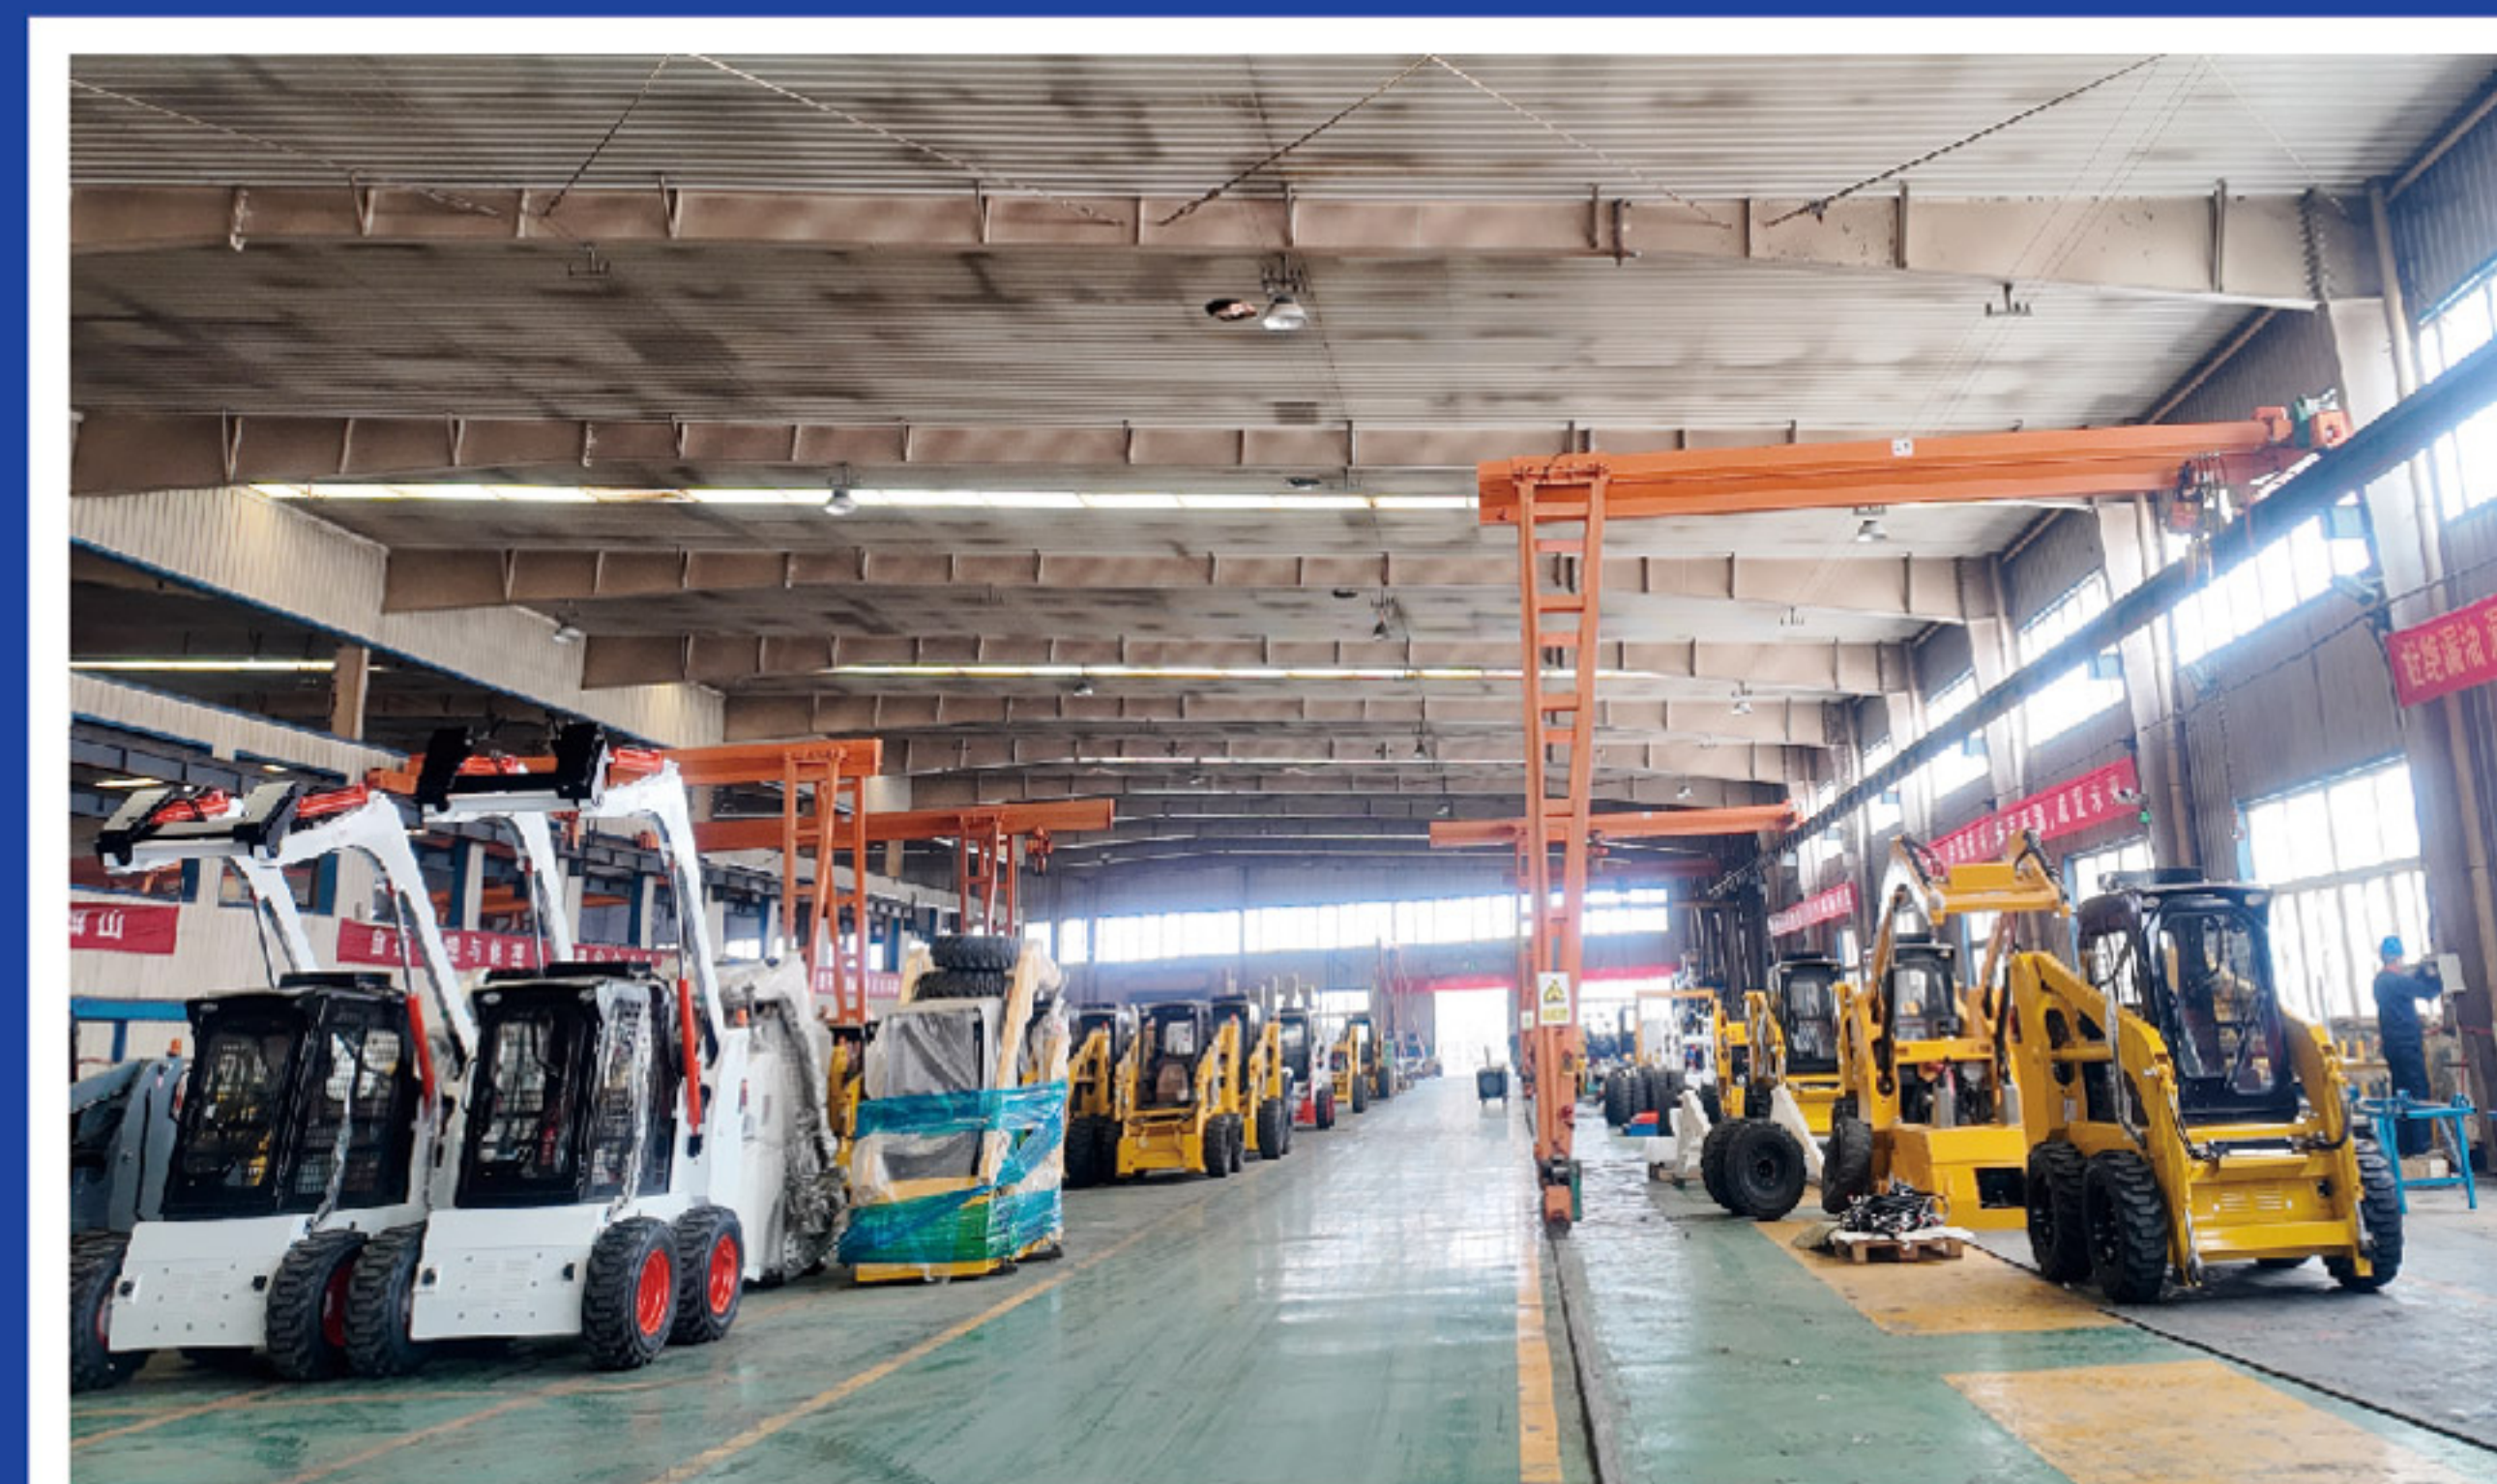

EVER STAR

Company Introduction

Xuzhou Hengxing Jinqiao Machinery Technology Co., Ltd., founded in 2008, is located in the High-Tech Industrial Development Zone of Xuzhou. Our company covers an area of 40000 square meters and with factory area about 30000 square meters.

We are a professional manufacturer offering a wide range of products, including earthmoving machinery (skid steer loaders, backhoe loaders), foundation equipment (Solar Pile drivers, piling rig Kelly bars and spare parts), and lifting equipment (truck-mounted aerial platforms, boom lifts, and scissor lifts).

Our internal management strictly adheres to ISO9001 standard, all products have passed the CE certification. Currently we have 40 patents and we are the high-tech enterprise. Our products have been exported to more than 100 countries such as Japan, South Korea, Russia, Singapore etc.

We provide nationwide quality assurance by 22 domestic offices, perfect after-sales service system provides customers with comprehensive and systematic solutions, we strive to build gold service in the machine industry. Over the past ten years, our products, services and reputation have been widely recognized and praised by more than 6000 construction companies.

Our Mission is to promote industry progress through technological innovation.

Our Core Values: Customer Orientation, Self-Criticism, Embrace Change
Continuous Striving.

Our vision is to become a healthier and long-lasting enterprise, achieving long-term mutual success and win-win development for customers, employees, partners, and shareholders.

Our Third Five-Year Strategic Plan (April 1, 2026 – March 31, 2031)

Focusing on construction machinery and special-purpose vehicles as our core business sectors, we aim to achieve substantial growth in scale, establish at least three new overseas subsidiaries, and become a global leader in at least five additional specialized product categories.



EC25-EC120

Wheeled skid steer Loader

Technical Parameters

Model	EC25	EC35	EC35D	EC35H	EC45G	EC45GH	EC50D
Operating weight(kg)	1460	2600	2600	2600	3100	3100	2800
Rated load(kg)	380	500	500	500	700	700	850
Bucket capacity(m³)	0.2	0.3	0.3	0.3	0.4	0.4	0.4
Max Speed(km/h)	9	10	10	10	12	12	6
Max traction(kN)	≥12	≥16	≥16	≥16	≥25.40	≥25.40	≥25.40
Max breakout(kN)	≥7.3	≥8.5	≥8.5	≥8.5	≥18.4	≥18.4	≥18.4
Lifting time of boom(s)	7	7	7	7	7	7	7
Manufacturer	Kubota	XINCHAI	XINCHAI	XINCHAI	XINCHAI	XINCHAI	XINCHAI
Model	D1105	C490BPG	C490BPG	C490BPG	C490BPG	C490BPG	A498BPG
Rated power(kW/rpm)	18.2/3000	36.7/2650	36.7/2650	36.7/2650	36.7/2650	36.7/2650	45/2500
Engine displacement (L)	1.123	2.27	2.27	2.27	2.27	2.27	3.17
Emission Standard	Euro VI/ EPA4	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ
Overall operating height(mm)	3400	3300	3300	3300	3980	3980	3485
Height to bucket hinge pin(mm)	2500	2450	2425	2450	3080	3080	2465
Height to top of cab(mm)	1813	2000	2000	2000	2140	2140	1400-1600
Height to bottom of level bucket(mm)	2446	2260	2260	2260	2913	2913	2643
Without bucket length(mm)	2200	2300	2300	2300	2640	2640	2800
Overall length with bucket(mm)	2950	2950	2950	2950	3420	3420	3490
Dumping angle at maximum height(°)	40	40	40	40	40	40	40
Dumping height(mm)	2000	2000	2000	2000	2380	2380	1700
Dumping reach(mm)	441	690	690	690	700	700	700
Rollback of bucket on ground(°)	30	30	30	30	30	30	30
Rollback of bucket at full height(°)	103	104	104	104	104	104	104
Wheelbase(mm)	801	897	897	897	991	991	991
Ground clearance(mm)	145	140	140	140	185	185	140
Angle of departure(°)	20	20	20	20	20	20	13
Front turning radius without bucket(mm)	960	1310	1310	1310	1300	1300	1228
Front tuning radius(mm)	1660	1881	1881	1881	2290	2290	2010
Rear tuning radius(mm)	1253	1296	1296	1296	1440	1440	1746
Rear axle to bumper(mm)	910	964	964	964	1080	1080	1208
Tread width(mm)	785	1080	1080	1080	1450	1450	1450
Width(mm)	920	1400	1400	1400	1720	1720	1720
Bucket width(mm)	1070	1422	1422	1422	1740	1740	1740

Model	EC60G	EC60GH	EC65G	EC65GH	EC75	EC100	EC120
Operating weight(kg)	3200	3200	3400	3400	3460	3600	4000
Rated load(kg)	850	850	950	950	1050	1200	1500
Bucket capacity(m³)	0.45	0.45	0.5	0.5	0.5	0.6	0.6
Max Speed(km/h)	12	12	12	12	12	12/18	12/18
Max traction(kN)	≥25.40	≥25.40	≥28.2	≥28.2	≥28.2	>30	>32
Max breakout(kN)	≥18.4	≥18.4	≥20	≥20	≥20	≥20	≥22
Lifting time of boom(s)	7	7	7	7	7	7	7
Manufacturer	XINCHAI	XINCHAI	XINCHAI	XINCHAI	XINCHAI	WEICHAI	WEICHAI
Model	A498BPG	A498BPG	A498BZG/T	A498BZG/T	A498BZG/T	WP4.1	WP4.1
Rated power(kW/rpm)	45/2500	45/2500	55/2500	55/2500	55/2500	74.9/2400	103/2300
Engine displacement (L)	3.17	3.17	3.17	3.17	3.17	4.088	4.088
Emission Standard	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅱ	China Stage Ⅲ	China Stage Ⅲ
Overall operating height(mm)	4000	4000	4070	4070	4290	4290	4290
Height to bucket hinge pin(mm)	3100	3100	3150	3150	3278	3278	3278
Height to top of cab(mm)	2160	2160	2160	2160	2160	2160	2160
Height to bottom of level bucket(mm)	2933	2933	2983	2983	2983	2983	2983
Without bucket length(mm)	2750	2750	2880	2880	2770	2963	3023
Overall length with bucket(mm)	3490	3490	3580	3580	3490	3735	3795
Dumping angle at maximum height(°)	40	40	40	40	40	40	40
Dumping height(mm)	2400	2400	2450	2450	2500	2500	2500
Dumping reach(mm)	750	750	700	700	700	700	700
Rollback of bucket on ground(°)	30	30	30	30	30	30	30
Rollback of bucket at full height(°)	104	104	104	104	104	104	104
Wheelbase(mm)	991	991	1115	1115	1115	1185	1185
Ground clearance(mm)	205	205	205	205	205	205	205
Angle of departure(°)	20	20	20	20	20	20	20
Front turning radius without bucket(mm)	1198	1198	1250	1250	1250	1278	1278
Front tuning radius(mm)	1958	1958	2112	2112	2112	2144	2144
Rear tuning radius(mm)	1728	1728	1774	1774	1774	1857	1857
Rear axle to bumper(mm)	1208	1208	1082	1082	1082	1082	1082
Tread width(mm)	1500	1500	1500	1500	1500	1500	1500
Width(mm)	1880	1880	1880	1880	1880	1880	1880
Bucket width(mm)	1880	1880	1880	1880	1880	1880	1880



Compatible Attachment Interface

International Standard Hydraulic Quick Coupler for Multi-Brand Attachment Compatibility.



Dual-hand control for loading and travel

Ensuring easy and reliable operation.



Bucket Auto-Leveling

Minimizes material spillage and improves loading efficiency.



ROPS & FOPS certified cab

With seat belts and bumper protection, providing operator safety and a spacious, comfortable cabin.

ETS25-125

Tracked Skid Steer Loader

Technical Parameters



Model	ETS25	ETS50	ETS65	ETS100	ETS125
Operating weight(kg)	1530	3000	4200	4800	5100
Rated load(kg)	400	700	1000	1200	1500
Bucket capacity(m³)	0.2	0.3	0.5	0.6	0.75
Max Speed(km/h)	9	10	12/18	12/18	12/18
Max traction(kN)	15	≥25.40	≥28.2	>30	>32
Max breakout(kN)	≥7.3	≥18.4	≥20	≥20	≥22
Lifting time of boom(s)	7	7	7	7	7
Manufacturer	Kubota	XINCHAI	XINCHAI	WEICHAI	WEICHAI
Model	D1105	C490BPG	A498BZG/T	WP4.1	WP4.1
Rated power(kW/rpm)	18.2/3000	36.7/2650	55/2500	74/2200	103/2300
Engine displacement (L)	1.123	2.27	3.17	4.088	4.088
Emission Standard	Euro V/EPA4	China Stage II	China Stage II	China Stage III	China Stage III
Overall operating height(mm)	3400	3350	3871	4800	4070
Height to bucket hinge pin(mm)	2500	2450	2900	3150	3150
Height to top of cab(mm)	1813	2050	2150	2160	2160
Height to bottom of level bucket(mm)	2446	2285	2730	2983	2983
Without bucket length(mm)	2200	2300	2750	3000	3000
Overall length with bucket(mm)	2950	2950	3500	3795	3795
Dumping angle at maximum height(°)	40	40	40	40	40
Dumping height(mm)	2000	2100	2230	2450	2450
Dumping reach(mm)	441	690	715	700	700
Rollback of bucket on ground(°)	30	30	30	30	30
Rollback of bucket at full height(°)	103	104	104	104	104
Wheelbase(mm)	801	1240	1500	1500	1500
Ground clearance(mm)	145	140	200	200	200
Angle of departure(°)	20	20	20	20	20
Front turning radius without bucket(mm)	960	1310	1298	1365	1365
Front tuning radius(mm)	1660	1881	2010	2439	2200
Rear tuning radius(mm)	1253	1264	1714	1617	1742
Rear axle to bumper(mm)	910	594	890	938	938
Tread width(mm)	790	1102	1462	1654	1674
Width(mm)	1080	1402	1782	1994	2124
Bucket width(mm)	1100	1500	1830	2030	2134

100+ Attachments Available



PALLET FORK



AUGER



4 - IN-1 BUCKET



HEDGE TRIMMER



TREE SPADE



ICE SCRAPER



VIBRATORY ROLLER



BUCKET MIXER



GRAPPLE RAKE



SKELETON BUCKET



TRENCHER



BALE FORK



ANGLE BROOM



PICKUP SWEEPER




PLANER



BACKHOE ATTACHMENT



DOZER BLADE

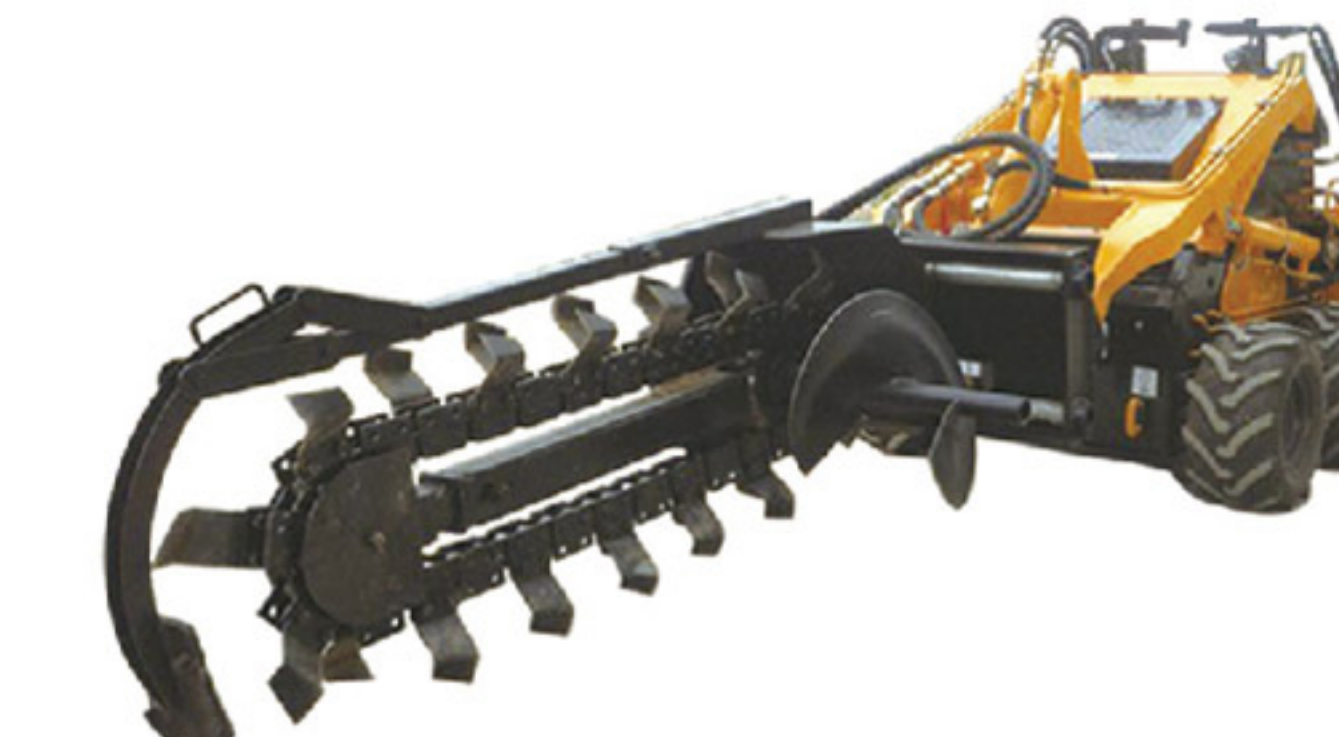

TRENCHER



BREAKER



UTILITY FORK



SNOW BLOWER



SWING BACKHOE ARM



CONCRETE MIXER



DRUM LCE BREAKER