




T-type Mobile Batch Mix Asphalt Plant

T型移动间歇式沥青搅拌站

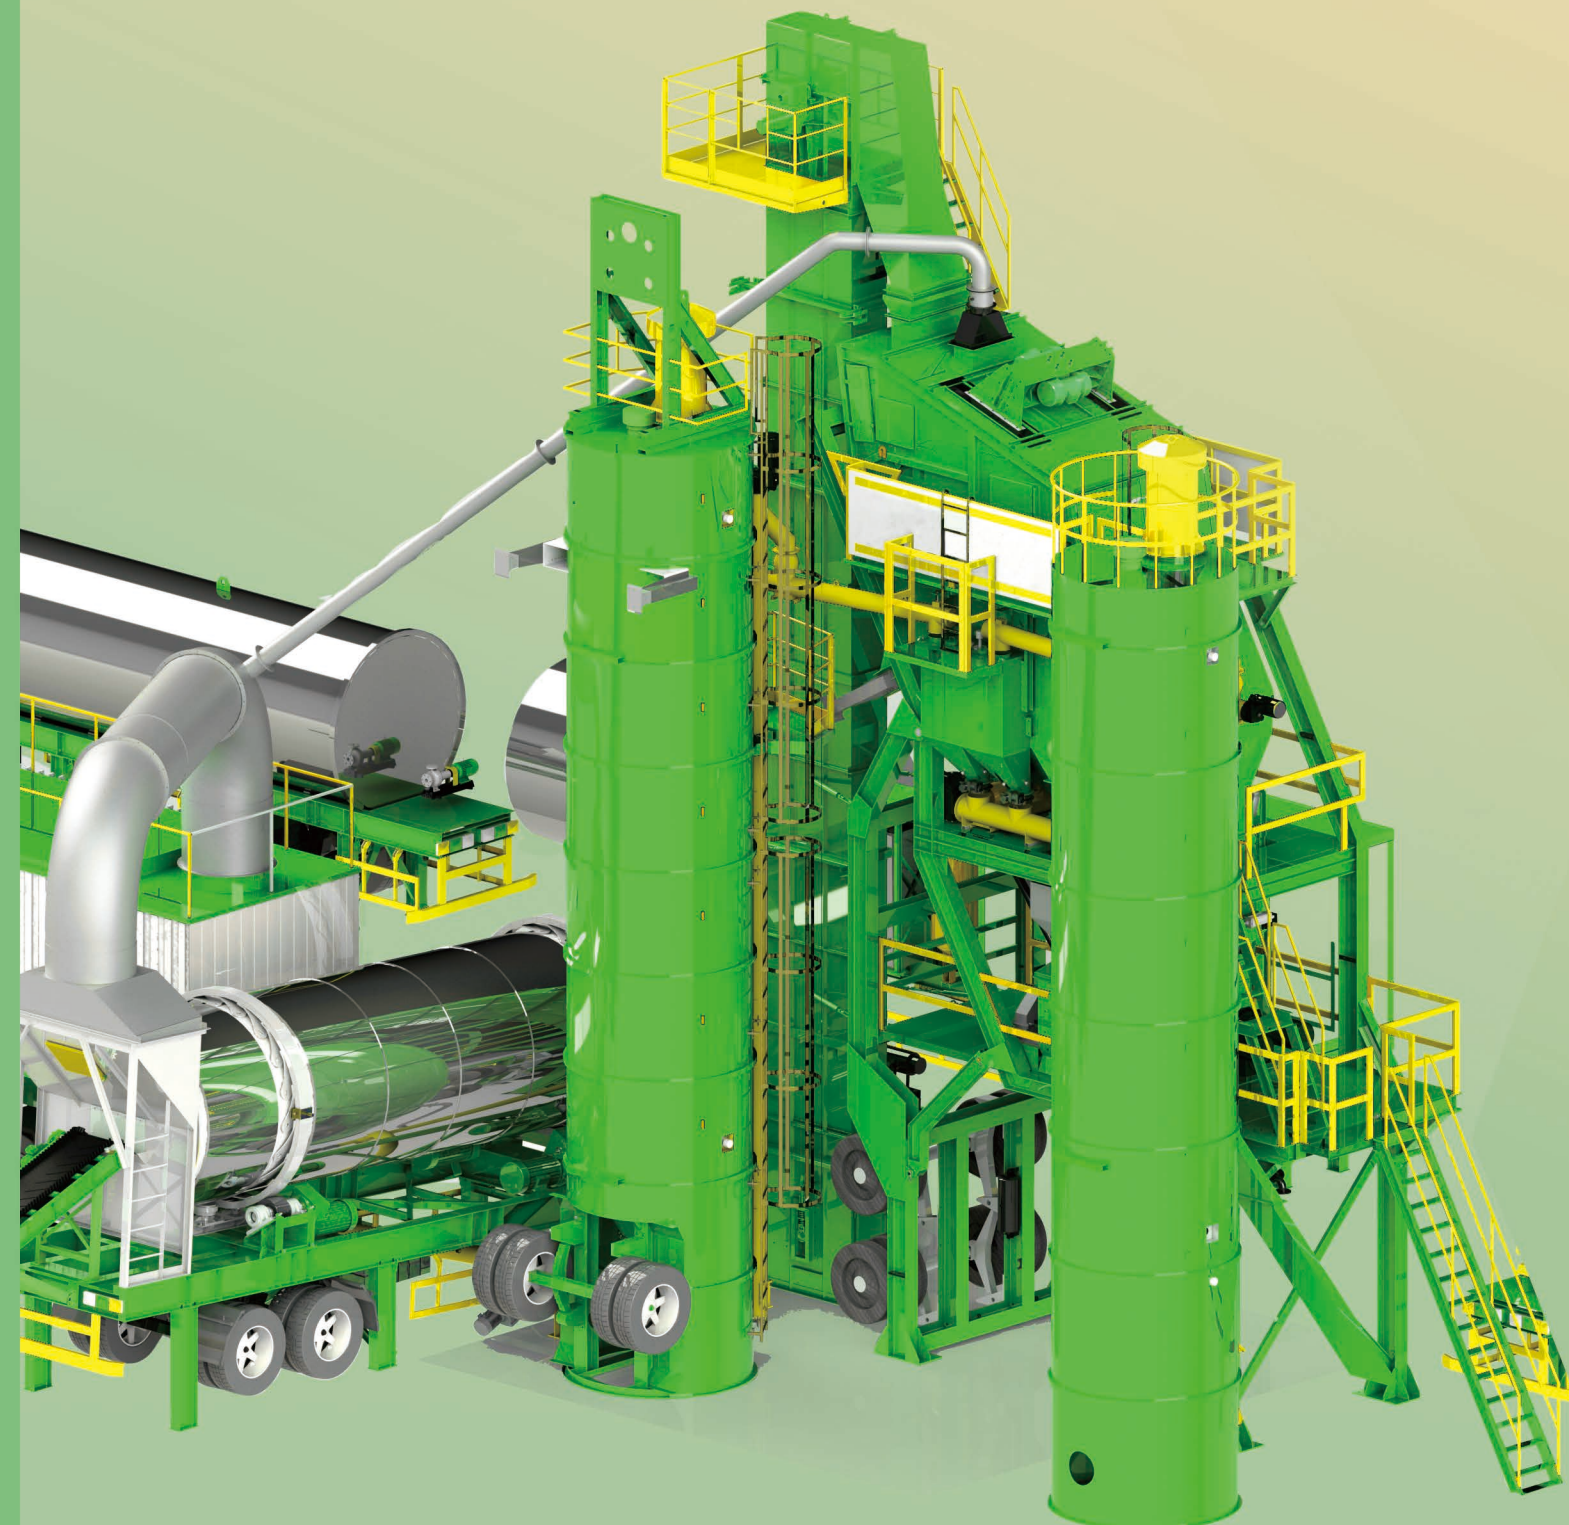

河南中基机械设备有限公司
HENAN ZOOMLINE MACHINERY CO.,LTD.



Tel: +86-371-65825035
WhatAPP: +86-18838114766
E-mail: info@zoomline.biz
Web: www.zoomline.com.cn
Factory Location: No.3 Western North Section of Road 01, Longsheng
Industrial Park, Nanyang, Henan, China.

河南中基机械设备有限公司
HENAN ZOOMLINE MACHINERY CO.,LTD.

INTRODUCTION


SUMMARY / 简介

The ZAP-M'T type is widely used in the construction of airport runways, ports, roads, and bridges. This equipment is ideal for the emergency construction of specialized roads.

ZAP-M'T型广泛应用于机场跑道、港口、道路和桥梁的建设。该设备是特种道路应急施工的理想选择。

With a modular design and compact construction, the asphalt plant is easy to install, transport, and dismantle. Each unit operates independently while allowing for seamless connections between them.

该沥青搅拌站采用模块化设计和紧凑的结构，易于安装、运输和拆卸。每个单元独立运行，但彼此之间可以无缝连接。

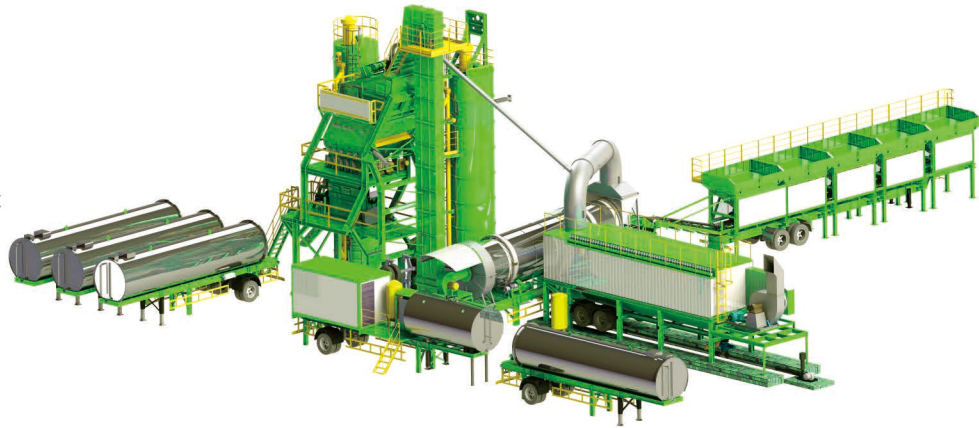

FEATURES / 特点

- Adopt mobile asphalt plant structure design, high mobility performance, small land occupied, convenient transportation and little downtime.
- 采用移动式沥青搅拌站结构设计，机动性能高，占地面积小，运输便捷，停机时间短。
- Adopt AVIC brand Aviation Plugs, easy connection, fast disassembly and assembly wires.
- 采用AVIC航空插头，连接便捷，快速拆装线路。
- Simple and convenient production technology process, accurate, highly reliable and stable control system.
- 生产工艺流程简洁便捷，控制系统精准、可靠、稳定。
- Move fast. Save costs.
- 移动速度快，节省成本。
- System of drying, weighing, mixing, discharging are full-automatically controlled.
- 干燥、称重、搅拌、卸料系统均采用全自动控制。
- All the units are separated mutually while each unit can achieve seamless connection.
- 所有单元相互独立，但各单元可实现无缝连接。



Parameter

Items 型号	ZAP-M60T	ZAP-M80T	ZAP-M100T	ZAP-M120T	ZAP-M160T	ZAP-M200T
Plant capacity 产量(吨/时)	60t/h	80t/h	100t/h	120t/h	160t/h	200t/h
Cold aggregate feeding system 冷骨料供给系统						
Hopper capacity 料斗容积(立方米)	4 x 4.5m³	4 x 6.5m³	4 x 6.5m³	4 x 8m³	5 x 8m³	5 x 8m³
Drying system 干燥系统						
Drying drum size (mm) 干燥筒尺寸(直径×长度)(米)	1200x5500	1500x6600	1500x6600	1800x8000	1950x9000	2200x9000
Drying capacity 干燥能力(吨/时)	60-70t/h	80-100t/h	100-120t/h	120-140t/h	160-180t/h	200-220t/h
Burner 燃烧器	Optional oil, gas, coal 可选燃油, 燃气, 燃煤					
Mixing tower 主楼						
Screen 筛网(层筛)	4 layers	4 layers	4 layers	4/5 layers	4/5 layers	5 layers
Aggregate weighing 骨料计量(千克)	3x800kg	3x1000kg	3x1500kg	3x1500kg	3x2000kg	3x3000kg
Bitumen weighing 沥青计量(千克)	3x80kg	3x100kg	3x200kg	3x200kg	3x200kg	3x500kg
Filler weighing 粉料计量(千克)	3x100kg	3x100kg	3x200kg	3x200kg	3x200kg	3x500kg
Mixer capacity 拌缸容量(千克)	800kg	1000kg	1300kg	1500kg	2000kg	2500kg
Mixing cycle 搅拌周期(秒)	45s					
Dust collecting system 除尘系统						
Bag house filtering 布袋除尘面积(平方米)	300m²	380m²	400m²	500m²	550m²	650m²
Exhaust fan power 引风机功率(千瓦)	37kW	45kW	55kW	2x45kW	2x55kW	2x75kW
Asphalt temperature 沥青温度(度)	140-180℃	140-180℃	140-180℃	140-180℃	140-180℃	140-180℃
Mobile filler silo 移动式粉仓						
Filler silo 矿粉仓(立方米)	30m³					Volume optional 容积可选
Recycling filler silo 回收粉仓	30m³					Volume optional 容积可选



Pre-sales service 售前服务

Professional engineers will propose the professional suggestions according to your requirements and performance parameter : Use advanced CAD , PRO/E to make maps , can offer various design plans and make the best solution for you .

专业工程师将按照您的工程量，施工场地，预算等具体要求，提出专业建议：运用先进的CAD,PRO/E制图，为您提供各种专业设计方案，制定出最合适的解决方案。

Medium-sales service 售中服务

The technician will answer the difficult problem and technical support timely that users will meet in the course of using while selling , and will train the technical staff for customer, teach them how to install maintain and use , make customers feel the sincerity of our company.

专业技术人员及时解答用户在实际过程中将会遇到的疑难问题和相关支持，并将用户方的技术人员进行现场培训，讲授设备的安装操作，保养和应用注意事项，使客户感受到我们的真诚。

After-sales service 售后服务

The company has professional and experienced engineers and technicians , set up the files for every user to responsible for the maintenance and using guidance of products , the seller will offer high-efficiently.

公司拥有专业培训，经验丰富的工程技术人员，并建立了用户档案，主要负责客户端的产品维修保养及使用指导，公司的销售服务人员随时为客户提供优质的服务，以保证设备高效运行。

Maintenance

- Adding the lubricant to every bearing regularly
定期给设备各部位轴承加注润滑
- Daub the grease on drive chain regularly, and adjust appropriately
定期给设备传动链涂润滑油，并适当调整
- Often check the fastening situation of every bolt
经常检查个螺栓的紧固情况
- Clear up the filler, cooler of air compressor in time
及时清理空压机滤清器，冷却器
- Check the abrasion situation of every conveyer belt and belt should change if necessary
检查各输送带和皮带磨损情况，必要时更换
- Check the engineering pipeline of fuel, hydraulic system to make sure they are in good state
定期检查燃油管道，液压系统，确保工作状态良好



